



Florida Department of Transportation

605 Suwannee Street
Tallahassee, FL 32399-0450

C3D SURVEY DATABASE

GROUPS-SURFACES-ALIGNMENTS

POINT AND FIGURE GROUPING














SURFACE OBJECTS

ALIGNMENT OBJECTS

FDOT2018.C3D

◆ CREATE A PROJECT

- ✓ From the FDOT2018.C3D Desktop Folder run “CreateProjectC3D” to create a project folder structure

Name	Date modified	Type	Size
 _FDOT2018.C3D	10/13/2017 1:51 PM	Shortcut	3 KB
 CADD GoToMeeting	10/13/2017 1:51 PM	Internet Shortcut	1 KB
 CADD Website	10/13/2017 1:51 PM	Internet Shortcut	1 KB
 Create Project	10/13/2017 1:51 PM	Shortcut	2 KB
 FDOT Civil 3D Quick Clips	10/13/2017 1:51 PM	Internet Shortcut	1 KB
 FDOT Profile Scrubber	10/13/2017 1:51 PM	Shortcut	3 KB
 FDOT XML Signing	10/13/2017 1:51 PM	Shortcut	2 KB
 File Checker	10/13/2017 1:51 PM	Shortcut	2 KB
 Land XML Converter	10/13/2017 1:51 PM	Shortcut	2 KB
 Land XML Grouper	10/13/2017 1:51 PM	Shortcut	2 KB
 Land XML Visualizer	10/13/2017 1:51 PM	Shortcut	2 KB
 Request CADD Support	10/13/2017 1:51 PM	Internet Shortcut	1 KB
 Sheet Set Organizer	10/13/2017 1:51 PM	Shortcut	2 KB

FDOT2018.C3D

- ◆ For FDOT projects, AutoCAD Drawing Units Insertion scale should be set to “Unitless”.
- ◆ If the Insertion scale is set to feet, it is an international foot setting. 1 yard = 0.9144 meters, exactly.
- ◆ FDOT works in Survey feet. 1 foot = 1200/3937 meters, exactly.
- ◆ By setting the Insertion scale to “Unitless” the State Plane Projection will control the units.
- ◆ All FDOT Templates are preset to “Unitless”.

FDOT2018.C3D



◆ THE FDOT RIBBON.

- ✓ If not loaded type in the command “FDOTRIBBON”.
- ✓ Can be found on the ribbon bar, select the FDOT tab.
- ✓ Contains useful tools.
- ✓ For Survey look for:
 - Create File
 - LandXMLGrouper
 - QC Quick Check
 - Links & Contacts
 - LandXML Converter

FDOT2018.C3D

- ◆ Open “Toolspace”.
 - ✓ Toolspace is a palette found on the “Home” tab in the Civil 3D Ribbon.
 - ✓ For surveying projects it is recommended that the user activates:
 - Prospector (Opens a tab in Toolspace)
 - Settings (Opens a tab in Toolspace)
 - Survey (Opens a tab in Toolspace)
 - Toolbox (Opens a tab in Toolspace)
 - Properties (Opens a separate palette that can be docked for continual use)

FDOT2018.C3D

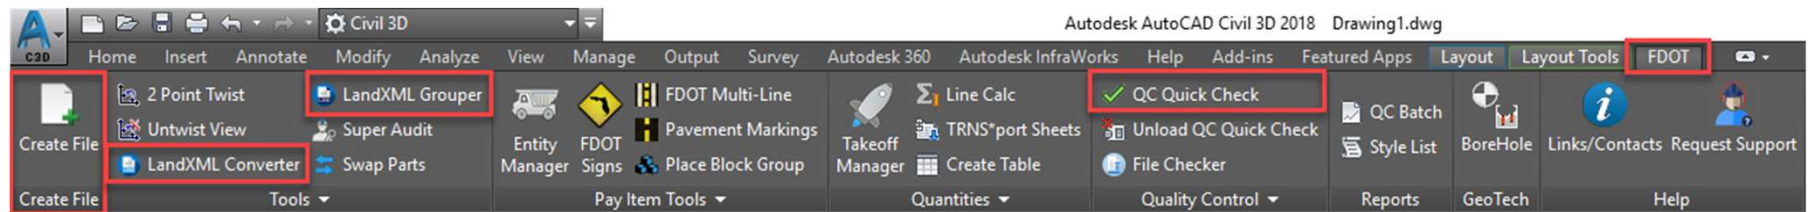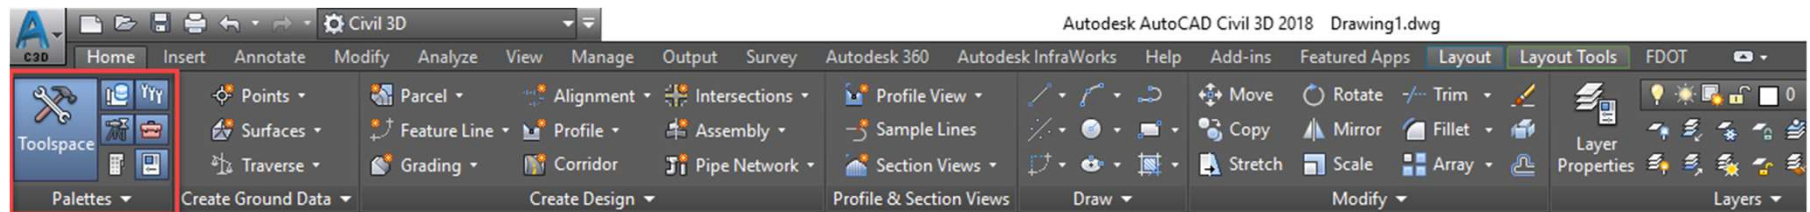


CIVIL 3D SURVEY DATABASE

- ◆ Separate from the DWG file.
 - ✓ Yet is dynamically linked to the active drawing file.
- ◆ Consist of two files:
 - ✓ Survey.sdbx
 - ✓ Survey.SDXX
- ◆ Can be edited directly.
- ◆ Can be edited through point and chain manipulation in the active drawing file.

CIVIL 3D SURVEY DATABASE


- ◆ Open C3D – You DO NOT need to be in a specific drawing file to create.
- ◆ TOOLSPACE – Survey Tab
- ◆ Set State Plane Zone in “Survey User Settings”.
 - The zone can be set after the database is created by right clicking on the database and choosing “Edit Survey Database Settings...”.

CIVIL 3D SURVEY DATABASE

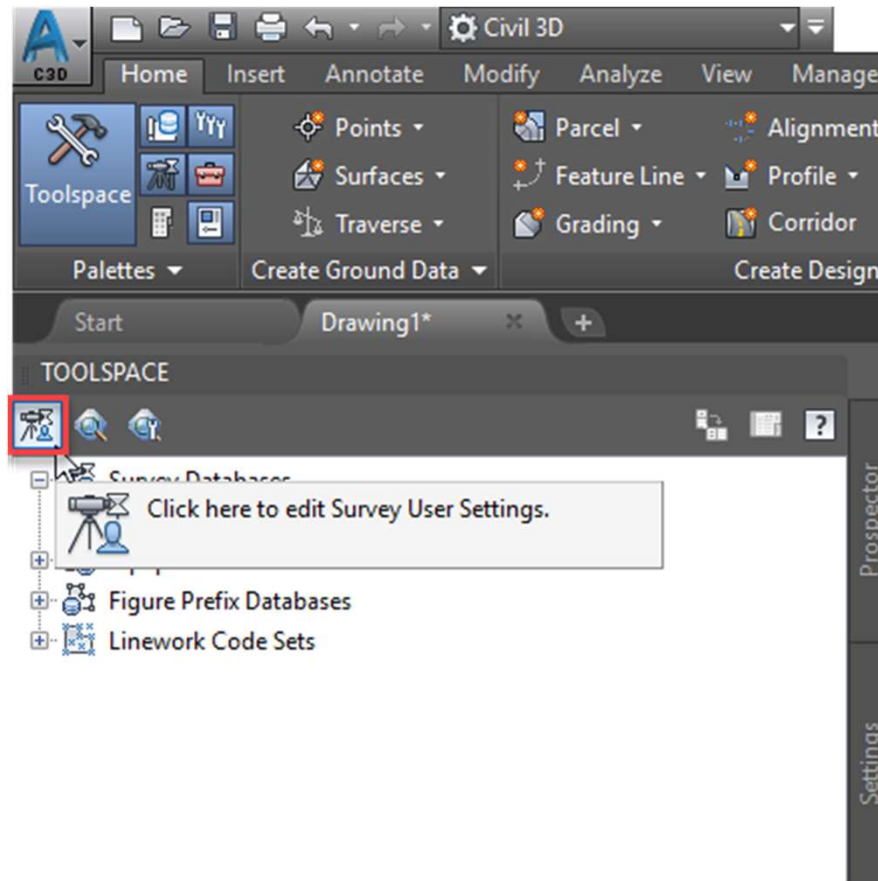


CIVIL 3D SURVEY DATABASE

- ◆ Set working folder...
 - ✓ FDOT recommends that your working folder is the survey folder in the project directory structure.
- ◆ If the database is shown in Toolspace but not highlighted like below, it exists but is not open for use or editing.

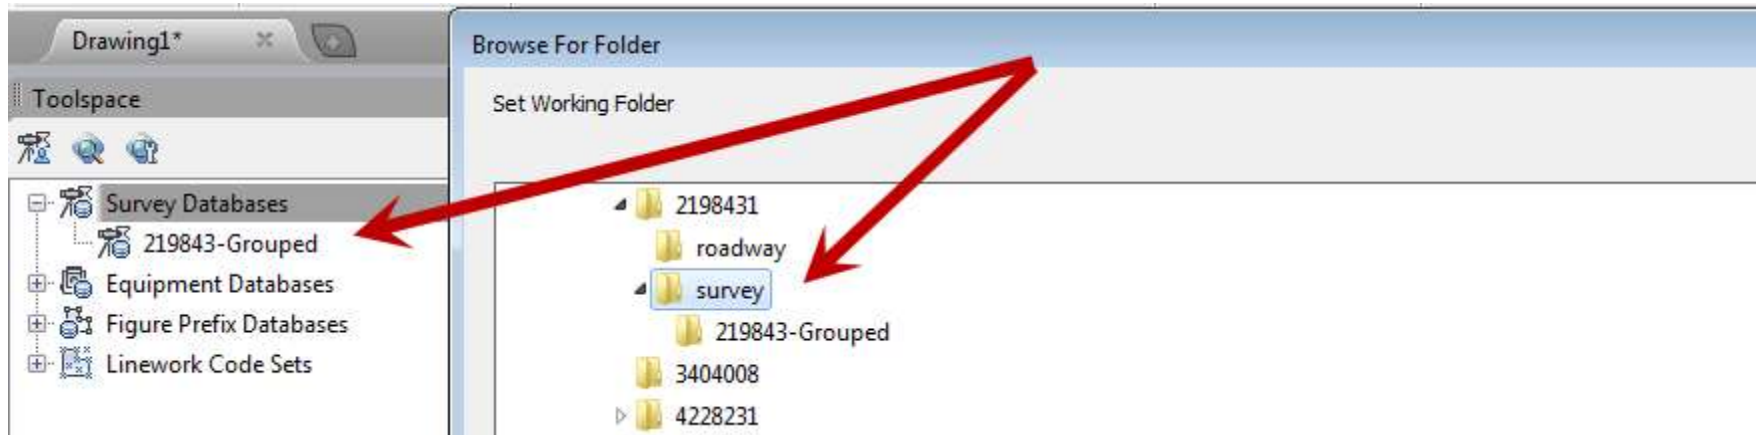


CIVIL 3D SURVEY DATABASE

- ◆ Double clicking on the database will open the database in read only mode.

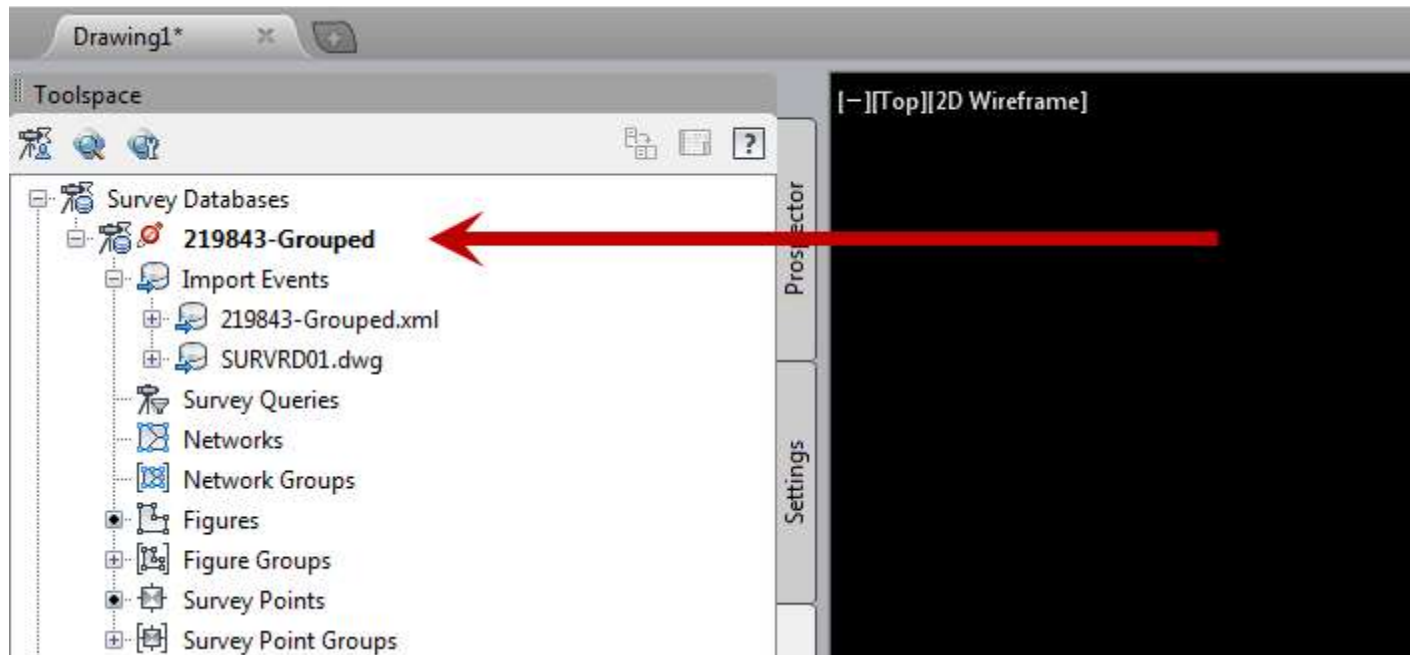

CIVIL 3D SURVEY DATABASE

- ◆ To open a database for use and editing, right click on the database name and choose “Open for edit”.

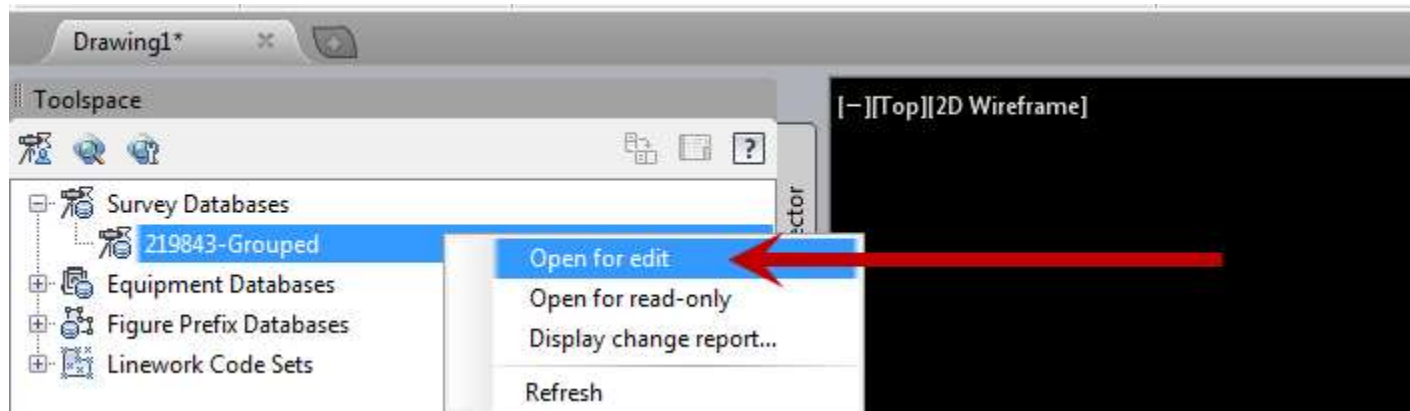


CIVIL 3D SURVEY DATABASE

- ◆ No Database shown means no database in the working folder.




CIVIL 3D SURVEY DATABASE

- ◆ To create a database, right click “Survey Databases” and select “New local survey database...”

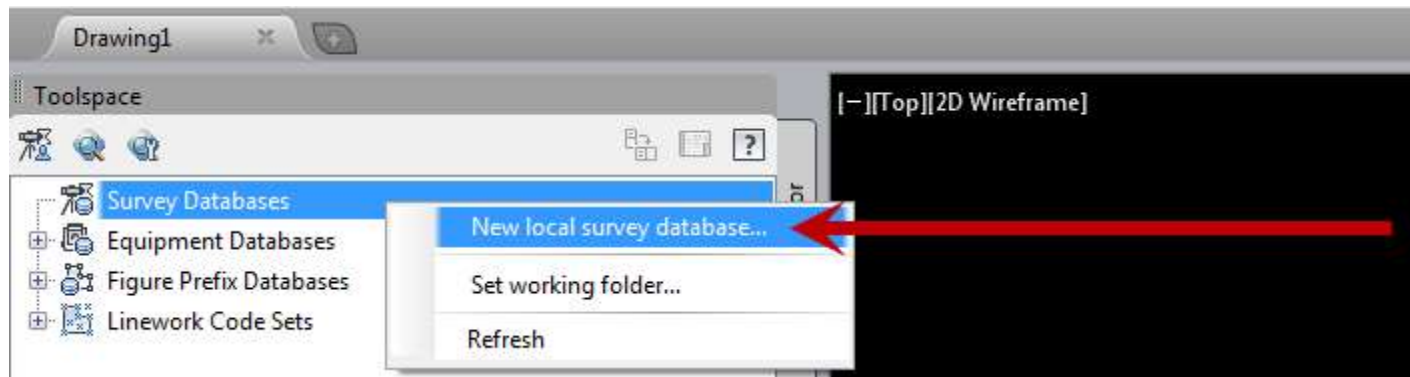


- ◆ Give the database a name

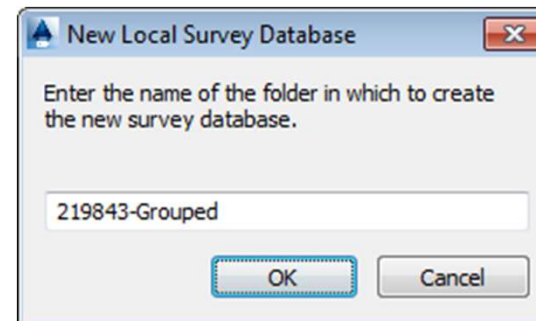


CIVIL 3D SURVEY DATABASE

- ◆ Once the database is created and ready for data import, the survey tab in Toolspace should contain both the Survey Database and the FDOT Figure Prefix Database.

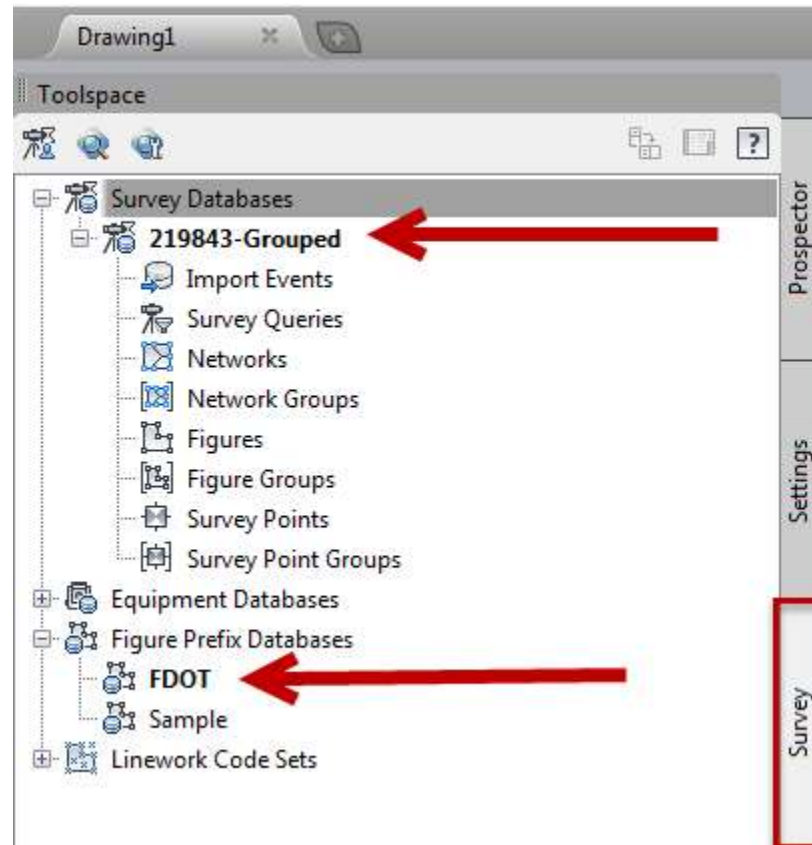


CIVIL 3D SURVEY DATABASE

- ◆ To populate the survey database with an XML file from CAiCE or EFB, right click on the Survey Database name and select Import and choose “Import survey data...” (import wizard) or “Import Survey LandXML...”.

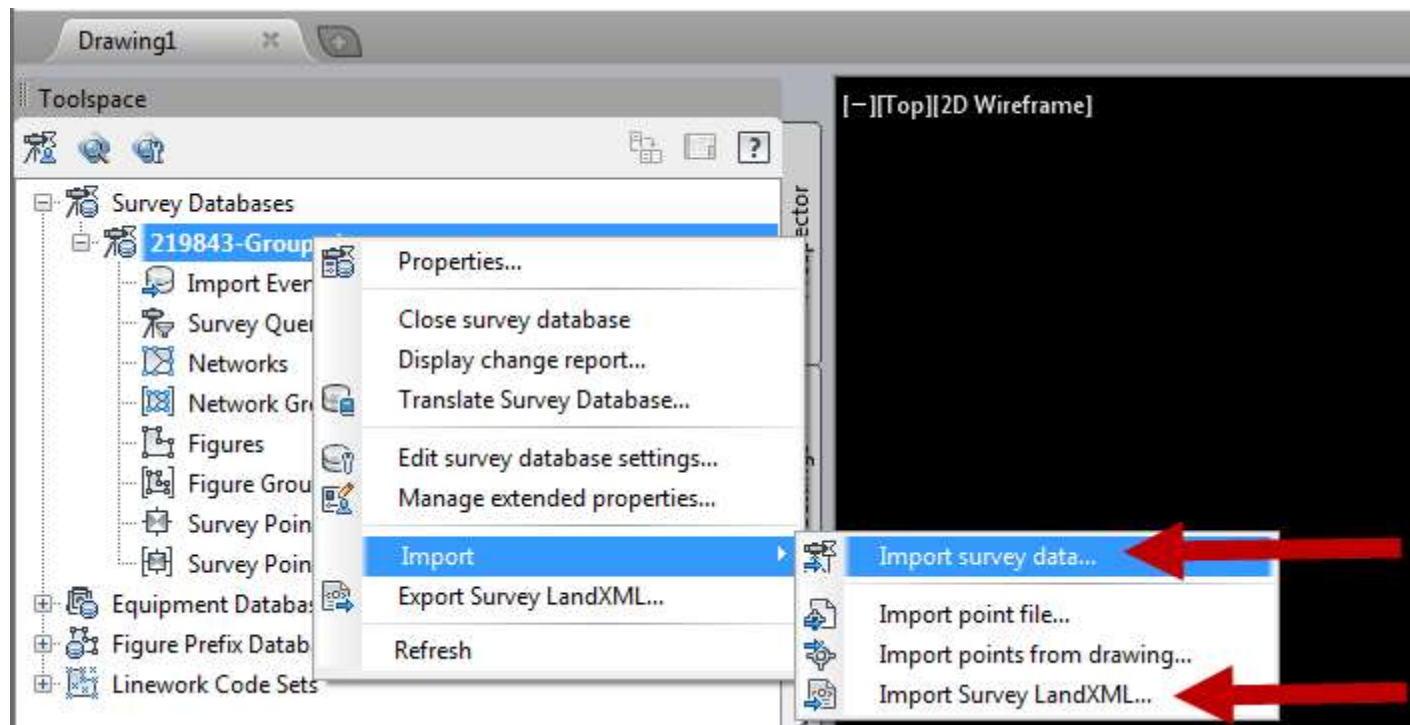

CIVIL 3D SURVEY DATABASE

- ◆ The Survey Database is now complete and ready for point and figure editing/grouping.
- ◆ The Survey Database can be transferred by copying the Survey.sdbx and Survey.SDXX files or the entire survey database folder.

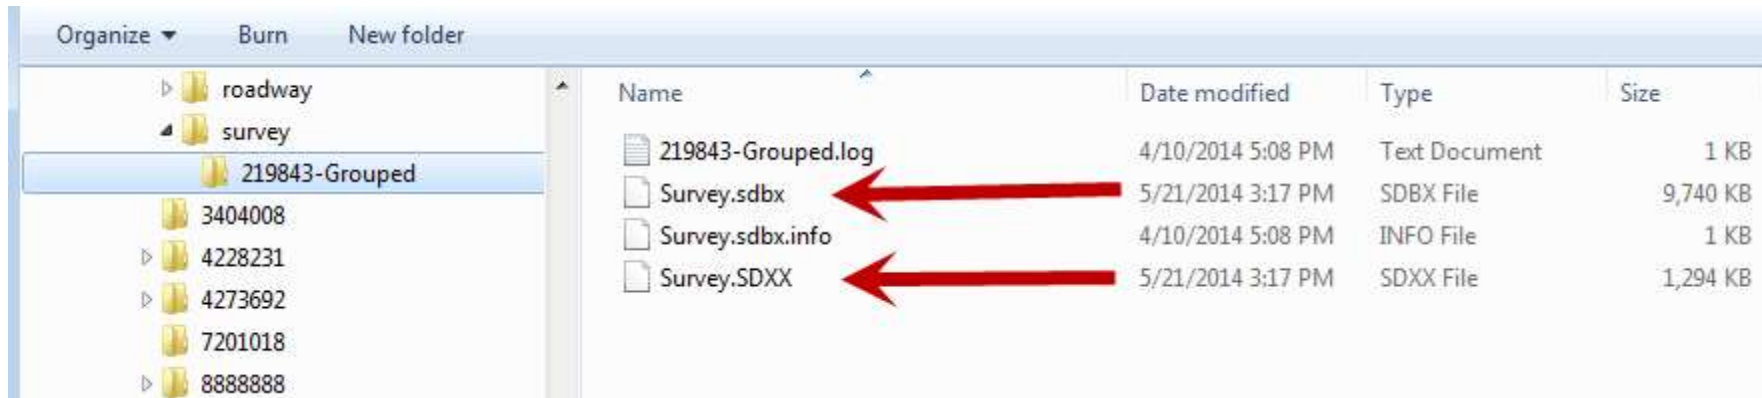


POINT AND FIGURE GROUPS

- ◆ Points and Figures can be grouped within the survey database.
- ◆ Point and Figure Groups are necessary for the efficient analysis, editing and visualization of survey data.
- ◆ Groups can be created manually within the survey database.
- ◆ Groups can be created in the XML prior to import into the survey database.
- ◆ The LandXML Grouper tool on the FDOT ribbon can be used to group XML data prior to import.

LANDXML GROUPEUR

- ◆ To manually create a point or figure group in the survey database right click on “Figure Groups” or “Survey Point Groups” and select “New”.
- ◆ To have the LandXML Grouper automatically create point and figure groups based on FDOT standards, click on “LandXML Grouper” in the FDOT ribbon.

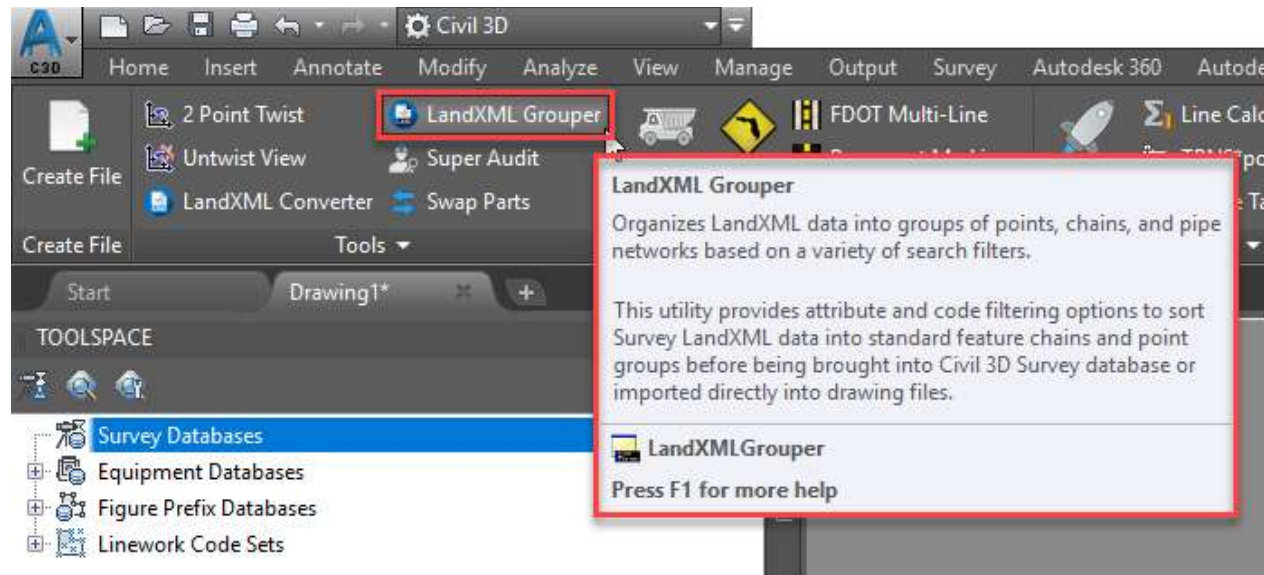

LANDXML GROUPEUR

- ◆ Under “File” in the LandXML Grouper, open the file you wish to group.
- ◆ Select the “Group filters” you wish to use to group your data. You may select one, some or all filters.
- ◆ Each individual filter can be edited by right clicking the filter and unlocking the filter. Once the filter is unlocked, the Zones, Codes and/or Attributes can be changed.
- ◆ Once the filter(s) are selected, right click in the Group Filters window and select “Create Group(s)”.
- ◆ Created Groups will be shown under “LandXML Output”.

LANDXML GROUPER

LandXML Group Maker 1.2.6481 Copyright © FDOT 2011-2016

File Filters Help

Group Filters

Name	Type
TOPORD Chains	Chains
TOPORD Points	Points
DREXRD Chains	Chains
DREXRD Points	Points
UTEXRD Chains	Chains
UTEXRD Points	Points
GDTMRD Chains	Chains
GDTMRD Points	Points
Bridge_DTM_Chains	Chains
Bridge_DTM_Points	Points
ROW_Control_Survey Ch...	Chains
ROW_Control_Survey Po...	Points
TOPORW Chains	Chains
TOPORW Points	Points
Control Chains Zone	Chains
Control Points Zone 5	Points
Reference Lines, Bas	Chains
Monumentation Zone	Chains
XSection Chains	Chains
XSection Points	Points
Existing Drainage Pip	Chains
Existing Utilities Pipe Net...	Pipes
Zone 1 - TOPO Chains	Chains
Zone 1 - TOPO Points	Points
Zone 2 - Drainage Chains	Chains
Zone 2 - Drainage Points	Points
Zone 3 - Utility Chains	Chains
Zone 3 - Utility Points	Points

Filter Criteria

Names	Zones	Codes	Attributes	Descriptions
	<input type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 <input type="checkbox"/> 4 <input type="checkbox"/> 5 <input type="checkbox"/> 6 <input type="checkbox"/> 7 <input type="checkbox"/> 9	<input checked="" type="checkbox"/> AC <input checked="" type="checkbox"/> AGF <input checked="" type="checkbox"/> AP <input checked="" type="checkbox"/> APRS <input checked="" type="checkbox"/> ARST <input checked="" type="checkbox"/> ATTN <input checked="" type="checkbox"/> BARW		

Right Click In The Blue To "Create Group(s)"

LANDXML GROUPER

- ◆ All groups were selected and all groups were created below. Individual groups can be viewed and edited before export to a grouped LandXML file.

LandXML Output


220495-Grouped.xml

- Survey Points
- Survey Chains
- TOPORD Chains
- TOPORD Points
- DREXRD Chains
- DREXRD Points
- UTEXRD Chains
- UTEXRD Points
- GDTMRD Chains
- GDTMRD Points
- Bridge_DTM_Chains
- Bridge_DTM_Points
- ROW_Control_Survey Chains
- ROW_Control_Survey Points
- TOPORW Chains
- TOPORW Points
- Control Chains Zone 5
- Control Points Zone 5
- Reference Lines, Baseline Survey Zone 6
- Monumentation Zone 6
- XSection Chains
- XSection Points
- Existing Drainage Pipe Network

Name	Zone	Code	Attribute	Chain Points	Description
LBOTB1	4	BRDG	ground	LBOTB1 LBOTB2 LBOTB3 LBOTB4 LBOTB5 LBOTB6 ...	BOTTOM BRIDGE
LCPVT2	4	CPVT	ground	LCPVT15 LCPVT16 LCPVT17 LCPVT18 LCPVT19 LC...	BRIDGE
LWAL2	4	HNDRL	ground	LWALA1 LWAL6 LWAL7 LWAL8 LWAL9 LWALA4	TOP
LWAL4	4	HNDRL	ground	LWAL10 LWAL11 LWAL12 LWAL13 LWAL14 LWAL1...	TOP
LWALA1	4	HNDRL	ground	LWALA1 LWALA2 LWALA3 LWALA4	TOP


LANDXML GROUPEUR

- ◆ Once the groups have been created in the LandXML Grouper, they can be exported to a new “grouped” LandXML file.
- ◆ Under “File” in the LandXML Grouper, select “Save As”. The extension “-Grouped” will be automatically added to the original LandXML file name for user convenience.

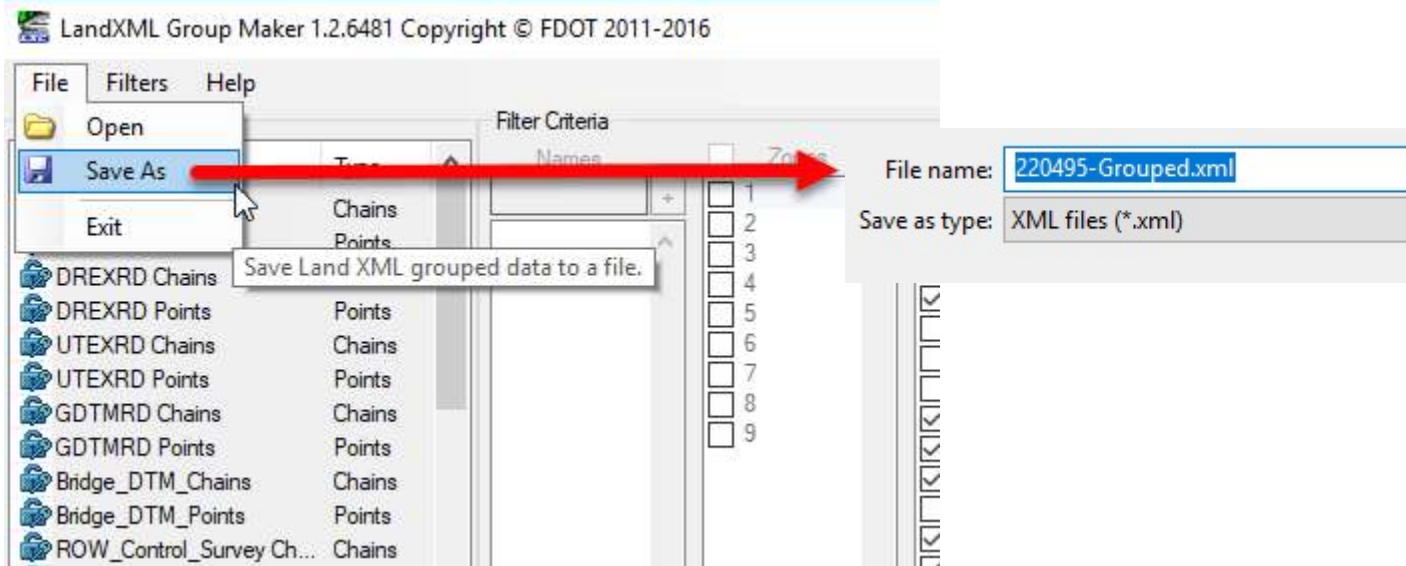


LANDXML GROUPEUR

- ◆ Close the LandXML Grouper. Before closing, the grouper will give the user a chance to save the current filter configuration.
- ◆ If changes were made to the “Group Filters” the user may wish to save the current filter configuration by selecting “Yes”. If no changes were made, select “No”.

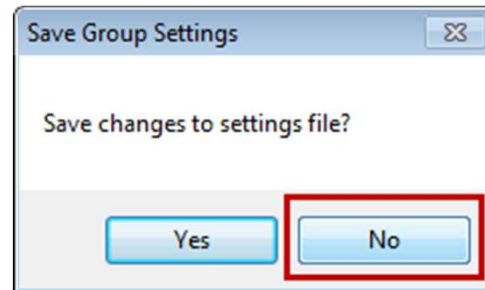


CIVIL 3D SURVEY DATABASE

- ◆ There is not, at this time, a standard Survey Database file naming convention. However, from experience we have seen it is beneficial to use the FP Number. If it is a grouped LandXML file add the “-Grouped” extension for clarity.
- ◆ Import the LandXML file into the Survey Database.

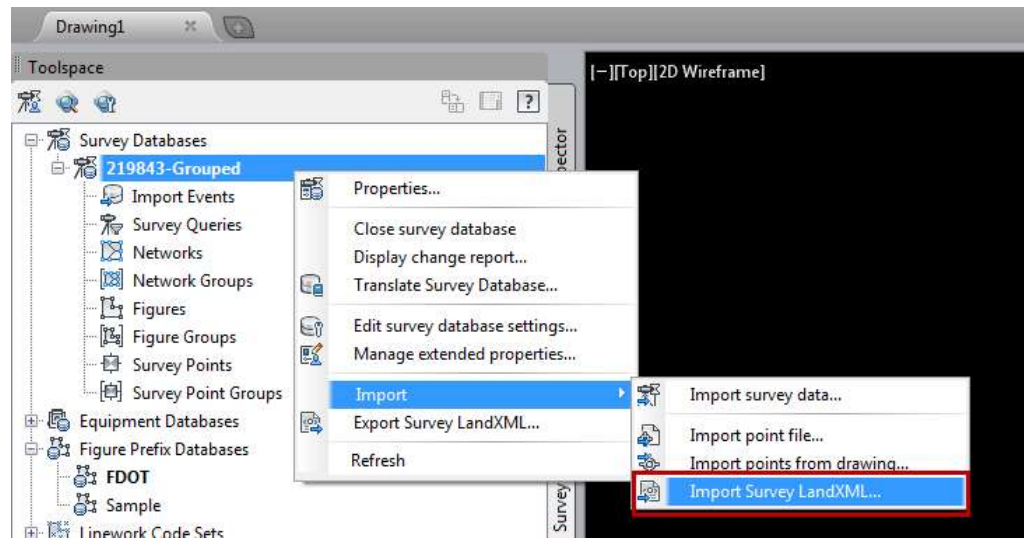

CIVIL 3D SURVEY DATABASE

- ◆ The “Current figure prefix database” must be set to FDOT

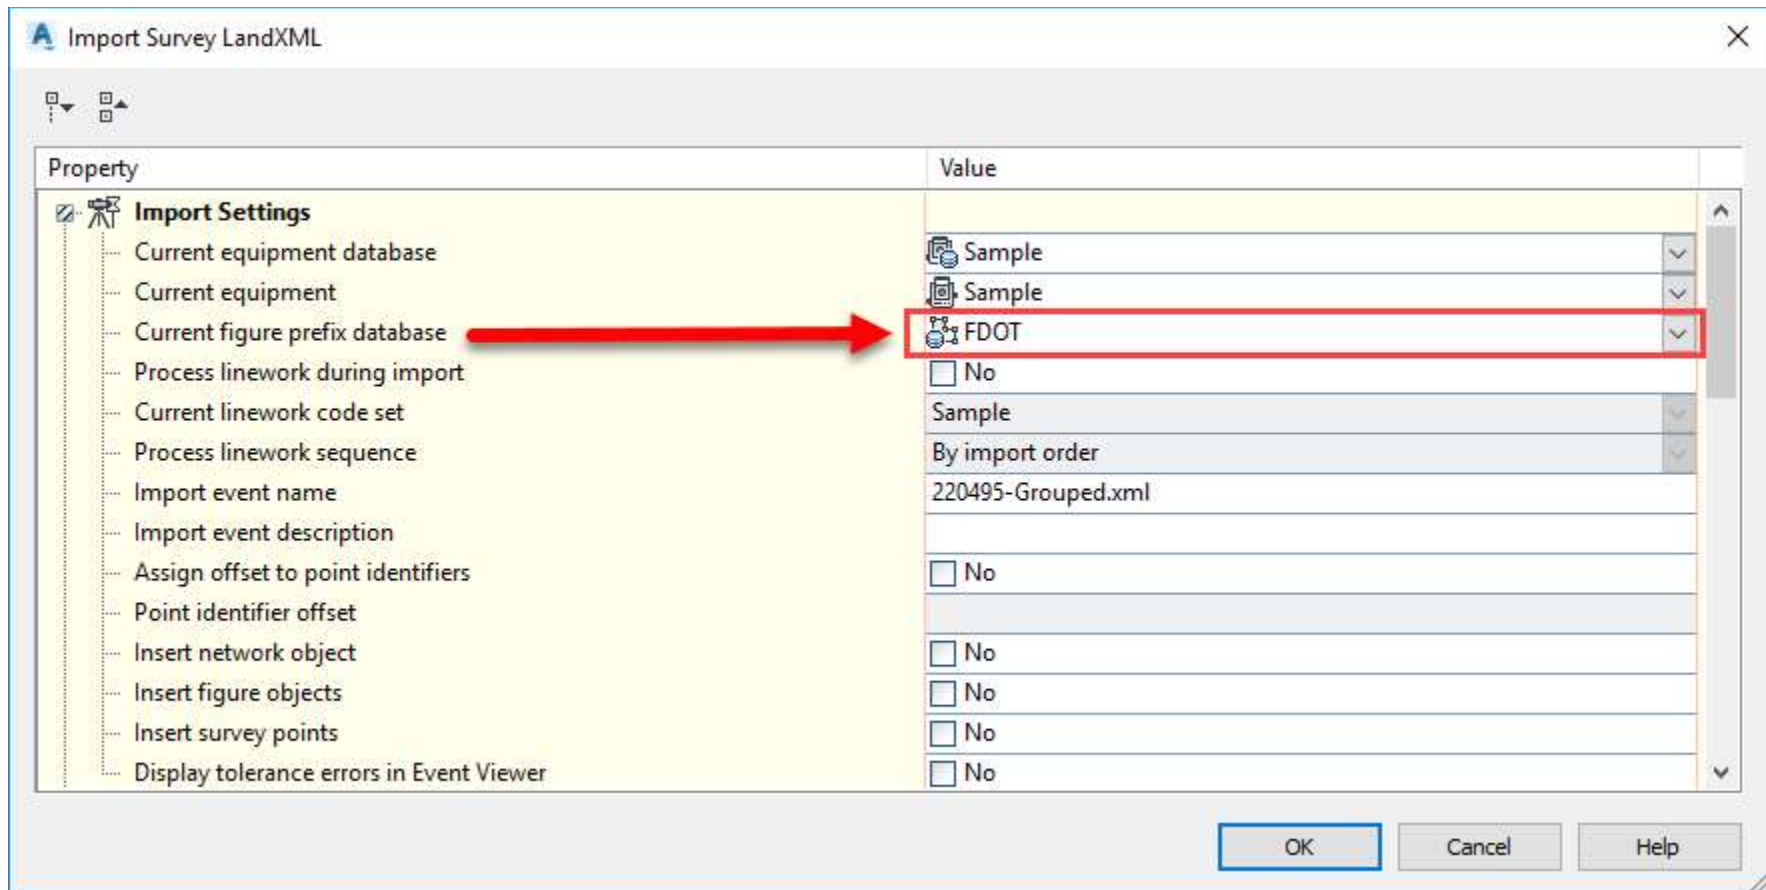

CIVIL 3D SURVEY DATABASE

- ◆ Do not insert points or objects at this time.
- ◆ Select the appropriate Datum/Projection and press “OK”.


Import Survey LandXML

Property	Value
Import event name	220495-Grouped.xml
Import event description	
Assign offset to point identifiers	<input type="checkbox"/> No
Point identifier offset	
Insert network object	<input type="checkbox"/> No
Insert figure objects	<input type="checkbox"/> No
Insert survey points	<input type="checkbox"/> No
Display tolerance errors in Event Viewer	<input type="checkbox"/> No
LandXML Data	
File name	D:\FDOT_Desktop\C3D_Projects\2018\220495\Survey\220495-Grouped...
<input checked="" type="checkbox"/> Units	
<input checked="" type="checkbox"/> Imperial angularUnit:decimal dd.mm.ss	
<input checked="" type="checkbox"/> Imperial linearUnit:USSurveyFoot	
<input checked="" type="checkbox"/> CoordinateSystem	NAD83 Florida State Planes, North Zone, US Foot
<input checked="" type="checkbox"/> CgPoints name:Survey Points (33551)	

OK Cancel Help

CIVIL 3D POINT & FIGURE GROUPS

- ◆ The Survey Database is built, grouped and ready for use.

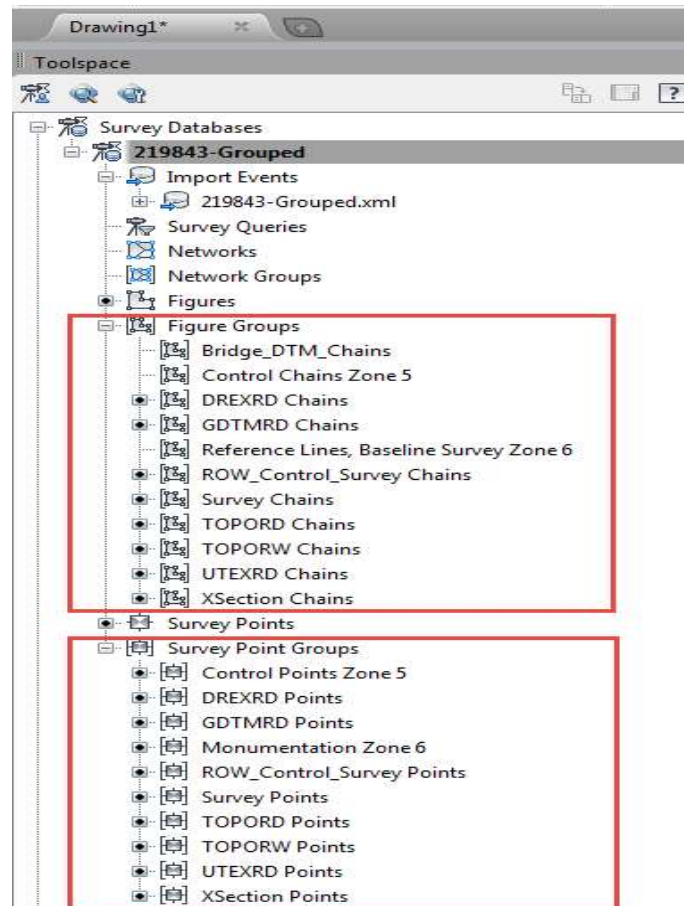

CREATE FILE UTILITY

- ◆ The survey development model template has been added for the purpose of aiding the development of FDOT design survey deliverables.
 - ✓ On the FDOT ribbon tab, open the Create File utility.
 - ✓ Select your project (the survey and roadway folders should be sub-folders under your project folder).
 - ✓ Discipline: ROADWAY.
 - ✓ File Group: Survey Design Files.
 - ✓ Select “Survey Development Model.
 - ✓ Set the State Plane Projection
 - ✓ Select the “Create File” button and select “Open File”.

CREATE FILE UTILITY

- ◆ Note that the base file for all surveying design files can be created from the “Survey Design Files” file group.
- ◆ The Output File uses the associated template and adds a two digit number starting with 01 and increments automatically as files from a given template are created.
- ◆ The Template used and the Template Path are also shown in the Create File utility.
- ◆ Once a file is created and opened the Create File utility can be closed.
- ◆ Note: The Alignment is under “Roadway Design Files”.

CREATE FILE UTILITY

Create File (v2018.0.3.9) ✕

Project: D:\FDOT_Desktop\C3D_Projects\2018\220495 Select Project

Discipline: ROADWAY

File Group: Survey Design Files

File Type:

- Digital Terrain Model TIN Model 3D
- Drainage Structures - Existing
- Project Control Sheets
- Survey Development Model**
- Survey of Verified Utilities 3D Version of UTEXRD.dgn
- Topography - Existing
- Tree Survey Sheet
- Utilities - Existing

Output File: SURVRD01.dwg

Output Folder: survey\ Browse

Template: survey.dwt Browse

Template Path: data/templates/

Coordinate System: FL North ←


Create/Open File Close

Set The Projection (State Plane)

- ◆ FDOT templates do not have the State Plane Zone preset due to most districts and consultants working in multiple zones. Therefore once a survey design file has been created the first thing that should be done is to set the appropriate State Plane Zone.
- ◆ There are multiple ways to set the State Plane Zone.
 - ✓ With the “Create File” tool.
 - ✓ In the Toolspace>Settings tab right click on the file name and select “Edit Drawing Settings...”.
 - Manually select the Zone from the Units and Zone tab “No Datum, No Projection” pull down.
 - Or manually type in the coordinate system code.

Set The Projection (State Plane)

- ◆ FDOT has provided another Way to set the Florida State Plane zone, US Foot.
 - ✓ Type in the Civil 3D command line:
 - SETFLNORTH
 - SETFLWEST
 - SETFLEAST
 - ✓ Select the “Yes” button on the Change Coordinate System warning dialogue box and **SAVE** your drawing.

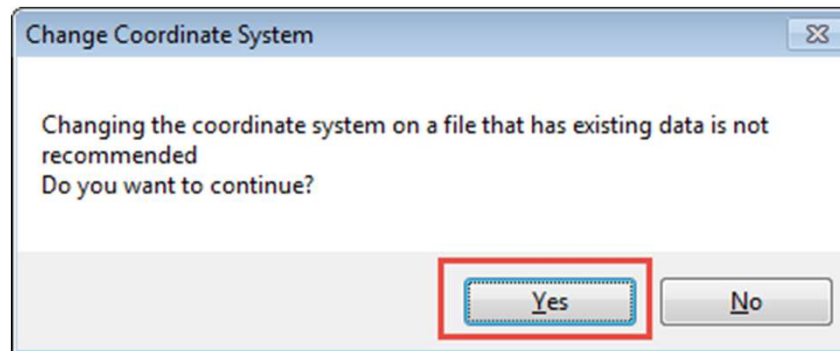


SURFACES

- ◆ Surfaces are Civil 3D objects.
 - ✓ A Civil 3D object has imbedded intelligence.
- ◆ Surfaces are created and saved within a specific drawing. They are not part of the Survey Database, but they can be dynamically linked.
- ◆ The SURVRD template was constructed for building surfaces.
- ◆ Surfaces can be exported as a Surface LandXML file.
 - ✓ Surface LandXML files should be imported into the GDTMRD.dwg file for delivery to design.

SURFACES


- ◆ Surfaces in Civil 3D are created from survey points and figures inserted into the drawing file. Therefore surfaces depend on the visualization of points and chains.
- ◆ The GDTMRD Point and Chain groups created by the LandXML grouper are specifically points and chains in zone one and/or zone two that have a “ground” attribute.
- ◆ The Bridge_DTM_Points and the Bridge_DTM_Chains are groups created by the LandXML grouper that are in zone four and have a “ground” attribute.
- ◆ Therefore if the survey points and chains in a project use the current standards, these groups can be used to create ground and bridge surfaces.

SURFACES

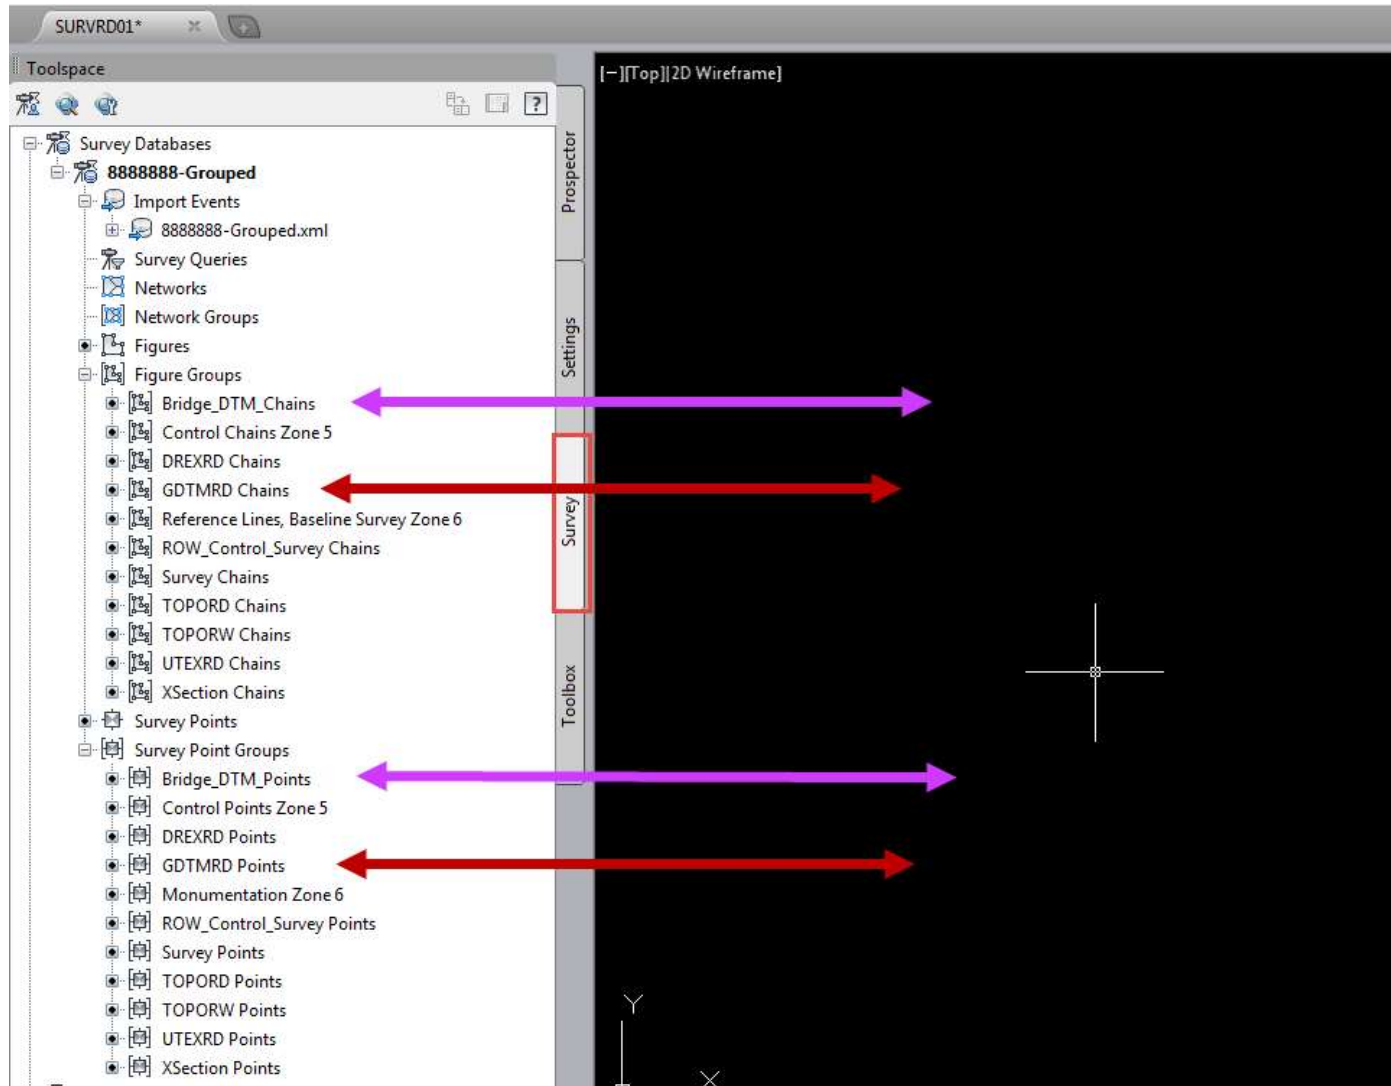


SURFACES

- ◆ In Toolspace>Prospector, right click on surfaces and create a new existing ground surface.

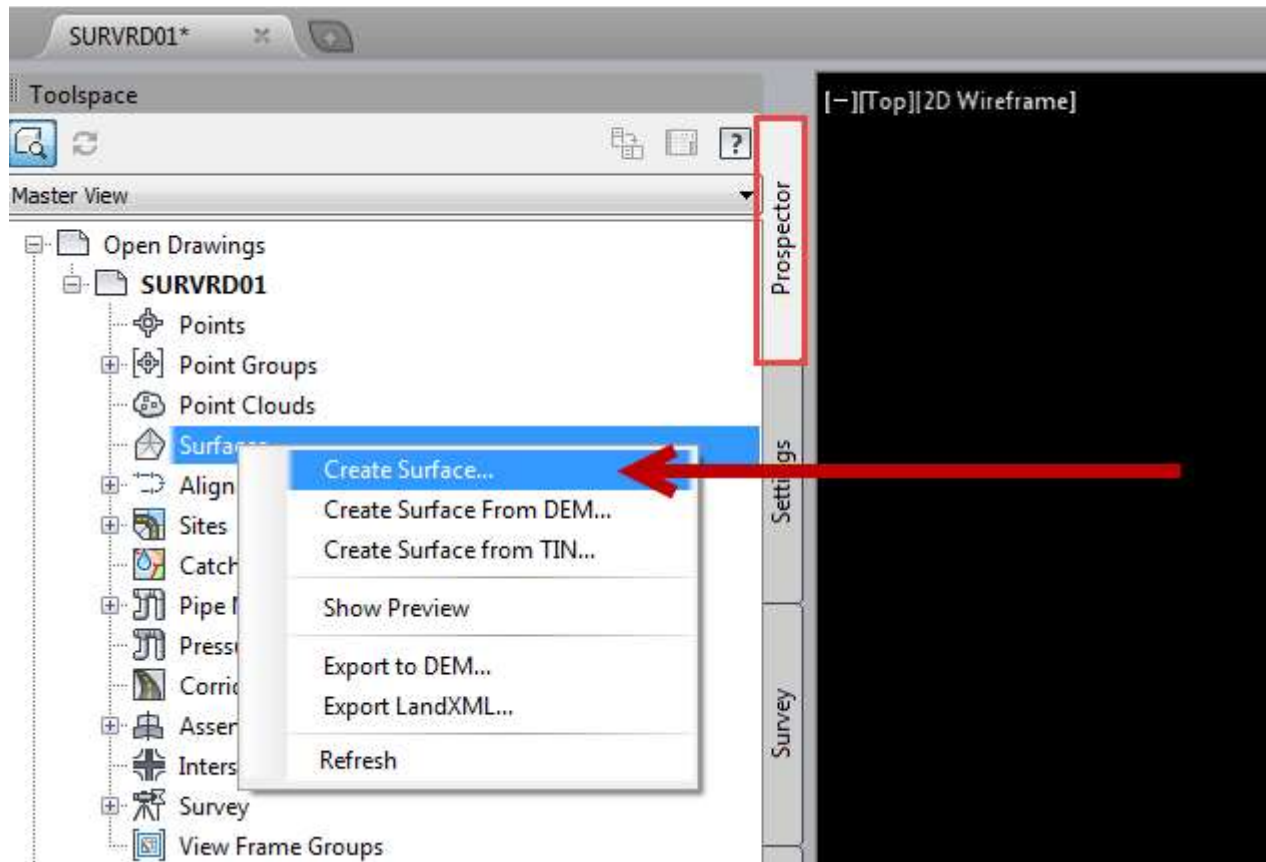

SURFACES

- ◆ Type of surface is “Tin surface” and the layer is “DTM”. Fill in a name and select the style. The style is for visualization and can be changed at any time.

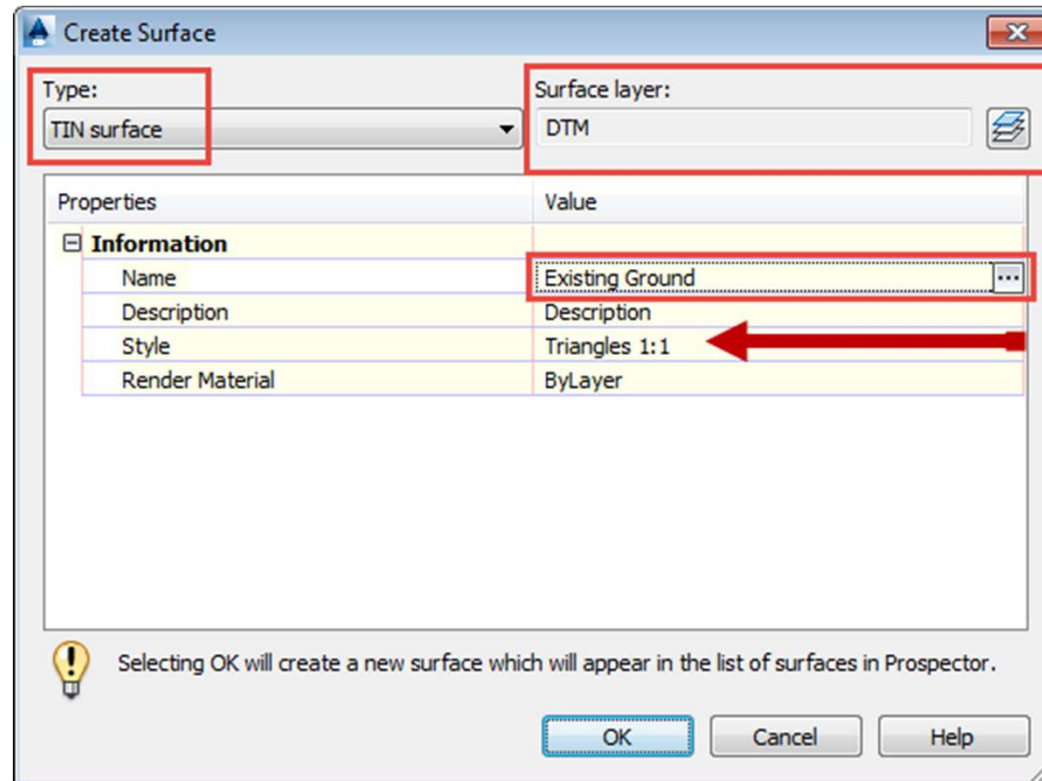


ADD POINTS TO SURFACES

- ◆ In the Toolspace>Prospector tab, expand surfaces to view the new surface and other facets of a Civil 3D surface.
- ◆ The GDTMRD Point group will need to be added along with the GDTMRD Figure group for breaklines.
- ◆ In the Toolspace>Survey tab, right click on the GDTMRD Points group and “Insert into drawing”. This will add the GDTMRD Point group to Point Groups under the prospector tab.
- ◆ Right click on the Prospector Point Groups and “Update”.


ADD POINTS TO SURFACES

- ◆ In the Toolspace>Prospector under Surfaces, right click on “Point Groups” and select “Add...” the GDTMRD point group only.

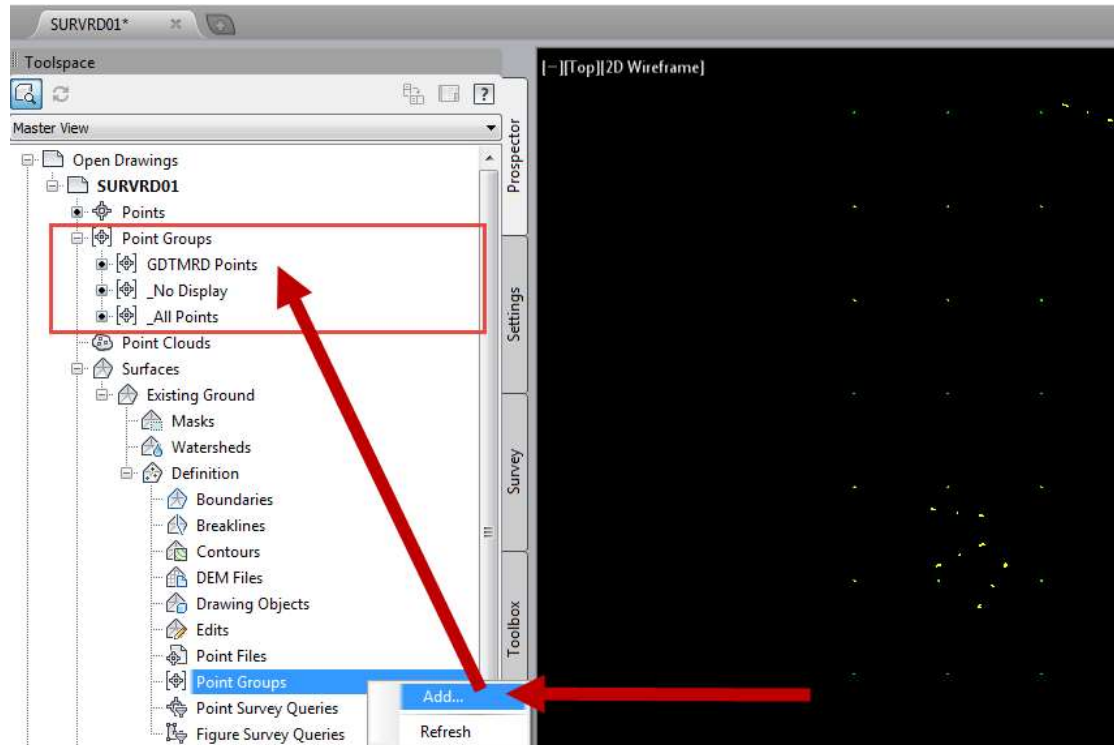


ADD POINTS TO SURFACES

- ◆ A black dot is beside the Existing Ground - Point Groups. Civil 3D creates the surface and visualizes the currently selected style (Triangles).

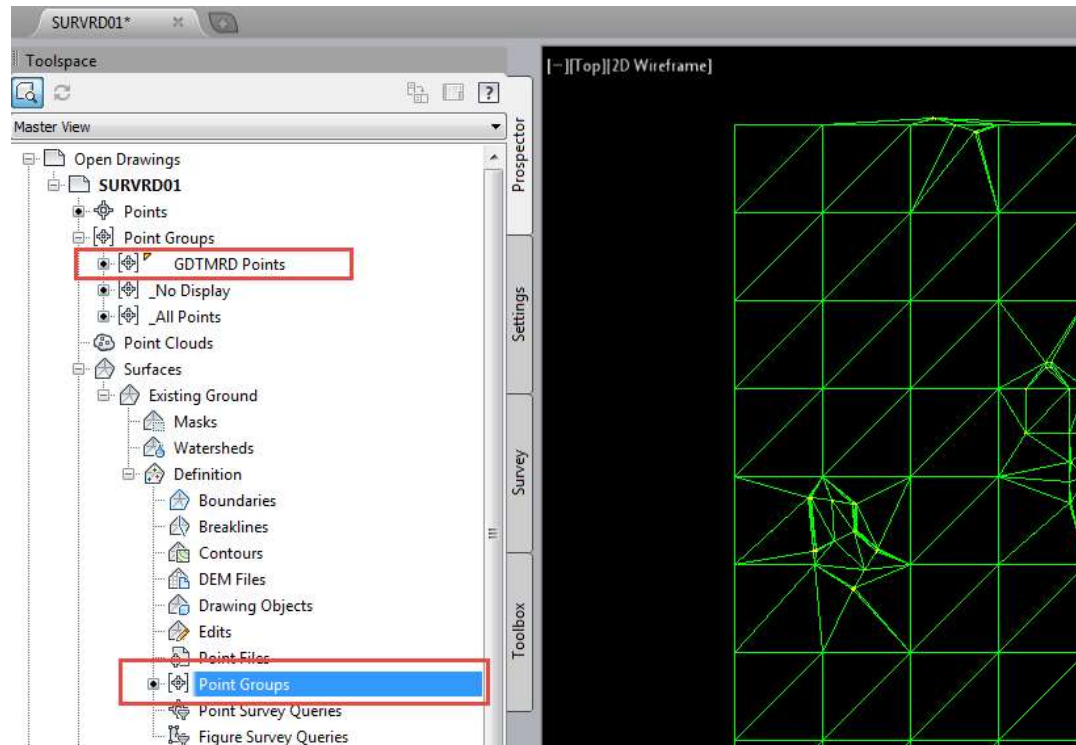


ADD FIGURES TO SURFACES

- ◆ In the Toolspace>Survey tab, right click on the GDTMRD Chains figure group and select “Create breaklines...”.

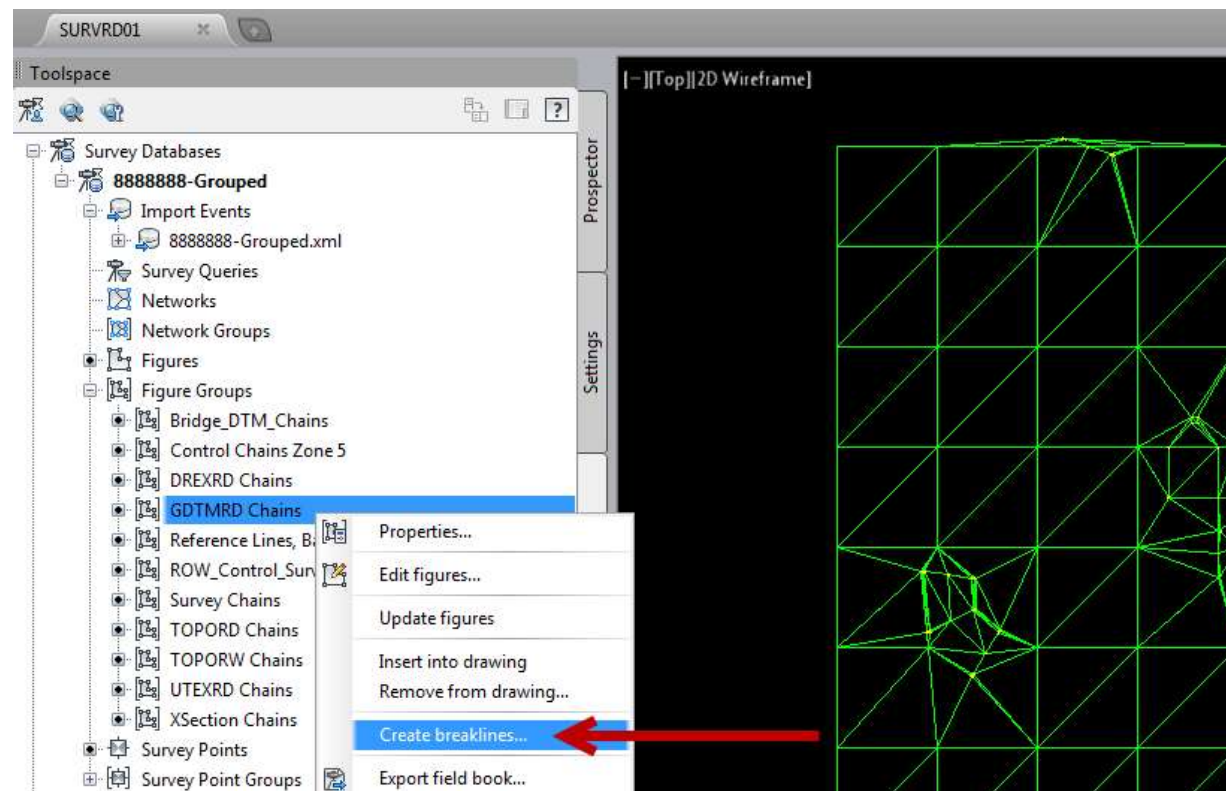

ADD FIGURES TO SURFACES

- ◆ The Create Breaklines dialogue box will come up. Be sure to select the appropriate surface to add the breaklines to.
- ◆ The breaklines listed and checked will be all the figures in the selected figure group. Uncheck any figure that is not to be used in creating the surface. Press “OK”.

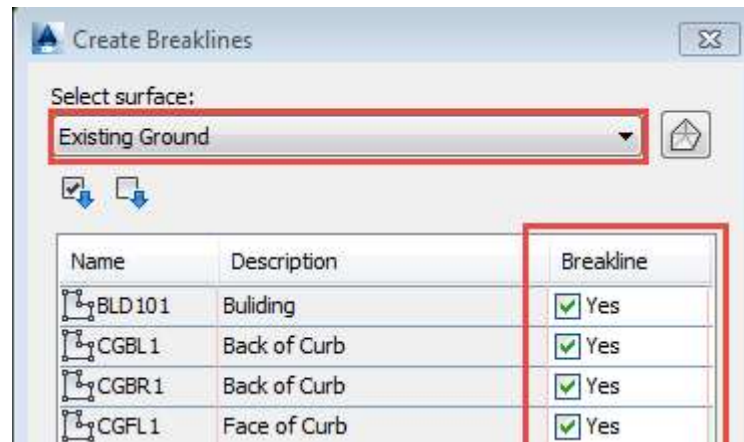

ADD FIGURES TO SURFACES

- ◆ The Add Breaklines dialogue box will appear. Fill in the Description.
- ◆ The type breakline will generally be “Standard” however, Civil 3D has added some other types that can be used if needed.
- ◆ Check the “Weeding factors” and the “Distance:” check boxes. Both have preset values that are generally standard but can be modified if need be.
- ◆ Press “OK”.

ADD FIGURES TO SURFACES



A Add Breaklines ✕

Description:
Ground Breaklines



Type:
Standard

File link options:
Break link to file

Weeding factors

Distance: 15.00'  Angle: 004° 00' 00" 


Supplementing factors

Distance: 50.00'  Mid-ordinate distance: 0.01' 

OK Cancel Help


ADD FIGURES TO SURFACES

- ◆ The GDTMRD Chains figure group will be added and the surface will be updated to include breaklines.

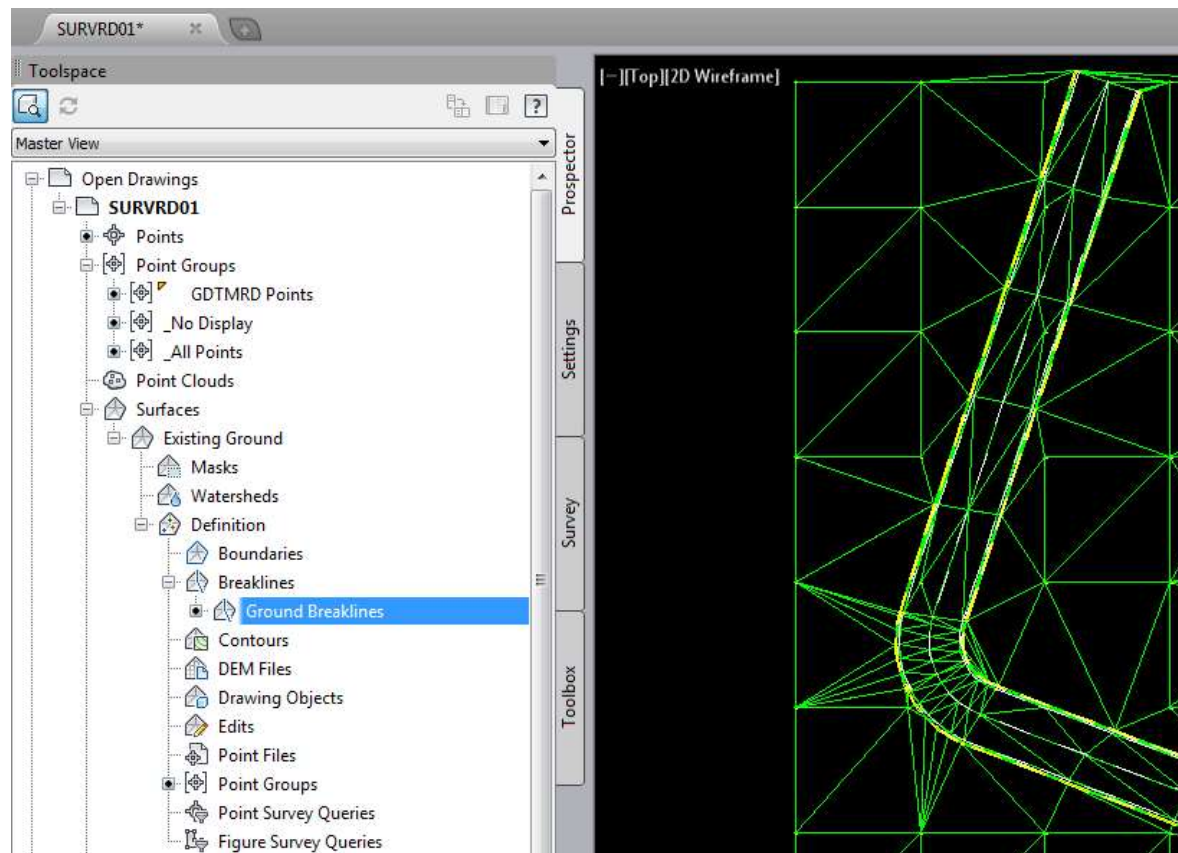

ADD FIGURES TO SURFACES

- ◆ If there are crossing breaklines, Civil 3D will list the errors in the event viewer.

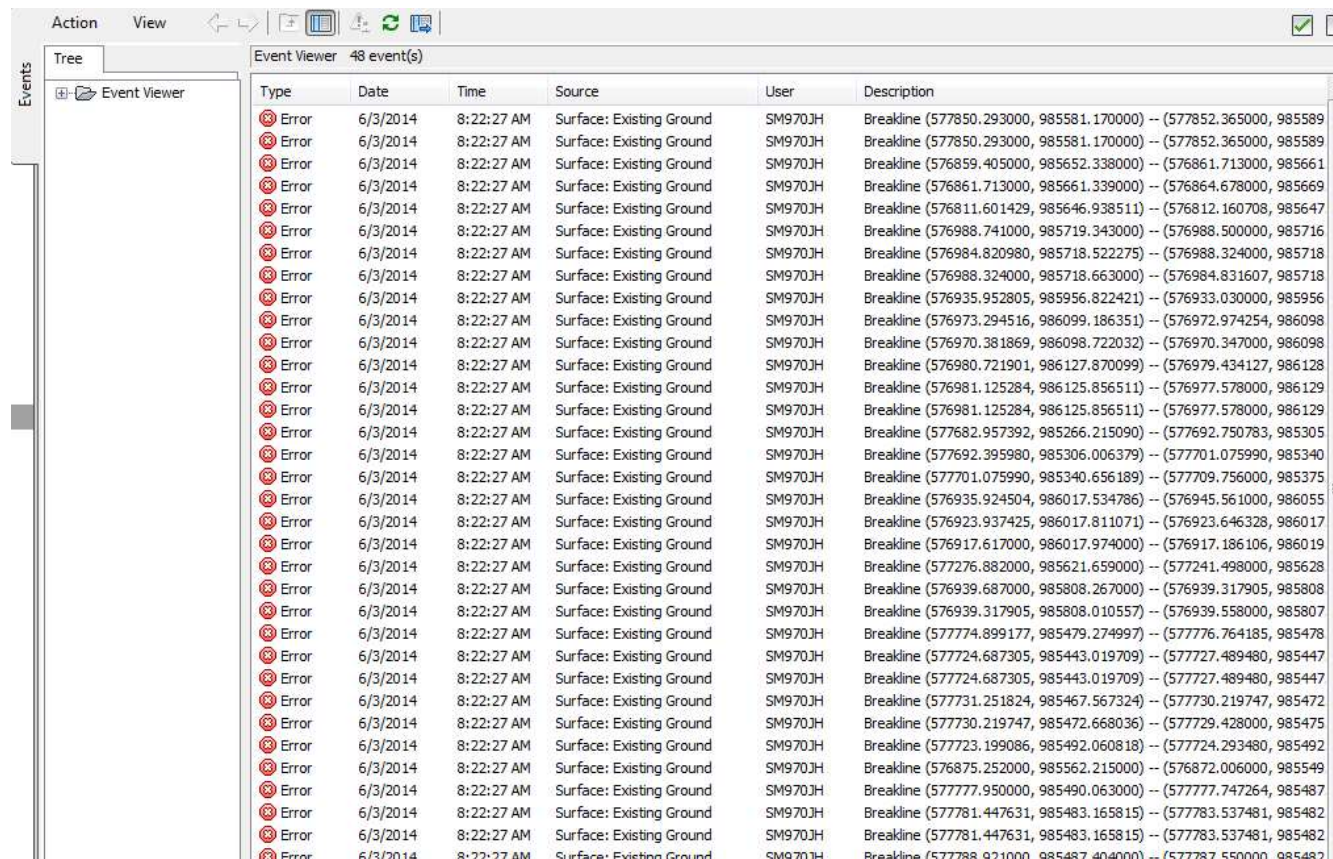

The screenshot displays the 'Event Viewer' window in Civil 3D, showing 48 error events. The events are listed in a table with columns for Type, Date, Time, Source, User, and Description. All events are of type 'Error' and occurred on 6/3/2014 at 8:22:27 AM. The source for all events is 'Surface: Existing Ground' and the user is 'SM970JH'. The descriptions indicate that the errors are caused by crossing breaklines between different surface objects.


Type	Date	Time	Source	User	Description
Error	6/3/2014	8:22:27 AM	Surface: Existing Ground	SM970JH	Breakline (577850.293000, 985581.170000) -- (577852.365000, 985589
Error	6/3/2014	8:22:27 AM	Surface: Existing Ground	SM970JH	Breakline (577850.293000, 985581.170000) -- (577852.365000, 985589
Error	6/3/2014	8:22:27 AM	Surface: Existing Ground	SM970JH	Breakline (576859.405000, 985652.338000) -- (576861.713000, 985661
Error	6/3/2014	8:22:27 AM	Surface: Existing Ground	SM970JH	Breakline (576861.713000, 985661.339000) -- (576864.678000, 985669
Error	6/3/2014	8:22:27 AM	Surface: Existing Ground	SM970JH	Breakline (576811.601429, 985646.938511) -- (576812.160708, 985647
Error	6/3/2014	8:22:27 AM	Surface: Existing Ground	SM970JH	Breakline (576988.741000, 985719.343000) -- (576988.500000, 985716
Error	6/3/2014	8:22:27 AM	Surface: Existing Ground	SM970JH	Breakline (576984.820980, 985718.522275) -- (576988.324000, 985718
Error	6/3/2014	8:22:27 AM	Surface: Existing Ground	SM970JH	Breakline (576988.324000, 985718.663000) -- (576984.831607, 985718
Error	6/3/2014	8:22:27 AM	Surface: Existing Ground	SM970JH	Breakline (576935.952805, 985956.822421) -- (576933.030000, 985956
Error	6/3/2014	8:22:27 AM	Surface: Existing Ground	SM970JH	Breakline (576973.294516, 986099.186351) -- (576972.974254, 986098
Error	6/3/2014	8:22:27 AM	Surface: Existing Ground	SM970JH	Breakline (576970.381869, 986098.722032) -- (576970.347000, 986098
Error	6/3/2014	8:22:27 AM	Surface: Existing Ground	SM970JH	Breakline (576980.721901, 986127.870099) -- (576979.434127, 986128
Error	6/3/2014	8:22:27 AM	Surface: Existing Ground	SM970JH	Breakline (576981.125284, 986125.856511) -- (576977.578000, 986129
Error	6/3/2014	8:22:27 AM	Surface: Existing Ground	SM970JH	Breakline (576981.125284, 986125.856511) -- (576977.578000, 986129
Error	6/3/2014	8:22:27 AM	Surface: Existing Ground	SM970JH	Breakline (577682.957392, 985266.215090) -- (577692.750783, 985305
Error	6/3/2014	8:22:27 AM	Surface: Existing Ground	SM970JH	Breakline (577692.395980, 985306.006379) -- (577701.075990, 985340
Error	6/3/2014	8:22:27 AM	Surface: Existing Ground	SM970JH	Breakline (577701.075990, 985340.656189) -- (577709.756000, 985375
Error	6/3/2014	8:22:27 AM	Surface: Existing Ground	SM970JH	Breakline (576935.924504, 986017.534786) -- (576945.561000, 986055
Error	6/3/2014	8:22:27 AM	Surface: Existing Ground	SM970JH	Breakline (576923.937425, 986017.811071) -- (576923.646328, 986017
Error	6/3/2014	8:22:27 AM	Surface: Existing Ground	SM970JH	Breakline (576917.617000, 986017.974000) -- (576917.186106, 986019
Error	6/3/2014	8:22:27 AM	Surface: Existing Ground	SM970JH	Breakline (577276.882000, 985621.659000) -- (577241.498000, 985628
Error	6/3/2014	8:22:27 AM	Surface: Existing Ground	SM970JH	Breakline (576939.687000, 985808.267000) -- (576939.317905, 985808
Error	6/3/2014	8:22:27 AM	Surface: Existing Ground	SM970JH	Breakline (576939.317905, 985808.010557) -- (576939.558000, 985807
Error	6/3/2014	8:22:27 AM	Surface: Existing Ground	SM970JH	Breakline (577774.899177, 985479.274997) -- (577776.764185, 985478
Error	6/3/2014	8:22:27 AM	Surface: Existing Ground	SM970JH	Breakline (577724.687305, 985443.019709) -- (577727.489480, 985447
Error	6/3/2014	8:22:27 AM	Surface: Existing Ground	SM970JH	Breakline (577724.687305, 985443.019709) -- (577727.489480, 985447
Error	6/3/2014	8:22:27 AM	Surface: Existing Ground	SM970JH	Breakline (577731.251824, 985467.567324) -- (577730.219747, 985472
Error	6/3/2014	8:22:27 AM	Surface: Existing Ground	SM970JH	Breakline (577730.219747, 985472.668036) -- (577729.428000, 985475
Error	6/3/2014	8:22:27 AM	Surface: Existing Ground	SM970JH	Breakline (577723.199086, 985492.060818) -- (577724.293480, 985492
Error	6/3/2014	8:22:27 AM	Surface: Existing Ground	SM970JH	Breakline (576875.252000, 985562.215000) -- (576872.006000, 985549
Error	6/3/2014	8:22:27 AM	Surface: Existing Ground	SM970JH	Breakline (577777.950000, 985490.063000) -- (577777.747264, 985487
Error	6/3/2014	8:22:27 AM	Surface: Existing Ground	SM970JH	Breakline (577781.447631, 985483.165815) -- (577783.537481, 985482
Error	6/3/2014	8:22:27 AM	Surface: Existing Ground	SM970JH	Breakline (577781.447631, 985483.165815) -- (577783.537481, 985482
Error	6/3/2014	8:22:27 AM	Surface: Existing Ground	SM970JH	Breakline (577788.921000, 985487.404000) -- (577787.550000, 985482

RESOLVE CROSSING BREAKLINES

- ◆ The “Resolve Crossing Breaklines” tool provided by Civil 3D will help with identifying crossing breaklines.
- ◆ Breaklines can be resolved before the surface is created by inserting the breaklines into the drawing and running the “Resolve Crossing Breaklines” tool from the Civil 3D Ribbon under the Analyze tab - Ground Data drop down.
- ◆ Breaklines can be resolved after the surface is created by running the “Resolve Crossing Breaklines” from the contextual ribbon tab when the surface is selected.
- ◆ To identify specific crossing breaklines, choose the **Figure** option to list in the event viewer.


RESOLVE CROSSING BREAKLINES

- ◆ The event viewer will open with a “Crossing Breaklines” tab. Selecting the breakline in the event viewer will highlight both crossing breaklines, on screen (red & blue).

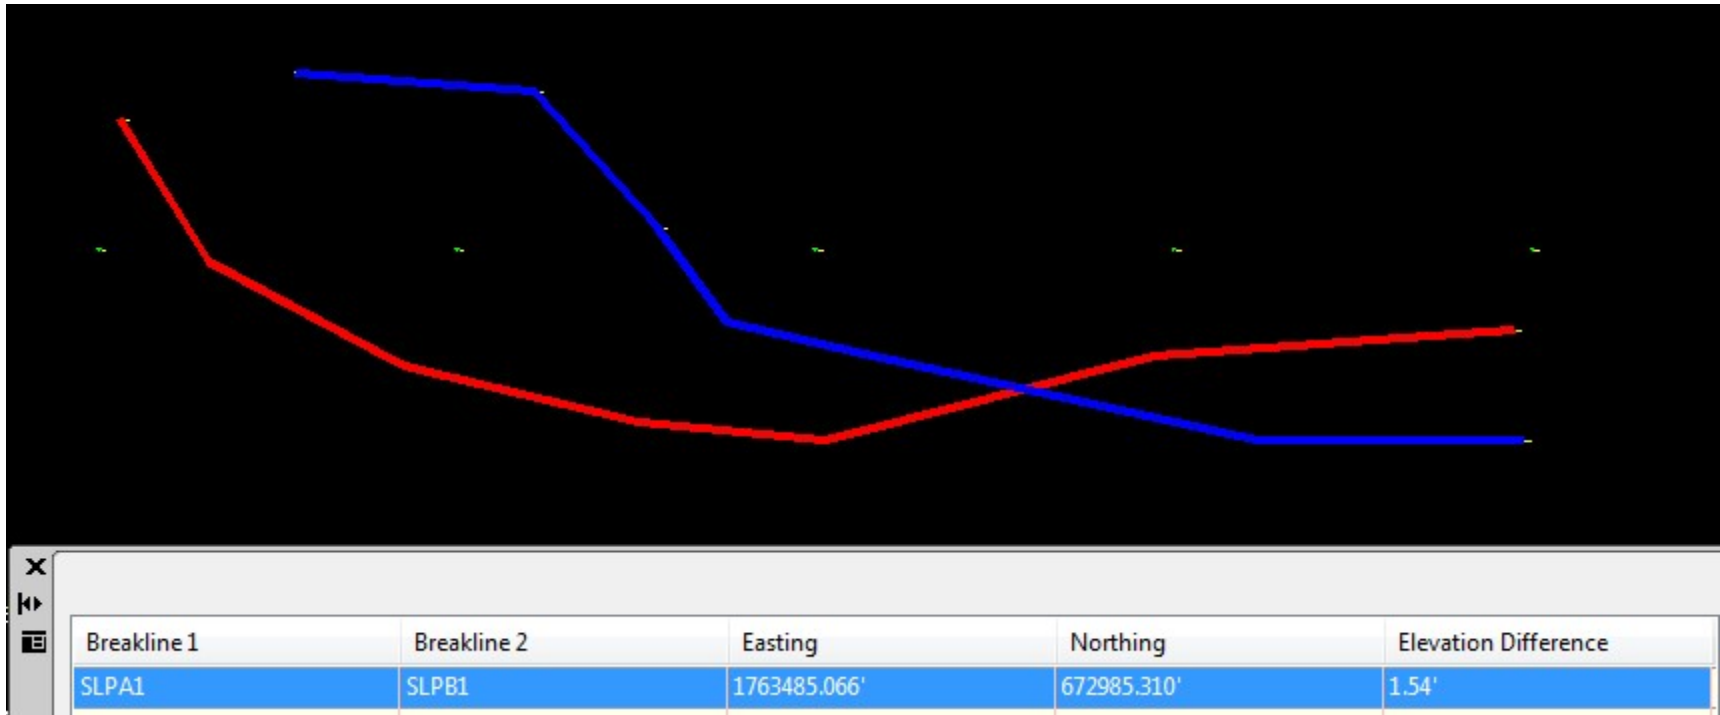

EDITING CROSSING BREAKLINES

- ◆ Crossing breaklines must be manually edited to resolve. Since breaklines are “Figures” (chains), use the figure editor to edit breaklines.
- ◆ Select a figure to edit. A contextual ribbon will open. Select “Survey Figure Properties” to edit the figure.
- ◆ Civil 3D provides a group of tools just above the points list in the Figure Properties dialogue box to manipulate figures.

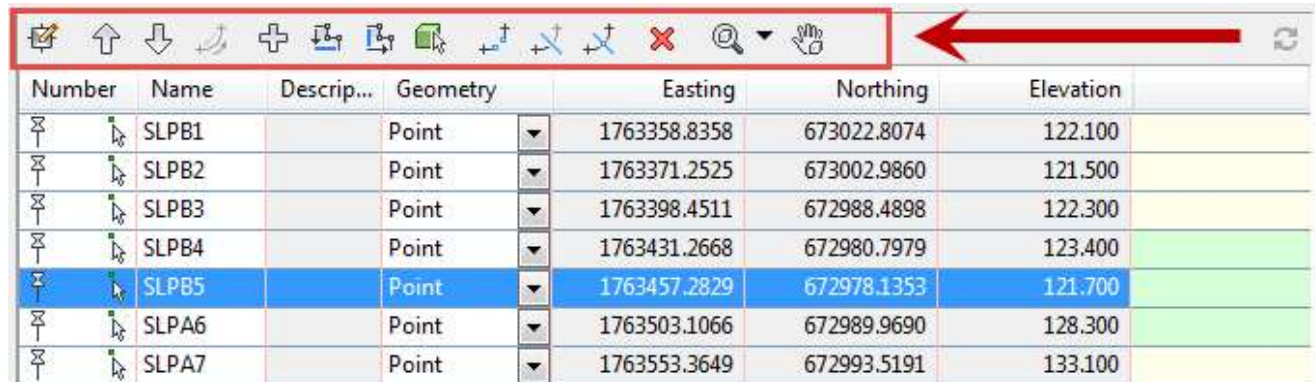


Number	Name	Descrip...	Geometry	Easting	Northing	Elevation
SLPB1	SLPB1		Point	1763358.8358	673022.8074	122.100
SLPB2	SLPB2		Point	1763371.2525	673002.9860	121.500
SLPB3	SLPB3		Point	1763398.4511	672988.4898	122.300
SLPB4	SLPB4		Point	1763431.2668	672980.7979	123.400
SLPB5	SLPB5		Point	1763457.2829	672978.1353	121.700
SLPA6	SLPA6		Point	1763503.1066	672989.9690	128.300
SLPA7	SLPA7		Point	1763553.3649	672993.5191	133.100

EDITING CROSSING BREAKLINES

- ◆ When a figure is edited in the Figure Properties dialogue box, press “Apply” or “OK” to save these edits in the survey database.
- ◆ NOTE: If a figure needs to be broken into two parts, a new figure name must be given to the remainder. This new chain is added to the survey database but it is NOT automatically part of the figure group. To add this chain to a figure group, right click on the appropriate figure group in the survey database, select properties, find the new chain name and select the check box.
- ◆ If figure breaklines for an active surface are edited, in the Prospector, right click on the surface name and rebuild.


WORKING WITH SURFACES

- ◆ Because a Civil 3D surface is an object, selecting it will bring up the contextual ribbon menu for surfaces.

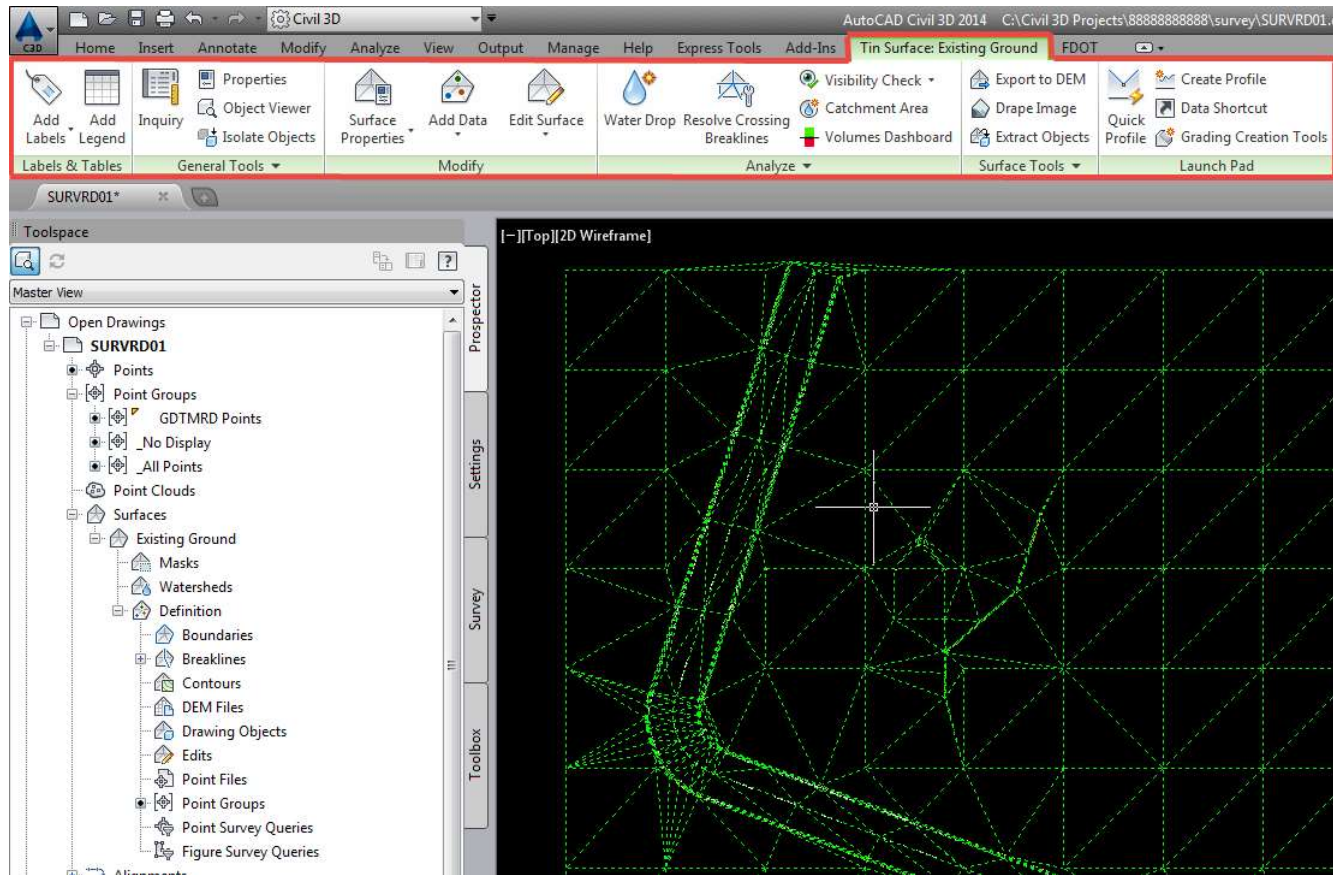


WORKING WITH SURFACES

- ◆ Selecting the “Object Viewer” will allow rotating and inspection of the surface with multiple renderings.

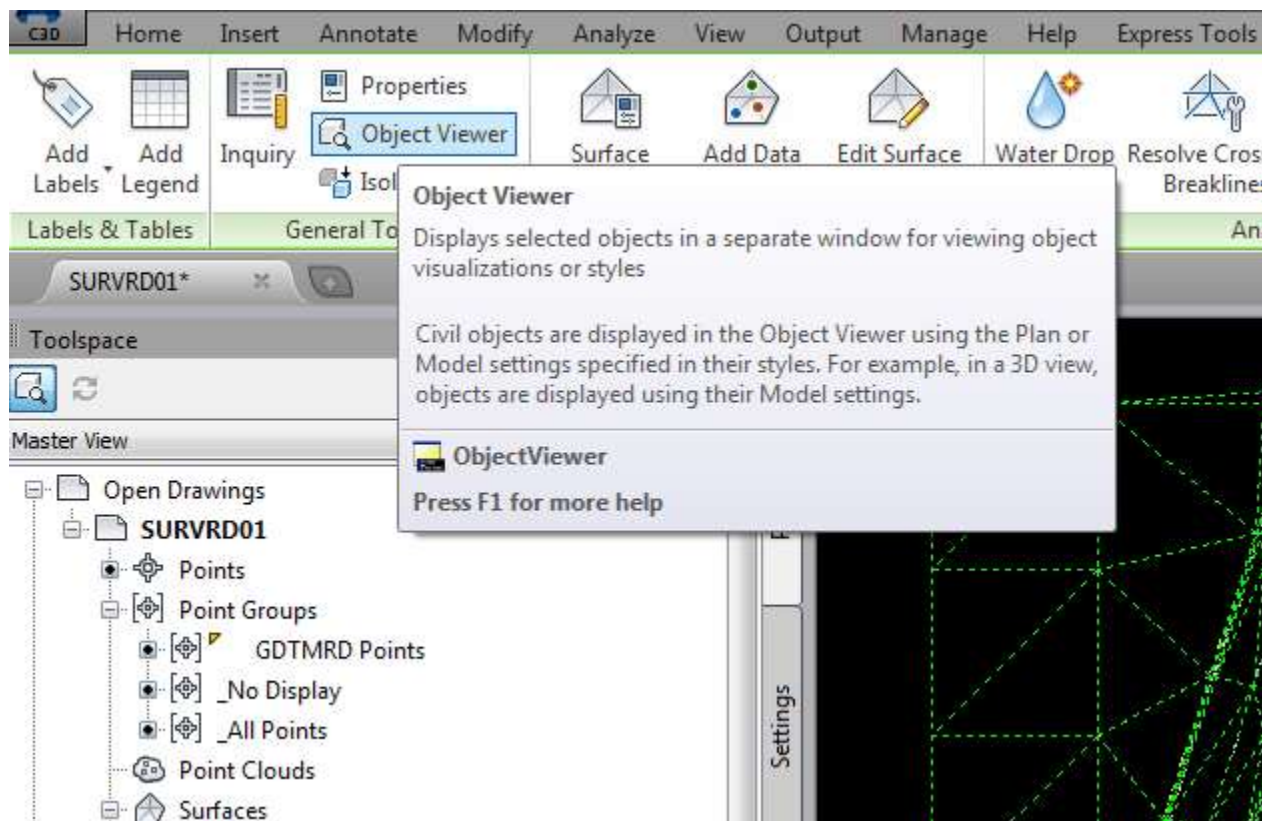


WORKING WITH SURFACES

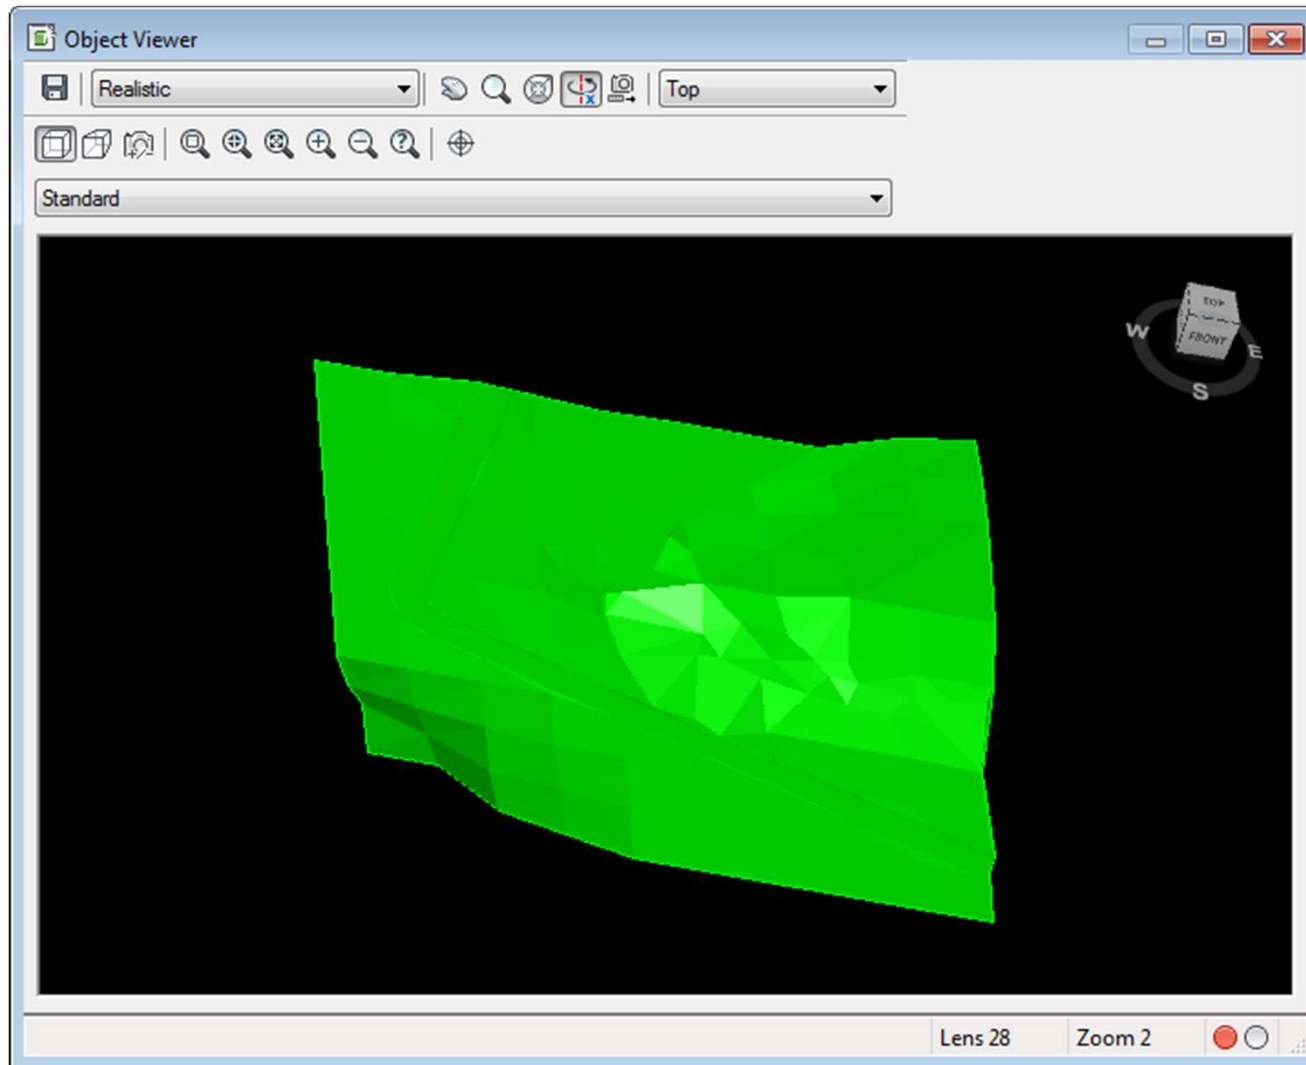


WORKING WITH SURFACES

- ◆ Select the “Surface Properties” to change the surface style, definitions, run analysis or view statistics.

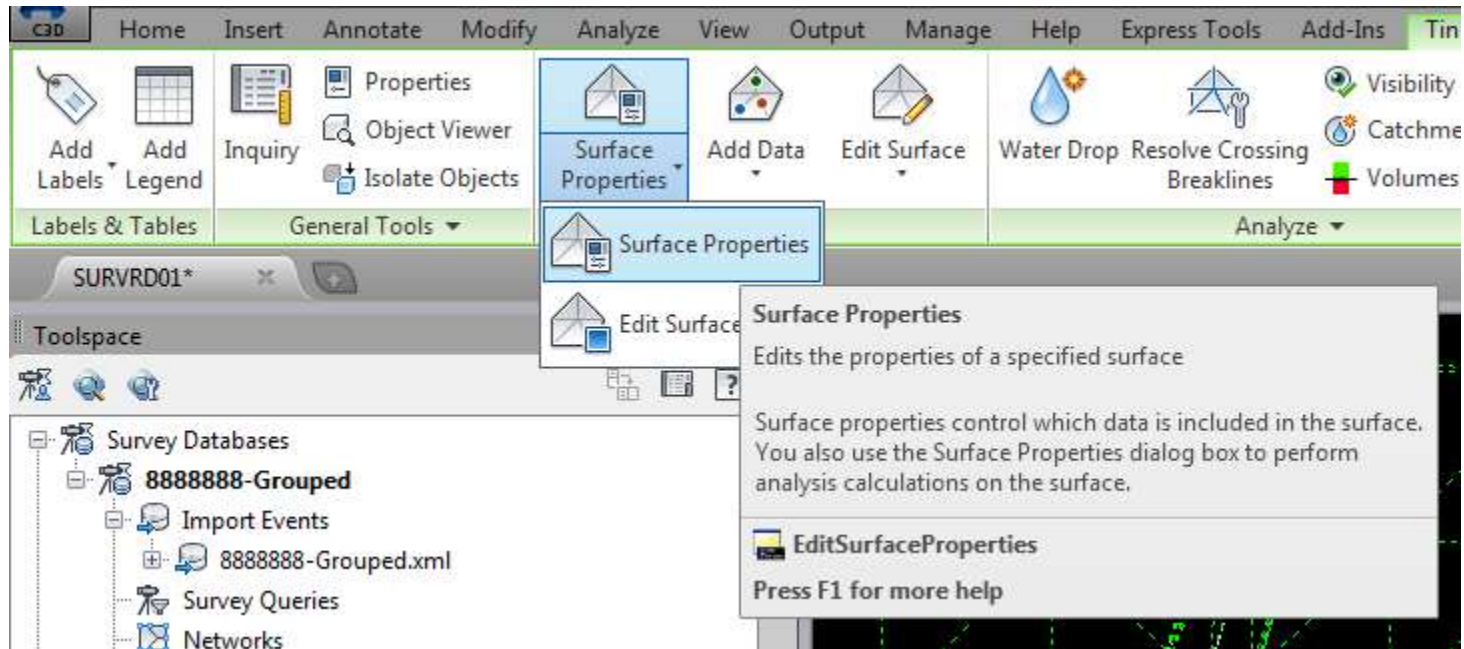


WORKING WITH SURFACES

- ◆ Changing the surface style is the most common use of the Surface Properties dialogue box.

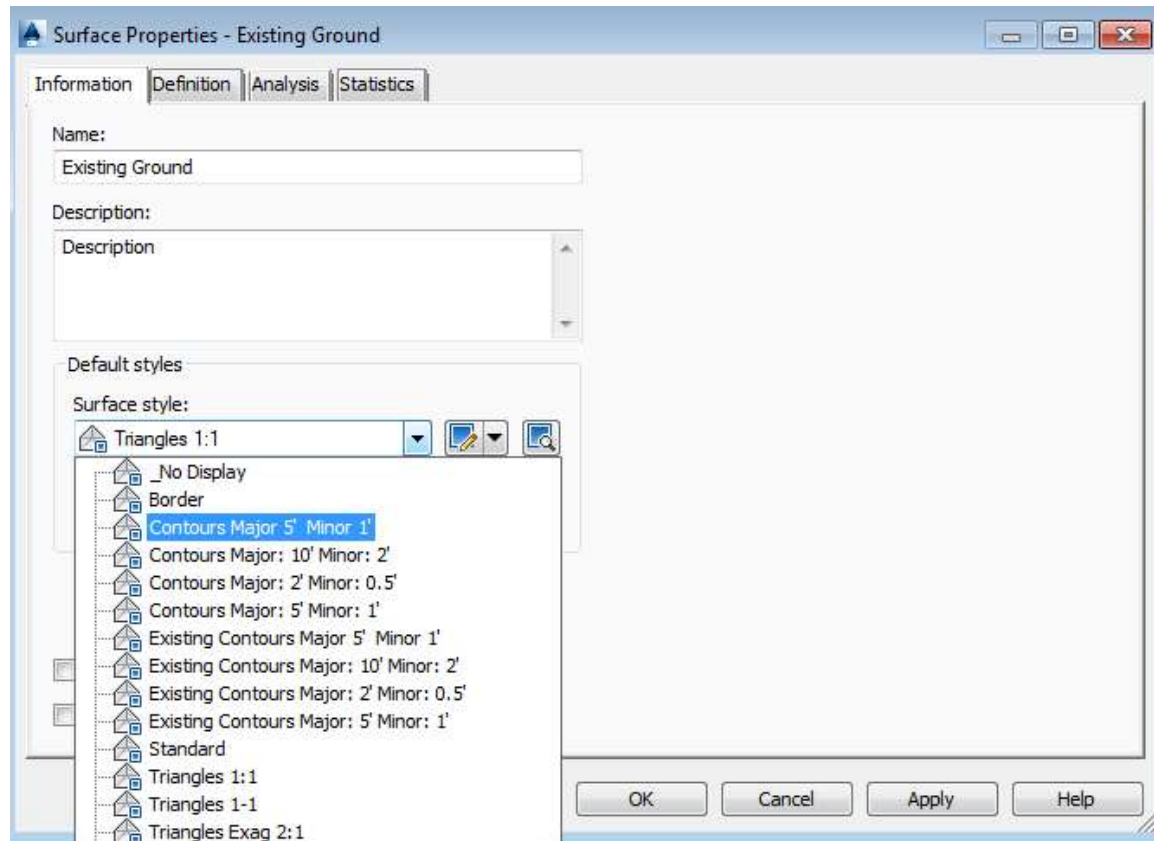


WORKING WITH SURFACES

- ◆ Select “Edit Surface Style” to bring up the Surface Style dialogue box. When editing triangles it is sometimes necessary to turn on surface vertex points within the Display tab.

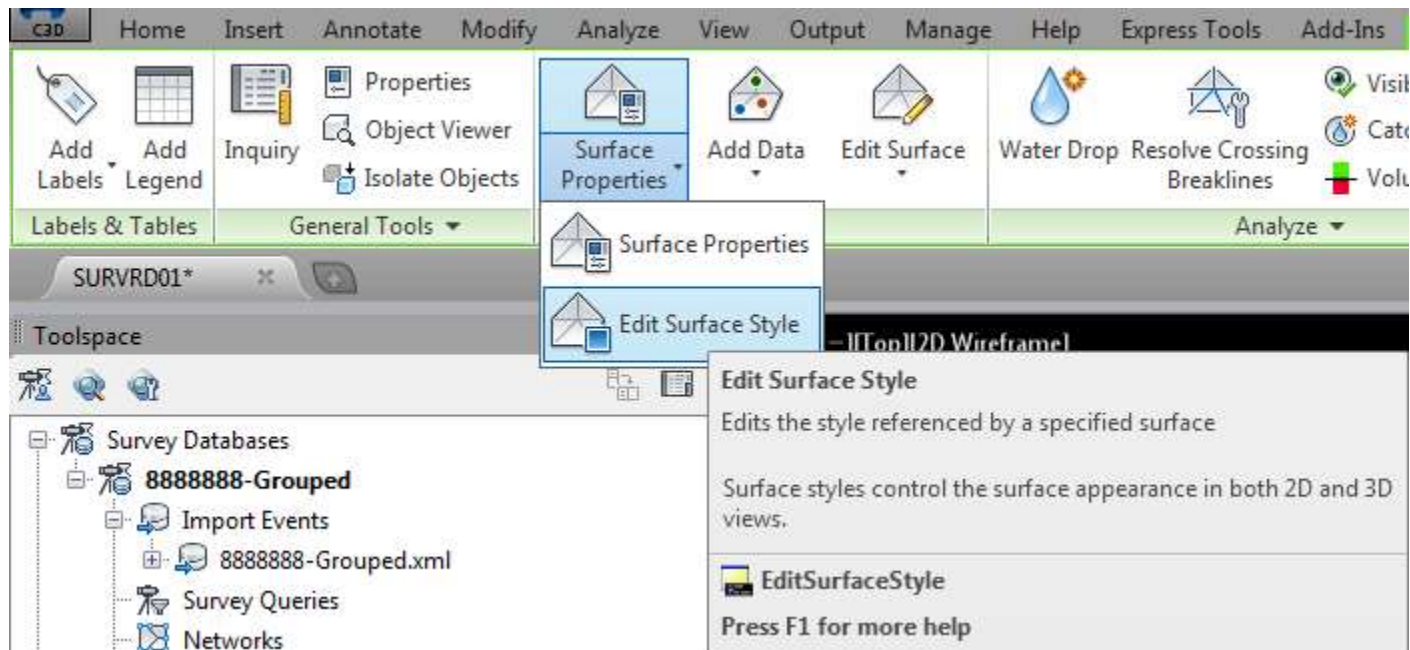


WORKING WITH SURFACES

- ◆ Make the surface points visible to edit the surface points.
- ◆ NOTE: DTMTriangles_ep and DTM_ep layers are embedded within the DTM surface style.

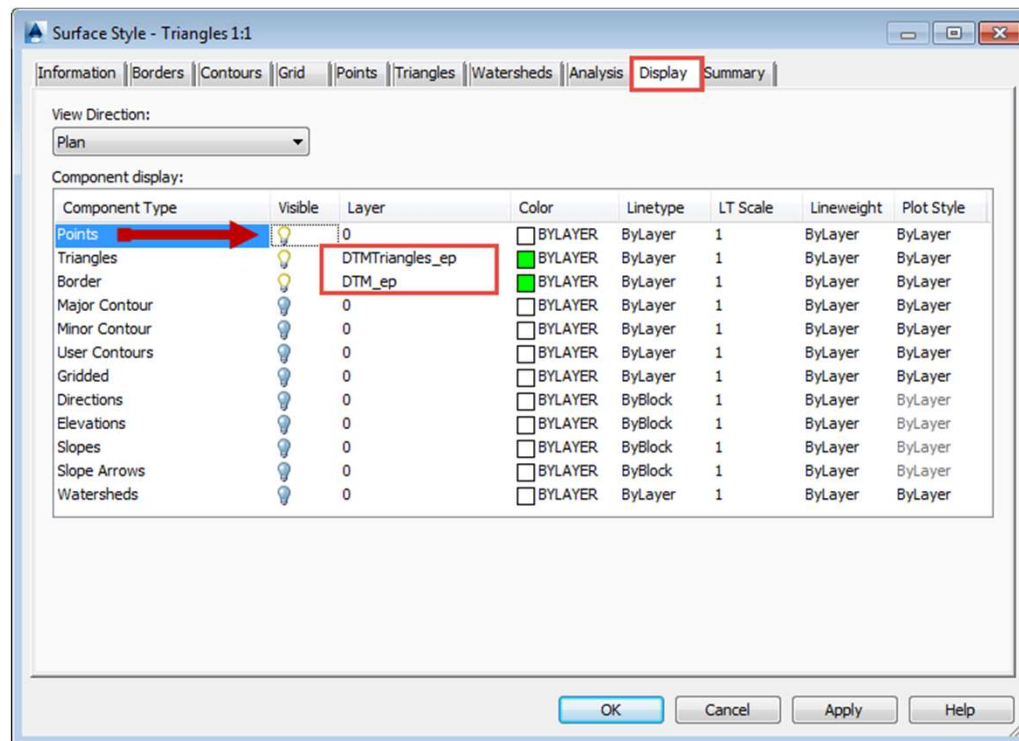


WORKING WITH SURFACES

- ◆ When surface points are turned on a plus sign will appear at each surface vertex.

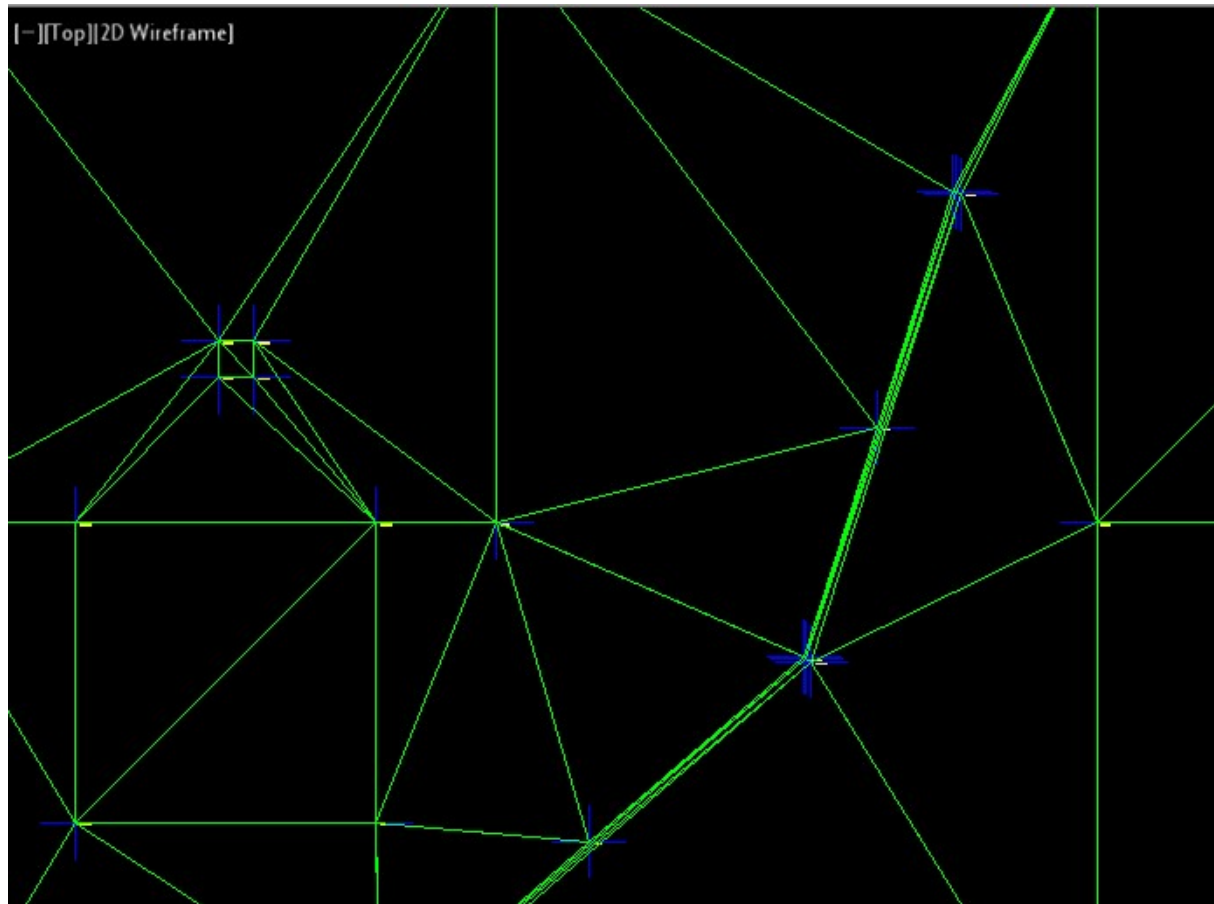


WORKING WITH SURFACES

- ◆ To delete a surface point vertex: from the ribbon select the “Edit Surface” drop down and select “Delete Point”. Press enter to complete the deletion.

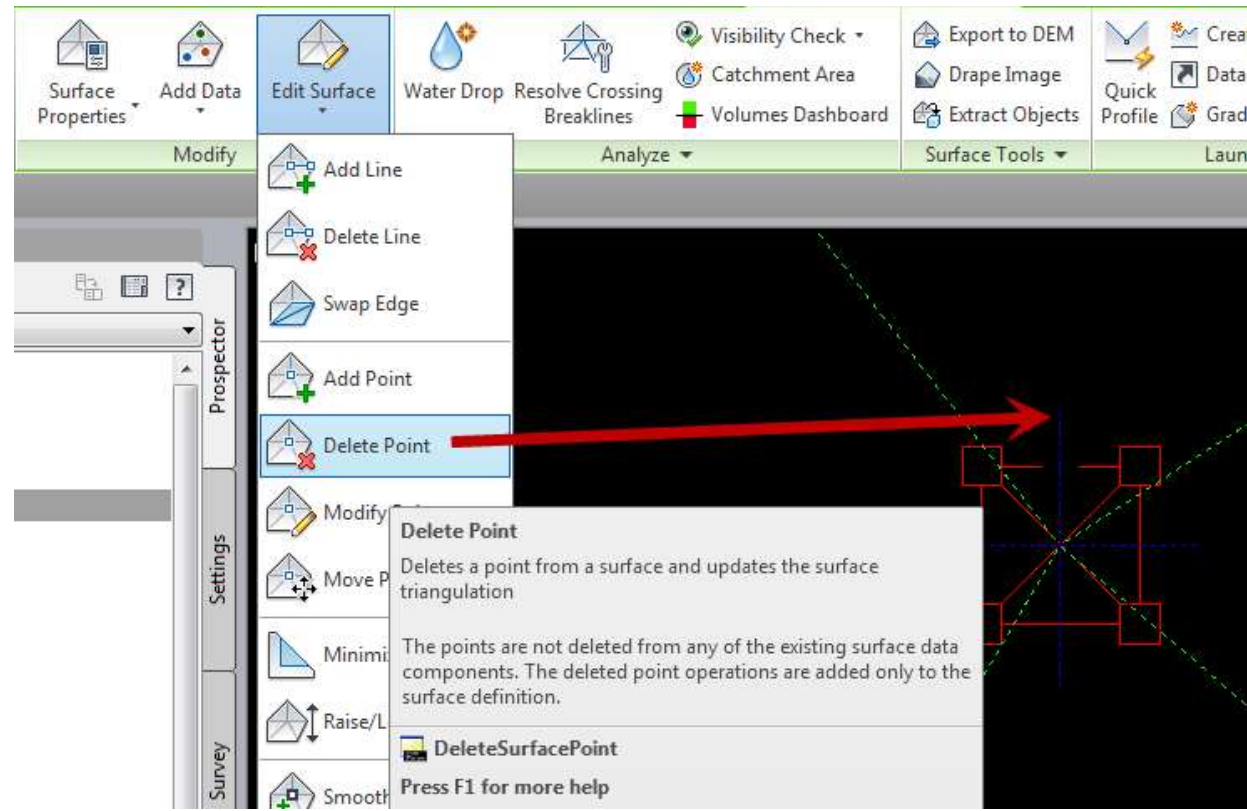


WORKING WITH SURFACES

- ◆ To delete a surface point vertex: from the ribbon select the “Edit Surface” drop down and select “Delete Point”. Press enter to complete the deletion.

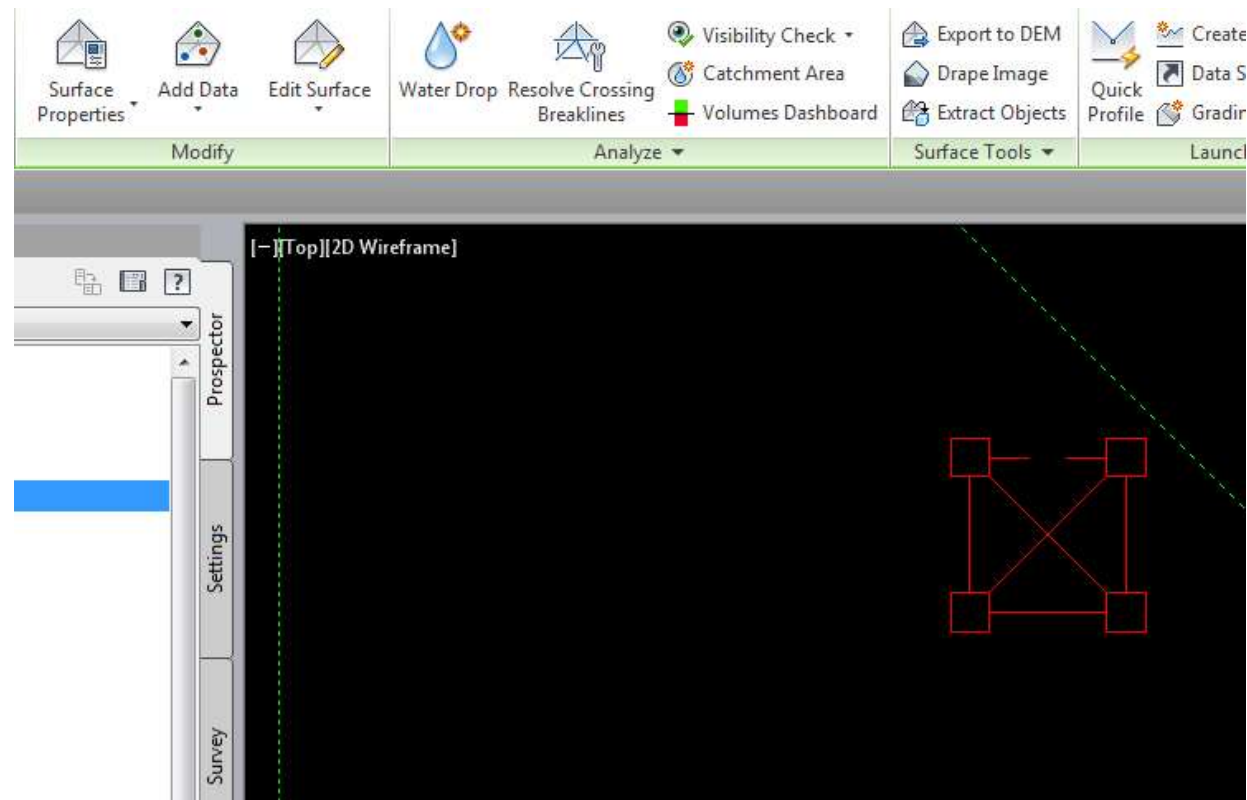

WORKING WITH SURFACES

- ◆ Additional edits can be made from the “Edit Surface” drop down such as “Delete Line” to remove a triangle and “Add Line” to add a triangle.

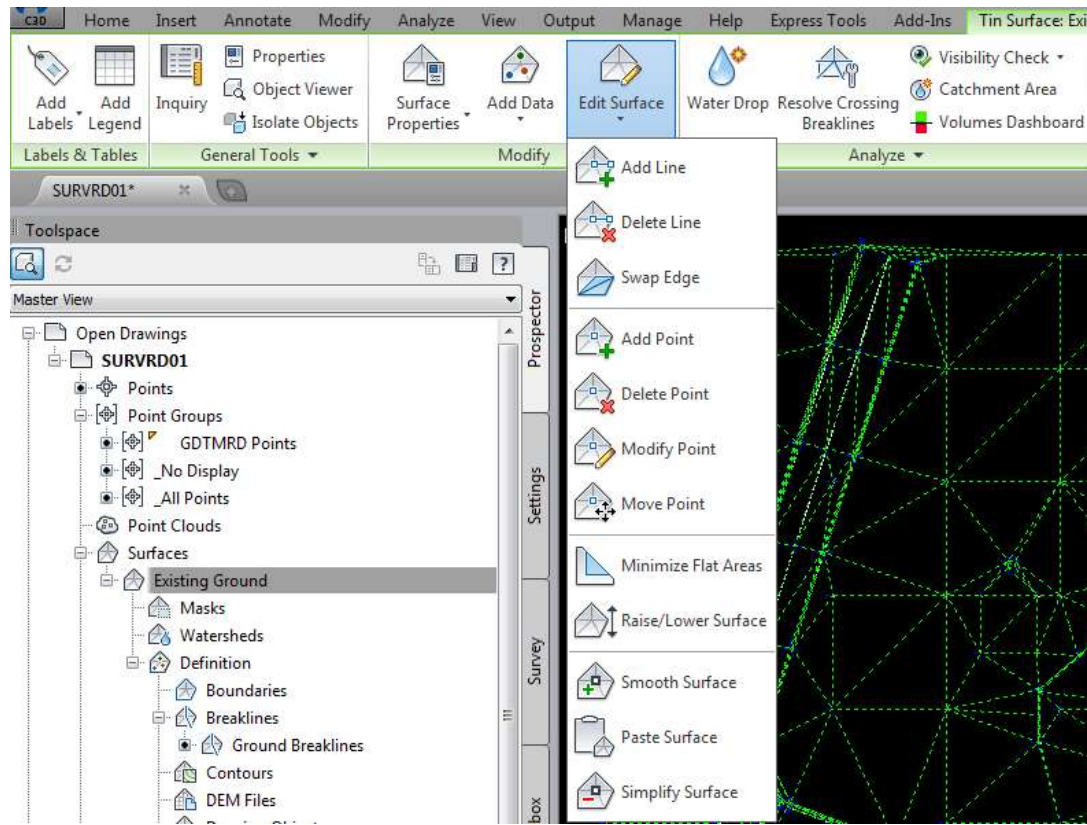

EXPORT SURFACE LANDXML

- ◆ When a surface has been completed, in the Prospector, right click on the surface name and select “Export LandXML”.
- ◆ The “Export to LandXML” dialogue box will open. Surfaces and the surface name will already be checked. Press “OK”.
- ◆ Save the Surface LandXML in the project survey folder for later use.
- ◆ Note that any subsequent change to the points or figures on screen will affect the surface. Right click on the surface name and select “Lock” to prevent changes.

WORKING WITH SURFACES


- ◆ Additional surfaces can be created in the SURVRD file, such as a bridge surface, following the same process.
- ◆ Remember any visual change, even turning layers on and off will affect the surface.
- ◆ Lock the surfaces to prevent change.
- ◆ To turn off the surface (un-visualize) select the surface or right click on the surface name and bring up the “Surface Properties” dialogue box. A surface style “_No Display” has been provided to hide the surface.

ALIGNMENTS

- ◆ Alignments are Civil 3D objects
 - ✓ A Civil 3D object has imbedded intelligence.
- ◆ Alignments are created and saved within a specific drawing. They are not part of the Survey Database, but they can be dynamically linked.
- ◆ The SURVRD template was specifically constructed for building alignments.
- ◆ Alignments can be exported as a LandXML file.
 - ✓ Alignment LandXML files should be imported into the ALGNRD.dwg file for delivery to design.

ALIGNMENTS FROM OBJECTS

- ◆ Alignments can be created in various ways. One way is to create an alignments from objects.
 - ✓ Connect a series of points with lines and curves or a polyline to represent the desired alignment.
 - ✓ Under the Home tab, click on the Alignment drop down and choose “Create Alignment from Objects”.

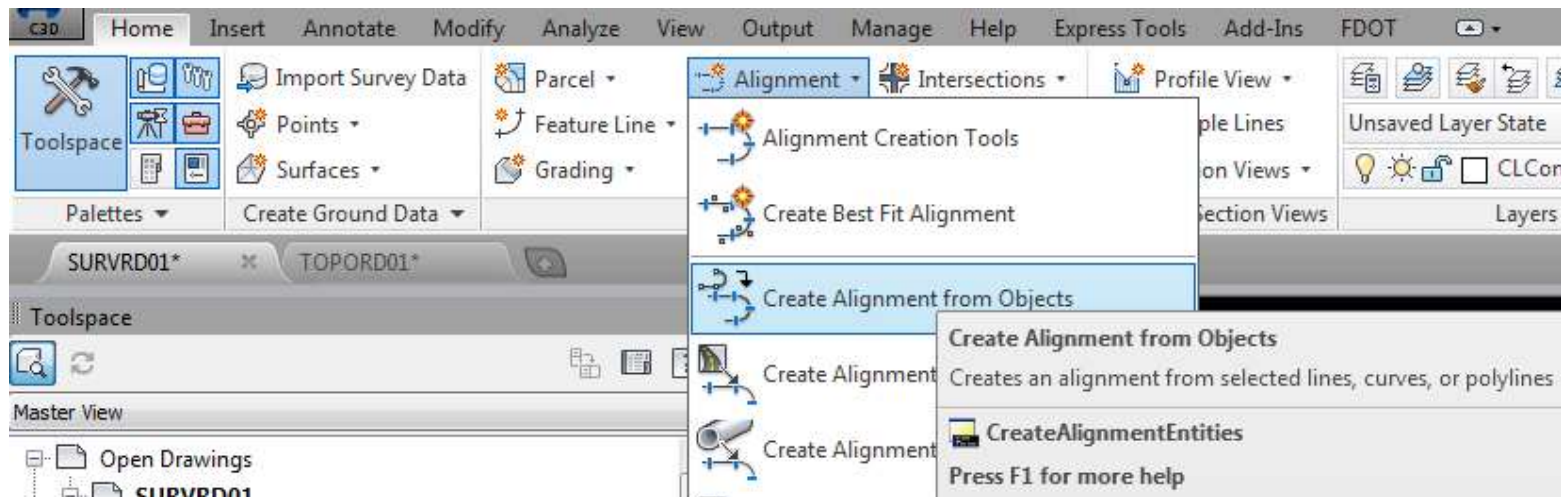

ALIGNMENTS FROM OBJECTS

- ◆ Note in the command line, Civil 3D is waiting for alignment entities to be selected.
 - ✓ If a polyline connects the alignment tangent points and includes the PC, PI, & PT of each curve, then the alignment tool will automatically put in the alignment curves.
 - Select the polyline,
 - ✓ Otherwise the objects must consist of all lines and curves that represent the alignment.
 - Select all line and curve objects.
- ◆ Press <Enter>, Civil 3D will show the alignment direction.
 - ✓ To change direction press “R” then press <Enter>.

ALIGNMENTS FROM OBJECTS

Create Alignment from Objects

Name: BL1

Type: Centerline

Description: Survey baseline to be staked.

Starting station: 0+00.00'

General | Design Criteria

Site: <None>

Alignment style: FDOT Existing

Alignment layer: BaselineSurvey

Alignment label set: Truncated Station Major 100' Minor 20'

Conversion options

Add curves between tangents

Default radius: 200.00'

Erase existing entities


OK Cancel Help

- ◆ Give the Alignment a name, Type and Starting station.
- ◆ In the General Tab.
 - ✓ Set the style.
 - ✓ Set the appropriate layer.
 - ✓ Choose a label set.
 - ✓ Uncheck the “Add curves between tangents.”

ALIGNMENTS FROM LANDXML


- ◆ An Alignment can be imported from a LandXML file.
 - ✓ Make sure the LandXML alignment linear units are set to “USSurveyFoot”

```
1 <?xml version="1.0"?>
2 <LandXML xmlns="http://www.landxml.org/schema/LandXML-1.0" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
3   <Application name="Visual PE" version="10.1.8.2" manufacturer="Autodesk, Inc." manufa
4   <Project name="220495"/>
5   <Units>
6     <Imperial linearUnit="USSurveyFoot" areaUnit="squareFoot" volumeUnit="cubicYard"
7   </Units>
```

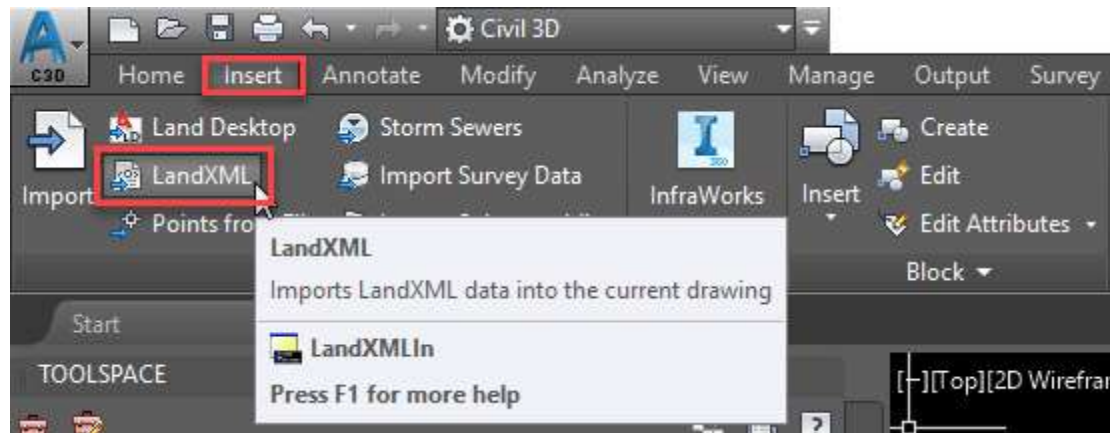


ALIGNMENTS FROM LANDXML

- ◆ Once the alignment is in the file it will need to be labeled.
 - ✓ Select the alignment
 - ✓ Click on “Add Labels” then “Add/Edit Station Labels”

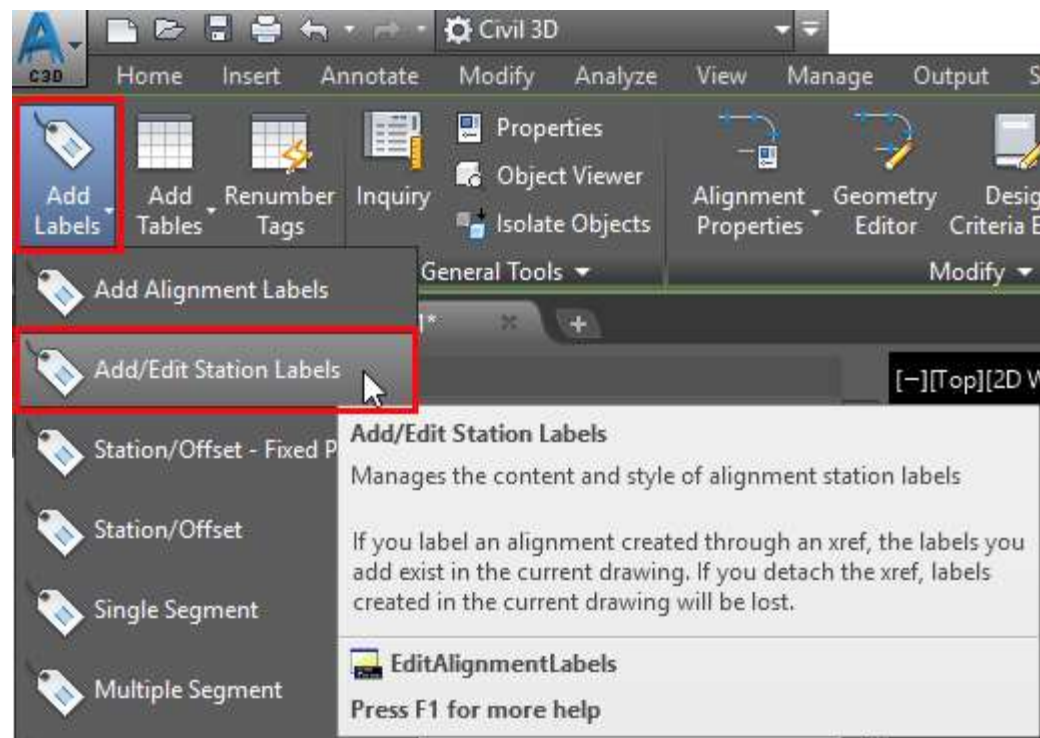

ALIGNMENTS FROM LANDXML

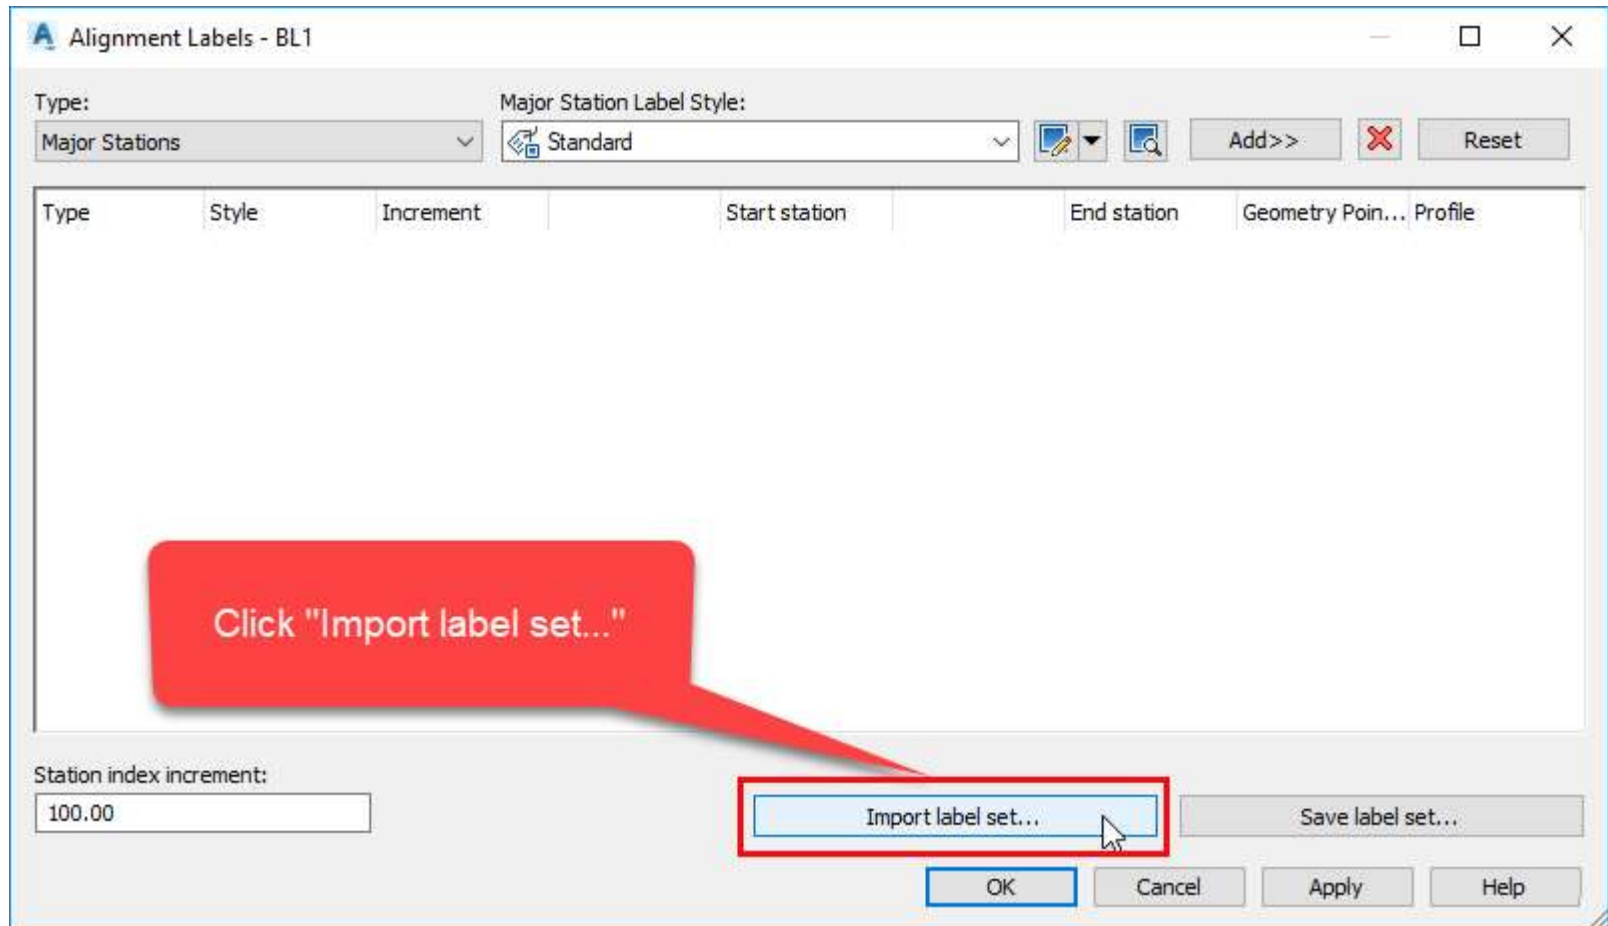

ALIGNMENTS FROM LANDXML

The image shows a software interface for configuring alignment labels. The main window is titled "Alignment Labels - BL1". It features a "Type" dropdown set to "Major Stations" and a "Major Station Label Style" dropdown set to "Standard". Below these are several icons and buttons: "Add>>", a red "X" button, and "Reset". A table with columns "Type", "Style", "Increment", "Start station", "End station", "Geometry Poin...", and "Profile" is present but empty. At the bottom left, there is a "Station index increment:" label and a text box containing "100.00".

A "Select Label Set" dialog box is overlaid on the main window. It has a dropdown menu currently showing "_No Labels". Below the dropdown is a list of label sets:

- _No Labels
- External References-Major 100' Minor 20'
- Full Station Major 100' Minor 20'
- Full Station Major 100' Minor 50'
- Standard
- Truncated Station Major 100' Minor 20'
- Truncated Station Major 100' Minor 50'
- Truncated Station Major 1000' Minor 200'
- Truncated Station Major 500' Minor 100'
- Truncated Station Major 5000' Minor 1000'

The "Truncated Station Major 100' Minor 20'" option is highlighted with a blue selection bar. At the bottom of the dialog are "OK", "Cancel", "Apply", and "Help" buttons. A red callout bubble with the text "Select desired label set from drop down Press 'OK' and then 'Apply'" points to the "Apply" button, which is also enclosed in a red rectangular box.

ALIGNMENTS FROM CAiCE

- ◆ An Alignment can be imported directly from CAiCE.
 - ✓ In the CAiCE menu under Geometry>Geometry Chains select “Edit Horizontal Alignment”.
 - ✓ Load the desired alignment geometry chain.
 - ✓ Be sure it is “loaded” showing point names and coordinates.
 - ✓ Select the “Save Input” button to save the alignment as a *.HA file.

ALIGNMENTS FROM CAICE

Edit Horizontal Alignment

Chain Name Snap

Locks
 None DA
 DB PI

	Name	Northing	Easting	Distance	Direction	Curve Info
1	AL101	672859.7117000	1763555.8944000			
2	CUR1	673012.6229000	1763151.7024000			31.397792
3	AL103	673254.7117000	1763230.8944000			
4						
5						

Runoff Table AutoTrack


Design Speed

Curve Radii
 Curve Radii And Spiral Lengths
 Spiral Lengths for Given Curves

New Points As: Prefix FC Zone
New Curves As: Prefix FC Zone
New SCS's As: Prefix FC Zone
Chains As: Prefix FC Zone

ALIGNMENTS FROM CAiCE

- ◆ In Civil 3D Toolspace>Toolbox tab, expand the Miscellaneous Utilities to show the CAiCE Translator.
 - ✓ Right Click - “Import CAiCE Alignments (*.HA)”
“Execute”

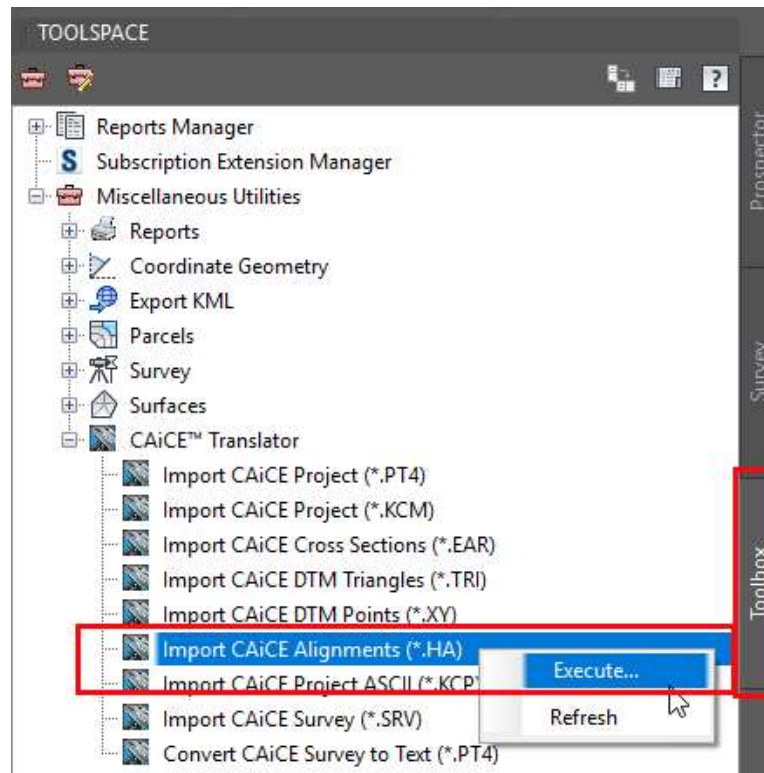

ALIGNMENTS FROM CAiCE

Alignment from CAiCE File

Name: BL1

Type: Centerline

Description: Survey Baseline from CAiCE

Starting station: 10+00.00'

General Design Criteria

Site: <None>

Alignment style: FDOT Existing

Alignment layer: BaselineSurvey

Alignment label set: Truncated Station Major 100' Minor 20'

Conversion options

Add curves between tangents

Default radius: 200.00'


Erase existing entities

OK Cancel

- ◆ Fill out the Alignment from CAiCE File dialogue box.
- ◆ Note that the Starting station is grayed out.
- ◆ Also note that the Conversion options is grayed out.
- ◆ Press “OK”.


ALIGNMENTS

- ◆ Using either method note that in the Prospector tab under Alignments that a new alignment has been added.
- ◆ Change the “Annotation Scale” to view the alignment at various scales.
- ◆ Select the alignment to bring up the Civil 3D contextual ribbon for alignments.

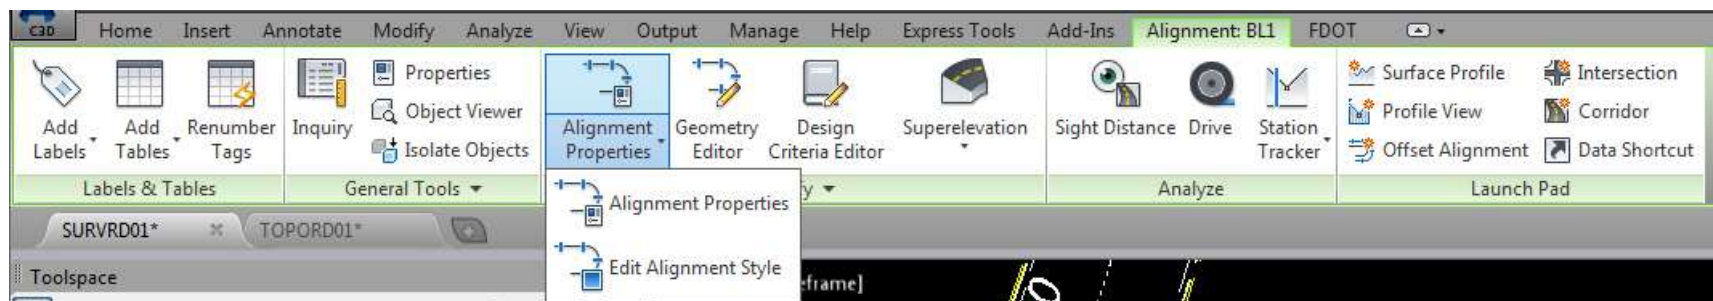

ALIGNMENTS


- ◆ Use the Alignment Properties to adjust the style, stationing, station equations, & design criteria.
- ◆ Use Edit Alignment Style to make changes to the alignment style.
- ◆ Use Add Labels > Add/Edit Station Labels to Import a label set and manager your labels.

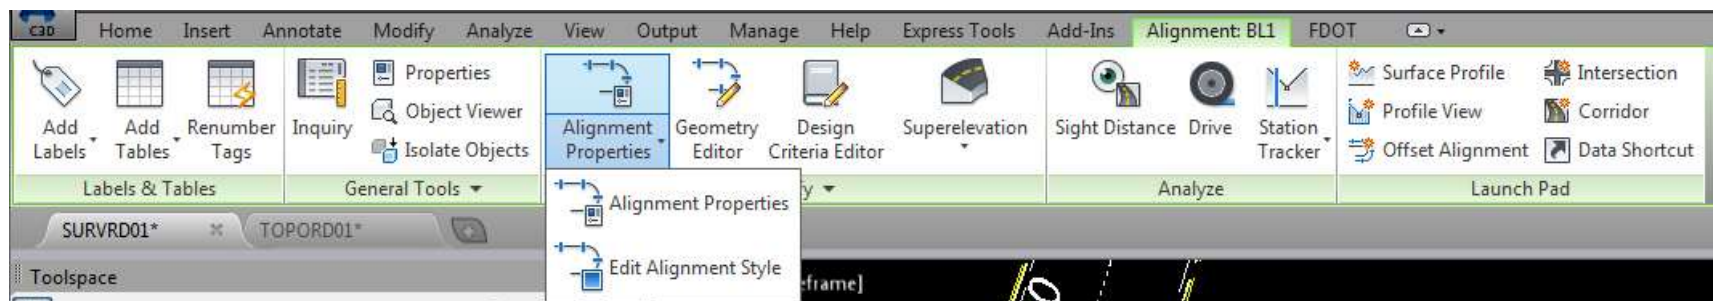

EXPORT ALIGNMENT LANDXML

- ◆ When an alignment has been completed, in the Prospector, right click on the alignment name and select “Export LandXML.”
- ◆ The “Export to LandXML” dialogue box will open and Alignments and the alignment name will already be checked. Press “OK”.
- ◆ Save the alignment LandXML in the project survey folder for later use.

EXPORT ALIGNMENT LANDXML

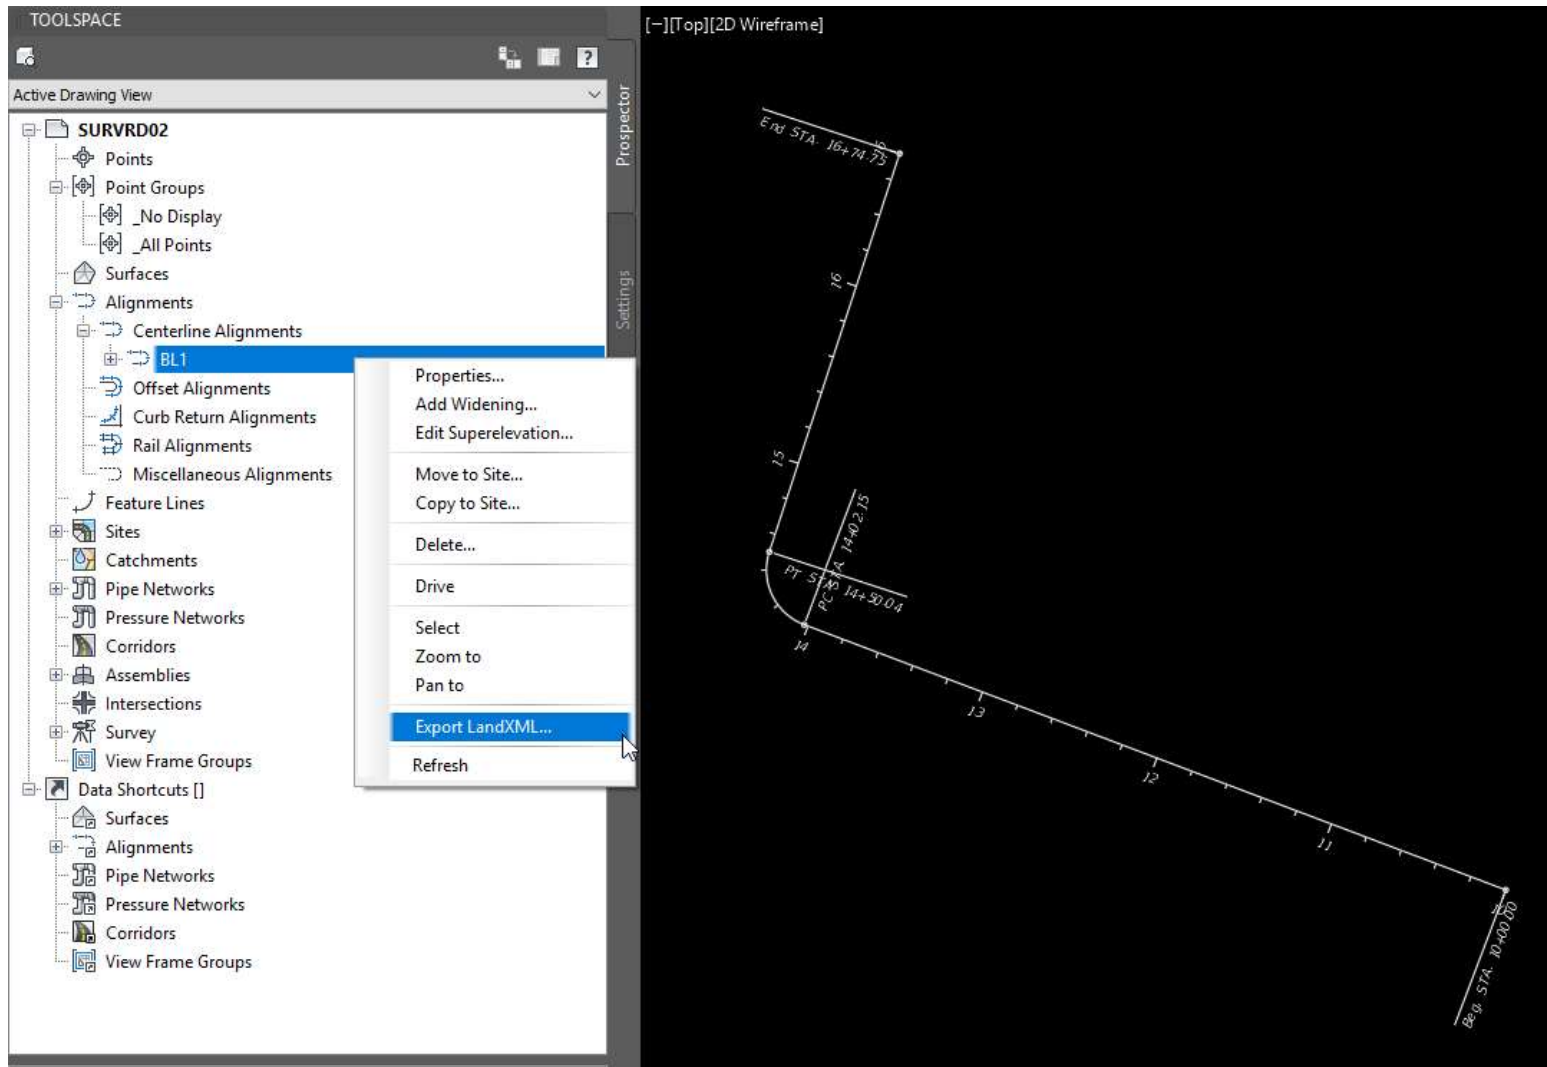



Florida Department of Transportation

605 Suwannee Street
Tallahassee, FL 32399-0450

C3D SURVEY DATABASE GROUPS-SURFACES-ALIGNMENTS

DIRECT QUESTIONS TO:

John.Hazlip@dot.state.fl.us