


C:\projects\standards\181000-s\18102-01.dgn  
 sm970re  
 7:35:23 PM  
 6/24/2013


LAST REVISION 01/01/10	REVISION	DESCRIPTION:	 <b>FDOT 2014 DESIGN STANDARDS</b>	<b>CCTV POLE GROUNDING</b>	INDEX NO. <b>18102</b>	SHEET NO. <b>1 of 2</b>
------------------------------	----------	--------------	--	----------------------------	------------------------------	-------------------------------

6/24/2013 7:35:24 PM sm970re C:\projects\standards\181000-s\18102-02.dgn

#2 AWG Tin-Plated Bare Solid Copper Wire Continuous To Air Terminal

#2 AWG Min. Tin-Plated Bare Solid Copper Wire To Ground Rods B, C And D As Required

#6 AWG Tin-Plated Bare Solid Copper Wire To Electrical Service Ground

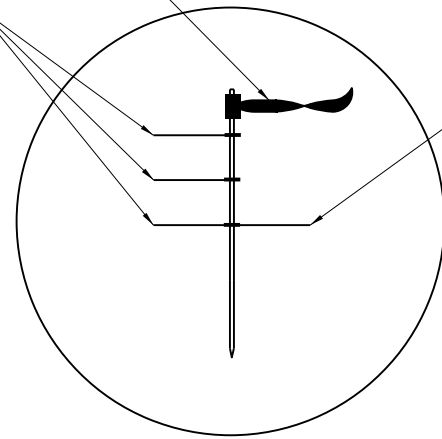


INSET "A"


**GENERAL NOTES:**

1. Distance must be in accordance with project design documents and greater than or equal to minimum clear zone requirements.
2. Exothermically weld all connections to ground rods.
3. Install marker tape directly above all grounding electrodes and conductors at a depth of 6".
4. All data, coaxial and power cables to the camera shall be completely concealed.
5. All air terminals must meet UL-96A.
6. Ground rod A is required. Ground rods B, C and D will be required as necessary to meet the ground resistance requirements in the contract documents.
7. Place ground system within right of way.
8. Route all camera cables inside arm of mounting bracket.
9. Main ground rod to be placed immediately adjacent to pole.

20' Radius Each "Sphere Of Influence"

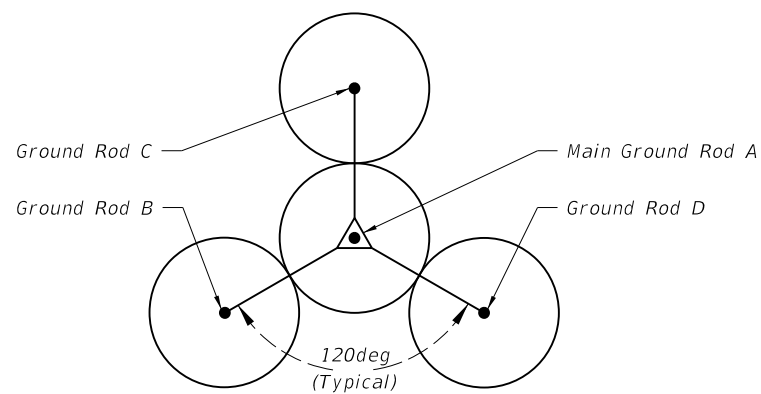

GROUND ROD PLACEMENT DETAIL  
(Typical Each Pole)

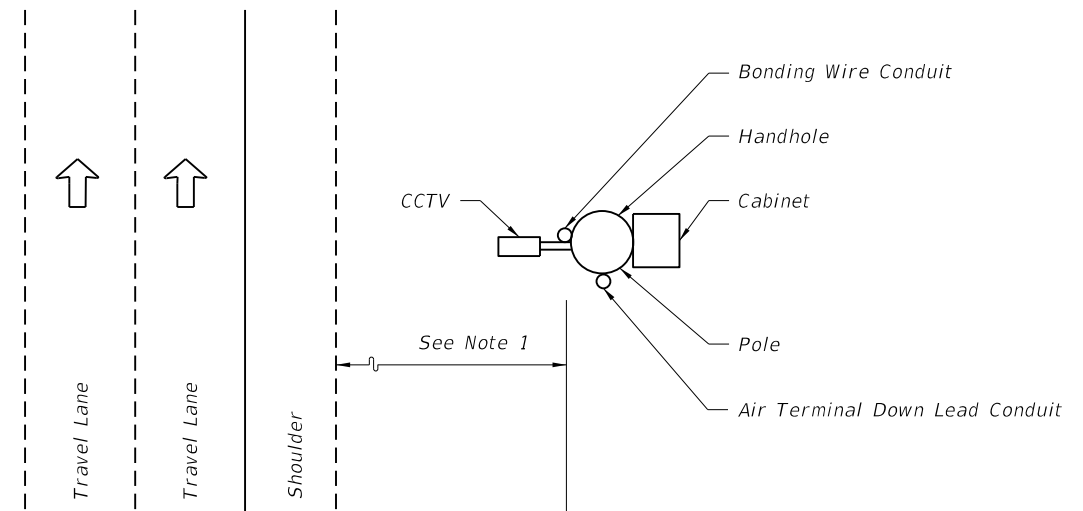

ORIENTATION OF CONDUITS AND DEVICES ON POLE

LAST REVISION	07/01/07
---------------	----------

DESCRIPTION:	
--------------	--



CCTV POLE GROUNDING	
---------------------	--

INDEX NO.	18102
-----------	-------

SHEET NO.	2 of 2
-----------	--------