
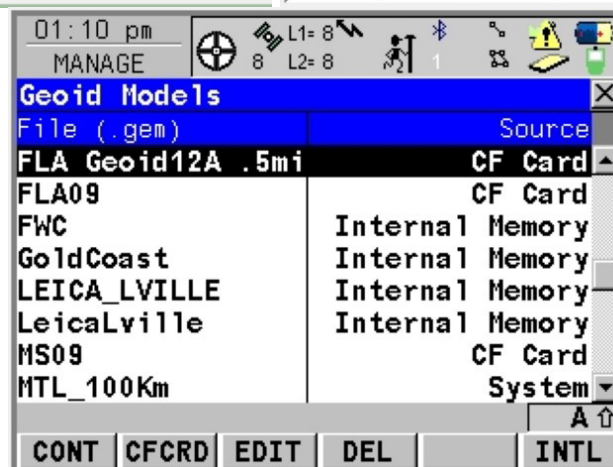
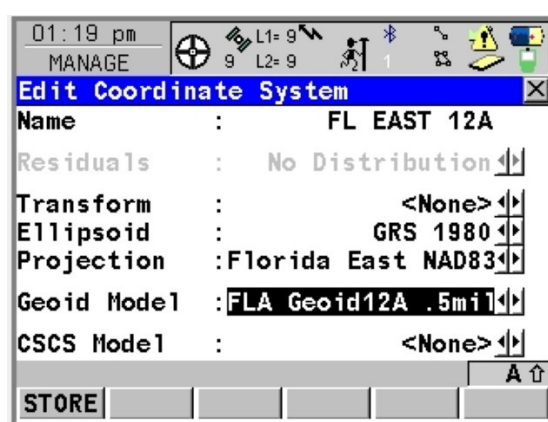


Geoid12A Installation

The Field Geoid File (**FLA Geoid12A .5mile.gem**) covers the entire state of Florida.

1. For GPS1200 systems, copy the file to the DATA,GPS,GEOID folder of a CF card you currently use. Then, replace your current geoid with the new geoid inside your Coordinate System(s) while leaving the geoid file on the CF card.

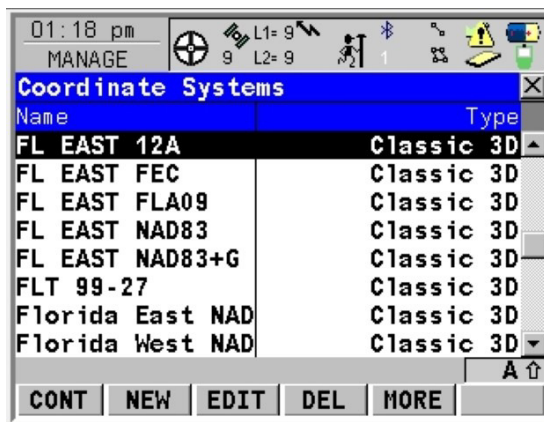

- For the newer SmartWorx systems, copy the new geoid to a USB drive with the following folder structure already created: DATA,GPS,GEOID. On the controller, select USER, TOOLS & UTILITIES, TRANSFER USER OBJECTS. Now select Object to Transfer: (Geoid field file), From: (USB), To: (Internal Memory), Geoid field file: (FLA Geoid12A ,5mile).
- Once the new geoid file is in Internal Memory, load a GPS job, select Jobs & Data, Job Properties, Coord System (TAB), hit <enter> on highlighted coordinate system, <Edit> your coordinate system, highlight Geoid model, hit <enter> & select your new geoid. If it is not showing, hit <Import>, then you should see it.

