



FLEXIBLE PAVEMENT DESIGN MANUAL

**OFFICE OF DESIGN, PAVEMENT MANAGEMENT SECTION
MARCH 2015
TALLAHASSEE, FLORIDA
Topic #625-010-002**

TABLE OF CONTENTS

Section	Title	Page No.
1.0	INTRODUCTION	1-1
1.1	PURPOSE	1-1
1.2	AUTHORITY	1-1
1.3	GENERAL	1-2
1.4	SCOPE	1-2
1.5	FLEXIBLE PAVEMENT DESIGN MANUAL ORGANIZATION AND REVISIONS	1-2
1.5.1	Background	1-2
1.5.2	References	1-3
1.5.3	Florida Conditions	1-3
1.5.4	Appendices	1-3
1.6	DISTRIBUTION	1-4
1.7	PROCEDURE FOR REVISIONS & UPDATES	1-4
1.8	TRAINING	1-5
1.9	FORMS	1-5
2.0	DEFINITIONS	2-1
2.1	PAVEMENT SYSTEM	2-1
2.2	AASHTO DESIGN EQUATION	2-4
2.2.1	Variables	2-4
2.2.2	Constants	2-6
2.2.3	Unknowns	2-7
2.3	TERMS	2-7
3.0	PAVEMENT THICKNESS DESIGN PROCESS	3-1
3.1	DESIGN SOURCE	3-1
3.2	DESIGN PERIODS	3-5
3.3	DISTRICT COORDINATION	3-5
3.4	QUALITY	3-6
3.5	GUIDELINES FOR DESIGN/BUILD PROJECTS	3-6
4.0	FRICITION COURSE POLICY	4-1
4.1	FRICITION COURSE OPTIONS	4-1

Section	Title	Page No.
4.2	FRICITION COURSES 12.5 AND 9.5 (FC-12.5 and FC-9.5)	4-4
4.3	FRICITION COURSE 5 (FC-5)	4-4
5.0	PAVEMENT THICKNESS DESIGN PROCESS FOR NEW CONSTRUCTION or RECONSTRUCTION	5-1
5.1	OVERVIEW	5-1
5.2	REQUIRED STRUCTURAL NUMBER (SN_R) CALCULATIONS USING THE AASHTO DESIGN GUIDE	5-1
5.2.1	Design Example	5-2
5.2.2	Design Base Highwater Clearance	5-3
5.2.3	Laboratory Resilient Modulus (M_R)	5-3
5.2.4	Resilient Modulus (M_R) From LBR	5-6
5.3	LAYER THICKNESS CALCULATIONS FOR NEW CONSTRUCTION	5-11
5.4	BINDER SELECTION ON THE BASIS OF TRAFFIC SPEED AND TRAFFIC LEVEL	5-12
5.5	NEW CONSTRUCTION DESIGN SAMPLE PROBLEM	5-19
5.6	DESIGN CONSIDERATIONS	5-24
5.6.1	Stabilized Subgrade	5-24
5.6.2	Base	5-25
5.6.3	Asphalt Base Curb Pad	5-27
5.6.4	Structural Course	5-27
5.6.5	Traffic Levels	5-28
5.6.6	Layer Thickness	5-28
5.6.7	Ramp Design	5-33
6.0	PAVEMENT WIDENING REQUIREMENTS	6-1
6.1	REQUIREMENTS	6-1
6.2	STRUCTURAL COURSE	6-1
6.3	BASE AND SUBGRADE	6-3
6.4	STABILIZATION	6-3
6.5	LABORATORY RESILIENT MODULUS (M_R)	6-3
6.6	WIDENING DESIGN SAMPLE PROBLEM	6-4

Section	Title	Page No.
7.0	PAVEMENT THICKNESS DESIGN PROCESS FOR REHABILITATION PROJECTS	7-1
7.1	OVERVIEW	7-1
7.2	REQUIRED STRUCTURAL NUMBER (SN_R) CALCULATIONS USING THE AASHTO DESIGN	7-1
7.3	RESILIENT MODULUS (M_R) VARIATIONS	7-1
7.3.1	Resilient Modulus (M_R) From Nondestructive Testing	7-3
7.3.2	Resilient Modulus (M_R) From LBR	7-3
7.4	EVALUATING THE EXISTING STRUCTURAL NUMBER (SN_E)	7-7
7.4.1	Field Testing	7-7
7.4.2	Data Collection	7-8
7.4.3	Pavement Evaluation	7-8
7.4.4	Reduced Layer Coefficients	7-9
7.5	MILLING	7-13
7.5.1	Candidate Projects	7-13
7.5.2	Pavement Coring and Sampling	7-14
7.5.3	Variable Depth Milling	7-15
7.5.4	Cross Slope	7-15
7.5.5	Rutted Pavement	7-16
7.5.6	Milling Depth	7-16
7.6	CALCULATING THE STRUCTURAL OVERLAY NUMBER (SN_O)	7-17
7.7	OVERLAY DESIGN SAMPLE PROBLEM	7-18
7.8	SPECIAL CONSIDERATIONS FOR REHABILITATION PROJECTS	7-21
7.8.1	Payment Of Structural Course	7-22
7.8.2	Overbuild	7-22
7.8.3	Operational Projects	7-23
7.8.4	Functional Overlays	7-23
7.8.5	Crack Relief Layers	7-24
8.0	SHOULDER DESIGN	8-1
8.1	DESIGN GUIDANCE	8-1

APPENDICES

Appendix	Title	Page No.
A.0	DESIGN TABLES	A-1
A.1	INSTRUCTIONS	A-1
B.0	FLEXIBLE PAVEMENT DESIGN QUALITY CONTROL PLAN	B-1
B.1	QUALITY CONTROL PLAN	B-1
B.2	DEFINITIONS	B-1
B.3	RESPONSIBILITY	B-1
B.4	FLEXIBLE PAVEMENT DESIGNS	B-2
B.4.1	Minimum Requirements	B-2
B.4.2	Distribution	B-3
B.4.3	Revisions	B-4
B.4.4	Documentation	B-5
B.5	DISTRICT QUALITY CONTROL	B-5
B.6	QUALITY ASSURANCE REVIEWS	B-6
B.7	PAVEMENT DESIGN UPDATES	B-6
	Flexible Pavement Design Quality Control Checklist	B-7
	Florida Department of Transportation Flexible Pavement Design Summary Sheet	B-10
C.0	MECHANISTIC-EMPIRICAL PAVEMENT DESIGN GUIDE	C-1
D.0	ESTIMATING DESIGN 18-KIP EQUIVALENT SINGLE AXLE LOADS (ESAL_D)	D-1
D.1	BACKGROUND	D-1
D.2	BASIC EQUATION	D-3
D.3	SAMPLE PROBLEMS	D-6
D.3.1	Sample Problem #1	D-6
D.3.2	Sample Problem #2	D-9

FIGURES

Figure	Title	Page No.
2.1	ROADWAY TYPICAL SECTION	2-3
3.1	AASHTO DESIGN EQUATION for FLEXIBLE PAVEMENT	3-2
3.2	AASHTO DESIGN EQUATION INPUT for FLEXIBLE PAVEMENT	3-3
3.3	FLEXIBLE PAVEMENT DESIGN VARIABLES	3-4
4.1-4.2	ILLUSTRATIONS SHOWING LIMITS of FRICTION COURSE-5 (FC-5) at INTERMEDIATE MEDIAN CROSSOVER	4-6 - 4-7
4.3	ILLUSTRATION SHOWING LIMITS of FRICTION COURSE-5 (FC-5) at MEDIAN AREAS of LOW VOLUME INTERSECTIONS	4-8
6.1	WIDENING DETAIL for SAMPLE PROBLEM	6-7
7.1	FLEXIBLE PAVEMENT REHABILITATION PROCESS	7-2
7.2-7.4	EXAMPLE DEFLECTION PLOTS	7-4 - 7-6

TABLES

Table	Title	Page No.
3.1	DESIGN PERIODS	3-8
4.1	FRICITION COURSE SELECTION	4-3
5.1	RELATIONSHIP BETWEEN RESILIENT MODULUS (M_R) and LIMEROCK BEARING RATIO (LBR) SAMPLE VALUES	5-8
5.2	RELIABILITY (%R) for DIFFERENT ROADWAY FACILITIES	5-9
5.3	EXAMPLE DESIGN TABLE (FROM APPENDIX A, TABLE A.4A)	5-10
5.4	STRUCTURAL COEFFICIENTS for DIFFERENT PAVEMENT LAYERS	5-14
5.5	REQUIRED MINIMUM THICKNESS for NEW CONSTRUCTION or RECONSTRUCTION	5-15
5.6	GENERAL USE OPTIONAL BASE GROUPS and STRUCTURAL NUMBERS (FROM STANDARD INDEX 514)	5-16
5.7	LIMITED USE OPTIONAL BASE GROUPS and STRUCTURAL NUMBERS (FROM STANDARD INDEX 514)	5-17
5.8	NOTES FOR OPTIONAL BASE GROUPS and STRUCTURAL NUMBERS (FROM STANDARD INDEX 514)	5-18
5.9	COMBINED STRUCTURAL NUMBER	5-23

TABLES (CONTINUED)

Table	Title	Page No.
5.10	DESIGN NOTES ON LAYER THICKNESS FOR ASPHALT CONCRETE STRUCTURAL COURSES	5-31
5.11	LAYER THICKNESS FOR ASPHALTIC CONCRETE STRUCTURAL COURSES	5-32
7.1	REDUCED STRUCTURAL COEFFICIENTS of ASPHALT MATERIALS PER INCH	7-11
7.2	AASHTO SUGGESTED LAYER COEFFICIENT FOR FRACTURED SLAB PAVEMENT	7-12
A.1A-A.10B	REQUIRED STRUCTURAL NUMBER (SN _R)	A-3 - A-22
D.1	RELATIONSHIP of AXLE WEIGHT TO DAMAGE	D-2
D.2	LANE FACTORS (L _F) FOR DIFFERENT TYPES of FACILITIES	D-4
D.3	EQUIVALENCY FACTORS E ₁₈ FOR DIFFERENT TYPES of FACILITIES	D-5

DESIGN AIDS

Title	Page No.
FLEXIBLE PAVEMENT DESIGN QUALITY CONTROL CHECKLIST	B-7
FLORIDA DEPARTMENT OF TRANSPORTATION FLEXIBLE PAVEMENT DESIGN SUMMARY SHEET	B-10

FLEXIBLE PAVEMENT DESIGN MANUAL

CHAPTER 1

INTRODUCTION

1.1 PURPOSE

The objective of this manual is to provide a Pavement Design Engineer with sufficient information so that the necessary input data can be developed and proper engineering principles applied to design a new flexible pavement, or develop a properly engineered pavement rehabilitation project. This design manual addresses methods to properly develop a pavement rehabilitation project, pavement milling, and the computations necessary for the pavement design process.

It is the responsibility of the Pavement Design Engineer to insure that the designs produced conform to Department policies, procedures, standards, guidelines, and sound engineering practices.

1.2 AUTHORITY

Sections 20.23(3) (a) and 334.048(3), Florida Statutes

1.3 GENERAL

Chapter 334 of the Florida Statutes, known as the Florida Transportation Code, establishes the responsibilities of the state, counties, and municipalities for the planning and development of the transportation systems serving the people of the State of Florida, with the objective of assuring development of an integrated, balanced statewide system.

The Code's purpose is to protect the safety and general welfare of the people of the State and to preserve and improve all transportation facilities in Florida. Under Section 334.048(3), Code sets forth the powers and duties of the Department of Transportation to develop and adopt uniform minimum standards and criteria for the design, construction, maintenance, and operation of public roads.

The standards in this manual represent minimum requirements, which must be met for flexible pavement design for new construction and pavement rehabilitation of Florida Department of Transportation projects. Any variances should be documented in project files.

Pavement design is primarily a matter of sound application of acceptable engineering criteria and standards. While the standards contained in this manual provide a basis for uniform design practice for typical pavement design situations, precise rules which would apply to all possible situations are impossible to give.

1.4 SCOPE

The principal users of this manual are the District Pavement Design Engineers and their agents (i.e. Consultants). Additional users include other department offices such as Construction, Maintenance, Traffic Operations, etc., and city and county offices.

1.5 FLEXIBLE PAVEMENT DESIGN MANUAL ORGANIZATION AND REVISIONS

1.5.1 BACKGROUND

The manual (Topic No. 625-010-002) is published as a revision to the March 2008 manual.

1.5.2 REFERENCES

The design procedures incorporated in this document are based on the American Association of State Highway and Transportation Officials (AASHTO) Guide for Design of Pavement Structures plus numerous National Cooperative Highway

Research Program (NCHRP), Transportation Research Board (TRB), and Federal Highway Administration (FHWA) publications.

The specifics addressed in this manual have been tailored to Florida conditions, materials, and policy.

1.5.3 FLORIDA CONDITIONS

A number of coefficients and variables are specified in this manual. They should be considered as standard values for typical Florida projects. There may be instances where a variance from the values would be appropriate. In these instances, the Pavement Design Engineer will stay within the bounds established by the basic AASHTO Design Guide, justify the variance, and document the actions in the Pavement Design File.

1.5.4 APPENDICES

Included with this manual are 4 appendices:

<u>Appendix</u>	<u>Contents</u>
A	Design Tables
B	Flexible Pavement Design Quality Control Plan
C	Mechanistic-Empirical Pavement Design Guide
D	Estimating Design 18-kip Equivalent Single Axle Loads (ESAL _D)

1.6 DISTRIBUTION

This document is available through the Maps and Publications Section. Manuals may be downloaded from:

Florida Department of Transportation
Map and Publication
<http://www.dot.state.fl.us/mapsandpublications/publications.shtm>

1.7 PROCEDURE FOR REVISIONS AND UPDATES

Flexible Pavement Design Manual holders are solicited for comments and suggestions for changes to the manual by writing to the address below:

Florida Department Of Transportation
Pavement Management Section
605 Suwannee Street, M.S.32
Tallahassee, Florida
32399-0450

Each idea or suggestion received will be reviewed by appropriate pavement design staff in a timely manner. Items warranting immediate change will be made with the approval of the State Pavement Design Engineer in the form of a Pavement Design Bulletin.

Pavement Design Bulletins for the Flexible Pavement Design Manual are distributed to the District Design Engineers, District Pavement Design Engineers, and District Consultant Pavement Management Engineers, Federal Highway Administration (FHWA) and posted on the FDOT website.

<http://www.dot.state.fl.us/rddesign/PM/publicationS.shtm>

Pavement Design Bulletins will be in effect until the official manual revision.

Statewide meetings of District Roadway Design Engineers will be held quarterly and a statewide meeting of designers may be held annually. A major agenda item at these meetings will be the review of Design Bulletins, planned revisions, and suggestions and comments that may warrant revisions. Based on input from these meetings, official revisions are developed and distributed to the District Design Engineers, District Pavement Design Engineers, Consultant Project Managers, Roadway Design Office, State Materials Office, Federal Highway Administration, industry and other appropriate offices as necessary.

All revisions and updates will be coordinated with the Forms and Procedures Office prior to implementation to ensure conformance with and incorporation into the Department's Standard Operating System, Procedure No. 025-020-002.

The final revisions and addenda will be distributed to District Pavement Design Engineers and copies provided to Maps and Publications. The date of the latest revision will be posted on the Pavement Management Section and the Maps and Publications Internet Web Pages.

<http://www.dot.state.fl.us/mapsandpublications/publications.shtm>

1.8 TRAINING

No mandatory training is required by this procedure. Classes on the manual are available on request by the District Pavement Design Engineer.

1.9 FORMS

No forms are required by this procedure.

CHAPTER 2

DEFINITIONS

2.1 PAVEMENT SYSTEM

The following define the general pavement layers in a flexible pavement system. Some of the most important layers are shown in Figure 2.1. The definitions are presented "top-down" through the pavement structure with the stronger layers on top of the weaker layers.

The concept of stronger layers on top of weaker layers, as load stresses are spread out and down through the pavement, is further supported by the horizontal extension of weaker layers beyond stronger layers in a pyramidal effect (See Figure 2.1). Standard Department practice is to extend the base 4-in beyond the edge of the structural course. This is very important when dealing with granular materials. Without this support, vehicle loads would cause failure along the pavement edge.

The pavement structure or system as it is sometimes referred to, is the pavement layers designed to support traffic loads and distribute them to the roadbed soil or select embankment material.

Friction Course

The friction course is the uppermost pavement layer and is designed to provide a skid resistant surface. The following friction courses are used by the Department:

- Friction Course FC-12.5 is a dense graded mix and is typically placed approximately 1½-in thick.
- Friction Course FC-9.5 is a dense graded mix and is typically placed approximately 1.0-in thick.

- Friction Course FC-5 is an open graded mix and is typically placed approximately 3/4-in thick.

Structural Course

The structural course is designed to distribute the traffic loadings to the base course. The following structural courses are used by the Department:

- Structural Course Type SP-9.5 uses a 3/8-in nominal maximum size aggregate.
- Structural Course Type SP-12.5 uses a 1/2-in nominal maximum size aggregate.
- Structural Course Type SP-19.0 uses a 3/4-in nominal maximum size aggregate.

Old Mixes

Types S-I, S-II, S-III, FC-1, FC-2, FC-3, FC-4, FC-6, Type I, II and III Asphaltic Concrete, Binder, and Asphaltic Concrete base mixes will occasionally be encountered on rehabilitation projects but are no longer designed by the Department.

Overbuild Course


The Overbuild Courses are used for surface leveling, longitudinal profile and cross-slope correction.

Base Course

The base course is a course (or courses) of specified material and design thickness, which supports the structural course and distributes the traffic loads to the subbase or subgrade.

Different base course materials that may have different thickness, but are structurally equivalent, are grouped together to form an optional base group. More detailed information can be found in Section 5 of this manual or Standard Index 514.

FIGURE 2.1
ROADWAY TYPICAL SECTION

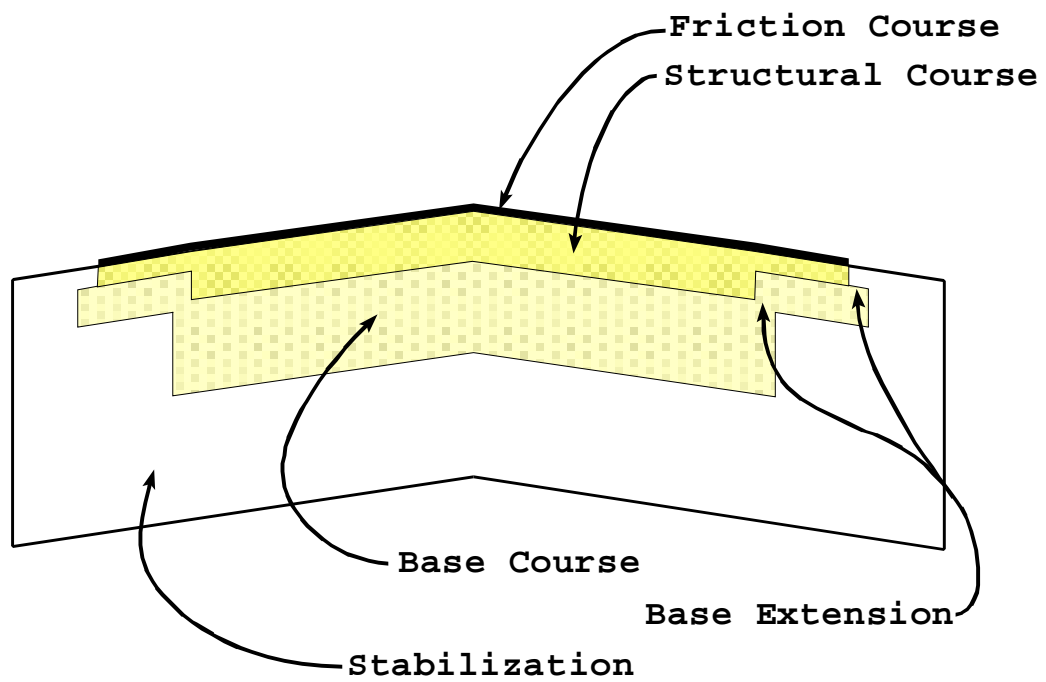

Composite Base

The composite base is a combined granular subbase and asphalt Type B-12.5 that together are bid as an Optional Base Material.

Subbase

The subbase is a layer of specified material and design thickness that supports the base. This generally is limited to use with a Composite Base.

Stabilized Subgrade

The stabilized subgrade is a structural layer that is 12in thick. This structural layer serves as a working platform to permit the efficient construction of the base material. It is generally bid as Type B Stabilization (LBR-40) with the contractor selecting the approved materials necessary to achieve the LBR 40 value.

Roadbed Soil

The roadbed soil is the natural (in-situ) materials or embankment upon which the Pavement Structure is constructed.

2.2 AASHTO DESIGN EQUATION

The following definitions relate to the AASHTO Design Equation used for calculating pavement thickness.

2.2.1 VARIABLES

Accumulated 18-kip Equivalent Single Axle Loads ESAL or ESAL_D

The Accumulated 18-kip Equivalent Single Axle Loads (ESAL) is the traffic load information used for pavement thickness design. The accumulation of the damage caused by mixed truck traffic during a design period is referred to as the ESAL_D.

Traffic Levels

TRAFFIC LEVELS FOR DESIGN EQUIVALENT SINGLE AXLE LOADS (ESAL_D) RANGE FOR SUPERPAVE ASPHALT CONCRETE STRUCTURAL COURSES

The following are the Traffic Levels for the Design Equivalent Single Axle Loads (ESAL_D) ranges for Superpave Asphalt Concrete Structural Courses

<u>AASHTO DESIGN ESAL_D RANGE (MILLION)</u>	<u>TRAFFIC LEVEL</u>
< 0.3	A
0.3 to < 3	B
3 to < 10	C
10 to < 30	D
>= 30	E

Resilient Modulus (M_R)

The Resilient Modulus (M_R) is a measurement of the stiffness of the roadbed soil.

Reliability (%R)

The use of Reliability (%R) permits the Pavement Design Engineer to tailor the design to more closely match the needs of the project. It is the probability of achieving the design life that the Department desires for that facility.

The Pavement Design Engineer is cautioned, however, that a high reliability value may increase the asphalt thickness substantially. The models are based on serviceability and not a specific failure mechanism, such as rutting.

Recommended values range from 75% to 99% and can be found in Table 5.2. It is important to note that this is not a direct input into the AASHTO Design Equation. The use of a converted value known as the Standard Normal Deviate (Z_R) is input

into the equation. The reliability value replaces the safety factor that was previously imbedded in the Soil Support Value.

Standard Normal Deviate (Z_R)

The Standard Normal Deviate (Z_R) is the corresponding Reliability (%R) value that has been converted into logarithmic form for calculation purposes.

2.2.2 CONSTANTS

Standard Deviation (S_O)

The Standard Deviation (S_O) of 0.45 is used in the design calculations to account for variability in traffic load predictions and construction.

Present Serviceability Index (PSI)

The Present Serviceability Index (PSI) is the ability of a roadway to serve the traffic which uses the facility. A rating of 0 to 5 is used with 5 being the best and 0 being the worst. As road condition decreases due to deterioration, the PSI decreases.

Initial Serviceability (P_I)

The Initial Serviceability (P_I) is the condition of a newly constructed roadway. A value of 4.2 is assumed.

Terminal Serviceability (P_T)

The Terminal Serviceability (P_T) is the condition of a road that reaches a point where some type of rehabilitation or reconstruction is warranted. A value of 2.5 is generally assumed.

Change In Serviceability (Δ PSI)

The Change in Serviceability (Δ PSI) is the difference between the Initial Serviceability (P_I) and Terminal Serviceability (P_T). The Department uses a value of 1.7.

2.2.3 UNKNOWNNS

Required Structural Number (SN_R)

The Required Structural Number (SN_R) is a weighted thickness in inches calculated from traffic load information and roadbed soil stiffness, representing the required strength of the pavement structure.

2.3 TERMS

The following terms will be used to describe the Department's design options.

New Construction

New construction is the complete development of a pavement system on a new alignment.

Reconstruction

Reconstruction is the complete removal of the friction course, structural course, and base layers along the existing alignment. Some lane additions or alignment changes may occur resulting in the design of additional subgrade.

Resurfacing

Entails improvement to the structural condition of existing pavement.

Milling

Milling is the controlled removal of existing asphalt pavement by using a rotating drum with teeth which removes the existing material to the desired depth or cross slope.

Operational Type Projects

Operational Type Projects are projects approximately 1000-ft or less that are relatively small such as turn lanes, radius improvements, culvert, replacement, skid hazard, etc.

Overlay

Overlay is the placement of additional layers of asphalt pavement to remedy functional or structural deficiencies of existing pavement. This is sometimes referred to as resurfacing with no milling.

Widening

Widening includes trench widening, lane addition, and operational type projects. This type of design does not require thickness design calculations, unless there are special design considerations as directed by the district pavement design engineer.

Asphalt Rubber Membrane Interlayer (ARMI)

A reflective crack treatment using an asphalt rubber spray application and cover aggregate. Cover aggregate normally consists of No.6 stone, slag or gravel, so a layer thickness of ½-in may be used. No prime or tack coat is required over the cover aggregate prior to overlaying with initial asphalt lift. ARMI is placed beneath the overlay to resist the stress/strain of reflective cracks and delay the propagation of the cracks through the new overlay. An ARMI layer has no structural value.

CHAPTER 3

PAVEMENT THICKNESS DESIGN PROCESS

3.1 DESIGN SOURCE

The American Association of State Highway Officials (AASHTO) Road Test at Ottawa, Illinois provided the basis for calculating the required pavement thickness. Models were developed that related pavement performance, vehicle loadings, strength of roadbed soils, and the pavement structure. Figure 3.1 is the AASHTO Equation used by the Department for design purposes.

The purpose of the AASHTO model in the pavement thickness design process is to calculate the Required Structural Number (SN_R). This is the strength of the pavement that must be constructed to carry the mixed vehicle loads over the roadbed soil, while providing satisfactory serviceability during the design period. Knowing the SN_R , the pavement layer thickness or overlay thickness can be calculated. Figure 3.2 illustrates the processes.

Vehicle loads are expressed in 18-kip Equivalent Single Axle Loads (ESAL's). This information is normally generated by the District Planning Office and is found in the Project Traffic Forecasting Procedure Topic No. 525-030-120 using the Project Traffic Forecasting Handbook. A simple procedure for estimating 18-kip ESAL's is given in Appendix D. The summation of the 18-kip ESAL's during the design period is referred to as $ESAL_D$.

FIGURE 3.1

AASHTO DESIGN EQUATION FOR FLEXIBLE PAVEMENT

$$\log_{10} W_{18} =$$

$$Z_R * S_O + 9.36 * \log_{10}(SN+1) - 0.20 +$$

$$\frac{\log_{10} \left[\frac{\Delta PSI}{4.2-1.5} \right]}{0.40 + \frac{1094}{(SN+1)^{5.19}}}$$

$$+ 2.32 * \log_{10}(M_R) - 8.07$$

FIGURE 3.2

AASHTO DESIGN EQUATION INPUT FOR FLEXIBLE PAVEMENT

The unknown to be determined is:

SN_R = Structural Number Required inches.

The input includes the variables:

W_{18} = Accumulated 18-kip Equivalent Single Axle Loads over the life of the project (18-kip) ESAL.

Z_R = Standard Normal Deviate.

M_R = Resilient Modulus psi

The input includes the constants:

S_O = Standard Deviation.

ΔPSI = Change In Serviceability.
(1.7 is the Department value used)

FIGURE 3.3

FLEXIBLE PAVEMENT DESIGN VARIABLES

$$\mathbf{SN_R = (ESAL_D, M_R, \%R)}$$

For New Construction:

$$\mathbf{SN_C = SN_R}$$

Overlay With and Without Milling:

$$\mathbf{SN_O = SN_R - SN_E}$$

Where:

$ESAL_D$ = Accumulated 18-kip Equivalent Single Axle Loads over the life of the project (18-kip ESAL).

SN_R = Structural number determined as a function of $ESAL_D$, Resilient Modulus (M_R) and the Reliability (%R).

SN_C = Structural number of the proposed structural layers in a newly constructed pavement.

SN_O = Structural number of the structural layers needed in the overlay.

SN_E = Structural number of the existing pavement structure after any milling.

3.2 DESIGN PERIODS

The design periods that will be used for flexible pavement design vary from 8 years to 20 years based on the type of construction proposed. The Pavement Design Engineer can adjust the design period within guidelines based on project specific conditions and constraints. These Design Period guidelines are summarized in Table 3.1.

3.3 DISTRICT COORDINATION

Early in the design process, the Pavement Design Engineer should closely coordinate with the following offices:

District Design

The District Design Engineer office should be involved in providing the proposed roadway typical section sheets for such information as: pavement widening, design speed, expected posted speed, a change in design speed occurring within project limits, side street work and other related information required for the typical section package according to the Department Roadway Plans Preparation Manual.

District Drainage

The District Drainage Office (DDO) should be involved to determine the Design High Water (DHW) applicable to each new construction and reconstruction project. The DDO should determine if there are any special drainage considerations, such as a high water table condition that is affecting pavement performance and needs correcting. An example would be a high water table condition that is affecting pavement performance and needs correcting. Another example would be the impact that additional asphalt overlay thickness would have on the drainage performance of the curb and gutter.

District Construction

The District Construction Office should be involved to determine if there is any specific information that needs to be included in the plans, such as special construction details, or issues that need to be addressed with regard to constructability and construction time. Some of these items may include base type, stabilization, traffic control plans, constructions time, etc.

District Materials

The District Materials Office should be involved to determine the availability of suitable materials in the construction area and any other special conditions that may exist. The District Materials Office can also provide recommendations with respect to stabilizing, milling, cross slope correction, and existing pavement condition.

Additional coordination of project field reviews and data collection might be needed. The latest Pavement Evaluation Coring and Condition Data (Form No. 675-030-09) can be obtained from the District Materials Office.

3.4 QUALITY

The Quality Control of a pavement's design is the District's responsibility. A written Pavement Design Quality Control Plan should be maintained by the district. Upon completion of the design process, an independent design review needs to be performed by a responsible Professional Engineer other than the original pavement design engineer. A suggested Pavement Design Quality Control Plan is provided in Appendix B.

3.5 GUIDELINES FOR DESIGN/BUILD PROJECTS

The complete pavement design package as part of the design criteria for Design/Build projects may be provided by the Department if sufficient data is available. If the pavement design is not provided by the Department, project

specific pavement design criteria should be provided as part of the Request for Proposal/Design Criteria Package to assure a reasonable pavement design is provided by all competing Design/Build teams.

The project specific pavement design criteria may include the minimum ESALs, minimum design reliability, roadbed resilient modulus, minimum structural asphalt thickness and whether or not modified asphalt binder should be used in the final structural layer. For resurfacing designs, a minimum milling depth and whether a crack relief layer is required may be included in the criteria. The Pavement Coring and Evaluation report will normally be provided with the criteria. In addition to project specific criteria, all standard requirements of the Department's pavement design manuals are to be followed.

TABLE 3.1

DESIGN PERIODS

**The Following Design Periods Will Be Used For
Flexible Pavement Designs.**

New Construction or Reconstruction	20 Years
Pavement Overlay without Milling	8 to 20 Years
Pavement Overlay with Milling	
Limited Access	12 to 20 Years*
Non-Limited Access	14 to 20 Years*
Pavement Overlay of Rigid Pavement	8 to 12 Years

Notes

- * Shorter design periods can be used if there are constraints such as curb and gutter or scheduled future capacity projects that justify limiting overlay thickness. These reasons should be documented in the pavement design package.

CHAPTER 4

FRICTION COURSE POLICY

4.1 FRICTION COURSE OPTIONS

There are two general types of friction courses currently in use by the Department, dense graded (FC-9.5 & FC-12.5) and open graded (FC-5). Their thickness is shown on the plans with spread rates determined by specification formula and paid for by the ton.

The Maximum Spread rate used for estimating quantities is as follows:

FC-9.5	110 lb/yd ²
FC-12.5	165 lb/yd ²
FC-5	80 lb/yd ²

Actual pay quantities will be based on the actual maximum specific gravity of the mixture used.

Friction Courses FC-12.5 and FC-9.5 are dense graded mixes which are placed 1-½-in and 1-in thick respectively. These friction courses provide smooth riding surfaces with adequate friction numbers for skid resistance.

The FC-9.5 dense graded mix will allow a 1-in lift of friction course. On some projects this thinner lift may allow room for an additional structural or overbuild lift, as in some curb and gutter sections, without milling into the base or overlaying friction course into the gutter.

The other friction course, FC-5, consists of an open graded material. FC-5 is placed and shown on the typical section as ¾-in thick. FC-5 provides a skid resistant surface. The open graded texture of the mix provides for the rapid removal of water from between the tire and the pavement to reduce the potential for hydroplaning at higher speeds.

A friction course will be placed on all roads with a design speed of 35 mph or higher, except for low volume two lane roads having a five year projected AADT from the opening year of 3000 vehicles per day or less. On multi-lane roadways with a design speed of 50 mph or greater, FC-5 will be used. On multi-lane roadways with curb and gutter and posted speeds of 45 mph or less, FC-12.5 or FC-9.5 may be considered, if there is no significant wet-weather crash history. On all other roadways FC-12.5 or FC-9.5 will normally be used. When traffic level D or E structural mixture is used, call for PG 76-22 (PMA) or PG 82-22 (PMA) binder in the friction course. Table 4.1 summarizes these requirements.

TABLE 4.1
FRICTION COURSE SELECTION

**The Following Friction Courses are
Required For Design Speeds of
35 mph or Greater.**

All Projects

<u>Design Speed</u>	<u>Two Lane</u>	<u>Multi Lane</u>
35 thru 45 mph	FC-12.5 or FC-9.5	FC-12.5 or FC-9.5
50 mph Or Greater	FC-12.5 or FC-9.5	FC-5

Low Volume Two Lane Roads

- Type SP Structural Course without a friction course may be used if the five years projected AADT from the opening year is less than 3000 vehicles per day.

4.2 FRICTION COURSES 12.5 AND 9.5 (FC-12.5 and FC-9.5)

The following are some of the features of the use of FC-12.5 and FC-9.5:

- FC-12.5 and FC-9.5 are allowed directly on top of any structural course mix.
- FC-12.5 and FC-9.5 are considered part of the structural layer and may be considered as both a structural and friction course.


4.3 FRICTION COURSE 5 (FC-5)

The following are some of the limitations on the use of FC-5:

- Open graded friction courses such as FC-2 and FC-5 should not be overlaid (due to its potential to allow water into the pavement system) except when approved by the District Materials Engineer.
- FC-5 should not sit after construction for more than four (4) months before being opened to traffic. If necessary, the FC-5 may need to be let under a separate contract.
- If the majority of a project is FC-5 and the quantity of FC-12.5 or FC-9.5 would be less than 1000 tons, FC-5 can be used throughout the project.
- On multi-lane non-limited access facilities, the FC-5 will cover the deceleration areas of turn lanes and shoulder pavement.
- FC-5 maybe placed directly on the milled surface provided the underlying layers are in good structural shape.
- On non-limited access facilities, the friction course is to be placed over the entire paved shoulder. On limited access facilities, the friction course is to extend 8-in beyond the edge of the travel lane, onto the paved shoulder.
- FC-5 is not to be placed in median crossovers or gore areas of multi-lane, high speed facilities.

- FC-5 is to be placed on limited access on- and off-ramps, and extend to the edge of the travel lane of the intersecting street.
- In order to minimize raveling/deterioration due to pavement sawcuts, FC-5 is not required on flexible pavement within proposed Toll facilities that utilize electronic data collection requiring loop installation in the pavement surface.

**FIGURE 4.1
ILLUSTRATION SHOWING LIMITS OF FRICTION COURSE
FC-5 AT INTERMEDIATE MEDIAN CROSSOVER**

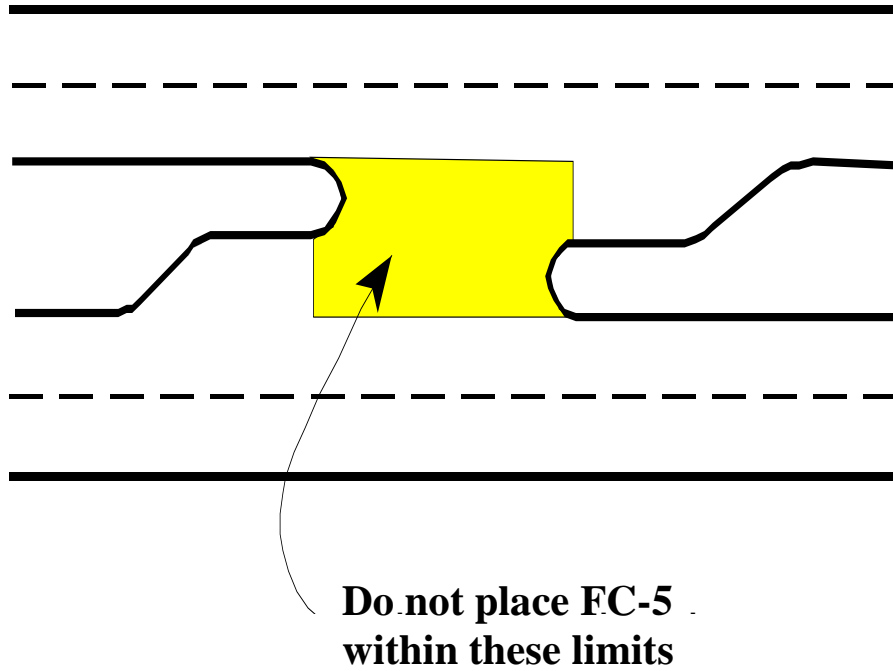

**FIGURE 4.2
ILLUSTRATION SHOWING LIMITS OF FRICTION COURSE FC-5 AT
INTERMEDIATE MEDIAN CROSSOVER**


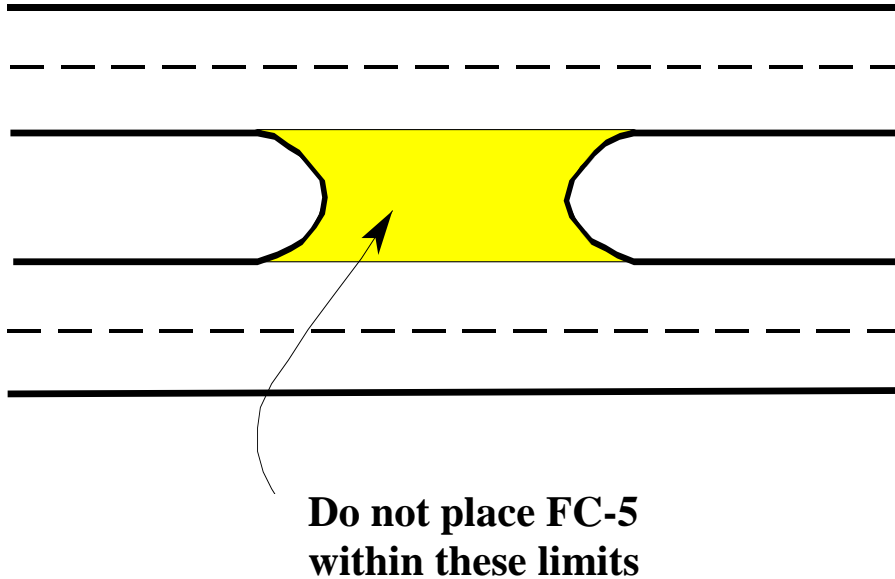


FIGURE 4.3

**ILLUSTRATION SHOWING LIMITS OF FRICTION COURSE
FC-5 AT MEDIAN AREAS OF LOW VOLUME INTERSECTION**

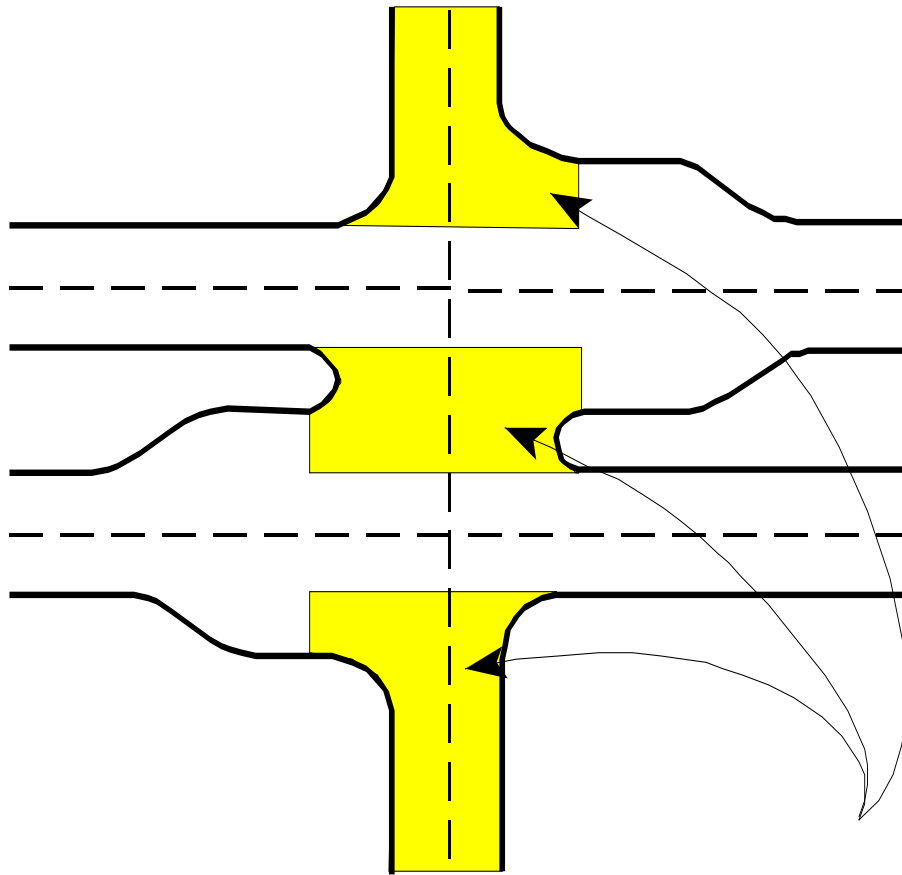

**Do not place FC-5
within these limits**

CHAPTER 5

PAVEMENT THICKNESS DESIGN PROCESS FOR NEW CONSTRUCTION OR RECONSTRUCTION

5.1 OVERVIEW

This process is applicable to new construction or total reconstruction projects in Florida where the Pavement Design Engineer must calculate the pavement layer thickness using the AASHTO Procedure.

For new lane additions, short pavement sections (approximately 1000-ft or less) such as bridge replacement, cross roads, short turnouts, etc., the principles provided in Chapter 6 of this manual shall apply.

5.2 REQUIRED STRUCTURAL NUMBER (SN_R) CALCULATIONS USING THE AASHTO DESIGN GUIDE

The following is a summary of the steps to be taken to solve for the Required Structural Number (SN_R):

- The 18-kip Equivalent Single Axle Loads 18-kip ESAL's are obtained from the District Planning Office. This process can be found in the Project Traffic Forecasting Handbook Procedure Topic No. 525-030-120 using the Project Traffic Forecasting Handbook. Appendix D provides a simple procedure for calculating the accumulated 18-kipESAL's or $ESAL_D$ for the appropriate design period.
- The Resilient Modulus (M_R) used to characterize the strength of the roadbed soil is obtained from the State Materials Office, through the District Materials Office using direct resilient modulus laboratory testing. As an alternative for low volume roads, the design Limerock Bearing Ratio (LBR) value which is based on 90% of the anticipated LBR's exceeding the Design LBR is discussed in section 5.2.4. The relationship between the Design Limerock Bearing Ratio

(LBR) and Resilient Modulus (M_R) sample values are shown in Table 5.1.

- A safety factor is applied using a Reliability (%R) value from Table 5.2. Recommended values range from 75% to 99%. A Standard Deviation (S_O) of 0.45 is used in the calculation. The Standard Normal Deviate (Z_R) is dependent on the Reliability (%R).

Using these values, the Pavement Design Engineer will calculate the Structural Number Required (SN_R) using the design tables in Appendix A.

Each design table uses a different Reliability (%R) and relates Design 18-kip Equivalent Single Axle Loads ($ESAL_D$) to the Structural Number Required (SN_R) for multiple Resilient Modulus (M_R) values. Table 5.3 provides an example of an FDOT design table.

5.2.1 DESIGN EXAMPLE

The following is an example illustrating the mechanics of this procedure. Using the following input for New Construction of an Urban Arterial:

$ESAL_D = 4,900,000$ (from the Planning Office)
Use 5,000,000

$M_R = 14,000$ psi (from the State Materials Office)

%R = 80 to 90 (choose %R = 90 from Table 5.2)

Design 18-kip Equivalent Single Axle Loads ($ESAL_D$) and Resilient Modulus (M_R) values can generally be rounded up or down to the nearest table values. Final thickness designs are to the nearest 1/2-in of structural course. If desired, an interpolated SN_R value can be used. The solution is:

$SN_R = 3.57$ -in (from Table 5.3)

5.2.2 DESIGN BASE HIGHWATER CLEARANCE

Base clearance above high water is critical for good pavement performance and to achieve the required compaction and stability during construction operations. (Dr. Ping - "Design Highwater Clearances for Highway Pavements" research report BD543-13).

The laboratory Design Resilient Modulus obtained from the State Materials Office is based on optimum moisture content conditions which correspond to a 3-ft base clearance.

In addition to thicker pavement structure for 1-ft base clearance, significant construction problems are also likely and additional costs such as dewatering may be required to achieve compaction.

When the base clearance is less than 3-ft, the pavement designer must reduce the Design Resilient modulus as follows:

- For 2-ft Base Clearance, a 25% modulus reduction
- For 1-ft Base Clearance, a 50% modulus reduction

Note: Refer to Section 5.6.2 for further guidance on high-water clearance and base design considerations.

5.2.3 LABORATORY RESILIENT MODULUS (M_R)

The Design Resilient Modulus (M_R) is determined by the State Materials Office (SMO) directly from laboratory testing (AASHTO T 307) for new construction and reconstruction projects based on instructions in FDOT Soils and Foundation Handbook.


For new construction with substantial fill sections in excess of 3-ft, samples should be obtained from potential borrow areas to estimate the roadway embankment resilient modulus.

The following method is generally applied by the SMO to the M_R test data to account for variability in materials and to provide for an optimum pavement design:

90% M_R Method - Resilient modulus values using AASHTO T 307 at 11 psi bulk stress sorted into descending order. For each value, the percentage of values, which are equal to or greater than that value, is calculated. These percentages are plotted versus the M_R values. The M_R value corresponding to 90% is used as the design value. Thus, 90% of the individual tests results are equal to or greater than the design value.

Ranked M_R Test Results for 90% Method

Rank	Sample Location	$\geq\%$	M_R (psi)
1	337+98	100	8,030
2	254+90	93	8,477
3	289+80	87	11,148
4	56+07	80	11,335
5	41+98	73	12,399
6	242+00	67	12,765
7	321+92	60	12,976
8	600+00	53	13,025
9	225+00	47	13,039
10	272+99	40	13,565
11	615+43	33	13,682
12	211+98	27	14,190
13	307+04	20	14,398
14	584+66	13	14,449
15	273+99	7	15,031

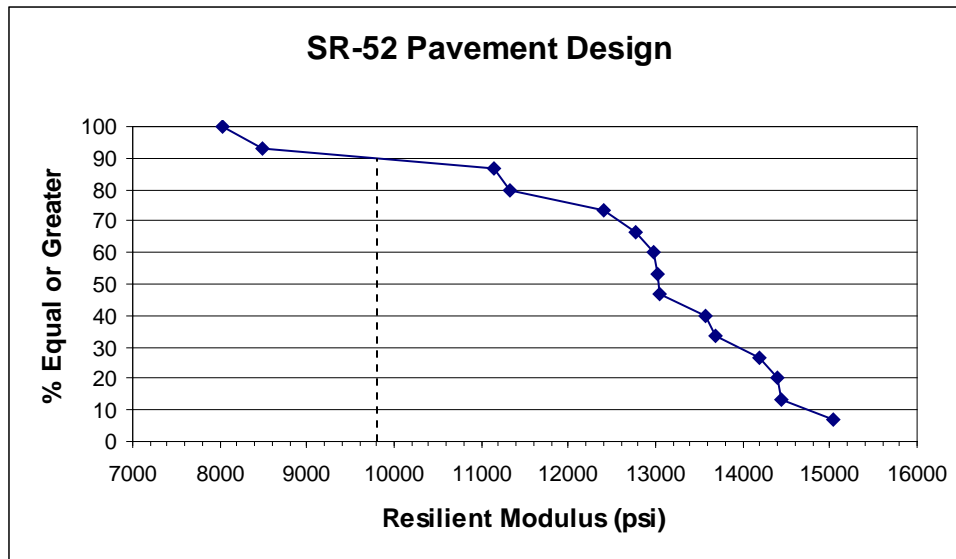

Ranked M_R Test Results for 90% Method

Based on the results shown, the resilient modulus corresponding to a 90th percentile is 9,800 psi.

5.2.4 RESILIENT MODULUS (M_R) FROM LBR

The roadbed soil resilient modulus, M_R can be estimated from the Limerock Bearing Ratio (LBR) value by the following equation.

$$M_R(PSI) = 10^{[0.7365 * \log(LBR)]} * 809$$

This equation combines equation $SSV = 4.596 * \log(LBR) - 0.576$ developed by Dr. Robert Ho of the State Materials Office (2/2/93 memo to Lofroos) that relates LBR to soil support value (SSV) and equation FF.3: $SSV = 6.24 * \log(M_R) - 18.72$ from the Appendix FF, Volume 2 of the AASHTO Guide for Design of Pavement Structures, that relates M_R to SSV.

Due to the approximate relationship of LBR to M_R , a Design LBR greater than 40 should not be recommended or used to estimate the Design M_R .

If a Design LBR or M_R Value is not available from the District Materials Office, and a series of LBR values are provided, the Pavement Design Engineer may select a Design LBR Value (not to exceed a maximum of 40 LBR) based on the 90th percentile methodology. The following simple analysis is provided as an example.

GIVEN:

The following illustrates the mechanics of calculating the Resilient Modulus (M_R) obtained from a set of LBR data.

DATA:

The following field data has been provided:

<u>Sample Number</u>	<u>LBR Values In Ascending Order</u>
1	22
2	22
3	23
4	24
5	24
6	24
7	25
8	25
9	25
10	26
11	26
12	27
13	27
14	40

SOLUTION:

Sample No. 14 is considered an outlier by inspection and should be eliminated. It is satisfactory to drop a high number as in this example, but care should be taken before dropping a low number, because it may indicate a localized weak spot, that may require special treatment.

This results in 13 good samples.

$$13 \times 90\% = 11.7 \text{ (Use 12)}$$

Count back 12 samples starting with Sample Number 13 to Sample Number 1:

$$\text{Use LBR} = 22.$$

CONCLUSION:

90% meet or exceed the Design LBR = 22.

The Pavement Design Engineer can now convert the Design LBR Value to a Resilient Modulus (M_R) using Table 5.1.

Therefore: $M_R = 8,000$ psi

TABLE 5.1

**RELATIONSHIP BETWEEN RESILIENT MODULUS (M_R) AND
LIMEROCK BEARING RATIO (LBR) SAMPLE VALUES**

The following are some Limerock Bearing Ratio (LBR) input values that were input into these equations to obtain Resilient Modulus (M_R) values.

Limerock Bearing Ratio (LBR)	Resilient Modulus PSI
10	4500
12	5000
14	5500
16	6000
18	7000
20	7500
22	8000
24	8500
26	9000
28	9500
30	10000
32	10500
34	11000
36	11500
38	12000
40	12000

TABLE 5.2

RELIABILITY (%R) FOR DIFFERENT ROADWAY FACILITIES

<u>Facility</u>	<u>New</u>	<u>Rehabilitation</u>
Limited Access	80 - 95	95 - 99
Urban Arterials	80 - 90	90 - 97
Rural Arterials	75 - 90	90 - 95
Collectors	75 - 85	90 - 95

Notes

The type of roadway is determined by the Transportation Statistics Office and can be obtained from the Roadway Characteristics Inventory (RCI).

The designer has some flexibility in selecting values that best fits the project when choosing the Reliability (%R).

Considerations for selecting a reliability level include projected traffic volumes and the consequences involved with early rehabilitation, if actual traffic loadings are greater than anticipated. A detailed discussion of reliability concepts can be found in the AASHTO Guide For Design Of Pavement Structures.

For traffic volume ranges, refer to Chapter 2, Design Geometrics and Criteria, of the Plans Preparation Manual - Topic No. 625-000-007.

TABLE 5.3
REQUIRED STRUCTURAL NUMBER (SN_R)
90% RELIABILITY (%R)
RESILIENT MODULUS (M_R) RANGE 4,000 PSI TO 18,000 PSI
RESILIENT MODULUS (M_R), (PSI x 1000)

ESAL _D	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
100 000	3.02	2.77	2.59	2.44	2.31	2.21	2.12	2.04	1.97	1.91	1.86	1.81	1.76	1.72	1.68
150 000	3.23	2.97	2.77	2.61	2.47	2.36	2.27	2.19	2.11	2.05	1.99	1.94	1.89	1.84	1.80
200 000	3.39	3.11	2.90	2.73	2.60	2.48	2.38	2.30	2.22	2.15	2.09	2.03	1.98	1.94	1.89
250 000	3.52	3.23	3.01	2.84	2.69	2.57	2.47	2.38	2.30	2.23	2.17	2.11	2.06	2.01	1.97
300 000	3.62	3.33	3.10	2.92	2.78	2.65	2.55	2.46	2.37	2.30	2.24	2.18	2.12	2.07	2.03
350 000	3.71	3.41	3.18	3.00	2.85	2.72	2.61	2.52	2.44	2.36	2.30	2.23	2.18	2.13	2.08
400 000	3.79	3.49	3.25	3.07	2.91	2.78	2.67	2.58	2.49	2.42	2.35	2.29	2.23	2.18	2.13
450 000	3.87	3.56	3.32	3.13	2.97	2.84	2.73	2.63	2.54	2.46	2.39	2.33	2.27	2.22	2.17
500 000	3.93	3.62	3.38	3.18	3.02	2.89	2.77	2.67	2.59	2.51	2.44	2.37	2.31	2.26	2.21
600 000	4.05	3.73	3.48	3.28	3.12	2.98	2.86	2.76	2.67	2.58	2.51	2.45	2.39	2.33	2.28
700 000	4.14	3.82	3.57	3.36	3.20	3.05	2.93	2.83	2.73	2.65	2.58	2.51	2.45	2.39	2.34
800 000	4.23	3.90	3.64	3.44	3.27	3.12	3.00	2.89	2.80	2.71	2.63	2.57	2.50	2.44	2.39
900 000	4.31	3.97	3.71	3.51	3.33	3.18	3.06	2.95	2.85	2.76	2.69	2.62	2.55	2.49	2.44
1 000 000	4.38	4.04	3.78	3.57	3.39	3.24	3.11	3.00	2.90	2.81	2.73	2.66	2.60	2.54	2.48
1 500 000	4.65	4.30	4.03	3.81	3.62	3.46	3.33	3.21	3.10	3.01	2.92	2.85	2.78	2.71	2.65
2 000 000	4.85	4.50	4.21	3.99	3.79	3.63	3.49	3.36	3.25	3.16	3.07	2.99	2.91	2.85	2.78
2 500 000	5.01	4.65	4.36	4.13	3.93	3.76	3.62	3.49	3.38	3.27	3.18	3.10	3.02	2.95	2.89
3 000 000	5.14	4.77	4.48	4.25	4.05	3.88	3.73	3.60	3.48	3.37	3.28	3.19	3.12	3.04	2.98
3 500 000	5.25	4.88	4.59	4.35	4.14	3.97	3.82	3.69	3.57	3.46	3.36	3.28	3.20	3.12	3.06
4 000 000	5.35	4.98	4.68	4.44	4.23	4.06	3.90	3.77	3.65	3.54	3.44	3.35	3.27	3.19	3.12
4 500 000	5.44	5.06	4.76	4.52	4.31	4.13	3.98	3.84	3.72	3.61	3.51	3.42	3.33	3.26	3.19
5 000 000	5.52	5.14	4.83	4.59	4.38	4.20	4.04	3.90	3.78	3.67	3.57	3.47	3.39	3.31	3.24
6 000 000	5.66	5.27	4.96	4.71	4.50	4.32	4.16	4.02	3.89	3.78	3.67	3.58	3.49	3.41	3.34
7 000 000	5.78	5.38	5.07	4.82	4.61	4.42	4.26	4.12	3.99	3.87	3.77	3.67	3.58	3.50	3.43
8 000 000	5.88	5.48	5.17	4.91	4.70	4.51	4.35	4.20	4.07	3.95	3.85	3.75	3.66	3.58	3.50
9 000 000	5.97	5.57	5.26	5.00	4.78	4.59	4.43	4.28	4.15	4.03	3.92	3.82	3.73	3.65	3.57
10 000 000	6.06	5.65	5.33	5.07	4.85	4.66	4.50	4.35	4.22	4.10	3.99	3.89	3.79	3.71	3.63
15 000 000	6.39	5.97	5.64	5.37	5.14	4.95	4.77	4.62	4.48	4.36	4.25	4.14	4.05	3.96	3.88
20 000 000	6.63	6.20	5.86	5.59	5.35	5.15	4.98	4.82	4.68	4.55	4.44	4.33	4.23	4.14	4.06
25 000 000	6.82	6.38	6.04	5.76	5.52	5.32	5.14	4.98	4.84	4.71	4.59	4.48	4.38	4.29	4.20
30 000 000	6.98	6.53	6.18	5.90	5.66	5.45	5.27	5.11	4.96	4.83	4.71	4.60	4.50	4.41	4.32
35 000 000	7.12	6.66	6.31	6.02	5.78	5.57	5.38	5.22	5.07	4.94	4.82	4.71	4.61	4.51	4.42
40 000 000	7.24	6.78	6.42	6.13	5.88	5.67	5.48	5.32	5.17	5.04	4.91	4.80	4.70	4.60	4.51
45 000 000	7.34	6.88	6.52	6.22	5.97	5.76	5.57	5.41	5.26	5.12	5.00	4.88	4.78	4.68	4.59
50 000 000	7.44	6.97	6.61	6.31	6.06	5.84	5.65	5.49	5.34	5.20	5.07	4.96	4.85	4.76	4.66
60 000 000	7.61	7.13	6.76	6.46	6.21	5.99	5.79	5.62	5.47	5.33	5.21	5.09	4.98	4.88	4.79
70 000 000	7.76	7.27	6.90	6.59	6.33	6.11	5.91	5.74	5.59	5.45	5.32	5.20	5.09	4.99	4.90
80 000 000	7.88	7.40	7.01	6.70	6.44	6.22	6.02	5.85	5.69	5.55	5.42	5.30	5.19	5.09	4.99
90 000 000	8.00	7.51	7.12	6.80	6.54	6.31	6.11	5.94	5.78	5.64	5.51	5.39	5.28	5.17	5.08
100 000 000	8.10	7.60	7.21	6.90	6.63	6.40	6.20	6.02	5.86	5.72	5.59	5.47	5.35	5.25	5.15

5.3 LAYER THICKNESS CALCULATIONS FOR NEW CONSTRUCTION

Once the Required Structural Number (SN_R) has been determined, the individual pavement layer thickness can be calculated using the following equation;

$$SN_C = (a_1 \times D_1) + (a_2 \times D_2) + (a_3 \times D_3) + \dots \\ + (a_N \times D_N)$$

where:

SN_C = The total calculated strength of the pavement layers and has units of inches.

a_1 = Layer coefficient of the 1st layer.

D_1 = Layer thickness in inches of the 1st layer.

Layer 1 is generally the friction course.

Layer 2 is generally the structural course.

Layer 3 is generally the base course.

Layer 4 is generally the stabilized subgrade.

a_N = Layer coefficient of the Nth layer.

D_N = Layer thickness in inches of the Nth layer.

Layer coefficients have been developed which represent the relative strength of different pavement materials in Florida. The values for these materials are given in Table 5.4. The coefficients presented in this table are based on the best available data. Future adjustments will be made to these values by manual revisions should research or other information dictate.

Always design to the nearest 1/2-in of structural course.

Optional Bases which are combinations of material type, thickness, and equivalent strength, have been developed as shown in Tables 5.6 and 5.7 (Notes provided in Table 5.8). This permits the Department to bid Optional Base with the contractor selecting from the base materials shown on the Typical Section Sheet or from Standard Index 514. If only the Base Group Number is shown in the plans then Sheet 1 of 2 (Table 5.6 General Use Bases) is applicable. The Base Group Numbers (1 thru 15) are shown on the left of the sheet.

Each set of bases within a base group have equivalent strength. As an example, reading across Optional Base Group 6, 8-in of Limerock (LBR 100) is equivalent to 5-in of Asphalt Base in total structural number. Either Optional Base could be constructed to provide a base Structural Number within the structural range of 1.35 - 1.50 of this base group.

Note that there are restrictions placed on certain materials. For new construction, certain minimum thicknesses have been established. These minimums are based on the type of road and are shown in Table 5.5.

Granular subbases are used as a component of a Composite Base. Subbase layer coefficients are set at 90% of the base coefficient.

To determine how much each layer (D_2 and D_3) will contribute, a balanced approach has been provided with the use of Table 5.9. Table 5.9 relates all optional bases with practical structural course thickness in ½-in increments and provides a band of recommended base and structural course thickness. Note that the structural value provided by the stabilization is not included in the Combined Structural Number shown in Table 5.9.

5.4 BINDER SELECTION ON THE BASIS OF TRAFFIC SPEED AND TRAFFIC LEVEL

By specification, the standard asphalt binder grade is a PG 67-22, which means the binder should be rut resistant up to temperatures of 67°C and crack resistant down to temperatures of -22°C.

For dense graded friction course mixtures use a PG 76-22 (ARB), as the standard binder for Traffic Levels A, B, & C. For Traffic Levels D and E, use a PG 76-22 (PMA). For open graded friction course mixtures, use the same binder type and grade as the underlying structural layer.

The resilient Modulus of asphalt concrete is less under a slow moving load than under a more dynamic, high speed load. As a result of this effect, slow moving or stopped trucks have a greater potential to cause rutting. For situations with slow moving or standing truck traffic and particularly those sections with a history of

rutting, a PG 76-22 (PMA) or PG 82-22 (PMA) may be substituted for PG 76-22 (ARB).

Examples:

For toll booths, intersections with slow truck traffic, pavement sections with history of rutting and existing weigh stations with standing traffic, use a PG 76-22 (PMA) or higher (i.e. PG 82-22 (PMA)) asphalt binder. A minimum of 1000 tons of modified structural mix is generally recommended per project or group of projects to make the most efficient use of the material.

For high traffic levels D and E, use PG 76-22 (PMA) or higher asphalt binder in the final structural layer for traffic level D and for the top two structural layers for traffic level E.

The PG 76-22 (PMA) or higher layer thickness should be shown separately on the typical section and a separate pay item used.

The appropriate Traffic Level is to be shown for structural friction courses FC-9.5 and FC-12.5. For Traffic Levels D and E, PG 76-22 (PMA) or higher should also be called for in the friction course. Note that as with SP-9.5, FC-9.5 should not be used for Traffic Levels D and E.

TABLE 5.4
STRUCTURAL COEFFICIENTS FOR DIFFERENT PAVEMENT LAYERS
(New Construction or Reconstruction)

<u>Layer Type</u>	<u>Layer Coeff. per inch</u>	<u>Spec. Sec.</u>
FC-5	0.00	337
FC-12.5, FC-9.5	0.44	337
Superpave Type SP (SP-9.5, SP-12.5, SP-19.0)	0.44	334
Limerock (LBR 100)	0.18	200
Cemented Coquina (LBR 100)	0.18	200
Shell Rock (LBR 100)	0.18	200
Bank Run Shell (LBR 100)	0.18	200
Graded Aggregate (LBR 100)	0.15	204
Recycled Concrete Aggregate (LBR 120)	0.15	204
Type B-12.5	0.30	234
Limerock Stab. (LBR 70)	0.12	230
Shell Stab. (LBR 70)	0.10	
Sand Clay (LBR 75)	0.12	
Soil Cement (500 psi)	0.20	
Soil Cement (300 psi)	0.15	
Type B Stab. (LBR 40)	0.08	
Type B Stab. (LBR 30)	0.06	
Type C Stab.	0.06	
Cement Treated (300 psi)	0.12	
Lime Treated	0.08	

TABLE 5.5

REQUIRED MINIMUM THICKNESS FOR NEW CONSTRUCTION OR RECONSTRUCTION

In order to avoid the possibility of producing an impractical design, the following minimum thicknesses are required for New Construction. It is assumed that a 12in stabilized subgrade (LBR 40) is to be constructed in order to establish a satisfactory working platform.

<u>18-kip ESAL's 20 year period</u>	<u>Minimum Structural Course</u>	<u>Minimum Base Group</u>
Limited Access	4"	9
Greater than 3,500,000	3"	9
Ramp <u>less than 3,500,000</u>	2"	9
300,000 to 3,500,000	2"	6
Less than 300,000	1 1/2"	3
Limited Access Shoulder	1 1/2"	1
Residential Streets, Parking Areas, Shoulder Pavement, Bike Paths	1"	1

FC-12.5 and FC-9.5 can be considered as structural courses and are sufficient for single layer shoulder pavement.

FC-5 has no structural value and is always shown as 3/4-in thick.

See Chapter 8 for Shoulder Design Guidance.

TABLE 5.6
GENERAL USE OPTIONAL BASE GROUPS AND STRUCTURAL
NUMBERS (STANDARD INDEX 514) (inches)

BASE THICKNESS AND OPTIONAL CODES										
Base Group	Structural Range	Base Group Pay Item Number	Base Options							RAP Base
			Limerock, LBR 100	Cemented Coquina, LBR 100	Shell Rock, LBR 100	Bank Run Shell, LBR 100	Graded Aggregated Base, LBR 100	Type B-12.5	B-12.5 and 4" Granular Subbase, LBR 100 *	
			Structural Number (Per In.)							
			(0.18)	(0.18)	(0.18)	(0.18)	(0.15)	(0.30)	(0.30 & 0.15)	
1	0.65 - 0.75	701	4"	4"	4"	4"	4 1/2"	Δ 4"	□ 5"	
2	0.80 - 0.90	702	5"	5"	5"	5"	5 1/2"	Δ 4"		
3	0.95 - 1.05	703	5 1/2"	5 1/2"	5 1/2"	5 1/2"	6 1/2"	Δ 4"		
4	1.05 - 1.15	704	6"	6"	6"	6"	7 1/2"	Δ 4"		
5	1.25 - 1.35	705	7"	7"	7"	7"	8 1/2"	4 1/2"		
6	1.35 - 1.50	706	8"	8"	8"	8"	9"	5"		
7	1.50 - 1.65	707	8 1/2"	8 1/2"	8 1/2"	8 1/2"	10"	5 1/2"		
8	1.65 - 1.75	708	9 1/2"	9 1/2"	9 1/2"	9 1/2"	11"	5 1/2"		
9	1.75 - 1.85	709	10"	10"	10"	10"	12"	6"	4"	
10	1.90 - 2.00	710	11"	11"	11"	11"	∅ 13"	6 1/2"	4 1/2"	
11	2.05 - 2.15	711	12"	12"	12"	12"	∅ 14"	7"	5"	
12	2.20 - 2.30	712	12 1/2"	12 1/2"	12 1/2"	12 1/2"		7 1/2"	5 1/2"	
13	2.35 - 2.45	713	∅ 13 1/2"	∅ 13 1/2"	∅ 13 1/2"	∅ 13 1/2"		8"	6"	
14	2.45 - 2.55	714	∅ 14"	∅ 14"	∅ 14"	∅ 14"		8 1/2"	6 1/2"	
15	2.60 - 2.70	715						9"	7"	

* For granular subbase, the construction of both the subbase and Type B-12.5 will be bid and used as Optional Base. Granular subbases include Limerock, Cemented Coquina, Shell Rock, RCA Base at LBR 120, Bank Run Shell and Graded Aggregate Base at LBR 100. The base thickness shown is Type B-12.5. All subbase thicknesses are 4" minimum.

Φ To be used for widening, three feet or less.

Δ Based on minimum practical thicknesses.

□ For restrictions on the use of RAP Base, see Specifications Section 283.

TABLE 5.7

**LIMITED USE OPTIONAL BASE GROUPS AND STRUCTURAL NUMBERS
 (STANDARD INDEX 514) (inches)**

BASE THICKNESS AND OPTION CODES									
Base Group	Structural Range	Base Group Pay Item Number	Base Options						
			Limerock Stabilized LBR 70	Shell LBR 70	Shell Stabilized LBR 70	Sand-Clay LBR 75	Soil Cement (300 psi)(Plant Mixed)	Soil Cement (300 psi)(Road Mixed)	Soil Cement (500 psi)(Plant Mixed)
			Structural Number (per inch)						
			(0.12)	(0.12)	(0.10)	(0.12)	(0.15)	(0.115)	(0.20)
1	0.65-0.75	701	5"	5"	7"	5"	5"	5"	4" ^Δ
2	0.80-0.90	702	6 ¹ / ₂ "	6 ¹ / ₂ "	8 ¹ / ₂ "	6 ¹ / ₂ "	5 ¹ / ₂ "	5 ¹ / ₂ "	4"
3	0.95-1.05	703	8"	8"	9 ¹ / ₂ "	8"	6 ¹ / ₂ "	6 ¹ / ₂ "	5"
4	1.05-1.15	704	9"	9"	10 ¹ / ₂ "	9"	7 ¹ / ₂ "	7 ¹ / ₂ "	5 ¹ / ₂ "
5	1.25-1.35	705	10"	10"	12"	10"	8 ¹ / ₂ "	8 ¹ / ₂ "	6"
6	1.35-1.50	706	11"	11"		11"	9"		7"
7	1.50-1.65	707	12 ¹ / ₂ "	12 ¹ / ₂ "		12 ¹ / ₂ "	10"		7 ¹ / ₂ "
8	1.65-1.75	708					11"		8 ¹ / ₂ "

Not Recommended For 20 year Design Accumulated 18
 Kip Equivalent Single Axle (ESAL) Loads Greater Than
 1,000,000.

← →

Note: These base materials may be used on FDOT projects when approved in writing by the District Materials Engineer and shown in the plans.

Δ Based On Minimum Practical Thicknesses.

TABLE 5.8

NOTES FOR OPTIONAL BASE GROUPS AND STRUCTURAL NUMBERS (STANDARD INDEX 514)

General Notes

1. On new construction and complete reconstruction projects, when an entirely new base is to be built, the design engineer may specify the Base Group and any unrestricted General Use Optional Base shown in that base group. Note, however, that some thick granular bases are limited to widening which prevents their general use.
2. Where base options are specified in the plans, only those options may be bid and used.
3. The designer may require the use of a single base option, for instance Type B-12.5 in a high water condition. This single base option will be bid and used as Optional Base.

5.5 NEW CONSTRUCTION DESIGN SAMPLE PROBLEM

This process is applicable for new construction. The following steps will take place in approximately the order shown with the understanding that some activities can take place concurrently.

GIVEN:

New Construction four lane, high volume, part urban, part rural, arterial.

$ESAL_D = 6,635,835$. This value is generally obtained from the District Planning Office. Round up $ESAL_D$ to 7,000,000 Traffic Level C (Section 5.5.4) for use in the design tables in Appendix A.

$M_R = 11,500$ psi. This value is obtained from the State Materials Office. Round up from the design M_R for use in the design tables in Appendix A.

FIND:

The pavement thickness from the information provided for a 20 year design with a design speed of 55 mph for the rural section and with a design speed of 45 mph for the urban section (curb and gutter).

DATA:

$\%R = 80$ to 90 . This value is from Table 5.2 for an Urban Arterial New Construction. $\%R = 75$ to 90 for Rural Arterial New Construction. $\%R = 90$ was chosen by the designer because of the high volume on both sections.

SN_R can be determined from the design tables in Appendix A for the appropriate reliability. From Table A.4A:

$$SN_R = 4.05\text{-in (interpolated)}$$

SOLUTION:

With the SN_R known, the pavement layer thickness can be calculated.

For the first part of this sample problem using a design speed of 55 mph we need to use FC-5 according to Table 4.1.

FC-5 has no structural value and is always shown as 3/4-in. The in-place thickness will average 3/4-in with edge rolling down to approximately 1/4-in. Also assume

that a 12-in Stabilized Subgrade (LBR-40) is to be used in order to establish a satisfactory working platform. The required base and structural course layer thickness can be determined using the following equation:

$$SN_R = SN_C$$

$$SN_R = (a_1 \times D_1) + (a_2 \times D_2) + (a_3 \times D_3) + (a_4 \times D_4)$$

$$4.05" = (0 \times 0.75") + (a_2 \times D_2) + (a_3 \times D_3) + (0.08 \times 12")$$

$$4.05" = 0 + (a_2 \times D_2) + (a_3 \times D_3) + 0.96"$$

The next step is to calculate the value that the base ($a_3 \times D_3$) and structural course ($a_2 \times D_2$) must contribute. To determine this, subtract the stabilized subgrade ($a_4 \times D_4 = 0.96$) from SN_R .

$$4.05" - 0.96" = (a_2 \times D_2) + (a_3 \times D_3)$$

In this case, the base and structural course must provide the following remaining structural value;

$$3.09" = (a_2 \times D_2) + (a_3 \times D_3)$$

Rounding the structural course asphalt to the nearest 1/2-in, from Table 5.9, it can be seen that the following combinations would prove satisfactory:

Optional Base Group 8 with 3.50-in of structural course with a SN = 3.16-in

Optional Base Group 9 with 3.0-in of structural course with a SN = 3.12-in

Optional Base Group 10 with 3.0-in of structural course with a SN = 3.21-in

Because this is a pavement with $ESAL_D$ greater than 3,500,000, the minimum thickness must be checked. From Table 5.5, the minimum allowed for this type of road is Optional Base Group 9 with 3-in of structural course. One of the combinations selected meets these minimum requirements.

If all the combinations were thinner than the minimum, another combination meeting the minimum requirements would be selected. A theoretical over-design using the minimums is not uncommon when a stabilized subgrade is constructed. The construction of at least these minimum thicknesses is required to provide practical designs that stay within the empirical limits of the AASHO Road Test. If a stabilized subgrade is not constructed due to unusual conditions, the base and structural course would have to provide a structural number of 4.05-in.

$$SN_R = (a_1 \times D_1) + (a_2 \times D_2) + (a_3 \times D_3)$$

$$4.05 = (0 \times 0.75") + (a_2 \times D_2) + (a_3 \times D_3)$$

$$4.05 = (a_2 \times D_2) + (a_3 \times D_3)$$

From Table 5.9 an Optional Base Group 10 and 5.0-in of structural course would give a structural number of 4.09-in. This would be satisfactory as the base and structural course exceed the required minimums.

For the second part of this sample problem using a design speed of 45 mph we need to use FC-12.5 or FC-9.5 according to Table 4.1. FC-12.5 or FC-9.5 has the same structural value as Type SP and are considered as structural layers. FC-12.5 is always shown as 1 1/2-in thick and FC-9.5 is always shown as 1-in thick.

For this problem, use Optional Base Group 9 with 1-1/2-in of Type SP Structural Course and 1-1/2-in FC-12.5

<OR>

use Optional Base Group 9 with 2-in of Type SP Structural Course and 1-in FC-9.5.

CONCLUSION:

The following comparisons are provided:

For a Design Speed of 55 mph:

<u>Layer/Material</u>	<u>Coefficient</u>		<u>Thickness</u>	=	<u>SN_C</u>
Friction Course, FC-5	0.00	x	3/4"	=	0.00
Structural Course	0.44	x	3.0"	=	1.32
Optional Base Group 9				=	1.80
Type B Stabilization (LBR 40)	0.08	x	<u>12.0"</u>	=	<u>0.96</u>
			3.75"		4.08

For a Design Speed of 45 mph:

<u>Layer/Material</u>	<u>Coefficient</u>		<u>Thickness</u>	=	<u>SN_C</u>
Friction Course, FC-12.5	0.44	x	1-1/2"	=	0.66
Structural Course	0.44	x	1-1/2"	=	0.66
Optional Base Group 9				=	1.80
Type B Stabilization (LBR 40)	0.08	x	<u>12.0"</u>	=	<u>0.96</u>
			3.0"		4.08

The pavement description in the plans with a design speed of 55 mph should read:

NEW CONSTRUCTION

OPTIONAL BASE GROUP 9 WITH TYPE SP STRUCTURAL COURSE (TRAFFIC C) 3"
 AND FRICTION COURSE FC-5 (3/4") PG76-22 (ARB)

The pavement description in the plans with a design speed of 45 mph should read:

NEW CONSTRUCTION

OPTIONAL BASE GROUP 9 WITH TYPE SP STRUCTURAL COURSE (TRAFFIC C) 1 1/2"
 AND FRICTION COURSE FC-12.5 (1 1/2") PG76-22 (ARB)

Note that the Type B Stabilization is not included in the description. This becomes a part of the plan detail, shown on the typical section.

TABLE 5.9
COMBINED STRUCTURAL NUMBER (INCHES)

COMBINED STRUCTURAL NUMBER (INCHES)											
Optional Base Group	Structural Course - Inches										
	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0
1	1.16	1.38									
2	1.34	1.56									
3	1.43	1.65	1.87								
4	1.52	1.74	1.96	2.18							
5	1.70	1.92	2.14	2.36	2.58						
6	1.88	2.10	2.32	2.54	2.76	2.98					
7		2.19	2.41	2.63	2.85	3.07					
8		2.37	2.59	2.81	3.03	3.25	3.47	3.69			
9				2.90	3.12	3.34	3.56	3.78			
10					3.30	3.52	3.74	3.96	4.18		
11					3.48	3.70	3.92	4.14	4.36	4.58	
12						3.79	4.01	4.23	4.45	4.67	4.89
13							4.19	4.41	4.63	4.85	5.07
14							4.28	4.50	4.72	4.94	5.16
15							4.46	4.68	4.90	5.12	5.34

Stabilization Structural Numbers Not Included.

5.6 DESIGN CONSIDERATIONS

The following special areas need to be addressed by the Pavement Design Engineer as the project develops.

5.6.1 STABILIZED SUBGRADE

Since stabilized subgrade has a history of good performance and provides strength to the pavement system at a low cost, it is highly recommended that a stabilized subgrade element be included in a pavement design as shown in the Plans Preparation Manual.

In some situations, project conditions may dictate elimination of a stabilized subgrade during design and achieving the Required Structural Number (SN_R) with base course and asphalt structural course. These conditions might include:

- Limited working areas at intersections or in medians.
- Shallow existing utilities that are impractical to relocate.
- Areas of urban projects where it is essential to accelerate construction to limit restriction of access to adjacent businesses.

Stabilized subgrade should not normally be eliminated over extensive areas, because it is necessary to provide a working platform for base construction operations. This is an especially important consideration with asphalt base course, because of the difficulty in achieving compaction of the first course placed on an unstable subgrade.

On rural highways, stabilized subgrade should extend to the shoulder point in order to provide a stable shoulder condition. On urban projects, stabilized subgrade is usually necessary to support curb and gutter. The District Construction Engineer should be consulted prior to deciding to eliminate stabilized subgrade in design. The reasons for eliminating stabilized subgrade must be documented in the project file.

In situations where construction time is critical, the following alternates to in-situ sampling and testing to determine the Limerock Bearing Ratio (LBR) value of a stabilized subgrade include:

- Mixing of soil and stabilized material and testing off site.
- Use of a natural occurring material that meets the Limerock Bearing Ratio (LBR) value requirement that has been tested at the source.
- Use of a Predesigned Stabilized Subgrade per a Special Provision specification covering this concept.

The specifications also provide that when 12-in of Type B Stabilization requiring an LBR value of 40 is called for, the Engineer may allow, at no additional compensation, the substitution of 6-in of Granular Subbase meeting the requirements of section 290.

These alternatives should be discussed with the District Construction Engineer and the District Materials Engineer and appropriate Special Provisions included in the Project Specifications.

The specifications provide for use of the No Soak LBR Test Method to expedite LBR testing under certain conditions. Use of this test method is at the option of the Contractor if approved by the District Materials Engineer.

5.6.2 BASE

Except as limited by Standard Index 514 or as may be justified by special project conditions, the options for base material should not be restricted. Allowing the contractor the full range of base materials will permit him to select the least costly material, thus resulting in the lowest bid price.

Unbound granular base materials are generally the least expensive. However, project conditions may dictate restricting the base course to Asphalt Base Course. The following conditions may warrant restricting the base course to Asphalt Base Course (designated as Type B-12.5) if the additional cost can be justified:

- In an urban area, maintenance of access to adjacent business is critical to the extent that it is desirable to accelerate base construction.
- The maintenance of traffic scheme requires acceleration of base construction in certain areas of the project.
- High ground water and back of sidewalk grade restrictions make it difficult to

obtain adequate design high water clearance from the bottom of a thicker limerock base. The thinner asphalt base can help increase the clearance. Note that asphalt base requires a well compacted subgrade, just as limerock base. It is usually necessary to have two feet of clearance above ground water to get adequate compaction in the top foot of subgrade. In areas where this cannot be obtained, the District Drainage Engineer should be consulted for an underdrain design or other methods to lower the ground water. Refer to section 5.2.2 for guidance on Design Base Highwater Clearance.

- The configuration of base widening and subgrade soil conditions are such that accumulation of rainfall in excavated areas will significantly delay construction.

The Pavement Design Engineer should become familiar with the material properties, construction techniques, testing procedures, and maintenance of traffic techniques that may enter into the decision to restrict the type of base material to be used. Consultation with the District Construction Engineer and the District Materials Engineer should be done prior to making any decision.

A decision to restrict base course material to an Asphalt Base Course throughout a project must be documented and approved by the District Design Engineer. A copy of the documentation shall be furnished to the State Pavement Design Engineer.

Base courses are normally set up under Optional Base Group (OBG) bid item.

On projects where the Pavement Design Engineer would like to use Asphalt Base (Type B-12.5) on a part of a project and allow multiple base options on other parts of the projects, the Pavement Design Engineer should change the OBG Number by one and specify Asphalt Base only for the area where it is required.

An example of a project where this may occur would be on a project where OBG 6 is recommended and the Pavement Design Engineer encounters an area of high water. The option would be to use Type B-12.5 from OBG 7. Another option would be to use Type B-12.5 from OBG 5. In both cases the structural asphalt thickness can be adjusted to meet the structural number requirements and allow for separate unit prices.

The Optional Base Group should not exceed OBG 12 for unbound granular base materials; except for trench widening where up to OBG 14 may be used.

5.6.3 ASPHALT BASE CURB PAD

When asphalt base only is decided on for a curb and gutter project, it is generally advisable to show, on the typical section, an asphalt Type B-12.5 pad under the curb (see PPM exhibit TYP-6A for example). The thickness of the asphalt pad should be shown in a constructability sketch and shown in the plans, so that the bottom of the curb pad matches the bottom of the initial lift of asphalt base. This will allow the initial lift of the asphalt base to include the curb pad and to be placed prior to the curb placement. This will protect the subgrade from rain earlier and potentially speed up construction. Since the thickness of the asphalt curb pad will be less than the asphalt base, the Base Group may need to be increased to provide for a minimum of 1-½-in of asphalt curb pad.

5.6.4 STRUCTURAL COURSE

Individual asphalt layers are not shown on the Plans Typical Section, only the overall asphalt thickness as prescribed in the Plans Preparation Manual. Table 5.11 provides individual layer thicknesses for asphalt structural courses.

Variations can occur when recommended in advance by the District Bituminous Engineer and concurred with by the District Pavement Design Engineer. For unusual situations, the State Pavement Management Office and the State Materials Office should be consulted.

The Pavement Design Engineer shall sketch out the construction sequence of the Typical Section to ensure constructability. This sketch is to be included in the pavement design package. Emphasis should be placed on allowing the final structural layer to be placed on the mainline and shoulder at the same time. This makes construction easier for the contractor and improves the final product by avoiding a construction joint at the shoulder.

Type SP mixes are designated in the plans by Traffic Level, based on the design ESAL_D and shoulders per Table 5.10. The same Traffic Level as the roadway should be used for paved shoulders less than or equal to 5-ft wide, where the final layer for the upper pavement structural layer and shoulder must be the same and paved in a single pass. For shoulders wider than 5-ft, refer to Chapter 8 of this manual.

As a practical matter, Superpave mixes for crossroads and other small sections with quantities less than 1000 tons can be designed with the same mix (i.e. Traffic Level) as the mainline. This should be discussed on a project by project basis with the District Bituminous Engineer.

5.6.5 TRAFFIC LEVELS

TRAFFIC LEVELS FOR DESIGN EQUIVALENT SINGLE AXLE LOADS (ESAL_D) RANGE FOR SUPERPAVE ASPHALT CONCRETE STRUCTURAL COURSES

The following are the Traffic Levels for the Design Equivalent Single Axle Loads (ESAL_D) ranges for Superpave Asphalt Concrete Structural Courses

<u>AASHTO DESIGN ESAL_D RANGE (MILLION)</u>	<u>TRAFFIC LEVEL</u>
< 0.3	A
0.3 to < 3	B
3 to < 10	C
10 to < 30	D
>= 30	E

5.6.6 LAYER THICKNESS

SPECIFICATION REQUIREMENTS ON LAYER THICKNESS FOR TYPE SP STRUCTURAL COURSES

The layer thickness must be consistent with the following thickness ranges:

<u>FINE MIXES</u>		
<u>Type Mix</u>	<u>Minimum</u>	<u>Maximum</u>
SP-9.5	1"	1-1/2"
SP-12.5	1-1/2"	2-1/2"
SP-19.0	2"	3-1/2"

In addition to the minimum and maximum thickness requirements, the following restrictions are placed on the respective material when used as a structural course:

- SP-9.5 Limited to the top two structural layers, two layers maximum.
- SP-9.5 May not be used on Traffic Level D and E applications.
- SP-19.0 May not be used in the final (top) structural layer below FC-5 mixtures. Type SP-19.0 mixtures are permissible in the layer directly below FC-9.5 and FC-12.5 mixtures.

All overbuild layers must be fine Type SP Asphalt Concrete designed at the traffic level as specified in the Contract Documents. On variable thickness overbuild layers, the minimum and maximum allowable thicknesses will be as specified below, unless called for differently in the Contract Documents.

Type SP-9.5	3/8 to 2-in
Type SP-12.5	1/2 to 3-in
Type SP-19.0	1½ to 3½ -in

Variable thickness overbuild layers constructed using a Type SP-9.5 or SP-12.5 mixtures may be tapered to zero thickness provided the Contract Documents require a minimum of 1-1/2 inches of dense-graded mix placed over the variable thickness overbuild layer.

Overbuild is further discussed in section 7.8.2.

Structural and Friction Courses are shown by thickness in plans, but bid as tonnage items. Bid quantities are estimated using maximum spread rate of 110 # = one square yard inch.

Actual spread rates to construct the plan thickness are determined by specification formula for the mix selected by the contractor.

When construction includes the paving of adjacent shoulders \leq 5-ft wide, the traffic level and layer thickness for the upper structural pavement layer and

shoulder must be the same and paved in a single pass, unless otherwise specified in plans.

A minimum of 1½-in initial lift of structural course is required over an Asphalt Rubber Membrane Interlayer (ARMI).

Superpave mixes are classified as fine and are defined in Specification Section 334-3.2.2.

The equivalent AASHTO nominal maximum aggregate size Superpave mixes are as follows:

SP-9.5	9.5 mm
SP-12.5.....	12.5 mm
SP-19.0.....	19.0 mm

For construction purposes, plan thickness and individual layer thickness will be converted to spread rate based on the maximum specific gravity of the asphalt mix being used, as well as the minimum density level as in the following equation:

$$\text{Spread rate (lbs/yd}^2\text{)} = t \times G_{\text{mm}} \times 43.3$$

Where:

t = Thickness (in) (Plan thickness or individual layer thickness)

G_{mm} = Maximum Specific Gravity from the verified mix design

Plan quantities are based on a G_{mm} of 2.540, corresponding to a spread rate of 110 lbs/yd²-in. Pay quantities will be based on the actual maximum Specific gravity of the mix used.

TABLE 5.10

**DESIGN NOTES ON LAYER THICKNESS FOR ASPHALT CONCRETE
SHOULDER STRUCTURAL COURSES**

For projects requiring FC-5, the top structural layer of the roadway overlay and a narrow adjacent shoulder course (≤ 5 -ft wide) must be constructed in one pass. The following apply when a 5-ft or less shoulder is to be constructed in conjunction with an overlay of the road.

<u>Roadway Course Thickness inch</u>	<u>Shoulder Structural Course Thickness inch</u>
1.0"	1.0"*
1.5"	1.5"*
2.0"	1.0"*
2.5"	1.0"*
3.0"	1.0"*
3.5"	1.0"*

For projects requiring FC-12.5 or FC-9.5, a single lift may be sufficient structural thickness for the shoulder pavement.

*Note: For Traffic Level D and E applications, SP-9.5 is not allowed.

TABLE 5.11
LAYER THICKNESS FOR
ASPHALTIC CONCRETE STRUCTURAL COURSES

LAYER THICKNESS FOR ASPHALTIC CONCRETE STRUCTURAL COURSES (Layers Are Listed In Sequence Of Construction)																			
Course Thickness (in)	LAYER THICKNESS (inches)																		
	SP-19.0 with SP-12.5 Top Layer			SP-19.0 with SP-9.5 Top Layer			SP-12.5		SP-12.5 with SP-9.5 Top Layer			SP-9.5		SP-19.0 1st Layer with SP-12.5 2nd Layer and Top Layer			SP-12.5 1st Layer with SP-9.5 2nd Layer and Top Layer		
	1	2	3	1	2	3	1	2	1	2	3	1	2	1	2	3	1	2	3
1												1							
1 1/2							1 1/2					1 1/2							
2							2					1	1						
2 1/2							2 1/2		1 1/2	1		1 1/2	1						
3				2	1		1 1/2	1 1/2	2	1		1 1/2	1 1/2						
3 1/2	2	1 1/2		2 1/2	1		2	1 1/2	2	1 1/2									
									2 1/2	1									
4	2 1/2	1 1/2		3	1		2	2	2 1/2	1 1/2									
	2	2		2 1/2	1 1/2		2 1/2	1 1/2											
4 1/2	2 1/2	2		2	1 1/2		2 1/2	2						2	1 1/2	1	2	1 1/2	1
	2	2 1/2																	
5	3	2		2	2	1	2 1/2	2 1/2	2	1 1/2	1 1/2			2	1 1/2	1 1/2	2	1 1/2	1 1/2
	2 1/2	2 1/2					2	1 1/2	2	2	1						2 1/2	1 1/2	1
5 1/2	2	2	1 1/2	2 1/2	2	1	2 1/2		1 1/2	2	2	1 1/2			2 1/2	1 1/2	1 1/2	2 1/2	1 1/2
							2	2	1 1/2	2 1/2	2	1			2	2	1 1/2		
6	2 1/2	2		2 1/2	2 1/2	1	2	2	2	2 1/2	2 1/2	1			2 1/2	2	1 1/2		
	2	2	2	3	2	1 1/2	2 1/2	2	1 1/2	2 1/2	2	1 1/2			2	2	2		

Notes: SP-9.5 not allowed on Traffic Level D or E applications.
SP-9.5 limited to the top two structural layers, two layers maximum.
SP-19.0 not allowed in the final (top) structural layer below FC-5 mixtures.
SP-19.0 allowed in the layer directly below FC-9.5 and FC-12.5 mixtures.

5.6.7 RAMP DESIGN

On new construction of limited access ramps, where future traffic is very uncertain, the structural number can be reduced by 25% from the mainline structural number in rural areas, and 15% in urban areas.

The reduction in structural number will be made in the thickness of the structural course. A minimum Base Group 9 and 2-in structural course should be provided. The transition from mainline thickness to ramp thickness will occur just beyond the gore. (See Standard Index 525, Ramp Terminals).

The design assumptions used for the above guidelines were based on 25% of the mainline traffic using the ramp in rural areas and 50% of the mainline traffic using the ramp in urban areas. The Pavement Design Engineer must verify that these assumptions are appropriate for each project.

A situation where the designer would not want to reduce the design would be a case where reliable traffic data has been provided and the design thickness is greater than the reduced thickness.

From the prior Design Example given in Section 5.5 with a mainline structural course thickness of 3-in and Design Speed of 55 mph:

Ramp design for a Rural Area:

<u>Layer/Material</u>	<u>Coefficient</u>		<u>Thickness</u>		<u>SN_C</u>
Friction Course, FC-5	0.00	x	3/4"	=	0.00
Structural Course	0.44	x	2.25"	=	0.99
Optional Base Group 9				=	1.80
Type B Stabilization (LBR 40)	0.08	x	<u>12.0"</u>	=	<u>0.96</u>
				=	3.75"

CHAPTER 6

PAVEMENT WIDENING

6.1 REQUIREMENTS

Pavement widening, which includes trench widening, lane addition, and operational type projects, do not require thickness design calculations. The Pavement Design Engineer needs to determine what the existing pavement structure consists of, including any designed overlays. The widening section will be designed and constructed to match the existing plus overlay pavement. The total structural number of the widened section must equal or exceed the total mainline structural number. The following guidelines will assist in providing a well engineered design.

6.2 STRUCTURAL COURSE

To provide for future milling, the asphalt thickness of the structural course of the widening should match or exceed the existing mainline asphalt plus any overlays planned as a part of the project.

It may be impractical to match the existing pavement of an old road that has had numerous overlays. It is essential that the Pavement Design Engineer evaluate what will be left if there is a future milling operation that for some reason removes a substantial amount of asphalt. A 4in to 5in thickness of structural asphalt is a reasonable limit depending on truck volumes, for inside traffic lanes which have less truck use.

On selected projects, it may be necessary to justify and use an Asphalt Base (Type B-12.5) for widening. However, with proper design it may be possible to take advantage of the potential economics of a granular base material and bid an Optional Base. Industry representatives and the Department's Construction Office

indicate that the following procedure could be used to permit the construction of trench widening without requiring the use of a barricade:

DAY ONE

- Cut a trench for that day's run.
- Place the first layer of granular base in the trench.
- Compact and finish.
- Check the density.
- Place the second layer of granular base in the trench.
- Compact and grade to comply with Standard Index 600.

DAY TWO

- Compact and finish second layer.
- Construct Structural Layers.

Standard Index 600 provides several optional treatments that could be utilized during the construction of a granular base.

The Pavement Design Engineer must also consider the constructability of his design. It is highly recommended that widening projects be kept as simple as possible.

If a granular base is to be used, it should be designed flush with the existing granular base. Asphalt structural layers will then be brought up to the top of the existing asphalt layers. Subsequent asphalt layers can then be constructed full width over the existing roadway and the widening. The purpose is to minimize the possibility of a longitudinal crack at this joint.

On complicated projects, it is highly recommended that the District Construction Engineer and the Resident Construction Engineer be contacted and the project reviewed in detail.

6.3 BASE AND SUBGRADE

The strength of the widened section base material, as measured by its layer coefficient multiplied by its thickness, must match or exceed the existing base strength.

The Pavement Design Engineer must visualize what is left when future milling occurs to insure that the remaining structural numbers are compatible. Normally the top of the new base and the top of the old base should match to facilitate future milling. From the top of the existing base down, the widening structural number must be equal to or greater than the existing structural number (including any stabilized subgrade).

On any type of widening project, the base options to be used may be specified by the Pavement Design Engineer and shown in the plans to ensure layer coefficients equal or greater than the existing base.

6.4 STABILIZATION

Stabilization should be considered when adding lanes or shoulders and on some operational type projects. The use of stabilizing in trench widening strips is generally not recommended. When stabilization is eliminated, the reasons should be documented in the project file. When stabilization is not provided, single course base layers should not be used.

6.5 LABORATORY RESILIENT MODULUS (M_R)

For widening projects, such as the addition of a new truck lane with substantial fill areas in excess of three feet (3-ft), samples should be obtained from potential borrow areas.

6.6 WIDENING DESIGN SAMPLE PROBLEM

The following is a sample problem on widening that is commonly found.

GIVEN:

The existing two lane rural roadway Traffic Level C with a posted speed of 65 mph is to be milled 2.5" and resurfaced with 1.5" Type SP and 1.5" Type SP w/ PG76-22, and ¾" FC-5. The existing lanes are 11' wide. The road needs to be brought up to current standards by widening the lane to 12-ft.

FIND:

The pavement design for widening to match the existing pavement plus resurfacing. List any assumptions. Sketch a possible layer construction sequence of the design, including resurfacing, widening, and shoulders, to insure constructability.

DATA:

Field data from the existing pavement as evaluated by the District Bituminous Engineer includes the following information.

<u>Material</u>	<u>Thickness</u>	<u>Condition</u>
Type S + FC	3.5"	poor
Limerock	10"	good
Stabilization	12"	good

SOLUTION:

The original plans and field inspection indicate that the area beyond the edge of pavement was stabilized to the shoulder point.

The pavement design for the widening includes:

SN_E (Limerock) = $(0.18 \times 10'') = 1.8''$ or Optional Base Group 9

use 3" Structural Course and 3/4" Friction Course over 6" Type B-12.5 base to match the total asphalt thickness after milling plus resurfacing

= 3/4" Friction Course (new)
1.5" Type SP (PG 76-22) (new)
1.5" Type SP (new)
6" Type B -12.5 Base

Existing stabilization is assumed.

A construction sketch of the design is provided (See Figure 6.1) showing the widening structural layers.

The pavement description in the plans should read:

WIDENING

OPTIONAL BASE GROUP 9 WITH
TYPE SP STRUCTURAL COURSE (TRAFFIC C) (1 1/2")
AND TYPE SP STRUCTURAL COURSE (TRAFFIC C) 1 1/2" PG 76-22 (ARB) WITH
FRICTION COURSE FC-5 (3/4") PG 76-22 (ARB)

Selection of optional base should result in material meeting or exceeding the structural strength of the existing material.

The pavement design for the shoulder includes:

Existing shoulder stabilization is adequate and traffic loadings are moderate. This results in using the minimums for design found in Table 5.5. Table 5.5 lists the following:

1" Structural Course

Optional Base Group 1

However, for constructability, use 1.5" Type SP so that the shoulder can be pulled with the final layer of the structural course by the paver.

The resurfacing and widening design includes 3" structural course on the widening, 4" of structural course on the resurfacing (including 1" of remaining Type S) and 3/4" FC-5 Friction Course on top of existing, widening and shoulder.

The shoulder should be designed as follows:

Friction Course FC-5 3/4"
1.5" Type SP (PG 76-22)
OBG 1

A construction sketch of the shoulder design is provided (See Figure 6.1) showing the shoulder structural layers.

The pavement description in the plans should read:

SHOULDER


OPTIONAL BASE GROUP 1 WITH
TYPE SP STRUCTURAL COURSE (1 1/2") PG 76-22 (ARB) WITH
FRICTION COURSE FC-5 3/4" PG 76-22 (ARB)

Note that the 12" Type B Stabilization is not included in the description since the existing stabilization is adequate.

FIGURE 6.1

WIDENING DETAIL FOR SAMPLE PROBLEM

The following is an example of a detail sketch, showing what needs to be done when designing a widening project.

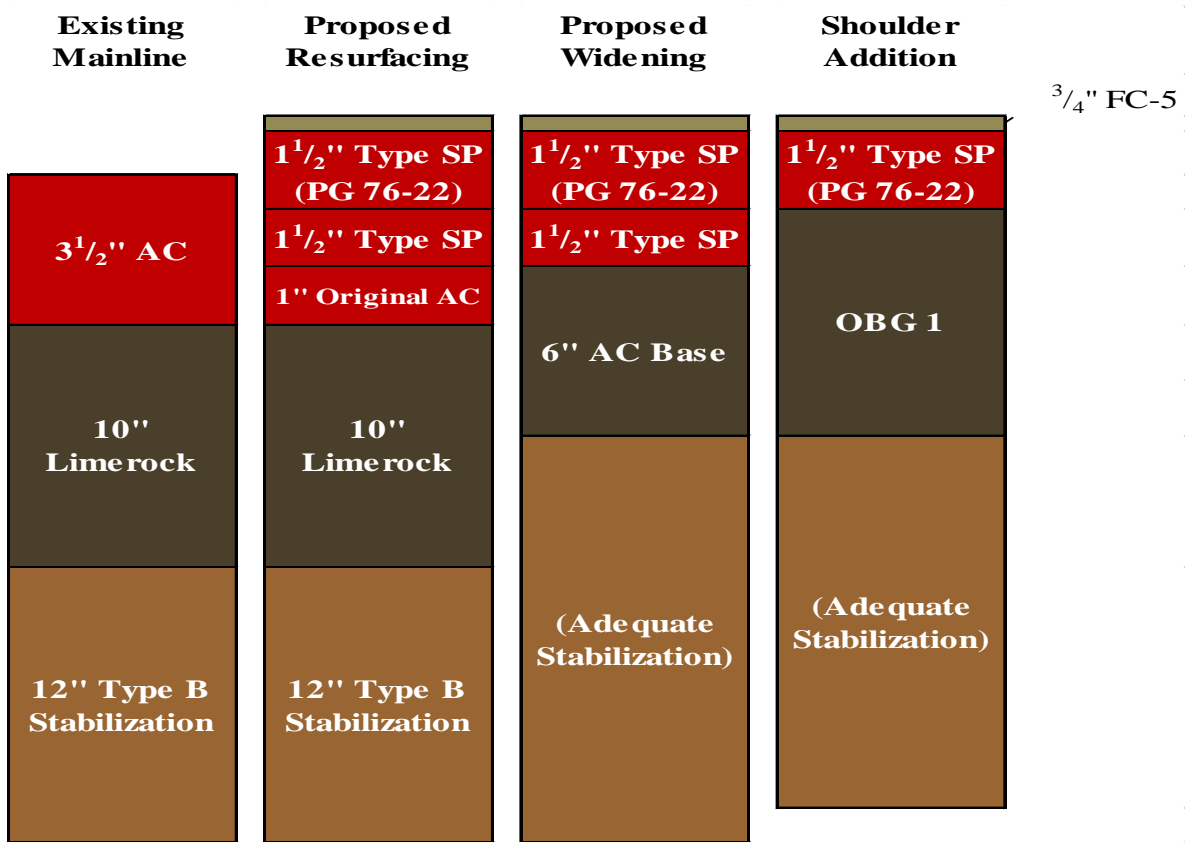

CHAPTER 7

PAVEMENT THICKNESS DESIGN PROCESS FOR REHABILITATION PROJECTS

(Section 5.5.4, 5.5.5 and 5.5.6 Requirements Apply)

7.1 OVERVIEW

This process is applicable to all rehabilitation projects in Florida where the Pavement Design Engineer must calculate a structural overlay thickness using the AASHTO procedure.

The following steps will take place in approximately the order shown with the understanding that some activities can take place concurrently. A schematic of the process is shown in Figure 7.1.

7.2 REQUIRED STRUCTURAL NUMBER (SN_R) CALCULATIONS USING THE AASHTO DESIGN GUIDE


The procedure for calculating the Required Structural Number (SN_R) is the same method detailed under New Construction (Refer to Section 5.2).

7.3 RESILIENT MODULUS (M_R) VARIATIONS

Rehabilitation projects use the existing subgrade soils. This material may be variable within a project for several reasons. One reason for subgrade variability may be that different parts of the project were constructed under several earlier projects. Other variability may be due to factors such as soil strata, compaction, and moisture content. Two methods of obtaining the Resilient Modulus (M_R) values are available to the Pavement Design Engineer. These are non-destructive testing using the Deflection Equipment, and Soil Test Data. This information needs to be obtained as early as possible in the design process.

FIGURE 7.1

FLEXIBLE PAVEMENT REHABILITATION PROCESS

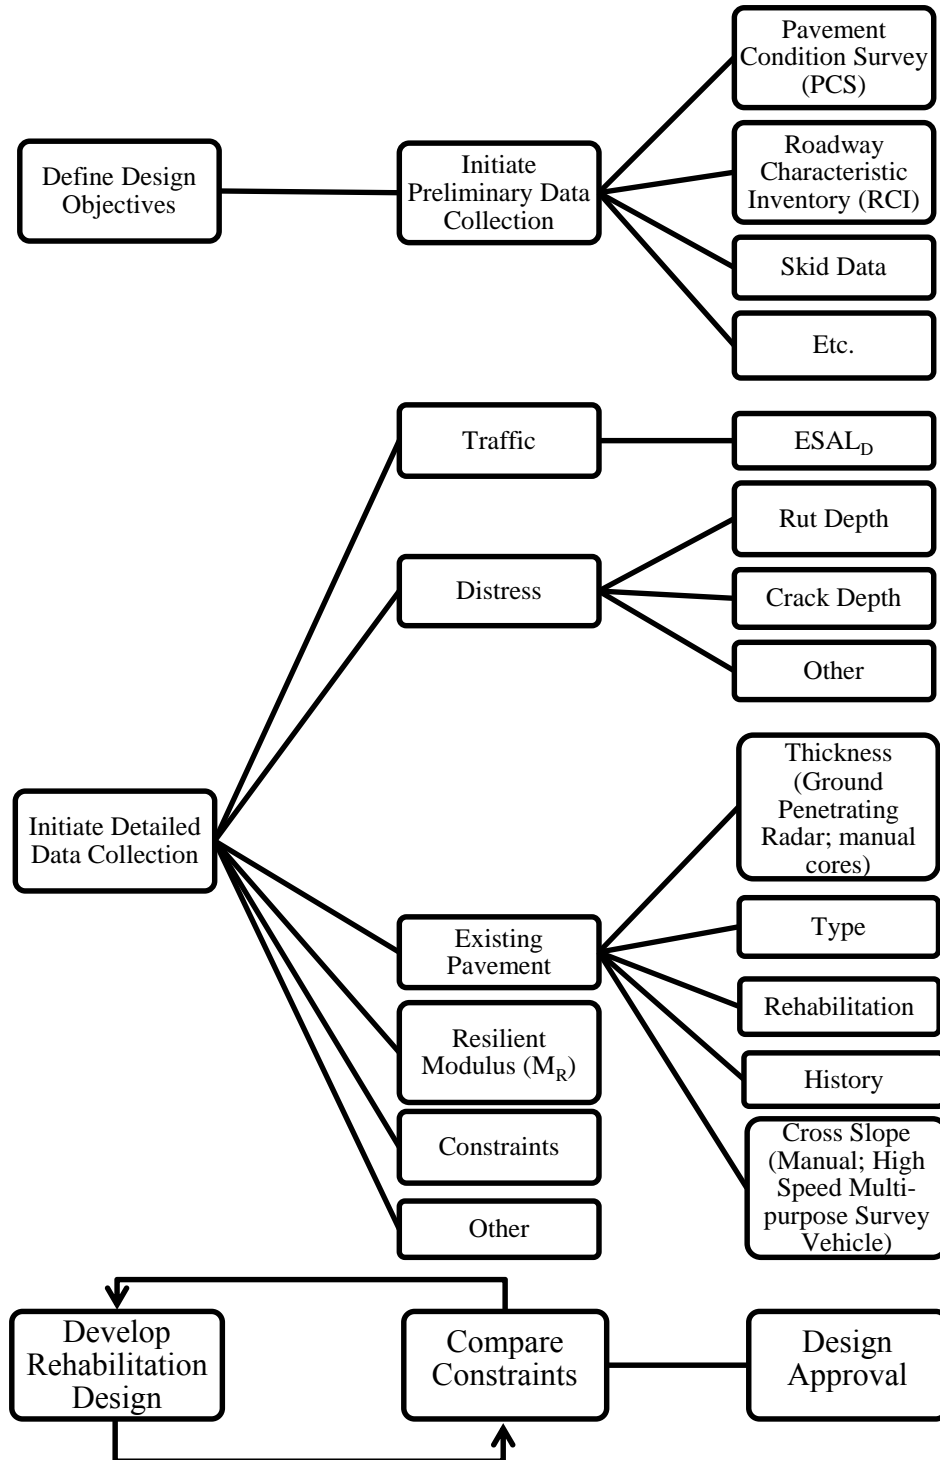

7.3.1 RESILIENT MODULUS (M_R) FROM NONDESTRUCTIVE TESTING

Nondestructive Deflection testing is the preferred method for obtaining the Resilient Modulus (M_R) for a rehabilitation project. The deflection values obtained represents the deflection of the embankment or natural subgrade material. More test data can be collected and used to statistically calculate the Resilient Modulus (M_R). A plot of the actual deflection data permits the Pavement Design Engineer to evaluate the uniformity of the material under the existing roadway.

The State Materials Office will provide an evaluation of the deflections and will provide one or more recommended Resilient Modulus (M_R) values for the project. The design Resilient Modulus (M_R) represents the weakest area within the design limits that it is practical to design for. It is based on the mean deflection plus two standard deviations and represents an optimum tradeoff between future isolated maintenance costs and increased overlay costs. This analysis is different than the Reliability factor (%R) which is used to account for traffic forecasting and construction variability.

Significant variances that show up on the plots should warrant further investigation to determine if special attention must be paid to these areas or if the designs must be modified accordingly.

Example plots are given in Figure 7.2, Figure 7.3, and Figure 7.4. Note that in Figure 7.2 the plot is constant compared to Figure 7.3 and Figure 7.4. In Figure 7.3, a significant change takes place in the Pavement Structure. In Figure 7.4, a "Blip" occurs in the plot warranting a field check.

7.3.2 RESILIENT MODULUS (M_R) FROM LBR

If it is not practical to obtain Deflection testing and a Design LBR Value is available, the Pavement Design Engineer can convert the Design LBR Value to a Resilient Modulus (M_R) using Table 5.1.

FIGURE 7.2

DEFLECTION PLOT EXAMPLE

**State Of Florida
Department Of Transportation
State Materials Office
Pavement Deflections**

Example of normal pavement deflections

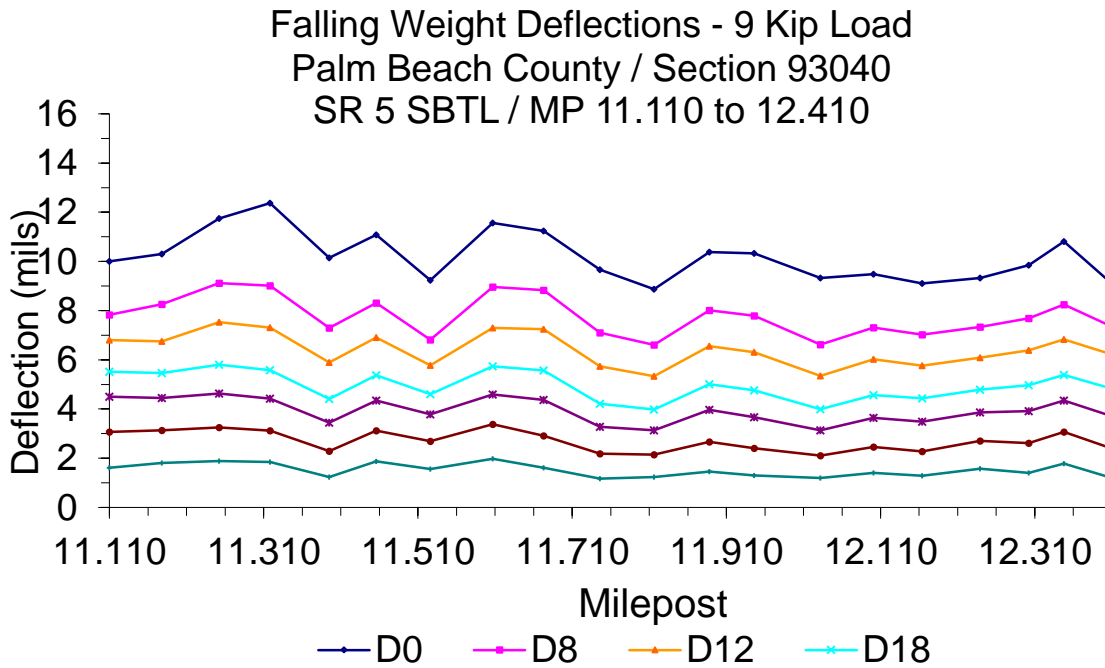


FIGURE 7.3
DEFLECTION PLOT EXAMPLE

State Of Florida
Department Of Transportation
State Materials Office
Pavement Deflections

Example of a pavement change.

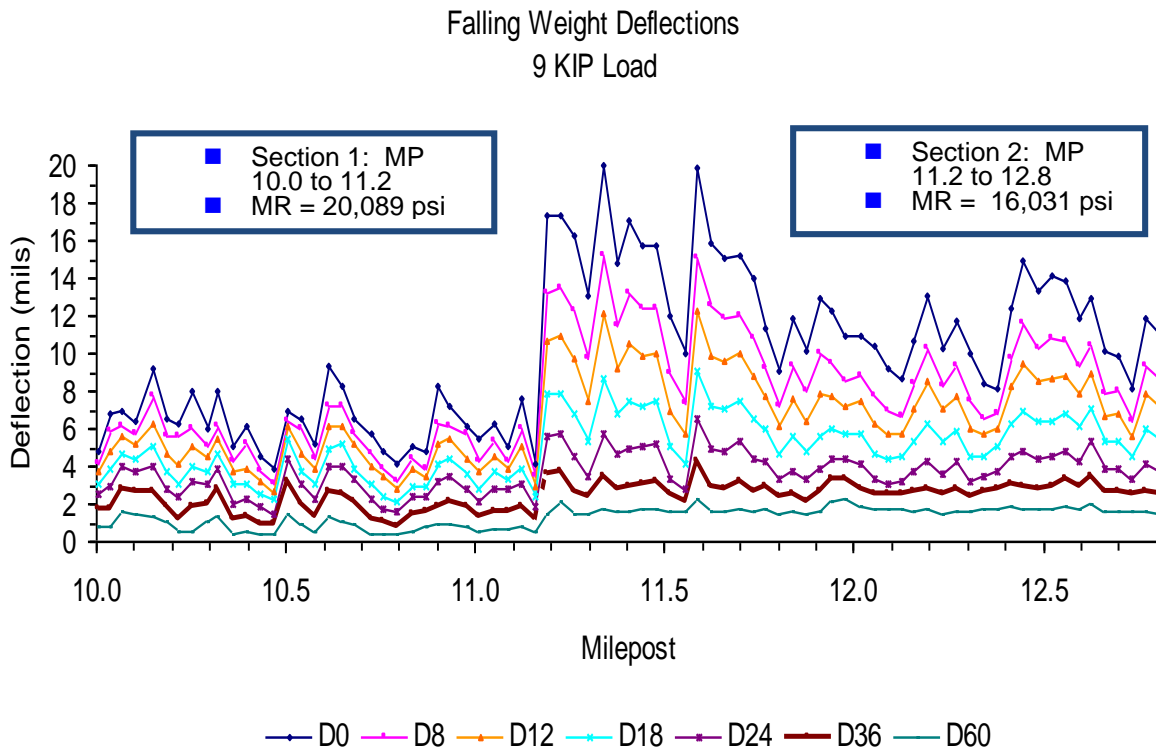



FIGURE 7.4

DEFLECTION PLOT EXAMPLE

**State Of Florida
Department Of Transportation
State Materials Office
Pavement Deflections**

Example of a 'Blip' that occurred that warrants a field investigation.

Falling Weight Deflections - 9 Kip Load
Broward County / Section 86100
SR 7 NBTL / MP 23.400 to 24.591

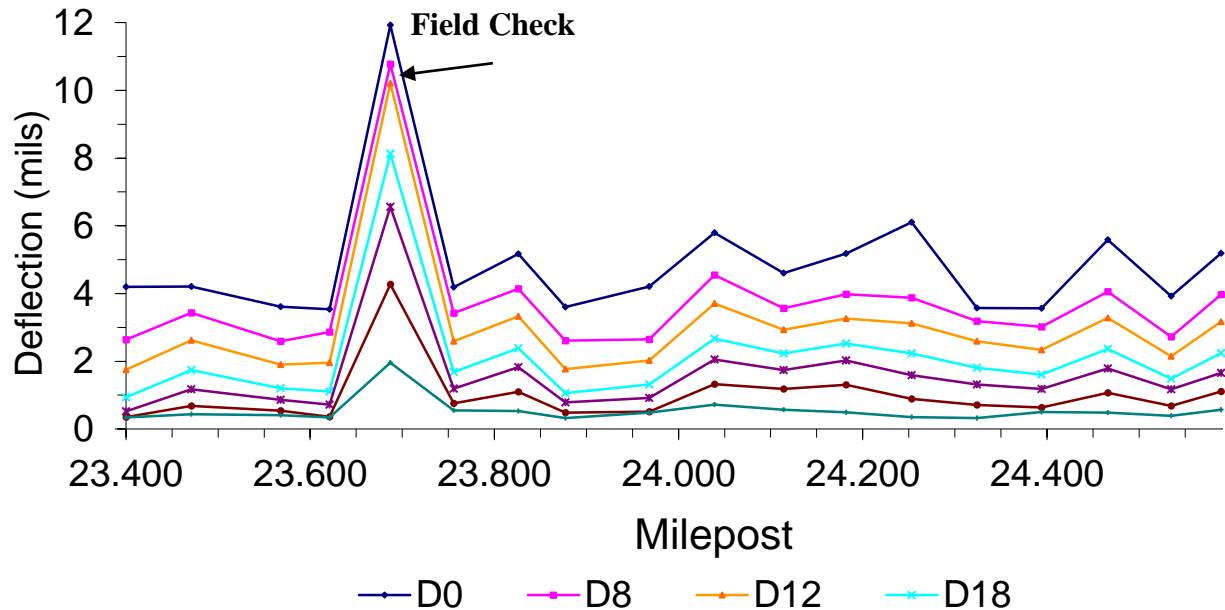

7.4 EVALUATING THE EXISTING STRUCTURAL NUMBER (SN_E)

Many items must be examined before the proper rehabilitation strategy can be initiated. After these items are reviewed, action by the Pavement Design Engineer is important to meet production schedules.

7.4.1 FIELD TESTING

The Pavement Design Engineer must determine what the project is to accomplish. Some jobs, such as skid hazard, widening, or operational type projects, are not designed structurally. They do not require a standard pavement thickness design and normally do not require deflection testing unless an evaluation of the underlying materials is needed. Testing is not feasible for extremely short projects due to the reduction in the normal testing frequency and testing confidence limits.

Deflection testing requests should not be made for:

- Two lane roadway projects less than 1 mile long.
- Three lanes or more roadway projects less than 0.5 miles long.

Example projects where Deflection testing should not be required include bridge or culvert replacement, intersection improvement, etc.

Scheduling the Maintenance of Traffic (MOT) in order to accomplish this field testing requires close coordination between the State Materials Office and the District Maintenance Offices. It is highly recommended that the longest possible lead time be allowed to accomplish this field work.

It is preferable to give the State Materials Office a year or more advance notice so that they can schedule their work throughout the state. A good time to do this is after the work program is updated and project schedules are set. Coordinated requests for multiple jobs within a district are preferred.

7.4.2 DATA COLLECTION

The goal of a Pavement Design Engineer is to provide a pavement structure that will maintain the desired serviceability over the design period at optimum cost. The design period will be between 8 and 20 years depending on the type of project the Pavement Design Engineer ultimately develops.

The Pavement Design Engineer will need to initiate a preliminary data collection effort. Sources of information include the present and historical Pavement Condition Survey (PCS).

Additional information can be obtained from the Roadway Characteristics Inventory (RCI), Straight Line Diagrams (SLD), and old plans.

The Design Survey Information should be obtained so that existing pavement cross slope can be checked.

Documentation is also available from the District Materials, Drainage, Maintenance, and Construction personnel who have knowledge of, and are interested in the project. A field review of the project is recommended to verify the project information and ensure that the design objectives have been properly defined.

The year of last rehabilitation, condition of the pavement before the last rehabilitation, and the type of rehabilitation performed should be documented in the pavement design package.

7.4.3 PAVEMENT EVALUATION

The pavement evaluation information should be used by the designer to carefully evaluate the possible causes of the current distress, so that the distresses are not simply repaired, but are also prevented from rapidly recurring.

The designer should not be satisfied with simply providing an adequate structural number, but should also consider other factors. An example would be an unstable lower layer that has repeatedly contributed to rutting in the past. By studying the pavement history, this problem could be identified and evaluated and a deeper

milling depth set. A concrete overlay or reconstruction to concrete are other alternatives to consider.

The District Materials Office should be requested to perform an evaluation of the project. Deflection data should be reviewed to see if special areas of investigation are warranted. Pavement Coring and Evaluation Procedure per the Materials Manual can be obtained from the State Materials Office or through the departments INTERNET and INFONET sites. Specific pavement data required includes the existing material type and thickness, the quality and condition of the materials, and the cross slope.

Research on the existing pavement should also include researching old plans for existing stabilization. If the existing plans are not available, additional testing to determine the need for stabilization on widening and/or shoulder pavement may be needed.

Specific detailed distress data needed at this time includes, type and extent of cracking, crack depths, cross slope, and rut depth. The District Materials Office will provide recommendations on milling, overbuild, use of automatic screed control, and an Asphalt Rubber Membrane Interlayer (ARMI) when required.

7.4.4 REDUCED LAYER COEFFECIENTS

When a pavement has been in service for some time, it can be demonstrated that the asphaltic materials will have lost some of their load carrying ability. To represent this in the Existing Structural Number (SN_E) calculations, a set of reduced layer coefficients reflecting the current pavement condition to be used for rehabilitation projects have been tabulated. These values are given in Table 7.1.

Granular base, subbase, and stabilizing, if present in the pavement structure, are assumed to remain at full strength and are not reduced in the Existing Structural Number (SN_E) calculations. If substandard materials are suspected, the State Materials Office should be requested to do an evaluation and possibly recommend a lower value.

The Existing Structural Number (SN_E) can be calculated using the following formula:

$$SN_E = (a_1 \times D_1) + (a_2 \times D_2) + (a_3 \times D_3) + \dots \\ + (a_N \times D_N)$$

where:

SN_E = Total strength of the existing pavement layers.

a_1 = Reduced layer coefficient of the 1st layer.

D_1 = Layer thickness in inches of the 1st layer.

a_2 = etc.

D_2 = etc.

a_N = Layer coefficient of the Nth layer.

D_N = Layer thickness in inches of the Nth layer.

If a pavement is to be milled, the thickness of the uppermost layers affected by the milling operation will be eliminated. The layer coefficients for asphaltic materials are reduced as shown in Table 7.1, based on the condition of the pavement. Pavement Condition should be based on the surface appearance of the pavement (cracking, patching, rutting, etc.) and may be supplemented by additional testing.

TABLE 7.1

REDUCED STRUCTURAL COEFFICIENTS OF ASPHALT MATERIALS PER INCH

Recommended Criteria
(based on the Pavement Condition Survey ratings)

Good - No Cracking, minor rutting/distortion

Fair - Crack Rated 8 or higher, minor rutting and / or distortion

Poor - Cracking or Rutting rated 7 or less

Layer coefficients for granular base, subbase, and stabilizing are not reduced. Use the values shown in Table 5.4.

<u>Layer</u>	<u>Original Design</u>	<u>Pavement Condition</u>		
		<u>Good</u>	<u>Fair</u>	<u>Poor</u>
FC-2 or FC-5	0			
FC-1 or FC-4	0.20	0.17	0.15	0.12
FC-3	0.22	0.20	0.17	0.15
FC-6	0.44	0.34	0.25	0.15
FC-12.5 or FC-9.5	0.44	0.34	0.25	0.15
Type S or SP	0.44	0.34	0.25	0.15
Type I	0.37	0.30	0.23	0.15
Type II	0.20	0.17	0.15	0.12
Type III	0.30	0.25	0.20	0.15
Binder	0.30	0.25	0.20	0.15
ABC-1	0.20	0.17	0.14	0.10
ABC-2	0.25	0.20	0.16	0.12
ABC-3	0.30	0.25	0.20	0.15
Type B-12.5	0.30	0.25	0.20	0.15
SAHM	0.15	0.13	0.11	0.08
SBRM	0.15	0.13	0.11	0.08

TABLE 7.2

**AASHTO SUGGESTED LAYER COEFFICIENT
FOR FRACTURED SLAB PAVEMENT**

<u>MATERIAL</u>	<u>SLAB CONDITION</u>	<u>COEFFICIENT</u>
Crack/Seat JPCP	Pieces one to three feet	0.20 - 0.35
Rubblized PCC	Completely fractured slab pieces less than one foot	0.14 - 0.30
Base/Subbase granular and stabilized	No evidence of degradation or intrusion of fines	0.10 - 0.14
	Some evidence of degradation or intrusion of fines	0.00 - 0.10

NOTE: The experience to date is to use the middle values for the AASHTO suggested layer coefficient for fractured slab pavements for asphalt overlay. However, complete evaluation of the existing PCC pavement must be made prior to selection of an appropriate layer coefficient per project.

7.5 MILLING

The need to mill all or part of the existing pavement should be evaluated for every project. A decision to mill should be based on sound economic and engineering principles. Consideration should also be given to the time between coring and evaluation of the project, and the construction phase of the project. If the project is cored and evaluated but not constructed for several years, the pavement conditions in the Pavement Evaluation may change significantly.

7.5.1 CANDIDATE PROJECTS

Milling may be appropriate for the following reasons:

- Remove badly cracked asphalt.
- To correct cross-slope.
- Avoid raising the grade excessively (i.e. curb and gutter sections, bridges, underpasses, etc.).
- To remove rut susceptible mixes.
- Minimize the need to perform construction work outside the mainline pavement area, (an example would be requiring a structurally unnecessary overlay of paved shoulders plus safety work and earthwork).
- Elimination of an existing mix problem that should be removed rather than be overlaid.
- For removal of FC-2 or FC-5 when overlaying.
- If the overall project cost would be less with milling than without.

Cracked pavement should be milled out where possible to avoid reflective cracking in the overlay. It is usually desirable to leave at least 3/4in of asphalt over the base throughout the project to protect it from traffic and rain. However, the entire asphalt structure can be milled out as long as contract provisions provide for maintenance of traffic and protection of the base, such as placement of the first lift of structural asphalt no later than the day after the surface was milled.

Consideration should also be given to underlying layers that may consist of potentially unstable materials that could cause problems if exposed by milling (such as some old low asphalt content binder courses or low Marshall Stability mixes). If these situations exist, they should be carefully discussed with the District Bituminous Engineer and the Roadway Design Engineer.

Special Provisions may be needed to limit the exposure of these layers to traffic until adequate structural thickness is placed.

Distress in an overlay due to reflective cracking is not fully modeled in the structural number calculations. Research is being done to better evaluate reflective cracking potential using computer modeling.

If it is not practical to mill out most of the cracked pavement, an Asphalt Rubber Membrane Interlayer (ARMI) and/or additional overlay thickness should be considered. Generally it is not practical to mill to a depth greater than 5in. Use of Asphalt Rubber Membrane Interlayer (ARMI) is discussed further in section 7.8.6.

Milling is not the solution when the base or subgrade is the problem. An evaluation should be made of the base or subgrade to determine if reconstruction is necessary.

7.5.2 PAVEMENT CORING AND SAMPLING

Where milling on a project will exceed 5000 tons of RAP material, 6-in diameter core specimens representative of the mix to be milled, will be taken in accordance with the coring and sampling requirements of the Materials Manual (Topic No. 675-000-000).

The condition of the pavement at each core location will be observed by District Materials Office and a Pavement Evaluation coring and Condition Data Form (No. 675-030-09) will be prepared and entered into the Pavement Coring and Reporting (PCR) System, per the Materials Manual.

7.5.3 VARIABLE DEPTH MILLING

Under some conditions, variable depth milling may be appropriate. As an example, cracks in a truck lane may be significantly deeper than cracks in the passing lane. This must be coordinated closely with district Construction.

Crack depth is recorded in the Pavement Evaluation and Condition Data Form (No. 675-030-09) . The milling depth should be uniform within a lane except when the milling slope has been set to correct a cross slope problem.

7.5.4 CROSS SLOPE

Proper pavement cross-slope is essential to provide adequate drainage, especially if minor rutting occurs on the pavement. The Pavement Design Engineer should work closely with the District Bituminous Engineer to ensure cross-slope is addressed in design.

Existing cross-slope should be field verified from the Design Survey, a roadway cross-slope measurement from a multi-purpose survey vehicle (MPSV), or from the cross-slope measurements shown on the Pavement Evaluation Coring and Condition Data Form. If a Design Survey has not been performed and cross-slope problems are suspected, then a survey should be requested according to Survey Guidelines for RRR Projects (section 25.3.4 of the Plans Preparation Manual (PPM) Vol.1)

If the existing cross-slope is out of tolerance (see criteria provided in section 25.4.6 of PPM Vol. 1), sufficient overbuild material must be provided by the Roadway Designer in the quantity estimate to correct the deficiency. The District Bituminous Engineer will provide recommendations with regard to specifying the use of transverse screed control for the pavers. Milling to a specified cross slope should also be considered.

If correction to the cross-slope is needed, the pavement designer should discuss possible corrective actions with the District Bituminous Engineer and the Roadway Design Engineer to ensure constructability. Special milling and layering details shall be shown in the plans when cross-slope correction is needed. (See examples in the PPM Vol. 2, Chapter 6 Exhibits).

If the longitudinal profile is also to be corrected, sufficient overbuild materials must be provided in the estimate.

7.5.5 RUTTED PAVEMENT

The rehabilitation technique to be applied to a rutted pavement must be carefully evaluated.

If the pavement is relatively young and rutting is a major form of distress, there may be a materials or mix problem. Milling of the substandard material may be essential. The history of the pavement should be studied to see if unstable mixes previously existed and need to be removed.

For a pavement that is rutted and not cracked, a special evaluation should be made prior to a decision on the depth of milling. The State Materials Office should be contacted and their assistance requested to determine if milling would be prudent. Special tests on various layers and cross sectional coring or trenching may be warranted to identify problem layers in the top 5in of pavement

7.5.6 MILLING DEPTH

The District Bituminous Engineer and the District Pavement Design Engineer will set the milling depth based on field data that is collected using the Pavement Coring and Evaluation Guidelines.

It should be noted that laboratory testing of the project field cores cannot be completed until the milling depths have been set. The cores are then cut and tested to provide a coring report for the Recycled Asphalt Pavement (RAP). This must be taken into consideration with the timing of these various operations. A Coring and Condition Data Form (No. 675-030-09) should be prepared by the State Materials Office and placed on the web for any project with milled material quantities over 5000 tons from the same general pavement structure.

7.6 CALCULATING THE STRUCTURAL OVERLAY NUMBER (SN_O)

The Overlay Structural Number (SN_O) as a minimum will provide the difference between the Required Structural Number (SN_R) and the Existing Pavement Strength (SN_E) after milling. This can be used to solve for the overlay thickness D_S as follows:

$$\begin{aligned}SN_O &= SN_R - SN_E \\a_S \times D_S &= SN_R - SN_E \\D_S &= (SN_R - SN_E) / a_S\end{aligned}$$

Where:

D_S = The required overlay thickness of the new structural course in inches (in).

a_S = Layer coefficient of structural course. This value is 0.44.

SN_R = The Required Structural Number determined from $ESAL_D$ and M_R .

SN_E = The Existing Structural Number of the pavement at the time of the overlay including any deductions for milling.

SN_O = The Overlay Structural Number needed to bring the pavement up to the needed design requirements.

Once D_S has been determined, this thickness needs to be rounded to the nearest 1/2 inch increment. This process works well when designing an open graded friction course. For a dense graded friction course, use the following:

$$\begin{aligned}SN_O &= SN_R - SN_E - SN_{FC-12.5} \\a_S \times D_S &= SN_R - SN_E - SN_{FC-12.5} \\D_S &= (SN_R - SN_E - SN_{FC-12.5}) / a_S\end{aligned}$$

Where: SN_{FC} = Structural strength of the 1 1/2" FC-12.5 or 1" FC-9.5 thick with structural coefficient of 0.44 per inch.

7.7 OVERLAY DESIGN SAMPLE PROBLEM

This process is applicable for overlay projects. The following steps will take place in approximately the order shown with the understanding that some activities can take place concurrently.

GIVEN:

Pavement Overlay, four lane, high volume, rural, arterial.

$ESAL_D = 3,997,200$. This value is generally obtained from the District Planning Office. Round up $ESAL_D$ to 4,000,000 Traffic Level C for use in the design tables in Appendix A.

$M_R = 10,600$ psi. This value is obtained from the State Materials Office. Round up the design M_R to 11,000 psi for use in the design tables in Appendix A.

FIND:

The pavement thickness for a resurfacing and a milling project from the information provided for a 14 year design with a design speed of 55 mph on part of the project and with a design speed of 45 mph on the remaining project.

DATA

The following field data is from an old pavement. The layers are rated in poor condition. Determine the SN_E .

<u>Material</u> ⁽¹⁾	<u>Thickness</u> ⁽¹⁾	<u>Coefficient</u>	<u>SN_E</u>
FC-2	0.5	0.00	0.00
Type S	1.5	0.15 ⁽²⁾	0.23
Type I	1.0	0.15 ⁽²⁾	0.15
Binder	2.0	0.15 ⁽²⁾	0.30
Limerock (LBR 100)	8.0	0.18 ⁽³⁾	1.44
Type B Stab.(LBR 40)	12.0	0.08 ⁽³⁾	<u>0.96</u>
			3.08

- (1) From Coring and Condition Data form
- (2) From Table 7.1
- (3) From Table 5.4

If the final design indicates that 2" of asphalt is to be milled, assume that all of the Type S Structural Course is removed.

%R = 90 to 95. This value is from Table 5.2 for Rural Arterial Rehabilitation.
%R = 94 was chosen by the designer because of the high volume.

SN_R can be determined from the design tables in Appendix A for the appropriate reliability.

From Table A.6A:

$$SN_R = 3.94$$

SOLUTION:

Once the SN_R and the SN_E (after milling) are determined, the thickness of an overlay, (in this case, with an open graded friction course (FC-5), can be calculated using the following equation :

$$SN_O = SN_R - SN_E$$

$$a_S \times D_S = SN_R - SN_E$$

$$D_S = (SN_R - SN_E) / a_S$$

$$SN_E = 3.08 - 0.23 \text{ (milled Type S)} = 2.85 \text{ in}$$

So:

$$D_S = (3.94 - 2.85) / 0.44$$

$$D_S = 2.48 \text{ in}$$

Knowing that the asphalt layer thickness is normally calculated to the nearest 1/2", use $D_S = 2 \frac{1}{2}$ " or

The thickness of an overlay can be calculated using the following equation for a dense graded friction course FC-12.5:

$$SN_O = SN_R - SN_E - SN_{FC-12.5}$$

$$a_S \times D_S = SN_R - SN_E - SN_{FC-12.5}$$

$$D_S = (SN_R - SN_E - SN_{FC-12.5}) / a_S$$

$$D_S = (3.94 - 2.85 - 0.66) / 0.44$$

$$D_S = 0.98 \text{ in}$$

Knowing that the asphalt layer thickness is normally calculated to the nearest 1/2", use $D_S = 1"$.

CONCLUSION:

The following comparisons are provided.

Resurfacing Design For The Design Speed Of 55 mph

For the first part of this sample problem using a design speed of 55 mph, we need to use FC-5 according to Table 4.1. FC-5 has no structural value and is always shown as 3/4" thick.

<u>Layer/Material</u>	<u>Coefficient</u>		<u>Asphalt Thickness</u>	<u>SN_O</u>
Friction Course, FC-5	0.00	x	3/4"	= 0.00
Structural Course, Type SP	0.44	x	2 1/2"	= 1.10
			3 1/4"	1.10

Resurfacing Design for The Design Speed Of 45 mph

For the second part of this sample problem using a design speed of 45 mph, we need to use FC-12.5 according to Table 4.1. FC-12.5 has a structural coefficient of 0.44 and is always shown as 1 1/2" thick.

<u>Layer/Material</u>	<u>Coefficient</u>		<u>Asphalt Thickness</u>	<u>SN_O</u>
Friction Course, FC-12.5	0.44	x	1 1/2"	= 0.66
Structural Course, Type SP	0.44	x	1.0"	= 0.44
			2 1/2"	1.10

To check:

$$SN_R = SN_O + SN_E$$

$$3.94 = 1.10 + 2.85 = 3.95 \text{ in (first part, FC-5)}$$

$$3.94 = 1.10 + 2.85 = 3.95 \text{ in (second part, FC-12.5)}$$

So:

This is within the nearest ½" of structural course.

For the roadway plans, the thickness has been converted from thickness in inches to 110 lb = one square yard inch thickness, so:

$$2.5" \text{ structural course/ } 1" \times 110 \text{ lb/sy} = 275 \text{ lb/sy}$$

$$1.0" \text{ structural course/ } 1" \times 110 \text{ lb/sy} = 110 \text{ lb/sy}$$

Note: See Section 5.4 for binder selection guidance.

The resurfacing description in the plans with a design speed of 55 mph should read:

RESURFACING

TYPE SP STRUCTURAL COURSE (TRAFFIC C) 2 ½" WITH
FRICTION COURSE FC-5 ¾" PG 76-22 (ARB).

The resurfacing description in the plans with a design speed of 45 mph should read:

RESURFACING

TYPE SP STRUCTURAL COURSE (TRAFFIC C) 1" WITH
FRICTION COURSE FC-12.5 1 ½" PG 76-22 (ARB).

7.8 SPECIAL CONSIDERATIONS FOR REHABILITATION PROJECTS

It is essential that the Pavement Design Engineer coordinate very closely with all of the offices that will be affected by the work. It is highly recommended that field

reviews of projects be made in a timely fashion. If appropriate, the State Pavement Management Section is available to assist on complex projects where statewide experience may be of value.

7.8.1 PAYMENT OF STRUCTURAL COURSE

It is the Department's policy to pay for all structural and friction course asphalt items by the ton. One of the reasons that this is done is due to the amount of material that may be needed for irregular shaped areas (i.e. transitions, driveways, intersections, etc.) in which the quantities are hard to determine.

7.8.2 OVERBUILD

The District Materials Office should be consulted for recommendations with respect to overbuild, taking into consideration existing pavement condition and cross slope. The following minimum values recommended by the State Materials Office are:

- Overbuild by specification is placed by a paving machine and is used to provide proper cross-slope and longitudinal profile. Only fine SP mixes are allowed.
- SP-9.5 Overbuild, minimum average uniform thickness with or without a structural course is 1in.
- For Overbuild greater than 1 1/2in, Type SP-12.5 may be used.
- Use the minimum and maximum layer thickness as noted in section 5.6.6 for uniform thickness overbuild layers.
- All overbuild layers shall be fine Type SP Asphalt Concrete. On variable thickness overbuild layers, the minimum and maximum allowable thicknesses will be as specified below, unless called for differently in the Contract Documents.

Type SP-9.5	3/8 to 2 inches
Type SP-12.5	3/4 to 3 inches
Type SP-19.0	1-1/2 to 3-1/2 inches

7.8.3 OPERATIONAL PROJECTS

On resurfacing projects such as skid hazard, intersection improvements, etc., where only a minimum amount of overbuild and (FC-5) are required, and no structural course is provided, the plans should specify:

TYPE SP 9.5 (TRAFFIC C) OVERBUILD 1" Average

The district pavement design engineer can make the determination to place FC-5 directly on the overbuild or directly on the milled surface provided the underlying layers are in good structural shape.

Projects using FC-5 without a structural course (such as Skid Hazard projects) where the existing roadway structural course is in good condition might include projects:

- With little or no cracking.
- No structural improvement is required.
- Minimum distortion and rutting are observed.

Friction course selection should continue to be in accordance with current Friction Course Policy.

7.8.4 FUNCTIONAL OVERLAYS

On an older road that has been resurfaced several times, the computations may indicate that no added structural course is required. In this case the Pavement Design Engineer should remedy the problem by using the minimum amount of material appropriate for the distress. This should include a subjective consideration of reflective cracking potential that is not accounted for by structural number calculations.

If the ride of the existing pavement is poor, it may be desirable to provide sufficient structural asphalt to restore a smooth ride. Milling, prior to overlay can also help improve the ride. The district bituminous engineer should be consulted for a recommendation in these cases.

Document the basis for the overlay thickness regardless of exceeding the theoretical structural number requirements.

7.8.5 CRACK RELIEF LAYERS

The use of a crack relief layer and/or additional overlay thickness may be necessary if insufficient material, cross slope, or other problems limit milling to remove cracked pavement.

Cracks left in underlying layers will reflect up through overlays due to stress concentrations at the cracks from temperature movement and load deflections. This can cause the overlay to deteriorate faster than would be indicated strictly by structural number calculations.

To provide sufficient design life for an overlay over cracked pavement, it is often necessary to use a crack relief layer with at least a minimum structural overlay thickness based on the type of vehicle loadings. The crack relief layer helps to reduce the stress concentrations while the structural thickness will reduce deflections and help insulate the cracked pavement to reduce temperature movements.

The crack relief layer must be covered prior to being opened to traffic or other action should be taken to prevent windshield breakage from loose cover material.

The review of the performance history of the pavement and similar projects in the area can provide useful information on reflective crack propagation potential for a specific project.

Research is underway to evaluate the effectiveness of alternative methods of preventing or delaying reflective cracking, including additional structural thickness, ARMI, 1/2-in overbuild, and a 1-in open graded crack relief layer (OGCR).

It is recommended that the State Materials Office or the State Pavement Design Engineer be contacted if the Pavement Design Engineer is considering the use of a crack relief layer and has not had recent experience in the District in the use of these materials.

ARMI

An Asphalt Rubber Membrane Interlayer (ARMI) should normally be used over cracked and resealed concrete pavement.

An ARMI may also be useful as a moisture barrier if subgrade moisture is entering the pavement system through capillary action and causing a rippling of the asphalt surface. The District Bituminous Engineer should be consulted for a recommendation on when an ARMI layer is needed.

ARMI should be placed on top of overbuild when the overbuild is being used for cross-slope correction.

The State Materials Office recommends that an ARMI should not be used under a relatively thin overlay due to its cost and the need for sufficient heat in the overlay to properly bond the ARMI with the overlay.

A 1½-in minimum initial structural asphalt lift is required over the ARMI to provide this heat, with a 2-in lift preferred. This will require that the initial lift thickness be specified on the plans. Special consideration should be given to construction sequencing if paved shoulders are being added.

Do not mill an existing ARMI layer during rehabilitation unless the ARMI is contributing to the pavement distress (ex. bleeding).

CHAPTER 8

SHOULDER DESIGN

8.1 DESIGN GUIDANCE

On low volume roadways, or where $ESAL_D < 10$ million, shoulders can be designed using the minimum values shown in Table 5.5. A typical minimum design would be 1½-in of FC-12.5 or 1-in of FC-9.5 and Optional Base Group 1. For very low volume two lane roads (see table 4.1) a friction course may not be required.

These minimums were established assuming a stabilized subgrade in conjunction with Optional Base Group 1. The pavement evaluation process will often indicate the shoulder was stabilized during original construction and additional stabilization is not needed.

If stabilization is not used under the shoulder, the Pavement Design Engineer must determine the type of materials in the embankment and evaluate the need for increasing the shoulder base and structural course.

On higher type roadways ($ESAL_D = 10$ million or more), a shoulder thickness design may use 3% of the $ESAL_D$ for the structural number calculated. This is an estimate of the number of trucks that will be riding or parking on the shoulder during the life of the pavement.

If the shoulders are to be used to carry substantial amounts of traffic as a part of a Maintenance of Traffic (MOT) scheme, the Pavement Design Engineer may need to design the shoulder in the same manner as a roadway. Under severe conditions, full depth shoulders matching the thickness of the travel lane pavement may be warranted.

When paved shoulders less than or equal to 5-ft wide are to be constructed in conjunction with an overlay of the roadway, the top layer of structural course of the roadway overlay and the adjacent shoulder structural course must be

constructed in one pass and with the same traffic level mix unless called for differently in the Contract Documents.

For curb and gutter sections in urban areas, with pavement shoulders less than or equal to 5-ft, full depth shoulders may be considered to accommodate future widening.

APPENDIX A

DESIGN TABLES

A.1 INSTRUCTIONS

The following are Required Structural Number (SN_R) Design Tables for 75%, 80%, 85%, 90%, 92%, 94%, 95%, 96%, 97% and 99% Reliability (%R).

Selected values of the 18-kip Equivalent Single Axle Loads ($ESAL_D$) and the Resilient Modulus (M_R) are provided.

The Change In Serviceability (ΔPSI) and the Standard Deviation (S_O) is the same for all the design tables.

The Standard Normal Deviate (Z_R) is dependent on the Reliability (%R) and is shown below:

<u>Reliability (%R)</u>	<u>Standard Normal Deviation (Z_R)</u>
75%	-0.674
80%	-0.841
85%	-1.037
90%	-1.282
92%	-1.405
94%	-1.555
95%	-1.645
96%	-1.751
97%	-1.881
99%	-2.327

To find the Required Structural Number (SN_R), use the following method:

- Determine the appropriate Reliability (%R).
- Using the known Resilient Modulus (M_R) value, select the table with the proper range. Ranges provided include the Resilient Modulus (M_R) between 4,000 psi to 18,000 psi and 18,000 psi to 32,000 psi. Overlap is provided between tables for ease of use.
- Select the design Resilient Modulus (M_R) value at the top of the table.
- Select the design Accumulated 18-kipEquivalent Single Axle Loads ($ESAL_D$) value at the left of the table.
- Read down the column of the selected Resilient Modulus (M_R) value and read across the row of the selected Accumulated 18-kipEquivalent Single Axle Loads ($ESAL_D$) value.
- The value intersected is the Structural Number Required (SN_R) in inches of the pavement system.

If the Resilient Modulus (M_R) value and/or the 18-kip Equivalent Single Axle Loads ($ESAL_D$) value is not listed in the design tables provided, the Structural Number Required (SN_R) of the flexible pavement can be interpolated.

TABLE A.1A
REQUIRED STRUCTURAL NUMBER (SN_R)
75% RELIABILITY (%R)
RESILIENT MODULUS (M_R) RANGE 4,000 PSI TO 18,000 PSI
RESILIENT MODULUS (M_R), (PSI x 1000)

ESAL _D	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
100 000	2.72	2.50	2.33	2.19	2.08	1.99	1.91	1.83	1.77	1.71	1.66	1.62	1.57	1.53	1.50
150 000	2.91	2.67	2.49	2.35	2.23	2.13	2.04	1.97	1.90	1.84	1.79	1.74	1.69	1.65	1.61
200 000	3.05	2.80	2.61	2.46	2.34	2.23	2.14	2.07	2.00	1.93	1.88	1.83	1.78	1.74	1.70
250 000	3.17	2.91	2.71	2.55	2.43	2.32	2.23	2.14	2.07	2.01	1.95	1.90	1.85	1.81	1.76
300 000	3.27	3.00	2.79	2.63	2.50	2.39	2.29	2.21	2.14	2.07	2.01	1.96	1.91	1.86	1.82
350 000	3.35	3.08	2.87	2.70	2.57	2.45	2.35	2.27	2.19	2.13	2.07	2.01	1.96	1.91	1.87
400 000	3.42	3.14	2.93	2.76	2.62	2.51	2.41	2.32	2.24	2.17	2.11	2.06	2.00	1.96	1.91
450 000	3.49	3.21	2.99	2.82	2.68	2.56	2.46	2.37	2.29	2.22	2.15	2.10	2.04	2.00	1.95
500 000	3.55	3.26	3.04	2.87	2.72	2.60	2.50	2.41	2.33	2.26	2.19	2.13	2.08	2.03	1.99
600 000	3.66	3.36	3.14	2.95	2.81	2.68	2.58	2.48	2.40	2.33	2.26	2.20	2.15	2.10	2.05
700 000	3.75	3.45	3.22	3.03	2.88	2.75	2.64	2.55	2.46	2.39	2.32	2.26	2.20	2.15	2.10
800 000	3.83	3.52	3.29	3.10	2.94	2.81	2.70	2.60	2.52	2.44	2.37	2.31	2.25	2.20	2.15
900 000	3.91	3.59	3.35	3.16	3.00	2.87	2.75	2.66	2.57	2.49	2.42	2.36	2.30	2.24	2.19
1 000 000	3.97	3.65	3.41	3.22	3.06	2.92	2.80	2.70	2.61	2.53	2.46	2.40	2.34	2.28	2.23
1 500 000	4.23	3.90	3.64	3.44	3.27	3.12	3.00	2.89	2.80	2.71	2.63	2.57	2.50	2.44	2.39
2 000 000	4.42	4.08	3.82	3.60	3.43	3.27	3.15	3.03	2.93	2.84	2.76	2.69	2.62	2.56	2.51
2 500 000	4.57	4.23	3.96	3.74	3.55	3.40	3.26	3.15	3.04	2.95	2.87	2.79	2.72	2.66	2.60
3 000 000	4.70	4.35	4.07	3.85	3.66	3.50	3.36	3.24	3.14	3.04	2.96	2.88	2.81	2.74	2.68
3 500 000	4.80	4.45	4.17	3.94	3.75	3.59	3.45	3.33	3.22	3.12	3.03	2.95	2.88	2.81	2.75
4 000 000	4.90	4.54	4.26	4.03	3.83	3.67	3.53	3.40	3.29	3.19	3.10	3.02	2.94	2.88	2.81
4 500 000	4.98	4.62	4.33	4.10	3.91	3.74	3.59	3.47	3.35	3.25	3.16	3.08	3.00	2.93	2.87
5 000 000	5.06	4.69	4.40	4.17	3.97	3.80	3.66	3.53	3.41	3.31	3.22	3.13	3.06	2.99	2.92
6 000 000	5.19	4.82	4.53	4.29	4.09	3.91	3.76	3.63	3.52	3.41	3.31	3.23	3.15	3.08	3.01
7 000 000	5.30	4.93	4.63	4.39	4.19	4.01	3.86	3.72	3.60	3.50	3.40	3.31	3.23	3.16	3.09
8 000 000	5.40	5.02	4.72	4.48	4.27	4.10	3.94	3.81	3.68	3.57	3.48	3.39	3.30	3.23	3.16
9 000 000	5.49	5.11	4.81	4.56	4.35	4.17	4.02	3.88	3.75	3.64	3.54	3.45	3.37	3.29	3.22
10 000 000	5.57	5.18	4.88	4.63	4.42	4.24	4.08	3.94	3.82	3.71	3.60	3.51	3.43	3.35	3.28
15 000 000	5.88	5.48	5.17	4.91	4.70	4.51	4.35	4.20	4.07	3.95	3.85	3.75	3.66	3.58	3.50
20 000 000	6.11	5.70	5.38	5.12	4.90	4.71	4.54	4.39	4.26	4.14	4.03	3.93	3.83	3.75	3.67
25 000 000	6.29	5.88	5.55	5.28	5.06	4.86	4.69	4.54	4.40	4.28	4.17	4.07	3.97	3.88	3.80
30 000 000	6.44	6.02	5.69	5.42	5.19	4.99	4.82	4.67	4.53	4.40	4.29	4.18	4.09	4.00	3.92
35 000 000	6.57	6.14	5.81	5.53	5.30	5.10	4.93	4.77	4.63	4.51	4.39	4.28	4.19	4.10	4.01
40 000 000	6.68	6.25	5.91	5.63	5.40	5.20	5.02	4.87	4.72	4.60	4.48	4.37	4.27	4.18	4.10
45 000 000	6.78	6.35	6.01	5.73	5.49	5.29	5.11	4.95	4.81	4.68	4.56	4.45	4.35	4.26	4.17
50 000 000	6.88	6.43	6.09	5.81	5.57	5.36	5.18	5.02	4.88	4.75	4.63	4.52	4.42	4.33	4.24
60 000 000	7.04	6.59	6.24	5.95	5.71	5.50	5.32	5.16	5.01	4.88	4.76	4.65	4.55	4.45	4.36
70 000 000	7.17	6.72	6.36	6.07	5.83	5.62	5.43	5.27	5.12	4.99	4.87	4.75	4.65	4.55	4.46
80 000 000	7.29	6.83	6.47	6.18	5.93	5.72	5.53	5.37	5.22	5.08	4.96	4.85	4.74	4.65	4.55
90 000 000	7.40	6.94	6.57	6.28	6.03	5.81	5.62	5.45	5.30	5.17	5.04	4.93	4.82	4.73	4.64
100 000 000	7.50	7.03	6.66	6.36	6.11	5.89	5.70	5.53	5.38	5.25	5.12	5.01	4.90	4.80	4.71

TABLE A.1B
REQUIRED STRUCTURAL NUMBER (SN_R)
75% RELIABILITY (%R)
RESILIENT MODULUS (M_R) RANGE 18,000 PSI TO 32,000 PSI
RESILIENT MODULUS (M_R), (PSI x 1000)

ESAL _D	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
100 000	1.50	1.46	1.43	1.40	1.37	1.35	1.32	1.30	1.28	1.25	1.23	1.21	1.20	1.18	1.16
150 000	1.61	1.58	1.54	1.51	1.48	1.45	1.43	1.40	1.38	1.36	1.33	1.31	1.29	1.28	1.26
200 000	1.70	1.66	1.62	1.59	1.56	1.53	1.51	1.48	1.45	1.43	1.41	1.39	1.37	1.35	1.33
250 000	1.76	1.73	1.69	1.66	1.63	1.60	1.57	1.54	1.52	1.49	1.47	1.45	1.43	1.41	1.39
300 000	1.82	1.78	1.74	1.71	1.68	1.65	1.62	1.59	1.57	1.54	1.52	1.50	1.47	1.45	1.43
350 000	1.87	1.83	1.79	1.76	1.72	1.69	1.66	1.64	1.61	1.59	1.56	1.54	1.52	1.50	1.48
400 000	1.91	1.87	1.83	1.80	1.77	1.73	1.70	1.68	1.65	1.62	1.60	1.58	1.55	1.53	1.51
450 000	1.95	1.91	1.87	1.84	1.80	1.77	1.74	1.71	1.68	1.66	1.63	1.61	1.59	1.57	1.54
500 000	1.99	1.95	1.91	1.87	1.84	1.80	1.77	1.74	1.72	1.69	1.66	1.64	1.62	1.60	1.57
600 000	2.05	2.01	1.97	1.93	1.89	1.86	1.83	1.80	1.77	1.74	1.72	1.69	1.67	1.65	1.63
700 000	2.10	2.06	2.02	1.98	1.94	1.91	1.88	1.85	1.82	1.79	1.77	1.74	1.72	1.69	1.67
800 000	2.15	2.11	2.07	2.03	1.99	1.95	1.92	1.89	1.86	1.83	1.81	1.78	1.76	1.73	1.71
900 000	2.19	2.15	2.11	2.07	2.03	1.99	1.96	1.93	1.90	1.87	1.84	1.82	1.79	1.77	1.75
1 000 000	2.23	2.19	2.14	2.10	2.07	2.03	2.00	1.96	1.93	1.91	1.88	1.85	1.83	1.80	1.78
1 500 000	2.39	2.34	2.30	2.25	2.21	2.17	2.14	2.10	2.07	2.04	2.01	1.98	1.96	1.93	1.91
2 000 000	2.51	2.46	2.41	2.36	2.32	2.28	2.24	2.21	2.17	2.14	2.11	2.08	2.06	2.03	2.00
2 500 000	2.60	2.55	2.50	2.45	2.41	2.37	2.33	2.29	2.26	2.22	2.19	2.16	2.14	2.11	2.08
3 000 000	2.68	2.63	2.58	2.53	2.48	2.44	2.40	2.36	2.33	2.29	2.26	2.23	2.20	2.17	2.15
3 500 000	2.75	2.70	2.64	2.59	2.55	2.50	2.46	2.42	2.39	2.35	2.32	2.29	2.26	2.23	2.20
4 000 000	2.81	2.76	2.70	2.65	2.60	2.56	2.52	2.48	2.44	2.41	2.37	2.34	2.31	2.28	2.25
4 500 000	2.87	2.81	2.76	2.70	2.66	2.61	2.57	2.53	2.49	2.45	2.42	2.39	2.36	2.33	2.30
5 000 000	2.92	2.86	2.80	2.75	2.70	2.66	2.61	2.57	2.53	2.50	2.46	2.43	2.40	2.37	2.34
6 000 000	3.01	2.95	2.89	2.84	2.79	2.74	2.69	2.65	2.61	2.57	2.54	2.50	2.47	2.44	2.41
7 000 000	3.09	3.02	2.97	2.91	2.86	2.81	2.76	2.72	2.68	2.64	2.60	2.57	2.54	2.50	2.47
8 000 000	3.16	3.09	3.03	2.98	2.92	2.87	2.83	2.78	2.74	2.70	2.66	2.63	2.59	2.56	2.53
9 000 000	3.22	3.15	3.09	3.03	2.98	2.93	2.88	2.84	2.79	2.75	2.72	2.68	2.64	2.61	2.58
10 000 000	3.28	3.21	3.15	3.09	3.03	2.98	2.93	2.89	2.84	2.80	2.76	2.73	2.69	2.66	2.63
15 000 000	3.50	3.43	3.36	3.30	3.24	3.19	3.14	3.09	3.04	3.00	2.96	2.92	2.88	2.84	2.81
20 000 000	3.67	3.60	3.53	3.46	3.40	3.34	3.29	3.24	3.19	3.14	3.10	3.06	3.02	2.98	2.95
25 000 000	3.80	3.73	3.66	3.59	3.53	3.47	3.41	3.36	3.31	3.26	3.22	3.17	3.13	3.09	3.06
30 000 000	3.92	3.84	3.77	3.70	3.63	3.57	3.52	3.46	3.41	3.36	3.32	3.27	3.23	3.19	3.15
35 000 000	4.01	3.93	3.86	3.79	3.73	3.66	3.61	3.55	3.50	3.45	3.40	3.36	3.31	3.27	3.23
40 000 000	4.10	4.02	3.94	3.87	3.81	3.74	3.68	3.63	3.58	3.52	3.48	3.43	3.39	3.34	3.30
45 000 000	4.17	4.09	4.02	3.95	3.88	3.82	3.76	3.70	3.64	3.59	3.54	3.50	3.45	3.41	3.37
50 000 000	4.24	4.16	4.08	4.01	3.94	3.88	3.82	3.76	3.71	3.65	3.60	3.56	3.51	3.47	3.43
60 000 000	4.36	4.28	4.20	4.13	4.06	3.99	3.93	3.87	3.82	3.76	3.71	3.66	3.62	3.57	3.53
70 000 000	4.46	4.38	4.30	4.23	4.16	4.09	4.03	3.97	3.91	3.86	3.81	3.76	3.71	3.66	3.62
80 000 000	4.55	4.47	4.39	4.32	4.24	4.18	4.11	4.05	4.00	3.94	3.89	3.84	3.79	3.74	3.70
90 000 000	4.64	4.55	4.47	4.39	4.32	4.25	4.19	4.13	4.07	4.01	3.96	3.91	3.86	3.82	3.77
100 000 000	4.71	4.62	4.54	4.46	4.39	4.32	4.26	4.20	4.14	4.08	4.03	3.98	3.93	3.88	3.83

TABLE A.2A
REQUIRED STRUCTURAL NUMBER (SN_R)
80% RELIABILITY (%R)
RESILIENT MODULUS (M_R) RANGE 4,000 PSI TO 18,000 PSI
RESILIENT MODULUS (M_R), (PSI x 1000)

ESAL _D	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
100 000	2.80	2.57	2.40	2.26	2.14	2.05	1.96	1.89	1.83	1.77	1.72	1.67	1.62	1.58	1.55
150 000	3.00	2.75	2.56	2.42	2.29	2.19	2.10	2.03	1.96	1.90	1.84	1.79	1.74	1.70	1.66
200 000	3.14	2.88	2.69	2.53	2.41	2.30	2.21	2.13	2.06	1.99	1.93	1.88	1.83	1.79	1.75
250 000	3.26	2.99	2.79	2.63	2.50	2.39	2.29	2.21	2.13	2.07	2.01	1.95	1.91	1.86	1.82
300 000	3.36	3.09	2.88	2.71	2.57	2.46	2.36	2.28	2.20	2.13	2.07	2.02	1.97	1.92	1.88
350 000	3.45	3.17	2.95	2.78	2.64	2.52	2.42	2.34	2.26	2.19	2.13	2.07	2.02	1.97	1.93
400 000	3.52	3.24	3.02	2.84	2.70	2.58	2.48	2.39	2.31	2.24	2.17	2.12	2.06	2.02	1.97
450 000	3.59	3.30	3.08	2.90	2.75	2.63	2.53	2.44	2.35	2.28	2.22	2.16	2.11	2.06	2.01
500 000	3.65	3.36	3.13	2.95	2.80	2.68	2.57	2.48	2.40	2.32	2.26	2.20	2.14	2.09	2.05
600 000	3.76	3.46	3.23	3.04	2.89	2.76	2.65	2.55	2.47	2.40	2.33	2.27	2.21	2.16	2.11
700 000	3.86	3.55	3.31	3.12	2.96	2.83	2.72	2.62	2.53	2.46	2.39	2.33	2.27	2.22	2.17
800 000	3.94	3.63	3.38	3.19	3.03	2.90	2.78	2.68	2.59	2.51	2.44	2.38	2.32	2.27	2.22
900 000	4.01	3.70	3.45	3.25	3.09	2.95	2.84	2.73	2.64	2.56	2.49	2.42	2.37	2.31	2.26
1 000 000	4.08	3.76	3.51	3.31	3.14	3.00	2.89	2.78	2.69	2.61	2.53	2.47	2.41	2.35	2.30
1 500 000	4.34	4.01	3.75	3.54	3.36	3.21	3.09	2.98	2.88	2.79	2.71	2.64	2.58	2.52	2.46
2 000 000	4.54	4.19	3.92	3.71	3.52	3.37	3.24	3.12	3.02	2.93	2.84	2.77	2.70	2.64	2.58
2 500 000	4.69	4.34	4.06	3.84	3.65	3.50	3.36	3.24	3.13	3.04	2.95	2.87	2.80	2.74	2.68
3 000 000	4.82	4.46	4.18	3.95	3.76	3.60	3.46	3.34	3.23	3.13	3.04	2.96	2.89	2.82	2.76
3 500 000	4.93	4.57	4.28	4.05	3.86	3.69	3.55	3.42	3.31	3.21	3.12	3.04	2.96	2.90	2.83
4 000 000	5.02	4.66	4.37	4.14	3.94	3.77	3.63	3.50	3.38	3.28	3.19	3.11	3.03	2.96	2.90
4 500 000	5.10	4.74	4.45	4.21	4.01	3.84	3.70	3.57	3.45	3.35	3.25	3.17	3.09	3.02	2.95
5 000 000	5.18	4.81	4.52	4.28	4.08	3.91	3.76	3.63	3.51	3.40	3.31	3.22	3.14	3.07	3.01
6 000 000	5.32	4.94	4.64	4.40	4.20	4.02	3.87	3.74	3.62	3.51	3.41	3.32	3.24	3.17	3.10
7 000 000	5.43	5.05	4.75	4.51	4.30	4.12	3.97	3.83	3.71	3.60	3.50	3.41	3.32	3.25	3.18
8 000 000	5.53	5.15	4.84	4.60	4.39	4.21	4.05	3.91	3.79	3.68	3.57	3.48	3.40	3.32	3.25
9 000 000	5.62	5.23	4.93	4.68	4.47	4.28	4.13	3.99	3.86	3.75	3.64	3.55	3.46	3.39	3.31
10 000 000	5.70	5.31	5.00	4.75	4.54	4.35	4.19	4.05	3.93	3.81	3.71	3.61	3.52	3.44	3.37
15 000 000	6.02	5.61	5.30	5.04	4.82	4.63	4.46	4.31	4.18	4.06	3.96	3.86	3.76	3.68	3.60
20 000 000	6.25	5.84	5.51	5.25	5.02	4.83	4.66	4.51	4.37	4.25	4.14	4.04	3.94	3.85	3.77
25 000 000	6.43	6.01	5.68	5.41	5.18	4.99	4.81	4.66	4.52	4.40	4.28	4.18	4.08	3.99	3.91
30 000 000	6.59	6.16	5.82	5.55	5.32	5.12	4.94	4.79	4.65	4.52	4.40	4.30	4.20	4.11	4.02
35 000 000	6.72	6.28	5.94	5.67	5.43	5.23	5.05	4.89	4.75	4.62	4.51	4.40	4.30	4.21	4.12
40 000 000	6.83	6.39	6.05	5.77	5.53	5.33	5.15	4.99	4.85	4.72	4.60	4.49	4.39	4.30	4.21
45 000 000	6.93	6.49	6.14	5.86	5.62	5.41	5.23	5.07	4.93	4.80	4.68	4.57	4.47	4.37	4.29
50 000 000	7.03	6.58	6.23	5.94	5.70	5.49	5.31	5.15	5.00	4.87	4.75	4.64	4.54	4.44	4.36
60 000 000	7.19	6.74	6.38	6.09	5.84	5.63	5.45	5.28	5.13	5.00	4.88	4.77	4.66	4.57	4.48
70 000 000	7.33	6.87	6.51	6.21	5.96	5.75	5.56	5.40	5.25	5.11	4.99	4.88	4.77	4.67	4.58
80 000 000	7.45	6.99	6.62	6.32	6.07	5.85	5.66	5.50	5.35	5.21	5.08	4.97	4.86	4.77	4.67
90 000 000	7.56	7.09	6.72	6.42	6.16	5.95	5.76	5.59	5.43	5.30	5.17	5.05	4.95	4.85	4.75
100 000 000	7.66	7.18	6.81	6.51	6.25	6.03	5.84	5.67	5.51	5.37	5.25	5.13	5.02	4.92	4.83

TABLE A.2B
REQUIRED STRUCTURAL NUMBER (SN_R)
80% RELIABILITY (%R)
RESILIENT MODULUS (M_R) RANGE 18,000 PSI TO 32,000 PSI
RESILIENT MODULUS (M_R), (PSI x 1000)

ESAL _D	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
100 000	1.55	1.51	1.48	1.45	1.42	1.39	1.37	1.34	1.32	1.30	1.28	1.26	1.24	1.22	1.20
150 000	1.66	1.63	1.59	1.56	1.53	1.50	1.47	1.45	1.42	1.40	1.38	1.36	1.34	1.32	1.30
200 000	1.75	1.71	1.68	1.64	1.61	1.58	1.55	1.53	1.50	1.48	1.46	1.43	1.41	1.39	1.37
250 000	1.82	1.78	1.74	1.71	1.68	1.65	1.62	1.59	1.56	1.54	1.52	1.49	1.47	1.45	1.43
300 000	1.88	1.84	1.80	1.76	1.73	1.70	1.67	1.64	1.62	1.59	1.57	1.54	1.52	1.50	1.48
350 000	1.93	1.89	1.85	1.81	1.78	1.75	1.72	1.69	1.66	1.64	1.61	1.59	1.57	1.54	1.52
400 000	1.97	1.93	1.89	1.85	1.82	1.79	1.76	1.73	1.70	1.67	1.65	1.63	1.60	1.58	1.56
450 000	2.01	1.97	1.93	1.89	1.86	1.82	1.79	1.76	1.74	1.71	1.68	1.66	1.64	1.62	1.59
500 000	2.05	2.00	1.96	1.93	1.89	1.86	1.83	1.80	1.77	1.74	1.72	1.69	1.67	1.65	1.62
600 000	2.11	2.07	2.03	1.99	1.95	1.92	1.88	1.85	1.82	1.80	1.77	1.75	1.72	1.70	1.68
700 000	2.17	2.12	2.08	2.04	2.00	1.97	1.93	1.90	1.87	1.85	1.82	1.79	1.77	1.75	1.72
800 000	2.22	2.17	2.13	2.09	2.05	2.01	1.98	1.95	1.92	1.89	1.86	1.84	1.81	1.79	1.76
900 000	2.26	2.21	2.17	2.13	2.09	2.05	2.02	1.99	1.96	1.93	1.90	1.87	1.85	1.82	1.80
1 000 000	2.30	2.25	2.21	2.17	2.13	2.09	2.06	2.02	1.99	1.96	1.93	1.91	1.88	1.86	1.83
1 500 000	2.46	2.41	2.36	2.32	2.28	2.24	2.20	2.17	2.13	2.10	2.07	2.04	2.02	1.99	1.97
2 000 000	2.58	2.53	2.48	2.43	2.39	2.35	2.31	2.27	2.24	2.21	2.18	2.15	2.12	2.09	2.06
2 500 000	2.68	2.62	2.57	2.52	2.48	2.44	2.40	2.36	2.32	2.29	2.26	2.23	2.20	2.17	2.14
3 000 000	2.76	2.70	2.65	2.60	2.56	2.51	2.47	2.43	2.40	2.36	2.33	2.30	2.27	2.24	2.21
3 500 000	2.83	2.77	2.72	2.67	2.62	2.58	2.54	2.50	2.46	2.42	2.39	2.36	2.33	2.30	2.27
4 000 000	2.90	2.84	2.78	2.73	2.68	2.64	2.59	2.55	2.51	2.48	2.44	2.41	2.38	2.35	2.32
4 500 000	2.95	2.89	2.84	2.78	2.73	2.69	2.64	2.60	2.56	2.53	2.49	2.46	2.43	2.39	2.37
5 000 000	3.01	2.94	2.89	2.83	2.78	2.73	2.69	2.65	2.61	2.57	2.53	2.50	2.47	2.44	2.41
6 000 000	3.10	3.03	2.97	2.92	2.87	2.82	2.77	2.73	2.69	2.65	2.61	2.58	2.54	2.51	2.48
7 000 000	3.18	3.11	3.05	2.99	2.94	2.89	2.84	2.80	2.76	2.72	2.68	2.64	2.61	2.58	2.55
8 000 000	3.25	3.18	3.12	3.06	3.01	2.96	2.91	2.86	2.82	2.78	2.74	2.70	2.67	2.64	2.60
9 000 000	3.31	3.24	3.18	3.12	3.07	3.02	2.97	2.92	2.88	2.83	2.80	2.76	2.72	2.69	2.65
10 000 000	3.37	3.30	3.24	3.18	3.12	3.07	3.02	2.97	2.93	2.88	2.84	2.81	2.77	2.73	2.70
15 000 000	3.60	3.53	3.46	3.40	3.34	3.28	3.23	3.18	3.13	3.09	3.04	3.00	2.96	2.93	2.89
20 000 000	3.77	3.70	3.63	3.56	3.50	3.44	3.38	3.33	3.28	3.24	3.19	3.15	3.11	3.07	3.03
25 000 000	3.91	3.83	3.76	3.69	3.63	3.57	3.51	3.46	3.41	3.36	3.31	3.27	3.22	3.18	3.15
30 000 000	4.02	3.95	3.87	3.80	3.74	3.67	3.62	3.56	3.51	3.46	3.41	3.37	3.32	3.28	3.24
35 000 000	4.12	4.04	3.97	3.90	3.83	3.77	3.71	3.65	3.60	3.55	3.50	3.45	3.41	3.37	3.33
40 000 000	4.21	4.13	4.05	3.98	3.91	3.85	3.79	3.73	3.68	3.63	3.58	3.53	3.48	3.44	3.40
45 000 000	4.29	4.20	4.13	4.05	3.99	3.92	3.86	3.80	3.75	3.70	3.64	3.60	3.55	3.51	3.47
50 000 000	4.36	4.27	4.19	4.12	4.05	3.99	3.93	3.87	3.81	3.76	3.71	3.66	3.61	3.57	3.53
60 000 000	4.48	4.39	4.31	4.24	4.17	4.10	4.04	3.98	3.92	3.87	3.82	3.77	3.72	3.68	3.63
70 000 000	4.58	4.50	4.42	4.34	4.27	4.20	4.14	4.08	4.02	3.97	3.91	3.86	3.81	3.77	3.72
80 000 000	4.67	4.59	4.51	4.43	4.36	4.29	4.23	4.16	4.11	4.05	4.00	3.95	3.90	3.85	3.80
90 000 000	4.75	4.67	4.59	4.51	4.44	4.37	4.30	4.24	4.18	4.12	4.07	4.02	3.97	3.92	3.88
100 000 000	4.83	4.74	4.66	4.58	4.51	4.44	4.37	4.31	4.25	4.19	4.14	4.09	4.04	3.99	3.94

TABLE A.3A
REQUIRED STRUCTURAL NUMBER (SN_R)
85% RELIABILITY (%R)
RESILIENT MODULUS (M_R) RANGE 4,000 PSI TO 18,000 PSI
RESILIENT MODULUS (M_R), (PSI x 1000)

ESAL _D	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
100'000	2.90	2.66	2.48	2.33	2.22	2.12	2.03	1.96	1.89	1.83	1.78	1.73	1.68	1.64	1.60
150'000	3.10	2.84	2.65	2.50	2.37	2.27	2.18	2.10	2.03	1.96	1.91	1.85	1.81	1.76	1.72
200'000	3.25	2.98	2.78	2.62	2.49	2.38	2.28	2.20	2.13	2.06	2.00	1.95	1.90	1.85	1.81
250'000	3.37	3.10	2.89	2.72	2.58	2.47	2.37	2.28	2.21	2.14	2.08	2.02	1.97	1.93	1.88
300'000	3.47	3.19	2.97	2.80	2.66	2.54	2.44	2.35	2.28	2.21	2.14	2.09	2.03	1.99	1.94
350'000	3.56	3.27	3.05	2.88	2.73	2.61	2.51	2.42	2.34	2.26	2.20	2.14	2.09	2.04	1.99
400'000	3.64	3.35	3.12	2.94	2.79	2.67	2.56	2.47	2.39	2.32	2.25	2.19	2.14	2.09	2.04
450'000	3.71	3.41	3.18	3.00	2.85	2.72	2.61	2.52	2.44	2.36	2.29	2.23	2.18	2.13	2.08
500'000	3.77	3.47	3.24	3.05	2.90	2.77	2.66	2.56	2.48	2.40	2.34	2.27	2.22	2.17	2.12
600'000	3.89	3.58	3.34	3.14	2.99	2.85	2.74	2.64	2.55	2.48	2.41	2.34	2.29	2.23	2.18
700'000	3.98	3.67	3.42	3.23	3.06	2.93	2.81	2.71	2.62	2.54	2.47	2.40	2.35	2.29	2.24
800'000	4.07	3.75	3.50	3.30	3.13	2.99	2.88	2.77	2.68	2.60	2.53	2.46	2.40	2.34	2.29
900'000	4.14	3.82	3.56	3.36	3.19	3.05	2.93	2.83	2.73	2.65	2.58	2.51	2.45	2.39	2.34
1'000'000	4.21	3.88	3.63	3.42	3.25	3.11	2.98	2.88	2.78	2.70	2.62	2.55	2.49	2.43	2.38
1'500'000	4.48	4.14	3.87	3.65	3.47	3.32	3.19	3.08	2.98	2.88	2.80	2.73	2.66	2.60	2.54
2'000'000	4.68	4.33	4.05	3.83	3.64	3.48	3.35	3.23	3.12	3.03	2.94	2.86	2.79	2.73	2.67
2'500'000	4.83	4.47	4.19	3.97	3.78	3.61	3.47	3.35	3.24	3.14	3.05	2.97	2.90	2.83	2.77
3'000'000	4.96	4.60	4.31	4.08	3.89	3.72	3.58	3.45	3.34	3.24	3.15	3.06	2.99	2.92	2.86
3'500'000	5.07	4.70	4.42	4.18	3.98	3.81	3.67	3.54	3.42	3.32	3.23	3.14	3.07	2.99	2.93
4'000'000	5.17	4.80	4.51	4.27	4.07	3.90	3.75	3.61	3.50	3.39	3.30	3.21	3.13	3.06	2.99
4'500'000	5.25	4.88	4.59	4.35	4.14	3.97	3.82	3.68	3.57	3.46	3.36	3.28	3.20	3.12	3.05
5'000'000	5.33	4.95	4.66	4.42	4.21	4.04	3.88	3.75	3.63	3.52	3.42	3.33	3.25	3.18	3.11
6'000'000	5.47	5.08	4.78	4.54	4.33	4.15	4.00	3.86	3.74	3.63	3.53	3.43	3.35	3.27	3.20
7'000'000	5.58	5.20	4.89	4.64	4.43	4.25	4.09	3.95	3.83	3.72	3.61	3.52	3.44	3.36	3.29
8'000'000	5.68	5.29	4.99	4.74	4.52	4.34	4.18	4.04	3.91	3.80	3.69	3.60	3.51	3.43	3.36
9'000'000	5.77	5.38	5.07	4.82	4.60	4.42	4.26	4.11	3.99	3.87	3.76	3.67	3.58	3.50	3.42
10'000'000	5.86	5.46	5.15	4.89	4.68	4.49	4.33	4.18	4.05	3.94	3.83	3.73	3.64	3.56	3.48
15'000'000	6.18	5.77	5.45	5.18	4.96	4.77	4.60	4.45	4.31	4.19	4.08	3.98	3.89	3.80	3.72
20'000'000	6.42	5.99	5.67	5.39	5.17	4.97	4.80	4.64	4.51	4.38	4.27	4.16	4.07	3.98	3.90
25'000'000	6.60	6.17	5.84	5.56	5.33	5.13	4.96	4.80	4.66	4.53	4.42	4.31	4.21	4.12	4.04
30'000'000	6.76	6.32	5.98	5.70	5.47	5.26	5.09	4.93	4.79	4.66	4.54	4.43	4.33	4.24	4.15
35'000'000	6.89	6.45	6.10	5.82	5.58	5.38	5.20	5.04	4.89	4.76	4.64	4.54	4.43	4.34	4.25
40'000'000	7.01	6.56	6.21	5.93	5.68	5.48	5.30	5.13	4.99	4.86	4.74	4.63	4.52	4.43	4.34
45'000'000	7.11	6.66	6.31	6.02	5.78	5.57	5.38	5.22	5.07	4.94	4.82	4.71	4.60	4.51	4.42
50'000'000	7.21	6.75	6.39	6.10	5.86	5.65	5.46	5.30	5.15	5.02	4.89	4.78	4.68	4.58	4.49
60'000'000	7.37	6.91	6.55	6.25	6.00	5.79	5.60	5.43	5.28	5.15	5.02	4.91	4.80	4.71	4.61
70'000'000	7.52	7.05	6.68	6.38	6.12	5.91	5.72	5.55	5.40	5.26	5.13	5.02	4.91	4.81	4.72
80'000'000	7.64	7.17	6.79	6.49	6.23	6.01	5.82	5.65	5.50	5.36	5.23	5.11	5.01	4.91	4.81
90'000'000	7.75	7.27	6.89	6.59	6.33	6.11	5.91	5.74	5.59	5.45	5.32	5.20	5.09	4.99	4.90
100'000'000	7.86	7.37	6.99	6.68	6.42	6.19	6.00	5.82	5.67	5.52	5.40	5.28	5.17	5.07	4.97

TABLE A.3B
REQUIRED STRUCTURAL NUMBER (SN_R)
85% RELIABILITY (%R)
RESILIENT MODULUS (M_R) RANGE 18,000 PSI TO 32,000 PSI
RESILIENT MODULUS (M_R), (PSI x 1000)

ESAL _D	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
100 000	1.60	1.57	1.53	1.50	1.47	1.45	1.42	1.39	1.37	1.35	1.33	1.31	1.29	1.27	1.25
150 000	1.72	1.68	1.65	1.62	1.59	1.56	1.53	1.50	1.48	1.45	1.43	1.41	1.39	1.37	1.35
200 000	1.81	1.77	1.74	1.70	1.67	1.64	1.61	1.58	1.56	1.53	1.51	1.49	1.47	1.45	1.43
250 000	1.88	1.84	1.80	1.77	1.74	1.71	1.68	1.65	1.62	1.60	1.57	1.55	1.53	1.51	1.49
300 000	1.94	1.90	1.86	1.83	1.79	1.76	1.73	1.70	1.67	1.65	1.62	1.60	1.58	1.56	1.54
350 000	1.99	1.95	1.91	1.88	1.84	1.81	1.78	1.75	1.72	1.69	1.67	1.65	1.62	1.60	1.58
400 000	2.04	2.00	1.96	1.92	1.88	1.85	1.82	1.79	1.76	1.73	1.71	1.68	1.66	1.64	1.62
450 000	2.08	2.04	2.00	1.96	1.92	1.89	1.86	1.83	1.80	1.77	1.74	1.72	1.70	1.67	1.65
500 000	2.12	2.07	2.03	1.99	1.96	1.92	1.89	1.86	1.83	1.80	1.78	1.75	1.73	1.71	1.68
600 000	2.18	2.14	2.10	2.06	2.02	1.98	1.95	1.92	1.89	1.86	1.83	1.81	1.78	1.76	1.74
700 000	2.24	2.19	2.15	2.11	2.07	2.04	2.00	1.97	1.94	1.91	1.88	1.86	1.83	1.81	1.79
800 000	2.29	2.24	2.20	2.16	2.12	2.08	2.05	2.02	1.98	1.96	1.93	1.90	1.88	1.85	1.83
900 000	2.34	2.29	2.24	2.20	2.16	2.12	2.09	2.06	2.02	2.00	1.97	1.94	1.91	1.89	1.86
1 000 000	2.38	2.33	2.28	2.24	2.20	2.16	2.13	2.09	2.06	2.03	2.00	1.97	1.95	1.92	1.90
1 500 000	2.54	2.49	2.44	2.40	2.35	2.31	2.28	2.24	2.21	2.17	2.14	2.12	2.09	2.06	2.03
2 000 000	2.67	2.61	2.56	2.52	2.47	2.43	2.39	2.35	2.32	2.28	2.25	2.22	2.19	2.16	2.14
2 500 000	2.77	2.71	2.66	2.61	2.56	2.52	2.48	2.44	2.40	2.37	2.34	2.30	2.27	2.25	2.22
3 000 000	2.86	2.80	2.74	2.69	2.64	2.60	2.56	2.52	2.48	2.44	2.41	2.38	2.34	2.31	2.29
3 500 000	2.93	2.87	2.81	2.76	2.71	2.67	2.62	2.58	2.54	2.51	2.47	2.44	2.41	2.38	2.35
4 000 000	2.99	2.93	2.88	2.82	2.77	2.73	2.68	2.64	2.60	2.56	2.53	2.49	2.46	2.43	2.40
4 500 000	3.05	2.99	2.93	2.88	2.83	2.78	2.73	2.69	2.65	2.61	2.58	2.54	2.51	2.48	2.45
5 000 000	3.11	3.04	2.98	2.93	2.88	2.83	2.78	2.74	2.70	2.66	2.62	2.59	2.55	2.52	2.49
6 000 000	3.20	3.14	3.08	3.02	2.97	2.91	2.87	2.82	2.78	2.74	2.70	2.67	2.63	2.60	2.57
7 000 000	3.29	3.22	3.16	3.10	3.04	2.99	2.94	2.90	2.85	2.81	2.77	2.73	2.70	2.67	2.63
8 000 000	3.36	3.29	3.23	3.17	3.11	3.06	3.01	2.96	2.92	2.87	2.83	2.80	2.76	2.73	2.69
9 000 000	3.42	3.35	3.29	3.23	3.17	3.12	3.07	3.02	2.97	2.93	2.89	2.85	2.81	2.78	2.75
10 000 000	3.48	3.41	3.35	3.29	3.23	3.17	3.12	3.07	3.03	2.98	2.94	2.90	2.86	2.83	2.79
15 000 000	3.72	3.65	3.58	3.51	3.45	3.39	3.34	3.29	3.24	3.19	3.15	3.10	3.06	3.03	2.99
20 000 000	3.90	3.82	3.75	3.68	3.62	3.56	3.50	3.44	3.39	3.35	3.30	3.25	3.21	3.17	3.13
25 000 000	4.04	3.96	3.88	3.81	3.75	3.69	3.63	3.57	3.52	3.47	3.42	3.38	3.33	3.29	3.25
30 000 000	4.15	4.07	4.00	3.93	3.86	3.80	3.74	3.68	3.63	3.57	3.53	3.48	3.43	3.39	3.35
35 000 000	4.25	4.17	4.10	4.02	3.96	3.89	3.83	3.77	3.72	3.67	3.62	3.57	3.52	3.48	3.44
40 000 000	4.34	4.26	4.18	4.11	4.04	3.97	3.91	3.85	3.80	3.75	3.69	3.65	3.60	3.56	3.51
45 000 000	4.42	4.34	4.26	4.18	4.11	4.05	3.99	3.93	3.87	3.82	3.77	3.72	3.67	3.62	3.58
50 000 000	4.49	4.41	4.33	4.25	4.18	4.12	4.05	3.99	3.94	3.88	3.83	3.78	3.73	3.69	3.64
60 000 000	4.61	4.53	4.45	4.37	4.30	4.23	4.17	4.11	4.05	4.00	3.94	3.89	3.84	3.80	3.75
70 000 000	4.72	4.63	4.55	4.48	4.40	4.34	4.27	4.21	4.15	4.09	4.04	3.99	3.94	3.89	3.85
80 000 000	4.81	4.73	4.64	4.57	4.49	4.42	4.36	4.30	4.24	4.18	4.12	4.07	4.02	3.97	3.93
90 000 000	4.90	4.81	4.73	4.65	4.57	4.50	4.44	4.37	4.31	4.26	4.20	4.15	4.10	4.05	4.00
100 000 000	4.97	4.88	4.80	4.72	4.65	4.57	4.51	4.44	4.38	4.33	4.27	4.22	4.17	4.12	4.07

TABLE A.4A
REQUIRED STRUCTURAL NUMBER (SN_R)
90% RELIABILITY (%R)
RESILIENT MODULUS (M_R) RANGE 4,000 PSI TO 18,000 PSI
RESILIENT MODULUS (M_R), (PSI x 1000)

ESAL _D	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
100 000	3.02	2.77	2.59	2.44	2.31	2.21	2.12	2.04	1.97	1.91	1.86	1.81	1.76	1.72	1.68
150 000	3.23	2.97	2.77	2.61	2.47	2.36	2.27	2.19	2.11	2.05	1.99	1.94	1.89	1.84	1.80
200 000	3.39	3.11	2.90	2.73	2.60	2.48	2.38	2.30	2.22	2.15	2.09	2.03	1.98	1.94	1.89
250 000	3.52	3.23	3.01	2.84	2.69	2.57	2.47	2.38	2.30	2.23	2.17	2.11	2.06	2.01	1.97
300 000	3.62	3.33	3.10	2.92	2.78	2.65	2.55	2.46	2.37	2.30	2.24	2.18	2.12	2.07	2.03
350 000	3.71	3.41	3.18	3.00	2.85	2.72	2.61	2.52	2.44	2.36	2.30	2.23	2.18	2.13	2.08
400 000	3.79	3.49	3.25	3.07	2.91	2.78	2.67	2.58	2.49	2.42	2.35	2.29	2.23	2.18	2.13
450 000	3.87	3.56	3.32	3.13	2.97	2.84	2.73	2.63	2.54	2.46	2.39	2.33	2.27	2.22	2.17
500 000	3.93	3.62	3.38	3.18	3.02	2.89	2.77	2.67	2.59	2.51	2.44	2.37	2.31	2.26	2.21
600 000	4.05	3.73	3.48	3.28	3.12	2.98	2.86	2.76	2.67	2.58	2.51	2.45	2.39	2.33	2.28
700 000	4.14	3.82	3.57	3.36	3.20	3.05	2.93	2.83	2.73	2.65	2.58	2.51	2.45	2.39	2.34
800 000	4.23	3.90	3.64	3.44	3.27	3.12	3.00	2.89	2.80	2.71	2.63	2.57	2.50	2.44	2.39
900 000	4.31	3.97	3.71	3.51	3.33	3.18	3.06	2.95	2.85	2.76	2.69	2.62	2.55	2.49	2.44
1 000 000	4.38	4.04	3.78	3.57	3.39	3.24	3.11	3.00	2.90	2.81	2.73	2.66	2.60	2.54	2.48
1 500 000	4.65	4.30	4.03	3.81	3.62	3.46	3.33	3.21	3.10	3.01	2.92	2.85	2.78	2.71	2.65
2 000 000	4.85	4.50	4.21	3.99	3.79	3.63	3.49	3.36	3.25	3.16	3.07	2.99	2.91	2.85	2.78
2 500 000	5.01	4.65	4.36	4.13	3.93	3.76	3.62	3.49	3.38	3.27	3.18	3.10	3.02	2.95	2.89
3 000 000	5.14	4.77	4.48	4.25	4.05	3.88	3.73	3.60	3.48	3.37	3.28	3.19	3.12	3.04	2.98
3 500 000	5.25	4.88	4.59	4.35	4.14	3.97	3.82	3.69	3.57	3.46	3.36	3.28	3.20	3.12	3.06
4 000 000	5.35	4.98	4.68	4.44	4.23	4.06	3.90	3.77	3.65	3.54	3.44	3.35	3.27	3.19	3.12
4 500 000	5.44	5.06	4.76	4.52	4.31	4.13	3.98	3.84	3.72	3.61	3.51	3.42	3.33	3.26	3.19
5 000 000	5.52	5.14	4.83	4.59	4.38	4.20	4.04	3.90	3.78	3.67	3.57	3.47	3.39	3.31	3.24
6 000 000	5.66	5.27	4.96	4.71	4.50	4.32	4.16	4.02	3.89	3.78	3.67	3.58	3.49	3.41	3.34
7 000 000	5.78	5.38	5.07	4.82	4.61	4.42	4.26	4.12	3.99	3.87	3.77	3.67	3.58	3.50	3.43
8 000 000	5.88	5.48	5.17	4.91	4.70	4.51	4.35	4.20	4.07	3.95	3.85	3.75	3.66	3.58	3.50
9 000 000	5.97	5.57	5.26	5.00	4.78	4.59	4.43	4.28	4.15	4.03	3.92	3.82	3.73	3.65	3.57
10 000 000	6.06	5.65	5.33	5.07	4.85	4.66	4.50	4.35	4.22	4.10	3.99	3.89	3.79	3.71	3.63
15 000 000	6.39	5.97	5.64	5.37	5.14	4.95	4.77	4.62	4.48	4.36	4.25	4.14	4.05	3.96	3.88
20 000 000	6.63	6.20	5.86	5.59	5.35	5.15	4.98	4.82	4.68	4.55	4.44	4.33	4.23	4.14	4.06
25 000 000	6.82	6.38	6.04	5.76	5.52	5.32	5.14	4.98	4.84	4.71	4.59	4.48	4.38	4.29	4.20
30 000 000	6.98	6.53	6.18	5.90	5.66	5.45	5.27	5.11	4.96	4.83	4.71	4.60	4.50	4.41	4.32
35 000 000	7.12	6.66	6.31	6.02	5.78	5.57	5.38	5.22	5.07	4.94	4.82	4.71	4.61	4.51	4.42
40 000 000	7.24	6.78	6.42	6.13	5.88	5.67	5.48	5.32	5.17	5.04	4.91	4.80	4.70	4.60	4.51
45 000 000	7.34	6.88	6.52	6.22	5.97	5.76	5.57	5.41	5.26	5.12	5.00	4.88	4.78	4.68	4.59
50 000 000	7.44	6.97	6.61	6.31	6.06	5.84	5.65	5.49	5.34	5.20	5.07	4.96	4.85	4.76	4.66
60 000 000	7.61	7.13	6.76	6.46	6.21	5.99	5.79	5.62	5.47	5.33	5.21	5.09	4.98	4.88	4.79
70 000 000	7.76	7.27	6.90	6.59	6.33	6.11	5.91	5.74	5.59	5.45	5.32	5.20	5.09	4.99	4.90
80 000 000	7.88	7.40	7.01	6.70	6.44	6.22	6.02	5.85	5.69	5.55	5.42	5.30	5.19	5.09	4.99
90 000 000	8.00	7.51	7.12	6.80	6.54	6.31	6.11	5.94	5.78	5.64	5.51	5.39	5.28	5.17	5.08
100 000 000	8.10	7.60	7.21	6.90	6.63	6.40	6.20	6.02	5.86	5.72	5.59	5.47	5.35	5.25	5.15

TABLE A.4B
REQUIRED STRUCTURAL NUMBER (SN_R)
90% RELIABILITY (%R)
RESILIENT MODULUS (M_R) RANGE 18,000 PSI TO 32,000 PSI
RESILIENT MODULUS (M_R), (PSI x 1000)

ESAL _D	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
100 000	1.68	1.64	1.61	1.57	1.54	1.51	1.49	1.46	1.44	1.41	1.39	1.37	1.35	1.33	1.31
150 000	1.80	1.76	1.73	1.69	1.66	1.63	1.60	1.57	1.55	1.52	1.50	1.48	1.46	1.44	1.42
200 000	1.89	1.85	1.81	1.78	1.75	1.71	1.68	1.66	1.63	1.61	1.58	1.56	1.54	1.51	1.49
250 000	1.97	1.92	1.89	1.85	1.81	1.78	1.75	1.72	1.70	1.67	1.65	1.62	1.60	1.58	1.56
300 000	2.03	1.99	1.95	1.91	1.87	1.84	1.81	1.78	1.75	1.72	1.70	1.67	1.65	1.63	1.61
350 000	2.08	2.04	2.00	1.96	1.92	1.89	1.86	1.83	1.80	1.77	1.75	1.72	1.70	1.67	1.65
400 000	2.13	2.08	2.04	2.00	1.97	1.93	1.90	1.87	1.84	1.81	1.79	1.76	1.74	1.71	1.69
450 000	2.17	2.13	2.08	2.04	2.01	1.97	1.94	1.91	1.88	1.85	1.82	1.80	1.77	1.75	1.73
500 000	2.21	2.16	2.12	2.08	2.04	2.01	1.97	1.94	1.91	1.88	1.86	1.83	1.81	1.78	1.76
600 000	2.28	2.23	2.19	2.15	2.11	2.07	2.04	2.00	1.97	1.94	1.92	1.89	1.86	1.84	1.82
700 000	2.34	2.29	2.24	2.20	2.16	2.13	2.09	2.06	2.03	2.00	1.97	1.94	1.91	1.89	1.87
800 000	2.39	2.34	2.30	2.25	2.21	2.17	2.14	2.10	2.07	2.04	2.01	1.99	1.96	1.93	1.91
900 000	2.44	2.39	2.34	2.30	2.26	2.22	2.18	2.15	2.11	2.08	2.05	2.03	2.00	1.97	1.95
1 000 000	2.48	2.43	2.38	2.34	2.30	2.26	2.22	2.18	2.15	2.12	2.09	2.06	2.03	2.01	1.98
1 500 000	2.65	2.60	2.55	2.50	2.46	2.41	2.38	2.34	2.30	2.27	2.24	2.21	2.18	2.15	2.12
2 000 000	2.78	2.73	2.67	2.62	2.58	2.53	2.49	2.45	2.42	2.38	2.35	2.32	2.29	2.26	2.23
2 500 000	2.89	2.83	2.77	2.72	2.67	2.63	2.59	2.55	2.51	2.47	2.44	2.40	2.37	2.34	2.31
3 000 000	2.98	2.92	2.86	2.81	2.76	2.71	2.67	2.62	2.58	2.55	2.51	2.48	2.45	2.42	2.39
3 500 000	3.06	2.99	2.93	2.88	2.83	2.78	2.73	2.69	2.65	2.61	2.58	2.54	2.51	2.48	2.45
4 000 000	3.12	3.06	3.00	2.94	2.89	2.84	2.80	2.75	2.71	2.67	2.63	2.60	2.57	2.53	2.50
4 500 000	3.19	3.12	3.06	3.00	2.95	2.90	2.85	2.81	2.76	2.72	2.69	2.65	2.62	2.58	2.55
5 000 000	3.24	3.17	3.11	3.05	3.00	2.95	2.90	2.86	2.81	2.77	2.73	2.70	2.66	2.63	2.60
6 000 000	3.34	3.27	3.21	3.15	3.09	3.04	2.99	2.94	2.90	2.86	2.82	2.78	2.74	2.71	2.68
7 000 000	3.43	3.36	3.29	3.23	3.17	3.12	3.07	3.02	2.98	2.93	2.89	2.85	2.82	2.78	2.75
8 000 000	3.50	3.43	3.36	3.30	3.24	3.19	3.14	3.09	3.04	3.00	2.96	2.92	2.88	2.84	2.81
9 000 000	3.57	3.50	3.43	3.37	3.31	3.25	3.20	3.15	3.10	3.06	3.01	2.97	2.94	2.90	2.86
10 000 000	3.63	3.56	3.49	3.43	3.37	3.31	3.25	3.20	3.16	3.11	3.07	3.03	2.99	2.95	2.91
15 000 000	3.88	3.80	3.73	3.66	3.60	3.54	3.48	3.43	3.37	3.33	3.28	3.24	3.20	3.16	3.12
20 000 000	4.06	3.98	3.90	3.83	3.77	3.71	3.65	3.59	3.54	3.49	3.44	3.39	3.35	3.31	3.27
25 000 000	4.20	4.12	4.04	3.97	3.90	3.84	3.78	3.72	3.67	3.62	3.57	3.52	3.48	3.43	3.39
30 000 000	4.32	4.24	4.16	4.09	4.02	3.95	3.89	3.83	3.78	3.73	3.67	3.63	3.58	3.54	3.49
35 000 000	4.42	4.34	4.26	4.19	4.12	4.05	3.99	3.93	3.87	3.82	3.77	3.72	3.67	3.63	3.58
40 000 000	4.51	4.43	4.35	4.27	4.20	4.14	4.07	4.01	3.96	3.90	3.85	3.80	3.75	3.71	3.66
45 000 000	4.59	4.51	4.43	4.35	4.28	4.21	4.15	4.09	4.03	3.97	3.92	3.87	3.82	3.78	3.73
50 000 000	4.66	4.58	4.50	4.42	4.35	4.28	4.22	4.15	4.10	4.04	3.99	3.94	3.89	3.84	3.80
60 000 000	4.79	4.70	4.62	4.54	4.47	4.40	4.34	4.27	4.21	4.16	4.10	4.05	4.00	3.95	3.91
70 000 000	4.90	4.81	4.73	4.65	4.58	4.51	4.44	4.38	4.32	4.26	4.20	4.15	4.10	4.05	4.00
80 000 000	4.99	4.90	4.82	4.74	4.67	4.60	4.53	4.46	4.40	4.35	4.29	4.24	4.19	4.14	4.09
90 000 000	5.08	4.99	4.90	4.82	4.75	4.68	4.61	4.54	4.48	4.42	4.37	4.31	4.26	4.21	4.16
100 000 000	5.15	5.06	4.98	4.90	4.82	4.75	4.68	4.62	4.55	4.49	4.44	4.38	4.33	4.28	4.23

TABLE A.5A
REQUIRED STRUCTURAL NUMBER (SN_R)
92% RELIABILITY (%R)
RESILIENT MODULUS (M_R) RANGE 4,000 PSI TO 18,000 PSI
RESILIENT MODULUS (M_R), (PSI x 1000)

ESAL _D	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
100 000	3.09	2.83	2.64	2.49	2.36	2.26	2.17	2.09	2.02	1.95	1.90	1.85	1.80	1.76	1.72
150 000	3.30	3.03	2.82	2.66	2.53	2.42	2.32	2.23	2.16	2.09	2.03	1.98	1.93	1.88	1.84
200 000	3.46	3.18	2.96	2.79	2.65	2.53	2.43	2.35	2.27	2.20	2.14	2.08	2.03	1.98	1.93
250 000	3.59	3.30	3.07	2.90	2.75	2.63	2.53	2.43	2.35	2.28	2.22	2.16	2.10	2.05	2.01
300 000	3.70	3.40	3.17	2.99	2.84	2.71	2.60	2.51	2.43	2.35	2.29	2.23	2.17	2.12	2.07
350 000	3.79	3.48	3.25	3.06	2.91	2.78	2.67	2.57	2.49	2.41	2.35	2.28	2.23	2.17	2.13
400 000	3.87	3.56	3.32	3.13	2.98	2.84	2.73	2.63	2.55	2.47	2.40	2.33	2.28	2.22	2.18
450 000	3.94	3.63	3.39	3.19	3.03	2.90	2.78	2.68	2.60	2.52	2.45	2.38	2.32	2.27	2.22
500 000	4.01	3.69	3.45	3.25	3.09	2.95	2.83	2.73	2.64	2.56	2.49	2.42	2.36	2.31	2.26
600 000	4.13	3.80	3.55	3.35	3.18	3.04	2.92	2.82	2.72	2.64	2.57	2.50	2.44	2.38	2.33
700 000	4.23	3.90	3.64	3.44	3.26	3.12	3.00	2.89	2.79	2.71	2.63	2.56	2.50	2.44	2.39
800 000	4.31	3.98	3.72	3.51	3.34	3.19	3.06	2.95	2.86	2.77	2.69	2.62	2.56	2.50	2.44
900 000	4.39	4.06	3.79	3.58	3.40	3.25	3.12	3.01	2.91	2.82	2.74	2.67	2.61	2.55	2.49
1 000 000	4.46	4.12	3.86	3.64	3.46	3.31	3.18	3.06	2.96	2.87	2.79	2.72	2.65	2.59	2.53
1 500 000	4.74	4.39	4.11	3.89	3.70	3.54	3.40	3.28	3.17	3.07	2.99	2.91	2.84	2.77	2.71
2 000 000	4.94	4.58	4.30	4.07	3.87	3.71	3.56	3.44	3.32	3.22	3.13	3.05	2.98	2.91	2.84
2 500 000	5.10	4.74	4.45	4.21	4.01	3.84	3.69	3.56	3.45	3.34	3.25	3.17	3.09	3.02	2.95
3 000 000	5.23	4.86	4.57	4.33	4.13	3.95	3.80	3.67	3.55	3.45	3.35	3.26	3.18	3.11	3.04
3 500 000	5.35	4.97	4.68	4.43	4.23	4.05	3.90	3.76	3.64	3.53	3.44	3.35	3.27	3.19	3.12
4 000 000	5.45	5.07	4.77	4.52	4.32	4.14	3.98	3.84	3.72	3.61	3.51	3.42	3.34	3.26	3.19
4 500 000	5.54	5.15	4.85	4.60	4.39	4.21	4.06	3.92	3.79	3.68	3.58	3.49	3.40	3.33	3.25
5 000 000	5.62	5.23	4.92	4.67	4.46	4.28	4.12	3.98	3.86	3.74	3.64	3.55	3.46	3.38	3.31
6 000 000	5.76	5.36	5.06	4.80	4.59	4.40	4.24	4.10	3.97	3.86	3.75	3.65	3.57	3.49	3.41
7 000 000	5.88	5.48	5.17	4.91	4.69	4.51	4.34	4.20	4.07	3.95	3.84	3.75	3.66	3.57	3.50
8 000 000	5.98	5.58	5.26	5.00	4.79	4.60	4.43	4.29	4.15	4.03	3.93	3.83	3.74	3.65	3.58
9 000 000	6.08	5.67	5.35	5.09	4.87	4.68	4.51	4.36	4.23	4.11	4.00	3.90	3.81	3.72	3.64
10 000 000	6.16	5.75	5.43	5.17	4.94	4.75	4.58	4.43	4.30	4.18	4.07	3.97	3.87	3.79	3.71
15 000 000	6.49	6.07	5.74	5.47	5.24	5.04	4.86	4.71	4.57	4.45	4.33	4.23	4.13	4.04	3.96
20 000 000	6.74	6.30	5.96	5.68	5.45	5.25	5.07	4.91	4.77	4.64	4.52	4.42	4.32	4.22	4.14
25 000 000	6.93	6.49	6.14	5.86	5.62	5.41	5.23	5.07	4.93	4.80	4.68	4.57	4.46	4.37	4.28
30 000 000	7.09	6.64	6.29	6.00	5.76	5.55	5.37	5.20	5.06	4.92	4.80	4.69	4.59	4.49	4.40
35 000 000	7.23	6.77	6.42	6.12	5.88	5.67	5.48	5.32	5.17	5.03	4.91	4.80	4.69	4.60	4.51
40 000 000	7.35	6.89	6.53	6.23	5.98	5.77	5.58	5.41	5.27	5.13	5.01	4.89	4.79	4.69	4.60
45 000 000	7.46	6.99	6.63	6.33	6.08	5.86	5.67	5.50	5.35	5.22	5.09	4.98	4.87	4.77	4.68
50 000 000	7.56	7.09	6.72	6.41	6.16	5.94	5.75	5.58	5.43	5.29	5.17	5.05	4.94	4.84	4.75
60 000 000	7.73	7.25	6.87	6.57	6.31	6.09	5.89	5.72	5.57	5.43	5.30	5.18	5.07	4.97	4.88
70 000 000	7.88	7.39	7.01	6.70	6.44	6.21	6.02	5.84	5.69	5.54	5.41	5.30	5.19	5.08	4.99
80 000 000	8.01	7.51	7.13	6.81	6.55	6.32	6.12	5.95	5.79	5.65	5.51	5.39	5.28	5.18	5.08
90 000 000	8.13	7.63	7.23	6.92	6.65	6.42	6.22	6.04	5.88	5.74	5.60	5.48	5.37	5.27	5.17
100 000 000	8.23	7.73	7.33	7.01	6.74	6.51	6.30	6.12	5.96	5.82	5.68	5.56	5.45	5.34	5.25

TABLE A.5B
REQUIRED STRUCTURAL NUMBER (SN_R)
92% RELIABILITY (%R)
RESILIENT MODULUS (M_R) RANGE 18,000 PSI TO 32,000 PSI
RESILIENT MODULUS (M_R), (PSI x 1000)

ESAL _D	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
100 000	1.72	1.68	1.64	1.61	1.58	1.55	1.52	1.50	1.47	1.45	1.43	1.40	1.38	1.36	1.35
150 000	1.84	1.80	1.76	1.73	1.70	1.67	1.64	1.61	1.58	1.56	1.54	1.51	1.49	1.47	1.45
200 000	1.93	1.89	1.85	1.82	1.79	1.75	1.72	1.69	1.67	1.64	1.62	1.59	1.57	1.55	1.53
250 000	2.01	1.97	1.93	1.89	1.86	1.82	1.79	1.76	1.73	1.71	1.68	1.66	1.64	1.61	1.59
300 000	2.07	2.03	1.99	1.95	1.91	1.88	1.85	1.82	1.79	1.76	1.74	1.71	1.69	1.67	1.65
350 000	2.13	2.08	2.04	2.00	1.97	1.93	1.90	1.87	1.84	1.81	1.79	1.76	1.74	1.71	1.69
400 000	2.18	2.13	2.09	2.05	2.01	1.98	1.94	1.91	1.88	1.85	1.83	1.80	1.78	1.75	1.73
450 000	2.22	2.17	2.13	2.09	2.05	2.02	1.98	1.95	1.92	1.89	1.86	1.84	1.81	1.79	1.77
500 000	2.26	2.21	2.17	2.13	2.09	2.05	2.02	1.99	1.96	1.93	1.90	1.87	1.85	1.82	1.80
600 000	2.33	2.28	2.23	2.19	2.15	2.12	2.08	2.05	2.02	1.99	1.96	1.93	1.91	1.88	1.86
700 000	2.39	2.34	2.29	2.25	2.21	2.17	2.14	2.10	2.07	2.04	2.01	1.98	1.96	1.93	1.91
800 000	2.44	2.39	2.34	2.30	2.26	2.22	2.18	2.15	2.12	2.09	2.06	2.03	2.00	1.98	1.95
900 000	2.49	2.44	2.39	2.35	2.30	2.27	2.23	2.19	2.16	2.13	2.10	2.07	2.04	2.02	1.99
1 000 000	2.53	2.48	2.43	2.39	2.35	2.31	2.27	2.23	2.20	2.17	2.14	2.11	2.08	2.05	2.03
1 500 000	2.71	2.66	2.60	2.55	2.51	2.47	2.43	2.39	2.35	2.32	2.29	2.26	2.23	2.20	2.17
2 000 000	2.84	2.79	2.73	2.68	2.63	2.59	2.55	2.51	2.47	2.43	2.40	2.37	2.34	2.31	2.28
2 500 000	2.95	2.89	2.83	2.78	2.73	2.69	2.64	2.60	2.56	2.52	2.49	2.46	2.42	2.39	2.36
3 000 000	3.04	2.98	2.92	2.87	2.82	2.77	2.72	2.68	2.64	2.60	2.57	2.53	2.50	2.47	2.44
3 500 000	3.12	3.06	3.00	2.94	2.89	2.84	2.79	2.75	2.71	2.67	2.63	2.60	2.56	2.53	2.50
4 000 000	3.19	3.13	3.06	3.01	2.95	2.90	2.86	2.81	2.77	2.73	2.69	2.66	2.62	2.59	2.56
4 500 000	3.25	3.19	3.12	3.07	3.01	2.96	2.91	2.87	2.82	2.78	2.74	2.71	2.67	2.64	2.61
5 000 000	3.31	3.24	3.18	3.12	3.07	3.01	2.96	2.92	2.87	2.83	2.79	2.76	2.72	2.69	2.65
6 000 000	3.41	3.34	3.28	3.22	3.16	3.11	3.06	3.01	2.96	2.92	2.88	2.84	2.80	2.77	2.73
7 000 000	3.50	3.43	3.36	3.30	3.24	3.19	3.13	3.09	3.04	3.00	2.95	2.91	2.88	2.84	2.81
8 000 000	3.58	3.50	3.44	3.37	3.31	3.26	3.20	3.15	3.11	3.06	3.02	2.98	2.94	2.90	2.87
9 000 000	3.64	3.57	3.50	3.44	3.38	3.32	3.27	3.22	3.17	3.12	3.08	3.04	3.00	2.96	2.93
10 000 000	3.71	3.63	3.56	3.50	3.44	3.38	3.32	3.27	3.22	3.18	3.13	3.09	3.05	3.01	2.98
15 000 000	3.96	3.88	3.80	3.74	3.67	3.61	3.55	3.50	3.45	3.40	3.35	3.31	3.26	3.22	3.18
20 000 000	4.14	4.06	3.98	3.91	3.85	3.78	3.72	3.67	3.61	3.56	3.51	3.47	3.42	3.38	3.34
25 000 000	4.28	4.20	4.12	4.05	3.98	3.92	3.86	3.80	3.75	3.69	3.64	3.59	3.55	3.51	3.46
30 000 000	4.40	4.32	4.24	4.17	4.10	4.03	3.97	3.91	3.86	3.80	3.75	3.70	3.66	3.61	3.57
35 000 000	4.51	4.42	4.34	4.27	4.20	4.13	4.07	4.01	3.95	3.90	3.85	3.80	3.75	3.70	3.66
40 000 000	4.60	4.51	4.43	4.36	4.29	4.22	4.15	4.09	4.04	3.98	3.93	3.88	3.83	3.78	3.74
45 000 000	4.75	4.67	4.58	4.51	4.43	4.37	4.30	4.24	4.18	4.12	4.07	4.02	3.97	3.92	3.87
50 000 000	4.88	4.79	4.71	4.63	4.56	4.49	4.42	4.36	4.30	4.24	4.19	4.13	4.08	4.03	3.99
60 000 000	4.99	4.90	4.82	4.74	4.66	4.59	4.52	4.46	4.40	4.34	4.29	4.23	4.18	4.13	4.09
70 000 000	5.08	4.99	4.91	4.83	4.76	4.68	4.62	4.55	4.49	4.43	4.37	4.32	4.27	4.22	4.17
80 000 000	5.17	5.08	4.99	4.91	4.84	4.77	4.70	4.63	4.57	4.51	4.45	4.40	4.35	4.30	4.25
90 000 000	5.25	5.16	5.07	4.99	4.91	4.84	4.77	4.70	4.64	4.58	4.52	4.47	4.42	4.37	4.32
100 000 000	5.32	5.23	5.14	5.06	4.98	4.91	4.84	4.77	4.71	4.65	4.59	4.53	4.48	4.43	4.38

TABLE A.6A
REQUIRED STRUCTURAL NUMBER (SN_R)
94% RELIABILITY (%R)
RESILIENT MODULUS (M_R) RANGE 4,000 PSI TO 18,000 PSI
RESILIENT MODULUS (M_R), (PSI x 1000)

ESAL _D	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
100 000	3.17	2.91	2.71	2.55	2.42	2.32	2.22	2.14	2.07	2.01	1.95	1.90	1.85	1.80	1.76
150 000	3.39	3.11	2.90	2.73	2.59	2.48	2.38	2.29	2.22	2.15	2.09	2.03	1.98	1.93	1.89
200 000	3.55	3.26	3.04	2.86	2.72	2.60	2.50	2.41	2.33	2.26	2.19	2.13	2.08	2.03	1.99
250 000	3.68	3.38	3.15	2.97	2.82	2.70	2.59	2.50	2.42	2.34	2.28	2.21	2.16	2.11	2.06
300 000	3.79	3.49	3.25	3.06	2.91	2.78	2.67	2.57	2.49	2.41	2.35	2.28	2.23	2.18	2.13
350 000	3.88	3.57	3.33	3.14	2.99	2.85	2.74	2.64	2.55	2.48	2.41	2.34	2.29	2.23	2.18
400 000	3.97	3.65	3.41	3.21	3.05	2.92	2.80	2.70	2.61	2.53	2.46	2.40	2.34	2.28	2.23
450 000	4.04	3.72	3.48	3.28	3.11	2.98	2.86	2.75	2.66	2.58	2.51	2.44	2.38	2.33	2.28
500 000	4.11	3.79	3.54	3.33	3.17	3.03	2.91	2.80	2.71	2.63	2.55	2.49	2.43	2.37	2.32
600 000	4.23	3.90	3.64	3.44	3.26	3.12	3.00	2.89	2.79	2.71	2.63	2.56	2.50	2.44	2.39
700 000	4.33	3.99	3.73	3.52	3.35	3.20	3.07	2.96	2.87	2.78	2.70	2.63	2.57	2.51	2.45
800 000	4.42	4.08	3.81	3.60	3.42	3.27	3.14	3.03	2.93	2.84	2.76	2.69	2.62	2.56	2.51
900 000	4.50	4.15	3.89	3.67	3.49	3.34	3.20	3.09	2.99	2.90	2.82	2.74	2.67	2.61	2.56
1 000 000	4.57	4.22	3.95	3.73	3.55	3.40	3.26	3.14	3.04	2.95	2.87	2.79	2.72	2.66	2.60
1 500 000	4.85	4.49	4.21	3.98	3.79	3.63	3.49	3.36	3.25	3.15	3.06	2.98	2.91	2.84	2.78
2 000 000	5.05	4.69	4.40	4.17	3.97	3.80	3.65	3.52	3.41	3.31	3.21	3.13	3.05	2.98	2.92
2 500 000	5.21	4.84	4.55	4.31	4.11	3.94	3.79	3.65	3.54	3.43	3.33	3.25	3.17	3.10	3.03
3 000 000	5.35	4.97	4.68	4.43	4.23	4.05	3.90	3.76	3.64	3.53	3.44	3.35	3.27	3.19	3.12
3 500 000	5.46	5.08	4.78	4.54	4.33	4.15	4.00	3.86	3.73	3.62	3.52	3.43	3.35	3.27	3.20
4 000 000	5.56	5.18	4.88	4.63	4.42	4.24	4.08	3.94	3.82	3.70	3.60	3.51	3.42	3.35	3.27
4 500 000	5.65	5.27	4.96	4.71	4.50	4.32	4.16	4.01	3.89	3.77	3.67	3.58	3.49	3.41	3.34
5 000 000	5.74	5.34	5.04	4.78	4.57	4.38	4.22	4.08	3.95	3.84	3.73	3.64	3.55	3.47	3.40
6 000 000	5.88	5.48	5.17	4.91	4.69	4.51	4.34	4.20	4.07	3.95	3.85	3.75	3.66	3.58	3.50
7 000 000	6.00	5.60	5.28	5.02	4.80	4.61	4.45	4.30	4.17	4.05	3.94	3.84	3.75	3.67	3.59
8 000 000	6.11	5.70	5.38	5.12	4.90	4.70	4.54	4.39	4.25	4.13	4.02	3.92	3.83	3.75	3.67
9 000 000	6.20	5.79	5.47	5.20	4.98	4.79	4.62	4.47	4.33	4.21	4.10	4.00	3.90	3.82	3.74
10 000 000	6.29	5.87	5.55	5.28	5.05	4.86	4.69	4.54	4.40	4.28	4.17	4.06	3.97	3.88	3.80
15 000 000	6.62	6.19	5.86	5.58	5.35	5.15	4.97	4.82	4.68	4.55	4.43	4.33	4.23	4.14	4.05
20 000 000	6.87	6.43	6.09	5.80	5.57	5.36	5.18	5.02	4.88	4.75	4.63	4.52	4.42	4.33	4.24
25 000 000	7.07	6.62	6.27	5.98	5.74	5.53	5.34	5.18	5.04	4.90	4.78	4.67	4.57	4.47	4.39
30 000 000	7.23	6.77	6.42	6.12	5.88	5.67	5.48	5.32	5.17	5.03	4.91	4.80	4.69	4.60	4.51
35 000 000	7.37	6.91	6.55	6.25	6.00	5.79	5.60	5.43	5.28	5.15	5.02	4.91	4.80	4.70	4.61
40 000 000	7.50	7.03	6.66	6.36	6.11	5.89	5.70	5.53	5.38	5.24	5.12	5.00	4.90	4.80	4.70
45 000 000	7.61	7.13	6.76	6.46	6.20	5.98	5.79	5.62	5.47	5.33	5.20	5.09	4.98	4.88	4.79
50 000 000	7.71	7.23	6.85	6.54	6.29	6.07	5.87	5.70	5.55	5.41	5.28	5.16	5.05	4.95	4.86
60 000 000	7.88	7.39	7.01	6.70	6.44	6.21	6.02	5.84	5.69	5.54	5.42	5.30	5.19	5.08	4.99
70 000 000	8.03	7.53	7.15	6.83	6.57	6.34	6.14	5.96	5.81	5.66	5.53	5.41	5.30	5.20	5.10
80 000 000	8.16	7.66	7.27	6.95	6.68	6.45	6.25	6.07	5.91	5.76	5.63	5.51	5.40	5.29	5.20
90 000 000	8.28	7.77	7.38	7.05	6.78	6.55	6.35	6.16	6.00	5.86	5.72	5.60	5.49	5.38	5.28
100 000 000	8.39	7.87	7.47	7.15	6.87	6.64	6.43	6.25	6.09	5.94	5.80	5.68	5.57	5.46	5.36

TABLE A.6B
REQUIRED STRUCTURAL NUMBER (SN_R)
94% RELIABILITY (%R)
RESILIENT MODULUS (M_R) RANGE 18,000 PSI TO 32,000 PSI
RESILIENT MODULUS (M_R), (PSI x 1000)

ESAL _D	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
100 000	1.76	1.72	1.69	1.66	1.62	1.59	1.57	1.54	1.51	1.49	1.47	1.45	1.42	1.40	1.39
150 000	1.89	1.85	1.81	1.78	1.74	1.71	1.68	1.66	1.63	1.60	1.58	1.56	1.53	1.51	1.49
200 000	1.99	1.94	1.90	1.87	1.83	1.80	1.77	1.74	1.71	1.69	1.66	1.64	1.62	1.59	1.57
250 000	2.06	2.02	1.98	1.94	1.91	1.87	1.84	1.81	1.78	1.76	1.73	1.70	1.68	1.66	1.64
300 000	2.13	2.08	2.04	2.00	1.97	1.93	1.90	1.87	1.84	1.81	1.79	1.76	1.74	1.71	1.69
350 000	2.18	2.14	2.10	2.06	2.02	1.98	1.95	1.92	1.89	1.86	1.83	1.81	1.78	1.76	1.74
400 000	2.23	2.19	2.14	2.10	2.06	2.03	1.99	1.96	1.93	1.90	1.88	1.85	1.83	1.80	1.78
450 000	2.28	2.23	2.19	2.14	2.11	2.07	2.04	2.00	1.97	1.94	1.91	1.89	1.86	1.84	1.82
500 000	2.32	2.27	2.22	2.18	2.14	2.11	2.07	2.04	2.01	1.98	1.95	1.92	1.90	1.87	1.85
600 000	2.39	2.34	2.29	2.25	2.21	2.17	2.14	2.10	2.07	2.04	2.01	1.98	1.96	1.93	1.91
700 000	2.45	2.40	2.35	2.31	2.27	2.23	2.19	2.16	2.13	2.09	2.06	2.04	2.01	1.98	1.96
800 000	2.51	2.45	2.41	2.36	2.32	2.28	2.24	2.21	2.17	2.14	2.11	2.08	2.06	2.03	2.00
900 000	2.56	2.50	2.45	2.41	2.37	2.32	2.29	2.25	2.22	2.18	2.15	2.12	2.10	2.07	2.04
1 000 000	2.60	2.55	2.50	2.45	2.41	2.37	2.33	2.29	2.26	2.22	2.19	2.16	2.13	2.11	2.08
1 500 000	2.78	2.72	2.67	2.62	2.58	2.53	2.49	2.45	2.41	2.38	2.35	2.31	2.28	2.26	2.23
2 000 000	2.92	2.86	2.80	2.75	2.70	2.66	2.61	2.57	2.53	2.50	2.46	2.43	2.40	2.37	2.34
2 500 000	3.03	2.97	2.91	2.85	2.80	2.76	2.71	2.67	2.63	2.59	2.55	2.52	2.49	2.46	2.43
3 000 000	3.12	3.06	3.00	2.94	2.89	2.84	2.79	2.75	2.71	2.67	2.63	2.60	2.56	2.53	2.50
3 500 000	3.20	3.14	3.07	3.02	2.96	2.91	2.87	2.82	2.78	2.74	2.70	2.66	2.63	2.60	2.57
4 000 000	3.27	3.21	3.14	3.09	3.03	2.98	2.93	2.89	2.84	2.80	2.76	2.72	2.69	2.66	2.62
4 500 000	3.34	3.27	3.21	3.15	3.09	3.04	2.99	2.94	2.90	2.86	2.82	2.78	2.74	2.71	2.68
5 000 000	3.40	3.33	3.26	3.20	3.14	3.09	3.04	2.99	2.95	2.91	2.87	2.83	2.79	2.76	2.72
6 000 000	3.50	3.43	3.36	3.30	3.24	3.19	3.13	3.09	3.04	3.00	2.95	2.91	2.88	2.84	2.81
7 000 000	3.59	3.52	3.45	3.38	3.32	3.27	3.22	3.17	3.12	3.07	3.03	2.99	2.95	2.91	2.88
8 000 000	3.67	3.59	3.52	3.46	3.40	3.34	3.29	3.24	3.19	3.14	3.10	3.06	3.02	2.98	2.94
9 000 000	3.74	3.66	3.59	3.53	3.46	3.41	3.35	3.30	3.25	3.20	3.16	3.12	3.08	3.04	3.00
10 000 000	3.80	3.73	3.65	3.59	3.52	3.47	3.41	3.36	3.31	3.26	3.22	3.17	3.13	3.09	3.05
15 000 000	4.05	3.97	3.90	3.83	3.76	3.70	3.64	3.59	3.54	3.48	3.44	3.39	3.35	3.31	3.27
20 000 000	4.24	4.16	4.08	4.01	3.94	3.88	3.82	3.76	3.70	3.65	3.60	3.56	3.51	3.47	3.42
25 000 000	4.39	4.30	4.22	4.15	4.08	4.02	3.95	3.90	3.84	3.79	3.74	3.69	3.64	3.59	3.55
30 000 000	4.51	4.42	4.34	4.27	4.20	4.13	4.07	4.01	3.95	3.90	3.85	3.80	3.75	3.70	3.66
35 000 000	4.61	4.53	4.45	4.37	4.30	4.23	4.17	4.11	4.05	3.99	3.94	3.89	3.84	3.80	3.75
40 000 000	4.70	4.62	4.54	4.46	4.39	4.32	4.26	4.19	4.13	4.08	4.03	3.97	3.92	3.88	3.83
45 000 000	4.79	4.70	4.62	4.54	4.47	4.40	4.33	4.27	4.21	4.15	4.10	4.05	4.00	3.95	3.90
50 000 000	4.86	4.77	4.69	4.61	4.54	4.47	4.40	4.34	4.28	4.22	4.17	4.12	4.07	4.02	3.97
60 000 000	4.99	4.90	4.82	4.74	4.66	4.59	4.53	4.46	4.40	4.34	4.29	4.23	4.18	4.13	4.09
70 000 000	5.10	5.01	4.93	4.85	4.77	4.70	4.63	4.57	4.50	4.45	4.39	4.33	4.28	4.23	4.19
80 000 000	5.20	5.11	5.02	4.94	4.86	4.79	4.72	4.66	4.60	4.54	4.48	4.42	4.37	4.32	4.27
90 000 000	5.28	5.19	5.11	5.02	4.95	4.87	4.80	4.74	4.68	4.62	4.56	4.50	4.45	4.40	4.35
100 000 000	5.36	5.27	5.18	5.10	5.02	4.95	4.88	4.81	4.75	4.69	4.63	4.57	4.52	4.47	4.42

TABLE A.7A
REQUIRED STRUCTURAL NUMBER (SN_R)
95% RELIABILITY (%R)
RESILIENT MODULUS (M_R) RANGE 4,000 PSI TO 18,000 PSI
RESILIENT MODULUS (M_R), (PSI x 1000)

ESAL _D	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
100 000	3.22	2.95	2.75	2.59	2.46	2.35	2.26	2.18	2.10	2.04	1.98	1.93	1.88	1.83	1.79
150 000	3.44	3.16	2.94	2.77	2.63	2.52	2.42	2.33	2.25	2.18	2.12	2.06	2.01	1.97	1.92
200 000	3.60	3.31	3.09	2.91	2.76	2.64	2.54	2.44	2.36	2.29	2.23	2.17	2.11	2.06	2.02
250 000	3.74	3.43	3.20	3.02	2.87	2.74	2.63	2.54	2.45	2.38	2.31	2.25	2.19	2.14	2.10
300 000	3.85	3.54	3.30	3.11	2.96	2.83	2.71	2.61	2.53	2.45	2.38	2.32	2.26	2.21	2.16
350 000	3.94	3.63	3.39	3.19	3.03	2.90	2.78	2.68	2.59	2.52	2.44	2.38	2.32	2.27	2.22
400 000	4.03	3.71	3.46	3.26	3.10	2.96	2.85	2.74	2.65	2.57	2.50	2.43	2.37	2.32	2.27
450 000	4.10	3.78	3.53	3.33	3.16	3.02	2.90	2.80	2.70	2.62	2.55	2.48	2.42	2.36	2.31
500 000	4.17	3.84	3.59	3.39	3.22	3.07	2.95	2.85	2.75	2.67	2.59	2.53	2.46	2.41	2.35
600 000	4.29	3.96	3.70	3.49	3.32	3.17	3.04	2.93	2.84	2.75	2.67	2.60	2.54	2.48	2.43
700 000	4.39	4.05	3.79	3.58	3.40	3.25	3.12	3.01	2.91	2.82	2.74	2.67	2.61	2.55	2.49
800 000	4.48	4.14	3.87	3.66	3.48	3.32	3.19	3.08	2.98	2.89	2.80	2.73	2.66	2.60	2.55
900 000	4.56	4.22	3.95	3.73	3.54	3.39	3.25	3.14	3.03	2.94	2.86	2.78	2.72	2.65	2.60
1 000 000	4.63	4.28	4.01	3.79	3.60	3.45	3.31	3.19	3.09	2.99	2.91	2.83	2.76	2.70	2.64
1 500 000	4.91	4.56	4.27	4.04	3.85	3.68	3.54	3.41	3.30	3.20	3.11	3.03	2.96	2.89	2.83
2 000 000	5.12	4.75	4.46	4.23	4.03	3.86	3.71	3.58	3.46	3.36	3.26	3.18	3.10	3.03	2.96
2 500 000	5.28	4.91	4.62	4.37	4.17	4.00	3.84	3.71	3.59	3.48	3.39	3.30	3.22	3.14	3.08
3 000 000	5.42	5.04	4.74	4.50	4.29	4.11	3.96	3.82	3.70	3.59	3.49	3.40	3.32	3.24	3.17
3 500 000	5.53	5.15	4.85	4.60	4.39	4.21	4.05	3.92	3.79	3.68	3.58	3.49	3.40	3.32	3.25
4 000 000	5.64	5.25	4.94	4.69	4.48	4.30	4.14	4.00	3.87	3.76	3.66	3.56	3.48	3.40	3.32
4 500 000	5.73	5.33	5.03	4.77	4.56	4.38	4.22	4.07	3.95	3.83	3.73	3.63	3.54	3.46	3.39
5 000 000	5.81	5.41	5.10	4.85	4.63	4.45	4.28	4.14	4.01	3.90	3.79	3.69	3.61	3.52	3.45
6 000 000	5.95	5.55	5.24	4.98	4.76	4.57	4.41	4.26	4.13	4.01	3.90	3.80	3.71	3.63	3.55
7 000 000	6.07	5.67	5.35	5.09	4.87	4.68	4.51	4.36	4.23	4.11	4.00	3.90	3.81	3.72	3.64
8 000 000	6.18	5.77	5.45	5.18	4.96	4.77	4.60	4.45	4.32	4.19	4.08	3.98	3.89	3.80	3.72
9 000 000	6.28	5.86	5.54	5.27	5.05	4.85	4.68	4.53	4.39	4.27	4.16	4.06	3.96	3.87	3.79
10 000 000	6.36	5.95	5.62	5.35	5.12	4.93	4.75	4.60	4.46	4.34	4.23	4.12	4.03	3.94	3.86
15 000 000	6.70	6.27	5.93	5.65	5.42	5.22	5.04	4.88	4.74	4.61	4.50	4.39	4.29	4.20	4.11
20 000 000	6.95	6.51	6.16	5.88	5.64	5.43	5.25	5.09	4.94	4.81	4.69	4.58	4.48	4.39	4.30
25 000 000	7.15	6.70	6.34	6.05	5.81	5.60	5.41	5.25	5.10	4.97	4.85	4.74	4.63	4.54	4.45
30 000 000	7.32	6.86	6.49	6.20	5.95	5.74	5.55	5.39	5.24	5.10	4.98	4.86	4.76	4.66	4.57
35 000 000	7.46	6.99	6.62	6.33	6.07	5.86	5.67	5.50	5.35	5.21	5.09	4.97	4.87	4.77	4.68
40 000 000	7.58	7.11	6.74	6.44	6.18	5.96	5.77	5.60	5.45	5.31	5.19	5.07	4.96	4.86	4.77
45 000 000	7.69	7.21	6.84	6.53	6.28	6.06	5.86	5.69	5.54	5.40	5.27	5.15	5.05	4.95	4.85
50 000 000	7.79	7.31	6.93	6.62	6.36	6.14	5.95	5.77	5.62	5.48	5.35	5.23	5.12	5.02	4.93
60 000 000	7.97	7.48	7.09	6.78	6.52	6.29	6.09	5.92	5.76	5.62	5.49	5.37	5.26	5.15	5.06
70 000 000	8.12	7.62	7.23	6.91	6.65	6.42	6.22	6.04	5.88	5.73	5.60	5.48	5.37	5.27	5.17
80 000 000	8.26	7.75	7.35	7.03	6.76	6.53	6.32	6.14	5.98	5.84	5.70	5.58	5.47	5.36	5.27
90 000 000	8.38	7.86	7.46	7.14	6.86	6.63	6.42	6.24	6.08	5.93	5.80	5.67	5.56	5.45	5.35
100 000 000	8.48	7.96	7.56	7.23	6.95	6.72	6.51	6.33	6.16	6.01	5.88	5.75	5.64	5.53	5.43

TABLE A.7B

**REQUIRED STRUCTURAL NUMBER (SN_R)
95% RELIABILITY (%R)
RESILIENT MODULUS (M_R) RANGE 18,000 PSI TO 32,000 PSI**

RESILIENT MODULUS (M_R), (PSI x 1000)

ESAL _D	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
100 000	1.79	1.75	1.72	1.68	1.65	1.62	1.59	1.57	1.54	1.52	1.49	1.47	1.45	1.43	1.41
150 000	1.92	1.88	1.84	1.81	1.77	1.74	1.71	1.68	1.66	1.63	1.61	1.58	1.56	1.54	1.52
200 000	2.02	1.98	1.94	1.90	1.86	1.83	1.80	1.77	1.74	1.72	1.69	1.67	1.64	1.62	1.60
250 000	2.10	2.05	2.01	1.97	1.94	1.90	1.87	1.84	1.81	1.78	1.76	1.73	1.71	1.69	1.66
300 000	2.16	2.12	2.07	2.03	2.00	1.96	1.93	1.90	1.87	1.84	1.81	1.79	1.76	1.74	1.72
350 000	2.22	2.17	2.13	2.09	2.05	2.01	1.98	1.95	1.92	1.89	1.86	1.84	1.81	1.79	1.77
400 000	2.27	2.22	2.18	2.14	2.10	2.06	2.03	1.99	1.96	1.93	1.91	1.88	1.86	1.83	1.81
450 000	2.31	2.26	2.22	2.18	2.14	2.10	2.07	2.03	2.00	1.97	1.95	1.92	1.89	1.87	1.84
500 000	2.35	2.30	2.26	2.22	2.18	2.14	2.10	2.07	2.04	2.01	1.98	1.95	1.93	1.90	1.88
600 000	2.43	2.38	2.33	2.29	2.24	2.21	2.17	2.14	2.10	2.07	2.04	2.02	1.99	1.96	1.94
700 000	2.49	2.44	2.39	2.35	2.30	2.26	2.23	2.19	2.16	2.13	2.10	2.07	2.04	2.01	1.99
800 000	2.55	2.49	2.44	2.40	2.36	2.32	2.28	2.24	2.21	2.18	2.14	2.12	2.09	2.06	2.04
900 000	2.60	2.54	2.49	2.45	2.40	2.36	2.32	2.29	2.25	2.22	2.19	2.16	2.13	2.10	2.08
1 000 000	2.64	2.59	2.54	2.49	2.44	2.40	2.36	2.33	2.29	2.26	2.23	2.20	2.17	2.14	2.11
1 500 000	2.83	2.77	2.71	2.66	2.62	2.57	2.53	2.49	2.45	2.42	2.38	2.35	2.32	2.29	2.26
2 000 000	2.96	2.90	2.85	2.79	2.74	2.70	2.65	2.61	2.57	2.54	2.50	2.47	2.43	2.40	2.37
2 500 000	3.08	3.01	2.95	2.90	2.85	2.80	2.75	2.71	2.67	2.63	2.59	2.56	2.53	2.49	2.46
3 000 000	3.17	3.10	3.04	2.99	2.93	2.88	2.84	2.79	2.75	2.71	2.67	2.64	2.60	2.57	2.54
3 500 000	3.25	3.19	3.12	3.06	3.01	2.96	2.91	2.87	2.82	2.78	2.74	2.71	2.67	2.64	2.61
4 000 000	3.32	3.26	3.19	3.13	3.08	3.03	2.98	2.93	2.89	2.84	2.80	2.77	2.73	2.70	2.66
4 500 000	3.39	3.32	3.26	3.20	3.14	3.09	3.04	2.99	2.94	2.90	2.86	2.82	2.79	2.75	2.72
5 000 000	3.45	3.38	3.31	3.25	3.19	3.14	3.09	3.04	3.00	2.95	2.91	2.87	2.83	2.80	2.76
6 000 000	3.55	3.48	3.41	3.35	3.29	3.24	3.18	3.13	3.09	3.04	3.00	2.96	2.92	2.88	2.85
7 000 000	3.64	3.57	3.50	3.44	3.38	3.32	3.27	3.21	3.17	3.12	3.08	3.04	3.00	2.96	2.92
8 000 000	3.72	3.65	3.58	3.51	3.45	3.39	3.34	3.29	3.24	3.19	3.15	3.10	3.06	3.03	2.99
9 000 000	3.79	3.72	3.65	3.58	3.52	3.46	3.40	3.35	3.30	3.25	3.21	3.17	3.12	3.09	3.05
10 000 000	3.86	3.78	3.71	3.64	3.58	3.52	3.46	3.41	3.36	3.31	3.27	3.22	3.18	3.14	3.10
15 000 000	4.11	4.03	3.96	3.89	3.82	3.76	3.70	3.64	3.59	3.54	3.49	3.44	3.40	3.36	3.32
20 000 000	4.30	4.22	4.14	4.07	4.00	3.94	3.87	3.82	3.76	3.71	3.66	3.61	3.56	3.52	3.48
25 000 000	4.45	4.36	4.29	4.21	4.14	4.08	4.01	3.95	3.90	3.84	3.79	3.74	3.70	3.65	3.61
30 000 000	4.57	4.49	4.41	4.33	4.26	4.19	4.13	4.07	4.01	3.96	3.90	3.85	3.81	3.76	3.71
35 000 000	4.68	4.59	4.51	4.43	4.36	4.29	4.23	4.17	4.11	4.05	4.00	3.95	3.90	3.85	3.81
40 000 000	4.77	4.68	4.60	4.52	4.45	4.38	4.32	4.25	4.20	4.14	4.08	4.03	3.98	3.94	3.89
45 000 000	4.85	4.76	4.68	4.60	4.53	4.46	4.39	4.33	4.27	4.21	4.16	4.11	4.06	4.01	3.96
50 000 000	4.93	4.84	4.75	4.68	4.60	4.53	4.47	4.40	4.34	4.28	4.23	4.18	4.12	4.08	4.03
60 000 000	5.06	4.97	4.88	4.80	4.73	4.66	4.59	4.52	4.46	4.40	4.35	4.29	4.24	4.19	4.15
70 000 000	5.17	5.08	4.99	4.91	4.84	4.76	4.69	4.63	4.57	4.51	4.45	4.40	4.34	4.29	4.25
80 000 000	5.27	5.17	5.09	5.01	4.93	4.86	4.79	4.72	4.66	4.60	4.54	4.49	4.43	4.38	4.33
90 000 000	5.35	5.26	5.17	5.09	5.01	4.94	4.87	4.80	4.74	4.68	4.62	4.57	4.51	4.46	4.41
100 000 000	5.43	5.34	5.25	5.17	5.09	5.02	4.94	4.88	4.81	4.75	4.69	4.64	4.58	4.53	4.48

TABLE A.8A
REQUIRED STRUCTURAL NUMBER (SN_R)
96% RELIABILITY (%R)
RESILIENT MODULUS (M_R) RANGE 4,000 PSI TO 18,000 PSI
RESILIENT MODULUS (M_R), (PSI x 1000)

ESAL _D	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
100 000	3.28	3.01	2.80	2.64	2.51	2.40	2.30	2.22	2.14	2.08	2.02	1.96	1.91	1.87	1.83
150 000	3.50	3.22	3.00	2.82	2.68	2.56	2.46	2.37	2.29	2.22	2.16	2.10	2.05	2.00	1.96
200 000	3.67	3.37	3.14	2.96	2.81	2.69	2.58	2.49	2.41	2.33	2.27	2.21	2.15	2.10	2.06
250 000	3.80	3.50	3.26	3.07	2.92	2.79	2.68	2.58	2.50	2.42	2.35	2.29	2.23	2.18	2.13
300 000	3.92	3.60	3.36	3.17	3.01	2.88	2.76	2.66	2.57	2.50	2.43	2.36	2.30	2.25	2.20
350 000	4.01	3.69	3.45	3.25	3.09	2.95	2.83	2.73	2.64	2.56	2.49	2.42	2.36	2.31	2.26
400 000	4.10	3.77	3.52	3.32	3.16	3.02	2.90	2.79	2.70	2.62	2.55	2.48	2.42	2.36	2.31
450 000	4.17	3.85	3.59	3.39	3.22	3.08	2.95	2.85	2.75	2.67	2.60	2.53	2.47	2.41	2.36
500 000	4.24	3.91	3.65	3.45	3.28	3.13	3.01	2.90	2.80	2.72	2.64	2.57	2.51	2.45	2.40
600 000	4.36	4.03	3.76	3.55	3.38	3.23	3.10	2.99	2.89	2.80	2.72	2.65	2.59	2.53	2.47
700 000	4.46	4.12	3.86	3.64	3.46	3.31	3.18	3.07	2.96	2.87	2.79	2.72	2.65	2.59	2.54
800 000	4.55	4.21	3.94	3.72	3.54	3.38	3.25	3.13	3.03	2.94	2.86	2.78	2.71	2.65	2.59
900 000	4.63	4.29	4.01	3.79	3.61	3.45	3.31	3.20	3.09	3.00	2.91	2.84	2.77	2.70	2.64
1 000 000	4.71	4.36	4.08	3.86	3.67	3.51	3.37	3.25	3.14	3.05	2.96	2.89	2.82	2.75	2.69
1 500 000	4.99	4.63	4.34	4.11	3.92	3.75	3.60	3.48	3.36	3.26	3.17	3.09	3.01	2.94	2.88
2 000 000	5.20	4.83	4.54	4.30	4.10	3.93	3.77	3.64	3.52	3.42	3.32	3.24	3.16	3.09	3.02
2 500 000	5.36	4.99	4.69	4.45	4.24	4.07	3.91	3.78	3.66	3.55	3.45	3.36	3.28	3.20	3.13
3 000 000	5.50	5.12	4.82	4.57	4.36	4.18	4.03	3.89	3.76	3.65	3.55	3.46	3.38	3.30	3.23
3 500 000	5.62	5.23	4.93	4.68	4.47	4.28	4.12	3.98	3.86	3.75	3.64	3.55	3.46	3.38	3.31
4 000 000	5.72	5.33	5.02	4.77	4.56	4.37	4.21	4.07	3.94	3.83	3.72	3.63	3.54	3.46	3.38
4 500 000	5.81	5.42	5.11	4.85	4.64	4.45	4.29	4.14	4.02	3.90	3.79	3.70	3.61	3.53	3.45
5 000 000	5.89	5.50	5.18	4.93	4.71	4.52	4.36	4.21	4.08	3.96	3.86	3.76	3.67	3.59	3.51
6 000 000	6.04	5.63	5.32	5.06	4.84	4.65	4.48	4.33	4.20	4.08	3.97	3.87	3.78	3.70	3.62
7 000 000	6.16	5.75	5.43	5.17	4.94	4.75	4.58	4.43	4.30	4.18	4.07	3.97	3.87	3.79	3.71
8 000 000	6.27	5.86	5.53	5.26	5.04	4.85	4.68	4.52	4.39	4.27	4.15	4.05	3.96	3.87	3.79
9 000 000	6.37	5.95	5.62	5.35	5.12	4.93	4.76	4.60	4.47	4.34	4.23	4.13	4.03	3.94	3.86
10 000 000	6.45	6.03	5.70	5.43	5.20	5.00	4.83	4.68	4.54	4.41	4.30	4.19	4.10	4.01	3.93
15 000 000	6.80	6.36	6.02	5.74	5.50	5.30	5.12	4.96	4.82	4.69	4.57	4.46	4.36	4.27	4.18
20 000 000	7.05	6.60	6.25	5.96	5.72	5.51	5.33	5.17	5.02	4.89	4.77	4.66	4.56	4.46	4.37
25 000 000	7.25	6.79	6.43	6.14	5.89	5.68	5.50	5.33	5.18	5.05	4.93	4.81	4.71	4.61	4.52
30 000 000	7.42	6.95	6.59	6.29	6.04	5.82	5.63	5.47	5.32	5.18	5.06	4.94	4.84	4.74	4.65
35 000 000	7.56	7.09	6.72	6.42	6.16	5.94	5.75	5.58	5.43	5.29	5.17	5.05	4.95	4.85	4.75
40 000 000	7.69	7.21	6.83	6.53	6.27	6.05	5.86	5.69	5.53	5.39	5.27	5.15	5.04	4.94	4.85
45 000 000	7.80	7.31	6.94	6.63	6.37	6.14	5.95	5.78	5.62	5.48	5.35	5.23	5.13	5.02	4.93
50 000 000	7.90	7.41	7.03	6.72	6.46	6.23	6.03	5.86	5.70	5.56	5.43	5.31	5.20	5.10	5.00
60 000 000	8.08	7.58	7.19	6.87	6.61	6.38	6.18	6.00	5.84	5.70	5.57	5.45	5.34	5.23	5.14
70 000 000	8.23	7.73	7.33	7.01	6.74	6.51	6.31	6.13	5.96	5.82	5.69	5.56	5.45	5.35	5.25
80 000 000	8.37	7.85	7.45	7.13	6.86	6.62	6.42	6.23	6.07	5.92	5.79	5.67	5.55	5.45	5.35
90 000 000	8.49	7.97	7.56	7.23	6.96	6.72	6.51	6.33	6.17	6.02	5.88	5.76	5.64	5.53	5.43
100 000 000	8.60	8.07	7.66	7.33	7.05	6.81	6.60	6.42	6.25	6.10	5.96	5.84	5.72	5.61	5.51

TABLE A.8B
REQUIRED STRUCTURAL NUMBER (SN_R)
96% RELIABILITY (%R)
RESILIENT MODULUS (M_R) RANGE 18,000 PSI TO 32,000 PSI
RESILIENT MODULUS (M_R), (PSI x 1000)

ESAL _D	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
100 000	1.83	1.79	1.75	1.72	1.68	1.65	1.62	1.60	1.57	1.55	1.52	1.50	1.48	1.46	1.44
150 000	1.96	1.92	1.88	1.84	1.81	1.77	1.74	1.72	1.69	1.66	1.64	1.61	1.59	1.57	1.55
200 000	2.06	2.01	1.97	1.93	1.90	1.87	1.83	1.80	1.78	1.75	1.72	1.70	1.68	1.65	1.63
250 000	2.13	2.09	2.05	2.01	1.97	1.94	1.91	1.88	1.85	1.82	1.79	1.77	1.74	1.72	1.70
300 000	2.20	2.16	2.11	2.07	2.03	2.00	1.97	1.93	1.90	1.88	1.85	1.82	1.80	1.78	1.75
350 000	2.26	2.21	2.17	2.13	2.09	2.05	2.02	1.99	1.96	1.93	1.90	1.87	1.85	1.82	1.80
400 000	2.31	2.26	2.22	2.18	2.14	2.10	2.06	2.03	2.00	1.97	1.94	1.92	1.89	1.87	1.84
450 000	2.36	2.31	2.26	2.22	2.18	2.14	2.11	2.07	2.04	2.01	1.98	1.96	1.93	1.90	1.88
500 000	2.40	2.35	2.30	2.26	2.22	2.18	2.14	2.11	2.08	2.05	2.02	1.99	1.96	1.94	1.91
600 000	2.47	2.42	2.37	2.33	2.29	2.25	2.21	2.18	2.14	2.11	2.08	2.05	2.03	2.00	1.97
700 000	2.54	2.48	2.43	2.39	2.35	2.31	2.27	2.23	2.20	2.17	2.14	2.11	2.08	2.05	2.03
800 000	2.59	2.54	2.49	2.44	2.40	2.36	2.32	2.28	2.25	2.22	2.18	2.16	2.13	2.10	2.07
900 000	2.64	2.59	2.54	2.49	2.45	2.40	2.37	2.33	2.29	2.26	2.23	2.20	2.17	2.14	2.12
1 000 000	2.69	2.63	2.58	2.53	2.49	2.45	2.41	2.37	2.33	2.30	2.27	2.24	2.21	2.18	2.15
1 500 000	2.88	2.82	2.76	2.71	2.66	2.62	2.58	2.54	2.50	2.46	2.43	2.39	2.36	2.33	2.30
2 000 000	3.02	2.96	2.90	2.84	2.79	2.75	2.70	2.66	2.62	2.58	2.55	2.51	2.48	2.45	2.42
2 500 000	3.13	3.07	3.01	2.95	2.90	2.85	2.80	2.76	2.72	2.68	2.64	2.61	2.57	2.54	2.51
3 000 000	3.23	3.16	3.10	3.04	2.99	2.94	2.89	2.84	2.80	2.76	2.72	2.69	2.65	2.62	2.59
3 500 000	3.31	3.24	3.18	3.12	3.07	3.01	2.96	2.92	2.87	2.83	2.79	2.76	2.72	2.69	2.65
4 000 000	3.38	3.32	3.25	3.19	3.13	3.08	3.03	2.98	2.94	2.90	2.86	2.82	2.78	2.75	2.71
4 500 000	3.45	3.38	3.31	3.25	3.20	3.14	3.09	3.04	3.00	2.95	2.91	2.87	2.84	2.80	2.77
5 000 000	3.51	3.44	3.37	3.31	3.25	3.20	3.15	3.10	3.05	3.01	2.96	2.92	2.89	2.85	2.82
6 000 000	3.62	3.54	3.48	3.41	3.35	3.29	3.24	3.19	3.14	3.10	3.06	3.01	2.98	2.94	2.90
7 000 000	3.71	3.63	3.56	3.50	3.44	3.38	3.33	3.27	3.22	3.18	3.13	3.09	3.05	3.01	2.98
8 000 000	3.79	3.71	3.64	3.58	3.51	3.45	3.40	3.35	3.30	3.25	3.20	3.16	3.12	3.08	3.04
9 000 000	3.86	3.78	3.71	3.64	3.58	3.52	3.47	3.41	3.36	3.31	3.27	3.22	3.18	3.14	3.10
10 000 000	3.93	3.85	3.78	3.71	3.64	3.58	3.53	3.47	3.42	3.37	3.32	3.28	3.24	3.20	3.16
15 000 000	4.18	4.10	4.03	3.96	3.89	3.83	3.77	3.71	3.65	3.60	3.55	3.51	3.46	3.42	3.38
20 000 000	4.37	4.29	4.21	4.14	4.07	4.00	3.94	3.88	3.83	3.77	3.72	3.67	3.63	3.58	3.54
25 000 000	4.52	4.44	4.36	4.28	4.21	4.15	4.08	4.02	3.97	3.91	3.86	3.81	3.76	3.72	3.67
30 000 000	4.65	4.56	4.48	4.40	4.33	4.26	4.20	4.14	4.08	4.02	3.97	3.92	3.87	3.83	3.78
35 000 000	4.75	4.67	4.58	4.51	4.44	4.37	4.30	4.24	4.18	4.12	4.07	4.02	3.97	3.92	3.88
40 000 000	4.85	4.76	4.68	4.60	4.53	4.46	4.39	4.33	4.27	4.21	4.15	4.10	4.05	4.00	3.96
45 000 000	4.93	4.84	4.76	4.68	4.61	4.54	4.47	4.40	4.34	4.29	4.23	4.18	4.13	4.08	4.03
50 000 000	5.00	4.92	4.83	4.75	4.68	4.61	4.54	4.48	4.41	4.36	4.30	4.25	4.20	4.15	4.10
60 000 000	5.14	5.05	4.96	4.88	4.80	4.73	4.66	4.60	4.54	4.48	4.42	4.37	4.32	4.27	4.22
70 000 000	5.25	5.16	5.07	4.99	4.91	4.84	4.77	4.71	4.64	4.58	4.53	4.47	4.42	4.37	4.32
80 000 000	5.35	5.25	5.17	5.09	5.01	4.93	4.86	4.80	4.73	4.67	4.62	4.56	4.51	4.46	4.41
90 000 000	5.43	5.34	5.25	5.17	5.09	5.02	4.95	4.88	4.82	4.76	4.70	4.64	4.59	4.54	4.49
100 000 000	5.51	5.42	5.33	5.25	5.17	5.09	5.02	4.96	4.89	4.83	4.77	4.71	4.66	4.61	4.56

TABLE A.9A
REQUIRED STRUCTURAL NUMBER (SN_R)
97% RELIABILITY (%R)
RESILIENT MODULUS (M_R) RANGE 4,000 PSI TO 18,000 PSI
RESILIENT MODULUS (M_R), (PSI x 1000)

ESAL _D	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
100 000	3.35	3.07	2.87	2.70	2.57	2.45	2.35	2.27	2.19	2.13	2.06	2.01	1.96	1.91	1.87
150 000	3.58	3.29	3.07	2.89	2.74	2.62	2.52	2.43	2.35	2.27	2.21	2.15	2.10	2.05	2.00
200 000	3.75	3.45	3.21	3.03	2.88	2.75	2.64	2.55	2.46	2.39	2.32	2.26	2.20	2.15	2.10
250 000	3.89	3.57	3.34	3.14	2.99	2.85	2.74	2.64	2.55	2.48	2.41	2.34	2.29	2.23	2.18
300 000	4.00	3.68	3.44	3.24	3.08	2.94	2.83	2.72	2.63	2.55	2.48	2.42	2.36	2.30	2.25
350 000	4.10	3.77	3.52	3.32	3.16	3.02	2.90	2.79	2.70	2.62	2.55	2.48	2.42	2.36	2.31
400 000	4.18	3.86	3.60	3.40	3.23	3.09	2.96	2.86	2.76	2.68	2.60	2.53	2.47	2.41	2.36
450 000	4.26	3.93	3.67	3.46	3.29	3.15	3.02	2.91	2.82	2.73	2.65	2.58	2.52	2.46	2.41
500 000	4.33	4.00	3.73	3.52	3.35	3.20	3.07	2.96	2.87	2.78	2.70	2.63	2.57	2.51	2.45
600 000	4.45	4.11	3.85	3.63	3.45	3.30	3.17	3.06	2.95	2.86	2.78	2.71	2.64	2.58	2.53
700 000	4.56	4.21	3.94	3.72	3.54	3.38	3.25	3.13	3.03	2.94	2.86	2.78	2.71	2.65	2.59
800 000	4.65	4.30	4.02	3.80	3.62	3.46	3.32	3.20	3.10	3.01	2.92	2.84	2.77	2.71	2.65
900 000	4.73	4.38	4.10	3.88	3.69	3.53	3.39	3.27	3.16	3.06	2.98	2.90	2.83	2.76	2.70
1 000 000	4.80	4.45	4.17	3.94	3.75	3.59	3.45	3.32	3.22	3.12	3.03	2.95	2.88	2.81	2.75
1 500 000	5.09	4.72	4.43	4.20	4.00	3.83	3.68	3.55	3.44	3.33	3.24	3.16	3.08	3.01	2.94
2 000 000	5.30	4.92	4.63	4.39	4.18	4.01	3.86	3.72	3.60	3.50	3.40	3.31	3.23	3.16	3.09
2 500 000	5.46	5.08	4.78	4.54	4.33	4.15	4.00	3.86	3.74	3.63	3.52	3.43	3.35	3.27	3.20
3 000 000	5.60	5.22	4.91	4.66	4.45	4.27	4.11	3.97	3.85	3.73	3.63	3.54	3.45	3.37	3.30
3 500 000	5.72	5.33	5.02	4.77	4.56	4.37	4.21	4.07	3.94	3.83	3.72	3.63	3.54	3.46	3.39
4 000 000	5.82	5.43	5.12	4.86	4.65	4.46	4.30	4.15	4.03	3.91	3.80	3.71	3.62	3.54	3.46
4 500 000	5.92	5.52	5.20	4.95	4.73	4.54	4.38	4.23	4.10	3.98	3.88	3.78	3.69	3.60	3.53
5 000 000	6.00	5.60	5.28	5.02	4.80	4.61	4.45	4.30	4.17	4.05	3.94	3.84	3.75	3.67	3.59
6 000 000	6.15	5.74	5.42	5.15	4.93	4.74	4.57	4.42	4.29	4.17	4.06	3.96	3.86	3.78	3.70
7 000 000	6.27	5.86	5.53	5.27	5.04	4.85	4.68	4.53	4.39	4.27	4.15	4.05	3.96	3.87	3.79
8 000 000	6.38	5.96	5.63	5.36	5.14	4.94	4.77	4.62	4.48	4.35	4.24	4.14	4.04	3.95	3.87
9 000 000	6.48	6.06	5.72	5.45	5.22	5.02	4.85	4.70	4.56	4.43	4.32	4.21	4.12	4.03	3.94
10 000 000	6.57	6.14	5.81	5.53	5.30	5.10	4.93	4.77	4.63	4.50	4.39	4.28	4.19	4.09	4.01
15 000 000	6.92	6.47	6.13	5.84	5.60	5.40	5.22	5.06	4.91	4.78	4.66	4.55	4.45	4.36	4.27
20 000 000	7.17	6.72	6.36	6.07	5.83	5.61	5.43	5.27	5.12	4.99	4.86	4.75	4.65	4.55	4.46
25 000 000	7.37	6.91	6.55	6.25	6.00	5.79	5.60	5.43	5.28	5.15	5.02	4.91	4.80	4.71	4.61
30 000 000	7.54	7.07	6.70	6.40	6.15	5.93	5.74	5.57	5.42	5.28	5.15	5.04	4.93	4.83	4.74
35 000 000	7.69	7.21	6.83	6.53	6.27	6.05	5.86	5.69	5.53	5.39	5.27	5.15	5.04	4.94	4.85
40 000 000	7.82	7.33	6.95	6.64	6.38	6.16	5.96	5.79	5.63	5.49	5.37	5.25	5.14	5.04	4.94
45 000 000	7.93	7.44	7.05	6.74	6.48	6.25	6.06	5.88	5.72	5.58	5.45	5.33	5.22	5.12	5.03
50 000 000	8.03	7.54	7.15	6.83	6.57	6.34	6.14	5.96	5.81	5.66	5.53	5.41	5.30	5.20	5.10
60 000 000	8.21	7.71	7.31	6.99	6.72	6.49	6.29	6.11	5.95	5.80	5.67	5.55	5.44	5.33	5.23
70 000 000	8.37	7.86	7.46	7.13	6.86	6.62	6.42	6.23	6.07	5.92	5.79	5.67	5.55	5.45	5.35
80 000 000	8.51	7.99	7.58	7.25	6.97	6.74	6.53	6.34	6.18	6.03	5.89	5.77	5.65	5.55	5.45
90 000 000	8.63	8.10	7.69	7.36	7.08	6.84	6.63	6.44	6.28	6.12	5.99	5.86	5.74	5.64	5.54
100 000 000	8.74	8.21	7.79	7.45	7.17	6.93	6.72	6.53	6.36	6.21	6.07	5.94	5.83	5.72	5.62

TABLE A.9B
REQUIRED STRUCTURAL NUMBER (SN_R)
97% RELIABILITY (%R)
RESILIENT MODULUS (M_R) RANGE 18,000 PSI TO 32,000 PSI
RESILIENT MODULUS (M_R), (PSI x 1000)

ESAL _D	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
100 000	1.87	1.83	1.79	1.76	1.72	1.69	1.66	1.64	1.61	1.58	1.56	1.54	1.52	1.50	1.48
150 000	2.00	1.96	1.92	1.88	1.85	1.82	1.79	1.76	1.73	1.70	1.68	1.65	1.63	1.61	1.59
200 000	2.10	2.06	2.02	1.98	1.94	1.91	1.88	1.85	1.82	1.79	1.76	1.74	1.72	1.69	1.67
250 000	2.18	2.14	2.10	2.06	2.02	1.98	1.95	1.92	1.89	1.86	1.83	1.81	1.78	1.76	1.74
300 000	2.25	2.20	2.16	2.12	2.08	2.05	2.01	1.98	1.95	1.92	1.89	1.87	1.84	1.82	1.79
350 000	2.31	2.26	2.22	2.18	2.14	2.10	2.07	2.03	2.00	1.97	1.94	1.92	1.89	1.87	1.84
400 000	2.36	2.31	2.27	2.23	2.19	2.15	2.11	2.08	2.05	2.02	1.99	1.96	1.93	1.91	1.89
450 000	2.41	2.36	2.31	2.27	2.23	2.19	2.15	2.12	2.09	2.06	2.03	2.00	1.97	1.95	1.92
500 000	2.45	2.40	2.35	2.31	2.27	2.23	2.19	2.16	2.13	2.09	2.06	2.04	2.01	1.98	1.96
600 000	2.53	2.47	2.43	2.38	2.34	2.30	2.26	2.23	2.19	2.16	2.13	2.10	2.07	2.05	2.02
700 000	2.59	2.54	2.49	2.44	2.40	2.36	2.32	2.28	2.25	2.22	2.19	2.16	2.13	2.10	2.07
800 000	2.65	2.60	2.55	2.50	2.45	2.41	2.37	2.34	2.30	2.27	2.23	2.20	2.18	2.15	2.12
900 000	2.70	2.65	2.60	2.55	2.50	2.46	2.42	2.38	2.35	2.31	2.28	2.25	2.22	2.19	2.16
1 000 000	2.75	2.69	2.64	2.59	2.55	2.50	2.46	2.42	2.39	2.35	2.32	2.29	2.26	2.23	2.20
1 500 000	2.94	2.88	2.83	2.77	2.72	2.68	2.63	2.59	2.55	2.52	2.48	2.45	2.42	2.39	2.36
2 000 000	3.09	3.02	2.96	2.91	2.86	2.81	2.76	2.72	2.68	2.64	2.60	2.57	2.54	2.50	2.47
2 500 000	3.20	3.14	3.08	3.02	2.96	2.91	2.87	2.82	2.78	2.74	2.70	2.67	2.63	2.60	2.57
3 000 000	3.30	3.23	3.17	3.11	3.06	3.00	2.96	2.91	2.87	2.82	2.78	2.75	2.71	2.68	2.65
3 500 000	3.39	3.32	3.25	3.19	3.13	3.08	3.03	2.98	2.94	2.90	2.86	2.82	2.78	2.75	2.71
4 000 000	3.46	3.39	3.32	3.26	3.21	3.15	3.10	3.05	3.01	2.96	2.92	2.88	2.84	2.81	2.77
4 500 000	3.53	3.46	3.39	3.33	3.27	3.21	3.16	3.11	3.07	3.02	2.98	2.94	2.90	2.86	2.83
5 000 000	3.59	3.52	3.45	3.38	3.33	3.27	3.22	3.17	3.12	3.07	3.03	2.99	2.95	2.91	2.88
6 000 000	3.70	3.62	3.55	3.49	3.43	3.37	3.31	3.26	3.21	3.17	3.12	3.08	3.04	3.00	2.97
7 000 000	3.79	3.71	3.64	3.58	3.51	3.46	3.40	3.35	3.30	3.25	3.21	3.16	3.12	3.08	3.04
8 000 000	3.87	3.79	3.72	3.65	3.59	3.53	3.47	3.42	3.37	3.32	3.28	3.23	3.19	3.15	3.11
9 000 000	3.94	3.87	3.79	3.73	3.66	3.60	3.54	3.49	3.44	3.39	3.34	3.30	3.25	3.21	3.17
10 000 000	4.01	3.93	3.86	3.79	3.72	3.66	3.60	3.55	3.50	3.45	3.40	3.35	3.31	3.27	3.23
15 000 000	4.27	4.19	4.11	4.04	3.97	3.91	3.85	3.79	3.73	3.68	3.63	3.58	3.54	3.49	3.45
20 000 000	4.46	4.38	4.30	4.23	4.16	4.09	4.03	3.97	3.91	3.86	3.80	3.76	3.71	3.66	3.62
25 000 000	4.61	4.53	4.45	4.37	4.30	4.23	4.17	4.11	4.05	4.00	3.94	3.89	3.84	3.80	3.75
30 000 000	4.74	4.65	4.57	4.49	4.42	4.35	4.29	4.23	4.17	4.11	4.06	4.01	3.96	3.91	3.86
35 000 000	4.85	4.76	4.68	4.60	4.53	4.46	4.39	4.33	4.27	4.21	4.16	4.10	4.05	4.01	3.96
40 000 000	4.94	4.85	4.77	4.69	4.62	4.55	4.48	4.42	4.36	4.30	4.24	4.19	4.14	4.09	4.04
45 000 000	5.03	4.94	4.85	4.77	4.70	4.63	4.56	4.50	4.43	4.38	4.32	4.27	4.21	4.17	4.12
50 000 000	5.10	5.01	4.93	4.85	4.77	4.70	4.63	4.57	4.51	4.45	4.39	4.34	4.28	4.23	4.19
60 000 000	5.23	5.14	5.06	4.98	4.90	4.83	4.76	4.69	4.63	4.57	4.51	4.46	4.40	4.35	4.31
70 000 000	5.35	5.26	5.17	5.09	5.01	4.94	4.87	4.80	4.74	4.68	4.62	4.56	4.51	4.46	4.41
80 000 000	5.45	5.35	5.27	5.18	5.10	5.03	4.96	4.89	4.83	4.77	4.71	4.65	4.60	4.55	4.50
90 000 000	5.54	5.44	5.35	5.27	5.19	5.12	5.04	4.98	4.91	4.85	4.79	4.73	4.68	4.63	4.58
100 000 000	5.62	5.52	5.43	5.35	5.27	5.19	5.12	5.05	4.99	4.92	4.86	4.81	4.75	4.70	4.65

TABLE A.10A
REQUIRED STRUCTURAL NUMBER (SN_R)
99% RELIABILITY (%R)
RESILIENT MODULUS (M_R) RANGE 4,000 PSI TO 18,000 PSI
RESILIENT MODULUS (M_R), (PSI x 1000)

ESAL _D	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
100 000	3.61	3.32	3.09	2.92	2.77	2.65	2.54	2.45	2.37	2.30	2.23	2.17	2.12	2.07	2.02
150 000	3.86	3.55	3.31	3.12	2.96	2.83	2.72	2.62	2.53	2.46	2.39	2.32	2.27	2.21	2.17
200 000	4.04	3.72	3.47	3.27	3.11	2.97	2.85	2.75	2.66	2.58	2.50	2.44	2.38	2.32	2.27
250 000	4.18	3.85	3.60	3.39	3.22	3.08	2.96	2.85	2.76	2.67	2.60	2.53	2.47	2.41	2.36
300 000	4.30	3.96	3.71	3.50	3.32	3.18	3.05	2.94	2.84	2.76	2.68	2.61	2.54	2.49	2.43
350 000	4.40	4.06	3.80	3.59	3.41	3.26	3.13	3.02	2.92	2.83	2.75	2.68	2.61	2.55	2.49
400 000	4.49	4.15	3.88	3.66	3.48	3.33	3.20	3.08	2.98	2.89	2.81	2.74	2.67	2.61	2.55
450 000	4.57	4.22	3.95	3.73	3.55	3.40	3.26	3.14	3.04	2.95	2.87	2.79	2.72	2.66	2.60
500 000	4.64	4.29	4.02	3.80	3.61	3.45	3.32	3.20	3.09	3.00	2.92	2.84	2.77	2.71	2.65
600 000	4.77	4.41	4.14	3.91	3.72	3.56	3.42	3.30	3.19	3.09	3.01	2.93	2.86	2.79	2.73
700 000	4.87	4.52	4.24	4.01	3.81	3.65	3.51	3.38	3.27	3.17	3.08	3.00	2.93	2.86	2.80
800 000	4.97	4.61	4.32	4.09	3.90	3.73	3.58	3.46	3.34	3.24	3.15	3.07	3.00	2.93	2.86
900 000	5.05	4.69	4.40	4.17	3.97	3.80	3.65	3.52	3.41	3.31	3.21	3.13	3.05	2.98	2.92
1 000 000	5.13	4.76	4.47	4.24	4.04	3.87	3.72	3.59	3.47	3.37	3.27	3.19	3.11	3.04	2.97
1 500 000	5.43	5.05	4.75	4.50	4.30	4.12	3.97	3.83	3.71	3.60	3.50	3.41	3.32	3.25	3.18
2 000 000	5.65	5.26	4.95	4.70	4.49	4.31	4.15	4.01	3.88	3.77	3.66	3.57	3.48	3.40	3.33
2 500 000	5.82	5.42	5.11	4.86	4.64	4.46	4.29	4.15	4.02	3.90	3.80	3.70	3.61	3.53	3.46
3 000 000	5.96	5.56	5.24	4.99	4.77	4.58	4.41	4.27	4.14	4.02	3.91	3.81	3.72	3.64	3.56
3 500 000	6.08	5.68	5.36	5.10	4.88	4.69	4.52	4.37	4.24	4.12	4.01	3.91	3.81	3.73	3.65
4 000 000	6.19	5.78	5.46	5.19	4.97	4.78	4.61	4.46	4.32	4.20	4.09	3.99	3.90	3.81	3.73
4 500 000	6.29	5.87	5.55	5.28	5.05	4.86	4.69	4.54	4.40	4.28	4.17	4.07	3.97	3.88	3.80
5 000 000	6.37	5.96	5.63	5.36	5.13	4.93	4.76	4.61	4.47	4.35	4.24	4.13	4.04	3.95	3.87
6 000 000	6.53	6.10	5.77	5.49	5.26	5.07	4.89	4.74	4.60	4.47	4.36	4.25	4.15	4.06	3.98
7 000 000	6.66	6.23	5.89	5.61	5.38	5.18	5.00	4.84	4.70	4.58	4.46	4.35	4.25	4.16	4.08
8 000 000	6.77	6.33	5.99	5.71	5.48	5.27	5.10	4.94	4.80	4.67	4.55	4.44	4.34	4.25	4.16
9 000 000	6.87	6.43	6.09	5.80	5.57	5.36	5.18	5.02	4.88	4.75	4.63	4.52	4.42	4.33	4.24
10 000 000	6.96	6.52	6.17	5.89	5.65	5.44	5.26	5.10	4.95	4.82	4.70	4.59	4.49	4.40	4.31
15 000 000	7.33	6.87	6.51	6.21	5.96	5.75	5.56	5.40	5.25	5.11	4.99	4.87	4.77	4.67	4.58
20 000 000	7.60	7.12	6.75	6.45	6.19	5.97	5.78	5.61	5.46	5.32	5.19	5.08	4.97	4.87	4.78
25 000 000	7.81	7.32	6.94	6.63	6.37	6.15	5.96	5.78	5.63	5.49	5.36	5.24	5.13	5.03	4.94
30 000 000	7.98	7.49	7.10	6.79	6.53	6.30	6.10	5.93	5.77	5.63	5.50	5.38	5.26	5.16	5.07
35 000 000	8.14	7.63	7.24	6.92	6.66	6.43	6.23	6.05	5.89	5.74	5.61	5.49	5.38	5.27	5.18
40 000 000	8.27	7.76	7.37	7.04	6.77	6.54	6.34	6.16	5.99	5.85	5.71	5.59	5.48	5.37	5.28
45 000 000	8.39	7.87	7.47	7.15	6.87	6.64	6.43	6.25	6.09	5.94	5.81	5.68	5.57	5.46	5.36
50 000 000	8.50	7.98	7.57	7.24	6.97	6.73	6.52	6.34	6.17	6.02	5.89	5.76	5.65	5.54	5.44
60 000 000	8.69	8.16	7.74	7.41	7.13	6.89	6.68	6.49	6.32	6.17	6.03	5.91	5.79	5.68	5.58
70 000 000	8.85	8.31	7.89	7.55	7.27	7.02	6.81	6.62	6.45	6.30	6.16	6.03	5.91	5.80	5.70
80 000 000	8.99	8.45	8.02	7.68	7.39	7.14	6.92	6.73	6.56	6.41	6.26	6.13	6.01	5.90	5.80
90 000 000	9.12	8.57	8.14	7.79	7.50	7.25	7.03	6.83	6.66	6.50	6.36	6.23	6.11	6.00	5.89
100 000 000	9.24	8.68	8.24	7.89	7.60	7.34	7.12	6.93	6.75	6.59	6.45	6.32	6.19	6.08	5.97

TABLE A.10B
REQUIRED STRUCTURAL NUMBER (SN_R)
99% RELIABILITY (%R)
RESILIENT MODULUS (M_R) RANGE 18,000 PSI TO 32,000 PSI
RESILIENT MODULUS (M_R), (PSI x 1000)

ESAL _D	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
100 000	2.02	1.98	1.94	1.90	1.87	1.83	1.80	1.77	1.75	1.72	1.69	1.67	1.65	1.62	1.60
150 000	2.17	2.12	2.08	2.04	2.00	1.97	1.93	1.90	1.87	1.85	1.82	1.79	1.77	1.75	1.72
200 000	2.27	2.23	2.18	2.14	2.10	2.07	2.03	2.00	1.97	1.94	1.91	1.88	1.86	1.83	1.81
250 000	2.36	2.31	2.26	2.22	2.18	2.14	2.11	2.08	2.04	2.01	1.99	1.96	1.93	1.91	1.88
300 000	2.43	2.38	2.33	2.29	2.25	2.21	2.17	2.14	2.11	2.08	2.05	2.02	1.99	1.97	1.94
350 000	2.49	2.44	2.40	2.35	2.31	2.27	2.23	2.20	2.16	2.13	2.10	2.07	2.05	2.02	1.99
400 000	2.55	2.50	2.45	2.40	2.36	2.32	2.28	2.25	2.21	2.18	2.15	2.12	2.09	2.07	2.04
450 000	2.60	2.55	2.50	2.45	2.41	2.37	2.33	2.29	2.26	2.22	2.19	2.16	2.13	2.11	2.08
500 000	2.65	2.59	2.54	2.49	2.45	2.41	2.37	2.33	2.30	2.26	2.23	2.20	2.17	2.14	2.12
600 000	2.73	2.67	2.62	2.57	2.53	2.48	2.44	2.40	2.37	2.33	2.30	2.27	2.24	2.21	2.18
700 000	2.80	2.74	2.69	2.64	2.59	2.55	2.51	2.47	2.43	2.39	2.36	2.33	2.30	2.27	2.24
800 000	2.86	2.80	2.75	2.70	2.65	2.60	2.56	2.52	2.48	2.45	2.41	2.38	2.35	2.32	2.29
900 000	2.92	2.86	2.80	2.75	2.70	2.66	2.61	2.57	2.53	2.50	2.46	2.43	2.40	2.37	2.34
1 000 000	2.97	2.91	2.85	2.80	2.75	2.70	2.66	2.62	2.58	2.54	2.51	2.47	2.44	2.41	2.38
1 500 000	3.18	3.11	3.05	2.99	2.94	2.89	2.84	2.80	2.76	2.72	2.68	2.64	2.61	2.58	2.55
2 000 000	3.33	3.26	3.20	3.14	3.08	3.03	2.98	2.94	2.89	2.85	2.81	2.77	2.74	2.70	2.67
2 500 000	3.46	3.39	3.32	3.26	3.20	3.15	3.10	3.05	3.00	2.96	2.92	2.88	2.84	2.80	2.77
3 000 000	3.56	3.49	3.42	3.36	3.30	3.24	3.19	3.14	3.09	3.05	3.01	2.97	2.93	2.89	2.86
3 500 000	3.65	3.58	3.51	3.44	3.38	3.33	3.27	3.22	3.17	3.13	3.08	3.04	3.00	2.97	2.93
4 000 000	3.73	3.66	3.59	3.52	3.46	3.40	3.35	3.29	3.24	3.20	3.15	3.11	3.07	3.03	3.00
4 500 000	3.80	3.73	3.65	3.59	3.53	3.47	3.41	3.36	3.31	3.26	3.22	3.17	3.13	3.09	3.05
5 000 000	3.87	3.79	3.72	3.65	3.59	3.53	3.47	3.42	3.37	3.32	3.27	3.23	3.19	3.15	3.11
6 000 000	3.98	3.90	3.83	3.76	3.69	3.63	3.58	3.52	3.47	3.42	3.37	3.33	3.28	3.24	3.20
7 000 000	4.08	4.00	3.92	3.85	3.79	3.72	3.67	3.61	3.56	3.51	3.46	3.41	3.37	3.33	3.29
8 000 000	4.16	4.08	4.01	3.94	3.87	3.81	3.75	3.69	3.63	3.58	3.53	3.49	3.44	3.40	3.36
9 000 000	4.24	4.16	4.08	4.01	3.94	3.88	3.82	3.76	3.70	3.65	3.60	3.56	3.51	3.47	3.43
10 000 000	4.31	4.23	4.15	4.08	4.01	3.94	3.88	3.82	3.77	3.72	3.67	3.62	3.57	3.53	3.48
15 000 000	4.58	4.50	4.42	4.34	4.27	4.20	4.14	4.08	4.02	3.96	3.91	3.86	3.81	3.77	3.72
20 000 000	4.78	4.69	4.61	4.53	4.46	4.39	4.33	4.26	4.20	4.15	4.09	4.04	3.99	3.94	3.90
25 000 000	4.94	4.85	4.76	4.69	4.61	4.54	4.47	4.41	4.35	4.29	4.24	4.18	4.13	4.08	4.04
30 000 000	5.07	4.98	4.89	4.81	4.74	4.67	4.60	4.53	4.47	4.41	4.36	4.30	4.25	4.20	4.15
35 000 000	5.18	5.09	5.00	4.92	4.84	4.77	4.70	4.64	4.58	4.52	4.46	4.41	4.35	4.30	4.25
40 000 000	5.28	5.18	5.10	5.02	4.94	4.87	4.80	4.73	4.67	4.61	4.55	4.50	4.44	4.39	4.34
45 000 000	5.36	5.27	5.18	5.10	5.02	4.95	4.88	4.81	4.75	4.69	4.63	4.58	4.52	4.47	4.42
50 000 000	5.44	5.35	5.26	5.18	5.10	5.02	4.95	4.89	4.82	4.76	4.70	4.65	4.59	4.54	4.49
60 000 000	5.58	5.48	5.39	5.31	5.23	5.16	5.08	5.02	4.95	4.89	4.83	4.77	4.72	4.67	4.62
70 000 000	5.70	5.60	5.51	5.43	5.34	5.27	5.20	5.13	5.06	5.00	4.94	4.88	4.83	4.77	4.72
80 000 000	5.80	5.70	5.61	5.53	5.44	5.37	5.29	5.22	5.16	5.09	5.03	4.98	4.92	4.87	4.81
90 000 000	5.89	5.79	5.70	5.61	5.53	5.46	5.38	5.31	5.24	5.18	5.12	5.06	5.00	4.95	4.90
100 000 000	5.97	5.88	5.78	5.70	5.61	5.53	5.46	5.39	5.32	5.26	5.20	5.14	5.08	5.02	4.97

APPENDIX B

FLEXIBLE PAVEMENT DESIGN QUALITY CONTROL PLAN

B.1 QUALITY CONTROL PLAN

All flexible pavement designs will be reviewed independently by a responsible Professional Engineer other than the original pavement design engineer for accuracy and correctness. The following quality control plan is provided as a guideline.

B.2 DEFINITIONS

The following definitions are used throughout this section.

Quality

Conformance to policies, procedures, standards, guidelines and above all, good engineering practice.

Quality Assurance (QA)

QA consists of all planned and systematic actions necessary to provide adequate confidence that a design, structure, system, or component will perform satisfactorily and conform to project requirements. QA involves establishing project related policies, procedures, standards, training, guidelines, and systems necessary to produce quality.

Quality Control (QC)

QC is the checking and review of designs and plans for compliance with policies, procedures, standards, guidelines and good engineering practice.

B.3 RESPONSIBILITY

The district offices and turnpike consultants are responsible for Quality Control. Quality Assurance is the role of the Central Office.

B.4 FLEXIBLE PAVEMENT DESIGNS

Pavement designs will be developed in accordance with the Flexible Pavement Design Manual (Topic No. 625-010-002). The approved pavement design and the supporting data will be included in the District Project Design File.

B.4.1 MINIMUM REQUIREMENTS

The Pavement Design Package as a minimum will include the following items:

- The Pavement Design Summary Sheet will show the approved pavement design and each Pavement Design Summary Sheet will be signed and sealed by the District Pavement Design Engineer or the designated responsible Pavement Design Engineer. The District Design Engineer will sign for concurrence with the design. The file copy will show Federal Highway Administration (FHWA) approval, if required, for Federal Aid Projects or Certification Acceptance as appropriate.
- Project location and description of the type of work, if not clearly stated on the summary sheet.
- The basis for the pavement design, signed and sealed where required, including if applicable for:

New Construction

- Resilient Modulus (M_R).
- Material properties used if different than those in the design manual.
- Subgrade stabilization requirements.

Rehabilitation And Lane Widening

- Existing pavement layer information (layer types, thickness, and condition).
- A copy of the Pavement Coring and Evaluation Report.
- Subgrade stabilization requirements.
- Overbuild recommendations.

- A copy of the signed and sealed Nondestructive Testing Report from the State Materials Office.
 - A Pavement Evaluation Coring and Condition Data report must be requested based on the milling recommendations for all projects involving milling greater than 5000 tons.
 - Existing cross-slope from design survey and method of correction if required.
 - The $ESAL_D$ calculations, signed and certified. This may be either a copy of the report prepared by the Planning Office or calculations using the design computer program. The basis for the input data used for these calculations must be stated.
- Design calculations (including pavement layer thickness).
 - Documentation addressing any special features such as feathering details, cross slope, coordination with adjacent projects, stage construction, drainage considerations, etc.
 - Sketch of a possible layer construction sequence, including any widening and shoulders, to ensure constructability.
 - A drawing of the final pavement design typical section or an adequate narrative description.

B.4.2 DISTRIBUTION

Central Office approval of the pavement design is not required. Designs will be monitored and periodically reviewed, in detail, for quality assurance and for purposes of identifying and improving deficiencies in design policies, procedures, standards and guidelines.

For Federal Aid Projects which are for oversight in design, two copies of the approved Pavement Design Summary Sheet and one copy of the supporting documentation, will be forwarded directly to the appropriate Federal Highway Administration (FHWA) Engineer for FHWA concurrence. .

Only mainline or major elements of a project need formal FHWA pavement design approval. Details such as cross roads and shoulders will be handled as a part of the plans approval process. Do not send these copies to the Central Office for transmittal to FHWA.

The District will deal directly with the FHWA to resolve any questions. Central Office Pavement Management will be available for assistance if requested by the District or FHWA. The FHWA will return directly to the District one copy of the summary sheet with signature denoting concurrence. This copy will be filed in the District Project Design file.

B.4.3 REVISIONS

Changes made subsequent to formal distribution will require that a revised summary sheet be prepared, a copy of which shall be signed and sealed, distributed, and filed for permanent record in the Project Design File. Minor changes may be noted in type or ink on the original Pavement Design Summary Sheet with the responsible Professional Engineer's initials and the date of change. A copy of the revised original should then be signed, dated, sealed and filed for permanent record.

Major changes may require that a complete new Pavement Design Summary Sheet be prepared and processed, in which case it shall note that it supersedes a previous design. Copies of revised pavement designs including backup data documenting why the change is being made will be transmitted to the State Pavement Design Engineer and redistributed as appropriate.

For skid hazard, intersection improvement, short roadway connectors on bridge replacement projects, and roadway widening projects, the Resilient Modulus, $ESAL_D$, and computation of Required Structural Number, SN_R , are normally not required. However in all cases, a document describing how the pavement design was developed should be prepared, signed and sealed.

B.4.4 DOCUMENTATION

The one area of pavement design involving perhaps the greatest liability to the Department is friction course selection. It is highly recommended that the Pavement Design Engineer become thoroughly familiar with the Departments Friction Course Policy. On projects where the policy is not adhered to, the reasons should be clearly documented in the Pavement Design Package. Small projects are not exempt.

Every attempt should be made to follow written procedures. Situations will occur where following the pavement design procedure will result in a SN_R which cannot be met. This could occur when an overlay is required in a curb and gutter section, or, when an existing cracked or distressed pavement requires rehabilitation, but the Existing Structural Number (SN_E) exceeds the Structural Required (SN_R).

The Pavement Design Engineer will have to exercise engineering judgment on what should be done in these cases. When this occurs, the Pavement Design Engineer is advised to document the project, make special note of the problem, and provide additional explanation as to how the recommended design was developed. Consultation with other engineers (Construction, Drainage, Materials, etc.) is highly recommended and should be noted in the design file.

B.5 DISTRICT QUALITY CONTROL

The quality control process will include three activities:

- The checking and review of pavement designs for compliance with policies, procedures, standards, guidelines and good engineering practice.
- The checking and review of plans to insure that the approved pavement designs are correctly incorporated.
- Documentation of the Quality Control Process.

The Quality Control Process will be carried out by an independent responsible Professional Engineer other than the original pavement design engineer. As a minimum, the documentation will consist of a copy of the QC Checklist filed with

the Pavement Design Package, or a Pavement Design Quality Control File identified by State Project Number consisting of:

- A copy of the signed and sealed Pavement Design Summary Sheet.
- A copy of the QC Checklist signed by the QC Engineer.
- A sample checklist is attached.

B.6 QUALITY ASSURANCE REVIEWS

The State Pavement Design Engineer will be responsible for conducting and/or coordinating all pavement related QA activities within each District and the Turnpike. A QA review of District Pavement Design activities will generally be conducted semi-annually.

B.7 PAVEMENT DESIGN UPDATES

A pavement design review activity by an experienced pavement designer should be scheduled in the project scheduling system on all pavement projects approximately three months prior to letting. This final review will allow for updating pavement designs and plans for new technologies and pay items that may have been implemented since the original pavement design was prepared.

If the pavement evaluation report is over two years old, another field review of the pavement should be conducted to see if the pavement condition has significantly changed. If there is a significant change, a few additional cores may be needed to evaluate crack depths for milling and the pavement design and quantities may need updating to reflect the latest pavement condition.

FLEXIBLE PAVEMENT DESIGN QUALITY CONTROL CHECKLIST

State Proj. No. _____ Federal Aid No. _____

FP ID No. _____ County _____

<u>Flexible Pavement Design Review</u>	<u>Satisfactory</u> <u>Yes/No/NA</u>
Pavement Design Summary Sheet.	_____
Project Location and Description	_____
Traffic Data and ESAL _D Calculations	_____
Resilient Modulus (M _R)	_____
Reduced Resilient Modulus (M _R) for base high- water clearance less than 3ft.	_____
Required Structural Number (SN _R) Calculations. . .	_____
Calculated Structural Number (SN _C) Calculations. .	_____
Base Material Selection.	_____
Friction Course Selection.	_____
Stabilized Subgrade Evaluation	_____
Shoulder Design.	_____
Coordination with Other Offices.	_____
Other Special Details.	_____
Final Pavement Design Drawing or Narrative	_____

Rehabilitation

Field Evaluation of Project. _____

Pavement Coring and Evaluation completed _____

Distress Evaluation. _____

Existing Cross-Slope and Correction method _____

Milling Depth and Purpose. _____

Overlay Structural Number (SN_O) Calculations _____

Overbuild Recommendation. _____

Pavement Evaluation Coring and. . . _____
Condition Data Report

Projects That Do Not Require Design Calculations

Existing Pavement Evaluation _____

Existing Cross-Slope and Correction method _____

Asphalt Thickness. _____

Base Type and Thickness. _____

Future Milling Considerations. _____

Structural Evaluation. _____

Plans Review

Plans Conform to Pavement Design _____

Cross-Slope correction addressed _____

Design Details Adequately Covered. _____

Standard Indexes Properly Referenced _____

Project is Constructible with Current Technology _____

Comments

QA by _____

Date _____

**FLORIDA DEPARTMENT OF TRANSPORTATION
FLEXIBLE PAVEMENT DESIGN SUMMARY SHEET**

Prepared by _____

Date Prep. _____

FP ID # _____

US # _____ SR # _____

State Proj. # _____

From _____

FAP # _____

To _____

County _____

Begin MP _____

Project Length _____

End MP _____

Type of Work _____

%R _____

Opening Year _____

M_R _____

Design Year _____

Design Speed _____

ESAL_D _____

Design Seq. # _____

SN_R _____

Proj. Name _____

Existing Pavement

Proposed Design

Approved By
Res. Engineer

Concurrence By
Dist. Des. Engineer

Concurrence By
FHWA (If Needed)

Date _____

Date _____

Date _____

APPENDIX C

MECHANISTIC-EMPIRICAL PAVEMENT DESIGN GUIDE (MEPDG)

C.1 MECHANISTIC-EMPIRICAL PAVEMENT DESIGN GUIDE (MEPDG)

The MEPDG was developed as part of the National Cooperative Highway Research Program (NCHRP). It includes software (AASHTO's Pavement M-E) with mechanistic-empirical models to predict pavement performance for a given climatic location.

The FDOT has currently not adopted the 2008 AASHTO Mechanistic-Empirical Pavement Design Guide for flexible pavement design. This is due to several major revisions underway nationally to the models used in the software.

APPENDIX D

ESTIMATING DESIGN 18-KIP EQUIVALENT SINGLE AXLE LOADS (ESAL_D)

D.1 BACKGROUND

One of the products of the AASHO (American Association Of State Highway Officials) Road Test conducted in Ottawa, Illinois from 1958 to 1960 was a method for relating the relative damage caused by different axle loadings. This evolved into a procedure that permitted the calculation of the accumulated damage caused by mixed vehicle loadings over a pavement design period. The four tires, single axle, carrying 18,000lb 18-kip Equivalent Single Axle Load or ESALD) was accepted as the base for these calculations. Table D.1 illustrates the relationship of axle weight to damage.

A detailed write-up, including tabulated damage factors for single, tandem, and triple axles, is given in Appendix D of the 1993 AASHTO (American Association Of State Highway and Transportation Officials) Guide for Design of Pavement Structures.

A procedure for calculating a more precise estimate on the Department's projects can be obtained from the Office of Planning Project Traffic Forecasting Procedure Topic No. 525-030-120 using the Project Traffic Forecasting Handbook. Calculations on Department projects must be signed and certified by the Department's planning section.

The following is a simple procedure for estimating ESAL_D in the design lane. Design periods used in these calculations can be found in the manual. The design lane is the lane where the majority of the trucks can be found. A common example would be a four lane divided highway where most of the trucks would be found in the outside lanes. The basic equation is presented and the variables are defined. Simple input coefficients are tabulated. Several computer programs that perform the necessary computations are available from the Department.

TABLE D.1
RELATIONSHIP OF AXLE WEIGHT TO DAMAGE

SN=5

	<u>Total Axle Load in KIP</u>	<u>Equivalent Damage in ESAL's</u>
Single Axle	14	0.36
	18	1.00
	22	2.18
Tandem Axle	30	0.66
	34	1.09
	38	1.70
	44	3.00

D.2 BASIC EQUATION

The $ESAL_D$ required for pavement design purposes can be computed using the following equation:

$$ESAL_D = \sum_{y=1}^{y=x} (AADT \times T_{24} \times D_F \times L_F \times E_{18} \times 365)$$

Where:

$ESAL_D$ = Number of accumulated 18-kip Equivalent Single Axle Loads in the design lane for the design period.

y = The year that the calculation is made for. When $y=1$, all the variables apply to year 1. Most of the variables are constant except AADT which may change from year to year. Others may change when changes in the system occur. Such changes include parallel roads, shopping centers, truck terminals, etc.

x = The Design Year.

AADT = Average Annual Daily Traffic.

T_{24} = Percent Heavy Trucks during a 24 hour period. Trucks with 6 tires or more are considered in the calculations.

D_F = Directional Distribution Factor. Use 1.0 if one way traffic is counted or 0.5 for two way traffic. This value is not to be confused with the Directional Factor use for planning capacity computations.

L_F = Lane Factor converts directional trucks to the design lane trucks. Lane factors can be adjusted to account for unique features known to the designer such as roadways with designated truck lanes. L_F values can be determined from Table D.2.

E_{18} = Equivalency factor which is the damage caused by one average heavy truck measured in 18 kip Equivalent Single Axle Loads. These factors will be periodically updated based on Weigh-In-Motion (WIM) data. E_{18} values can be determined from Table D.3.

TABLE D.2

LANE FACTORS (L_F) FOR DIFFERENT TYPES OF FACILITIES

<u>Total AADT</u>	<u>Number of Lanes In One Direction</u>	
	<u>Two Lanes</u> L_F	<u>Three Lanes</u> L_F
4 000	0.94	0.82
8 000	0.88	0.76
12 000	0.85	0.72
16 000	0.82	0.70
20 000	0.81	0.68
30 000	0.77	0.65
40 000	0.75	0.63
50 000	0.73	0.61
60 000	0.72	0.59
70 000	0.70	0.58
80 000	0.69	0.57
100 000	0.67	0.55
120 000	0.66	0.53
140 000	-	0.52
160 000	-	0.51
200 000	-	0.49

The equation that best defines this Lane Factor (L_F) information is:

$$L_F = (1.567 - 0.0826 \times \ln(\text{One Way AADT}) - 0.12368 \times LV)$$

Where:

L_F = Proportion of all one directional trucks in the design lane.

LV = 0 if the number of lanes in one direction is 2. LV = 1 if the number of lanes in one direction is 3 or more.

Ln = Natural Logarithm.

Source - National Cooperative Highway Research Program Report 277, Portland Cement Concrete Pavement Evaluation System (COPES), Transportation Research Board, September 1986

TABLE D.3
EQUIVALENCY FACTORS E_{18} FOR DIFFERENT TYPES OF FACILITIES

	<u>Flexible Pavement</u>	<u>Rigid Pavement</u>
Freeways		
Rural	1.05	1.60
Urban	0.90	1.27
Arterials and Collectors		
Rural	0.96	1.35
Urban	0.89	1.22

D.3 SAMPLE PROBLEMS

Several sample problems have been provided that illustrates this process.

D.3.1 SAMPLE PROBLEM #1

The District Planning Engineer has provided the following information about a high volume, urban, arterial; four lanes divided two way projects that will open in the year 2005. The Pavement Type Selection Process indicates that the best alternative is flexible pavement.

GIVEN:

The following input is provided. Note that other facilities within the urban area become available in the year 2013 thus causing the traffic assignment (AADT) to drop and T_{24} to change.

$T_{24} = 12\%$
2005 Estimated AADT = 12,000
2013 Estimated AADT = 16,000

$T_{24} = 8\%$
2014 Estimated AADT = 34,000
2025 Estimated AADT = 56,000

DATA:

The following data can be determined from information and tables provided.

$D_F = 0.50$ (for two way traffic)
 $E_{18} = 0.89$ (from Table D.3)
 $L_F =$ Determined using the equation from Table D.2

FIND:

The $ESAL_D$ for 20 years design period beginning in 2005.

SOLUTION:

Using the following equations:

For the years 2005 to 2013:

$$ESAL_D = \sum_{y=2005}^{y=2013} (AADT \times T_{24} \times D_F \times L_F \times E_{18} \times 365)$$

$$ESAL_D = \sum_{y=2005}^{y=2013} (AADT \times 0.12 \times 0.50 \times L_F \times 0.89 \times 365)$$

For the years 2014 to 2025:

$$ESAL_D = \sum_{y=2014}^{y=2025} (AADT \times T_{24} \times D_F \times L_F \times E_{18} \times 365)$$

$$ESAL_D = \sum_{y=2014}^{y=2025} (AADT \times 0.08 \times 0.50 \times L_F \times 0.89 \times 365)$$

Calculating:

<u>Year</u>	<u>AADT</u>	<u>L_F</u>	<u>Annual ESAL*</u>	<u>Accumulated ESAL</u>
2005	12 000	0.85	198 800	198 800
2006	12 500	0.84	204 700	403 500
2007	13 000	0.84	212 800	616 300
2008	13 500	0.84	221 000	837 300
2009	14 000	0.84	229 200	1 066 500
2010	14 500	0.83	234 600	1 301 100
2011	15 000	0.83	242 700	1 543 800
2012	15 500	0.83	250 800	1 794 600
2013	16 000	0.82	255 700	2 050 300
2014	34 000	0.76	335 800	2 386 100
2015	36 000	0.76	355 500	2 741 600
2016	38 000	0.75	370 300	3 111 900
2017	40 000	0.75	389 800	3 501 700
2018	42 000	0.75	409 300	3 911 000
2019	44 000	0.74	423 100	4 334 100
2020	46 000	0.74	442 300	4 776 400
2021	48 000	0.73	455 300	5 231 700
2022	50 000	0.73	474 300	5 706 000
2023	52 000	0.73	493 300	6 199 300
2024	54 000	0.72	505 200	6 704 500
2025	56 000	0.72	523 900	7 228 400

* Values are rounded for simplicity.

CONCLUSION:

Note that the 20 years accumulated value (ESAL_D) is 6,704,500 ESALs or 7,000,000 ESALs.

D.3.2 SAMPLE PROBLEM #2

The District Planning Engineer has provided the following information about a moderate volume, rural arterial four lanes divided two way projects that will open in the year 1990. The Pavement Type Selection Process indicates that the best alternative is flexible pavement.

GIVEN:

The following input is provided.

$$\begin{aligned}T_{24} &= 10\% \\1990 \text{ Estimated AADT} &= 17,000 \\2006 \text{ Estimated AADT} &= 25,000\end{aligned}$$

DATA:

The following data can be determined from information and tables provided.

$$\begin{aligned}D_F &= 0.50 \text{ (for two way traffic)} \\E_{80} &= 0.96 \text{ (from Table D.3)} \\L_F &= \text{Determined using the equation from Table D.2}\end{aligned}$$

FIND:

The $ESAL_D$ for 14 years design period beginning in 1990.

SOLUTION:

Using the following equations:

For the years 1990 to 2003:

$$ESAL_D = \sum_{y=1990}^{y=2003} (AADT \times T_{24} \times D_F \times L_F \times E_{18} \times 365)$$

$$ESAL_D = \sum_{y=1990}^{y=2003} (AADT \times 0.10 \times 0.50 \times L_F \times 0.96 \times 365)$$

Calculating:

<u>Year</u>	<u>AADT</u>	<u>L_F</u>	<u>Annual ESAL*</u>	<u>Accumulated ESAL</u>
1990	17 000	0.82	244 300	244 300
1991	17 500	0.82	251 400	495 700
1992	18 000	0.82	258 600	754 300
1993	18 500	0.81	262 500	1 016 800
1994	19 000	0.81	269 600	1 286 400
1995	19 500	0.81	276 700	1 563 100
1996	20 000	0.81	283 800	1 846 900
1997	20 500	0.80	287 300	2 134 200
1998	21 000	0.80	294 300	2 428 500
1999	21 500	0.80	301 300	2 729 800
2000	22 000	0.80	308 400	3 038 200
2001	22 500	0.79	315 400	3 353 600
2002	23 000	0.79	318 300	3 671 900
2003	23 500	0.79	325 300	3 997 200
2004	24 000	0.79	332 200	4 329 400
2005	24 500	0.79	339 100	4 668 500
2006	25 000	0.82	346 000	5 014 500

* Values are rounded for simplicity.

CONCLUSION:

Note that the 14 year (2003) accumulated value is 3,997,200 ESALs (rounding $ESAL_D = 4,000,000$).

If the project was delayed one year, the new $ESAL_D$ would be:

$$4,329,400 - 244,300 = 4,085,100 \text{ ESALs}$$

It is important to note that even though ESAL information is needed for only a 14 year period, additional ESAL information beyond that period is sometimes needed for project delays or increased design periods due to different rehabilitation strategies (i.e. resurfacing verses milling and resurfacing). This gives the designer flexibility in design and programming of this project.