## **2022 Construction Academy**

January 25, 2023

## Concrete and Structural Materials

Jose Armenteros Concrete Materials Engineer

Gonzalo Gallo Mass Concrete Specialist

Thomas Frank Concrete Field Operations Manager


Richard DeLorenzo Structural Materials Lab Manager



This conference has been prepared for you, construction project engineers, to facilitate better understanding of your role when dealing with concrete and structural materials in your projects.

If you want to know the specifics of each material beyond the scope of this presentation, please contact the presenters.



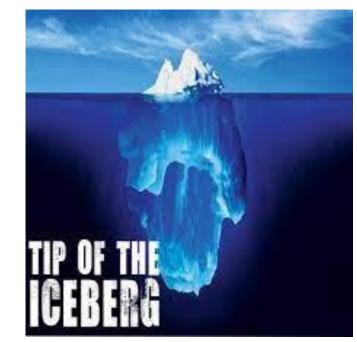


# Scope of the Presentation

#### **Concrete Fundamentals (1)**



#### **Precast / Prestressed Concrete (2)**



#### **Structural Materials (3)**



## Part 1

#### **Concrete Fundamentals**



Jose Armenteros P.E. Concrete Materials Engineer Jose.Armenteros@dot.state.fl.us (352) 955-6666





**Concrete Raw Materials** 

**Concrete Classification** 

**Concrete System Components** 


**Sampling and Testing** 

**Special Types of Concrete** 

**Concrete Acceptance based on Compressive Strength** 

**Low Compressive Strength** 


**Concrete Personnel Qualification Requirements** 

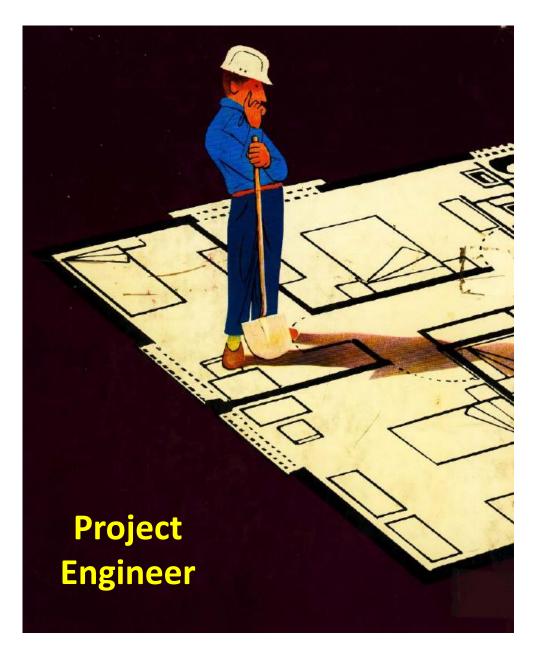

Who do I call if I have questions related to concrete or structural materials?




#### **FDOT Concrete Materials Structure**

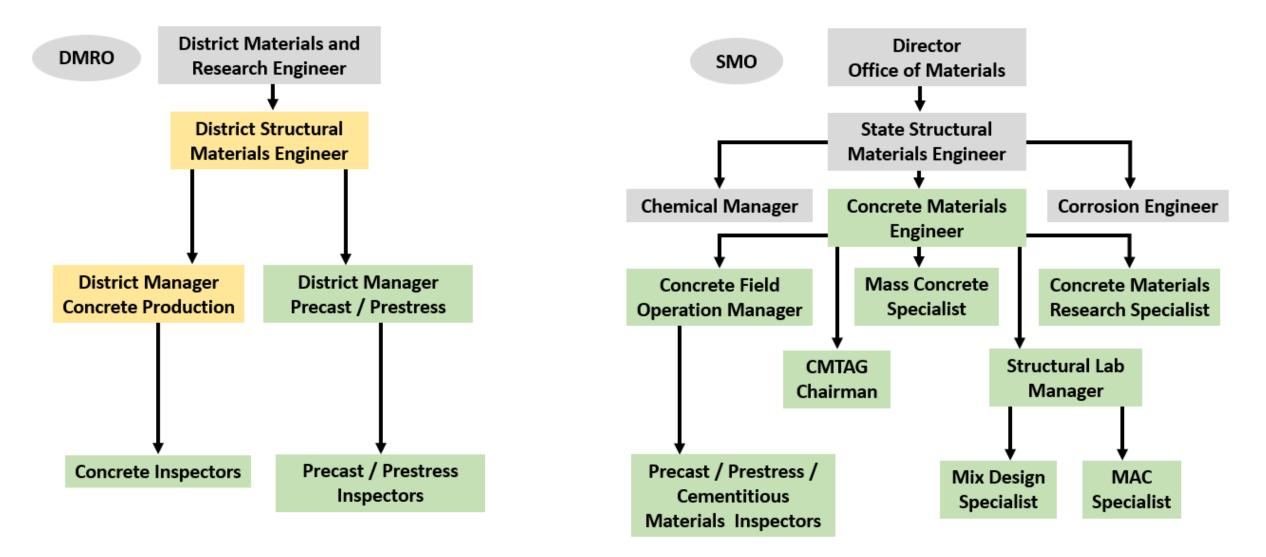

Contact your DMRO *first* and they may contact the SMO if needed.

#### Who do I call if I have questions related to concrete or structural materials?

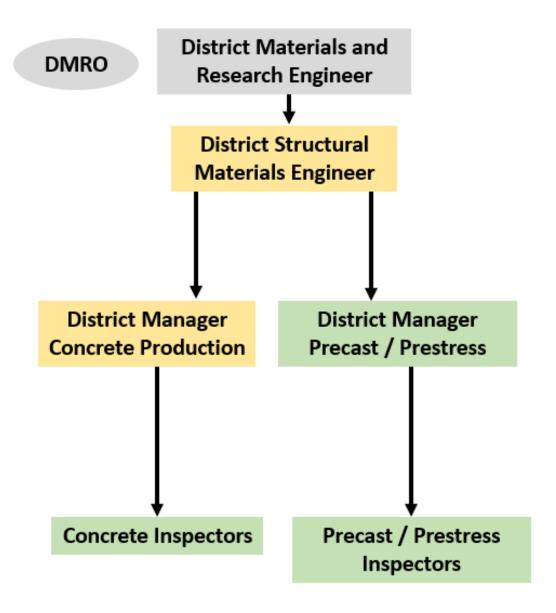

#### Districts 4 & 6

Jamshid Sajadi (Jay) District Structural Materials Engineer (954) 677-7016 Office (954) 826-0150 Cell Jamshid.Sajadi@dot.state.fl.us

Frandy Manasse District Manager Concrete Production (954) 677-7017 Office (954) 290-4046 Cell Brian.Price@dot.state.fl.us

#### **Concrete – Essential Documents**



CONSTRUCTION FY 2023-24

#### **Standard Specification (SS)**

<u>https://fdotwww.blob.core.windows.net/sitefinity/docs/default-</u> source/programmanagement/implemented/specbooks/fy-2023-24/fy2023-24ebook.pdf?sfvrsn=6b69416d\_6

#### Materials Manual 8.4, 8.6, 9.2 and 9.3 (Vol I & II) (MM)


https://infonet.dot.state.fl.us/materials/administration/resources/library/publications/ materialsmanual/index.htm

#### **CPAM (Chapter 10 Structures)**

Construction Project Administration Manual (fdot.gov)




#### **Concrete Raw Materials**

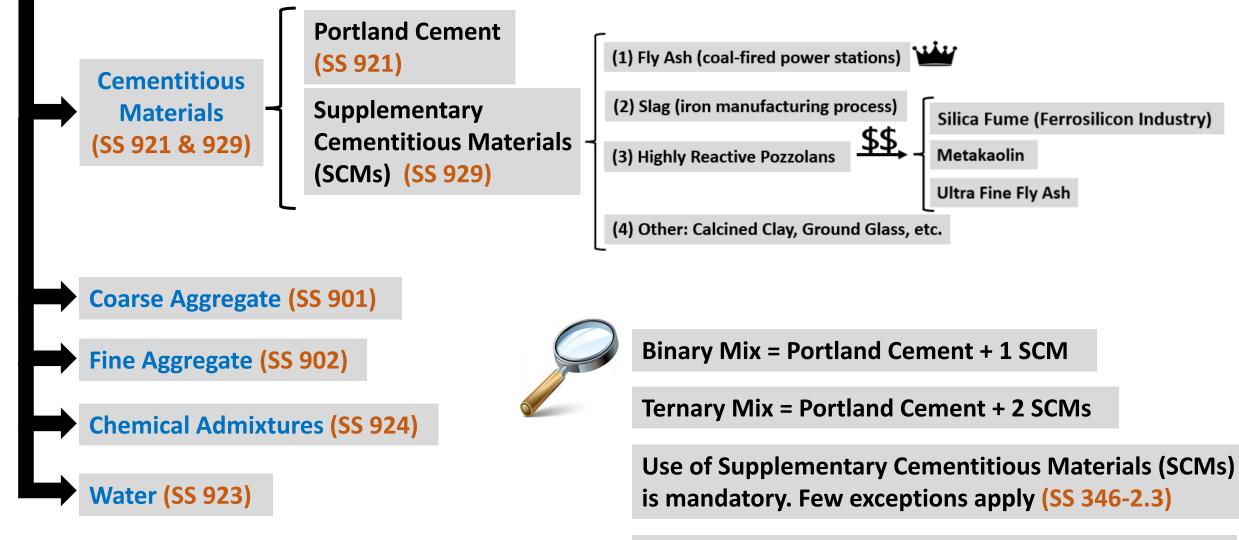

 $\frac{Water}{Cem}Ratio = \frac{Total Water (lb)}{Total Cementitious Materials (lb)}$ 

#### **Concrete Classification according to FDOT Specifications**

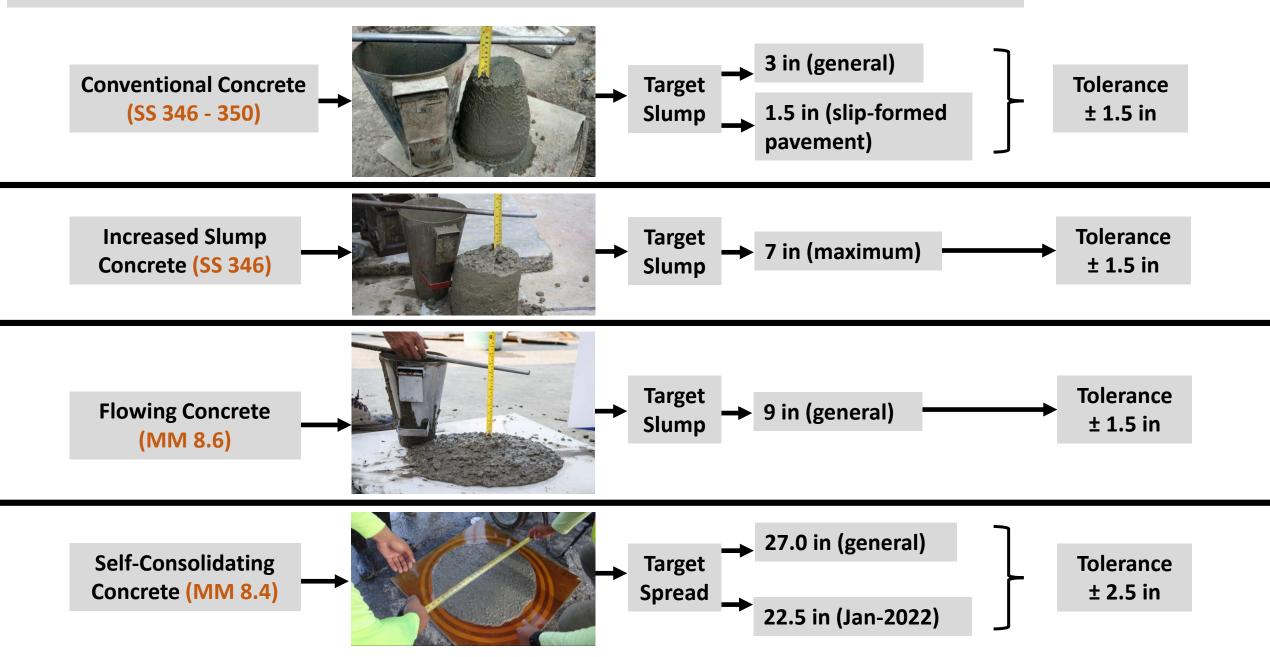

#### **Buy America Concrete – Cars Dealerships**



Ultra-High-Performance Concrete (UHPC) (Ford Formula 1 Team)

## What is your favorite car?



Self-Consolidating Concrete (SCC) (Ford GT-40)

Issues



 $\diamondsuit$ 



Flowing Concrete (Chevrolet Corvette) Cementitious Content Cementitious



Increased Slump Concrete (Cadillac CT6)



Conventional Concrete (Ford Fusion)

#### Conventional Concrete Class I (Pavement) f'c = 3,000 psi (SS 350 – MM 9.3)









⇐ Excessive Slump Issues (Target 1.5 in ± 1.0 tolerance [0.5 in to 2.5 in])

#### Ex. Use of Flowing Concrete I-395 Signature Bridge Central Footing (District 6)






Flowing Concrete (MM 8.6), SCC (MM 8.4) and UHPC (DevSpec 349/927) require a Mock-Up Production and Evaluation





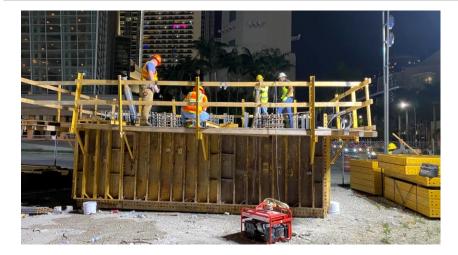









#### **UHPC (DevSpec 349/927)**


#### Standard Concrete Products (Tampa) Field Demonstration










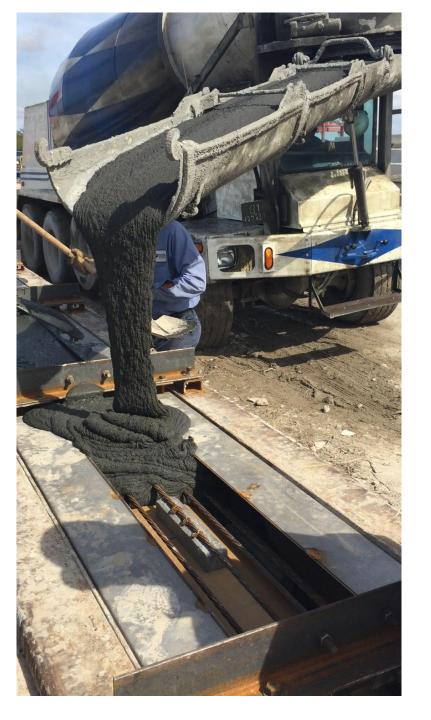

#### UHPC – Mockup Demonstration in District 3 – SR 8 Approach Slab Replacement





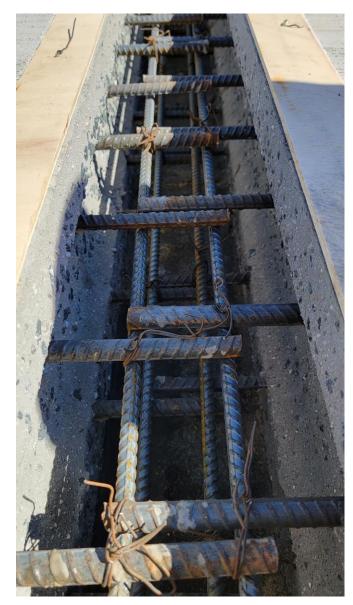



#### **Concrete System**

#### **Mix Design (Proportioning)**

Mix Design

Batching

Transporting

**Placing & Finishing** 

#### Curing



Placing &


Finishing

Curing

Transporting

Batching

#### Sources of variability in concrete

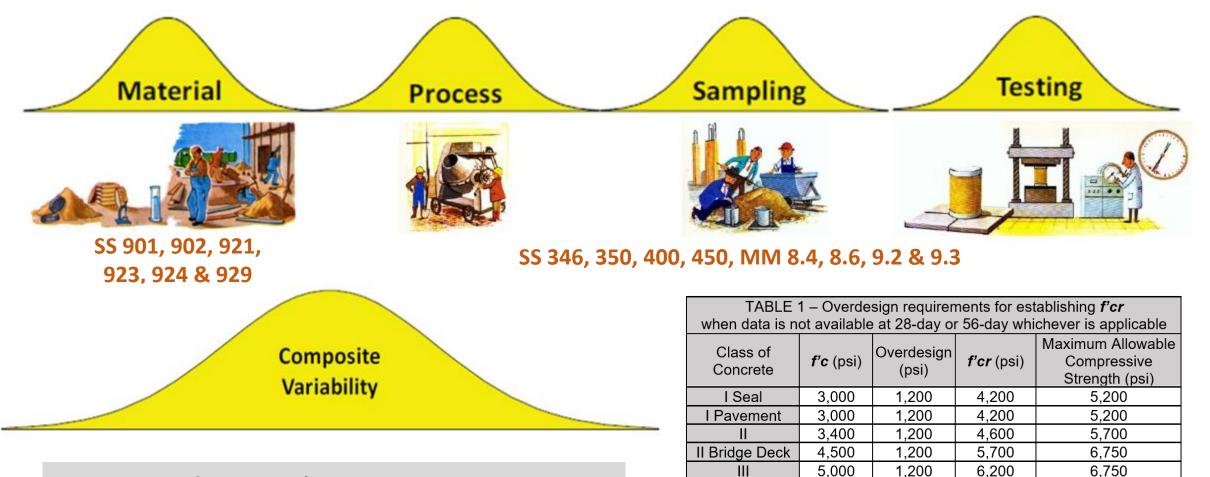

IV

IV Drilled Shaft

V VI

VII

5,500

4,000

6,500

8,500

10.000

1.250

1,200

1,350

1,550

1.700

6,750

5,200

7,850

10,050

11,700

7,850

6,200


10,050

11,700

13,000

We overdesign the concrete MM 9.2 f'cr = f'c + Overdesign

#### Basis of Concrete Mix Design ⇒ SS 346 & MM 9.2

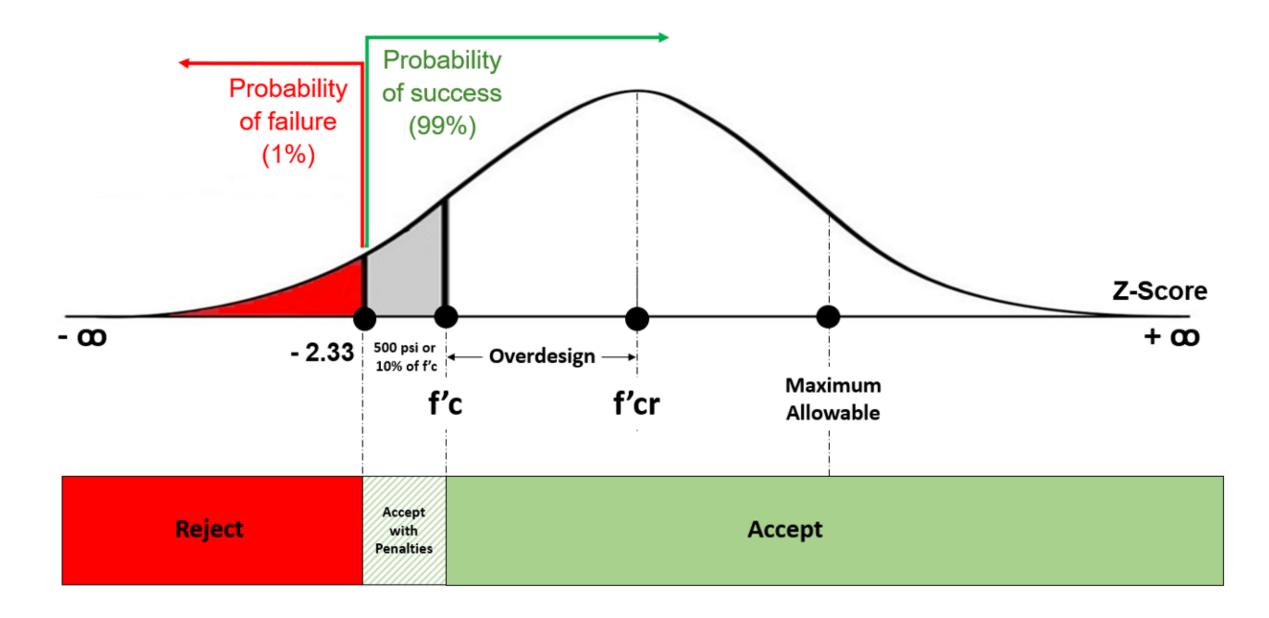

### Mix Design (Proportioning)



Design


A Concrete Mix Design is unique and proprietary (MAC – ID).

Concrete supplier proposes a mix design for approval. *DMRO reviews* the mix. *SMO approves* the mix.

Each mix design approved meets the specified compressive strength plus an overdesign for the specified class of concrete (MM 9.2)

Raw materials substitutions may be considered (at the discretion of the SMO) to prevent concrete placement delays on ongoing construction projects (MM 9.2)

The Engineer may allow the substitution of a higher-class concrete in lieu of the specified class concrete. Acceptance is based on the requirements in Table 346-3 for the specified class concrete. (SS 346-3.2)



Concrete Batch Plants follow the mixer manufacturer's design or recommendations.




#### <u>Wet Mixers</u>: Batch Plants equipped with a central mixer.



<u>Dry Mixers</u>: Batch Plants without a central mixer.

Plants weigh the materials, and ready-mix trucks are utilized to mix and transport the concrete.

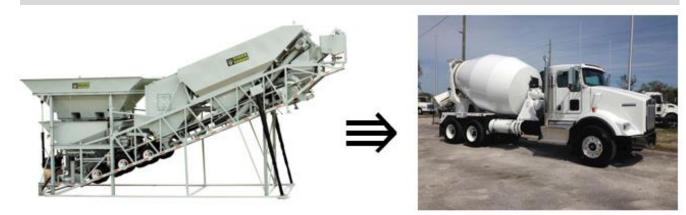



#### <u>Movable Mixers</u>: Proportion, mix and deliver the concrete.





#### Developmental Specification 346 (Volumetric Mixers)

https://www.fdot.gov/programmanagement/otherfdotlinks/d evelopmental/default.shtm

VOLUMETRIC MIXERS Use only with Structural Concrete Class I and II. NOTE: Must be used with Dev346VM and Dev105VM	Jose Armenteros	DevMM9.2VM
VOLUMETRIC MIXERS Use only with Structural Concrete Class I and II. NOTE: Must be used with Dev346VM and DevMM9.2VM	Jose Armenteros	Dev105VM
VOLUMETRIC MIXERS Use only with Structural Concrete Class I and II. NOTE: Must be used with Dev105VM and DevMM9.2VM	Jose Armenteros	Dev346VM




**Batch Plant Requirements are detailed in the Plant QC Plan.** Ensure that each truck has a rating plate and a valid mixer identification card issued by the Department. Ensure that the revolution counter on the mixer is working properly, and calibration of the water dispenser has been performed within the last twelve months. (SS 346-8 & MM 9.2)

Operate all concrete mixers at speeds and volumes per the manufacturer's design or recommendation as stipulated on the mixer rating plate. (SS 346-7.1)



DMRO performs quarterly Batch Plant inspections



#### Transporting (SS 346, 400, MM 9.2)

**346-7.2.1 Transit Time:** Ensure compliance with Table 346-8 between the initial introduction of water into the mix and completely discharging all the concrete from the truck. Reject concrete exceeding the maximum transit time. The Engineer may approve an extension of the transit time which will be identified on the approved mix design.

Agitator Trucks
Agitator Trucks
60 minutes
90 minutes <sup>(1)</sup>
d

**346-7.2.2 Placement Time:** All the concrete in a load must be in its final placement position a maximum of 15 minutes after the transit time has expired unless a time extension is approved by the Engineer.

For Class IV (Drilled Shaft) mixes, placement time may be extended provided the slump loss time of the first concrete placed is not exceeded throughout the elapsed time. Fresh concrete loses its workability with time. This phenomenon is called "slump loss".

## Placing and Finishing (SS 400)



Finishing

When concrete arrives to the job site and before placing it, check the delivery ticket information. (MM 9.2)

- The Contractor is responsible for ensuring that the truck has an FDOT issued mixer identification card.
  - If the mixer card is not present, the Contractor must reject the load.

Reject concrete exceeding 100°F at the time of placement. (SS 346-7.5)

Do not mix or place concrete when the air temperature is below 40°F. (SS 346-7.5) Protect the fresh concrete from freezing in accordance with Section 400.

Where conveyor belts, pumps, or chutes are used to transport concrete directly to the point of final placement, samples will be obtained at the point of discharge.

Avoid segregation of concrete during placement. (SS 400-7.5)



#### **Placing and Finishing**

Segregation is the tendency for the coarse aggregate to separate from the mortar and is a measure of how cohesive the concrete mix is. Segregation can lead to non-uniform zones in the concrete, such as rock pockets or honeycombs.

Use a method and manner of placing concrete that avoids the possibility of segregation or separation of aggregates.

**Concrete Segregation - Causes** 



Excessively wet mix. Over vibration. Excessive drop in placing (+5 ft). Gap graded aggregate. Low mix viscosity.






#### (SS 400-16)



Early covering with mats, kept watersoaked, protect concrete while it cures in hot weather (SS 400-16.2)

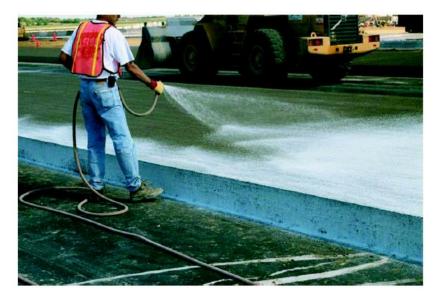



Curing compound application on Concrete Class I (Pavement) (SS 400-16.2)

#### Sampling and Testing


#### **Plastic Properties**



Slump



Air Content (Pressure Meter)

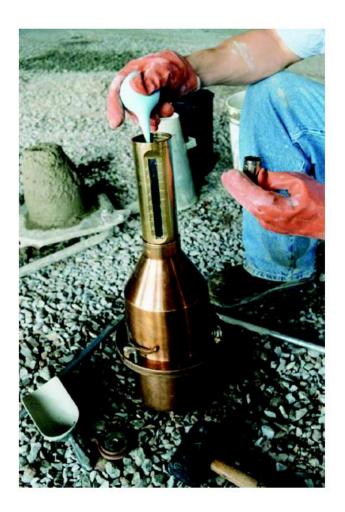

Air Content (Roller Meter)

#### **Plastic Properties**





#### Temperature



Unit Weight (Density)



#### **Casting Cylinders**

#### Do we reject concrete with slump out of the tolerance? (Y / N)

#### YES, we do.

There are opportunities to correct a low slump. **346-6.4 Plastic Property Tolerances:** Reject concrete with slump or air content that does not fall within the specified tolerances, except as noted below, and immediately notify the concrete production facility that an adjustment of the concrete mixture is required. If a load does not fall within the tolerances, test each subsequent load and the first adjusted load. If failing concrete is not rejected or adjustments are not implemented, the Engineer may reject the concrete and terminate further production until the corrections are implemented.


At the Contractor's risk, water may be added at the placement site immediately after completion of the initial slump test, either to correct a low slump or to increase the concrete workability, provided the addition of water does not exceed the water to cementitious materials ratio as defined by the mix design.


After adding water, perform an additional slump test to confirm the concrete is within the slump tolerance range. If the slump is outside the tolerance range, reject the load. If an adjustment is made at the concrete production facility, perform a slump test on the next load to ensure the concrete is within the slump tolerance range. Do not place concrete represented by slump test results outside of the tolerance range. Include water missing from the water storage tanks upon arrival at the project site in the jobsite water added.

Do not allow concrete to remain in a transporting vehicle to reduce slump.

There is an exception for Self-Consolidating Concrete (SCC) based on additional plastic property tests (Precast/Prestressed). (MM 8.4)


#### **Concrete Acceptance based on Compressive Strength at 28 days**

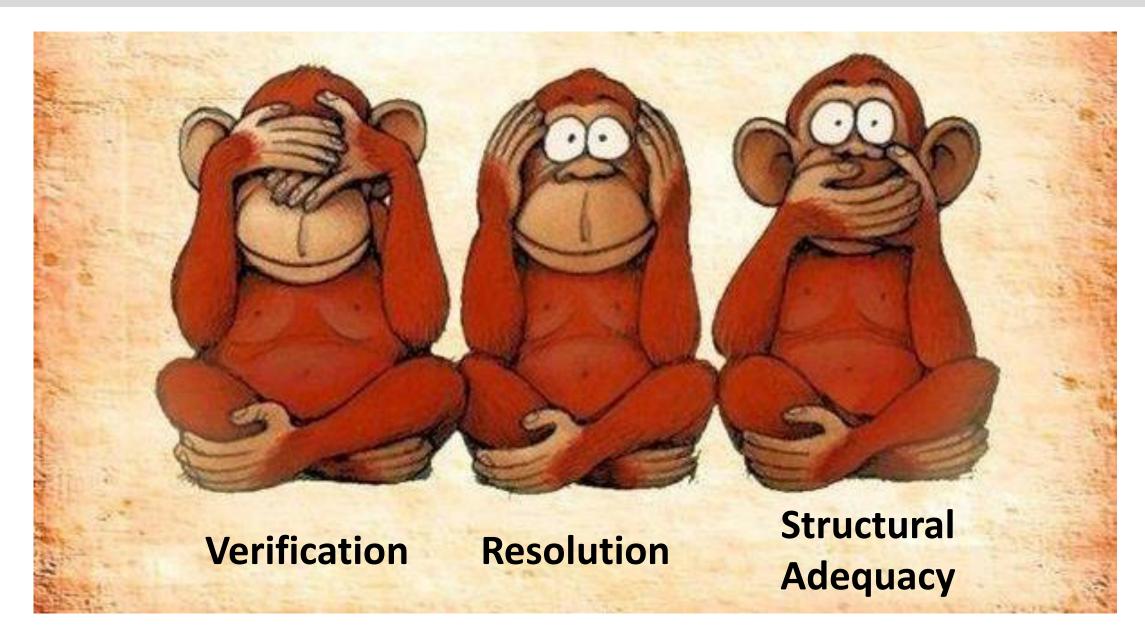



#### Verification of compressive strength by comparing *QC* and *VT* results.

QC VT Lot 1 QR VR +Lot 2 + Lot 3 **Resolution Cylinders** Lot 4 "Hold Cylinders"

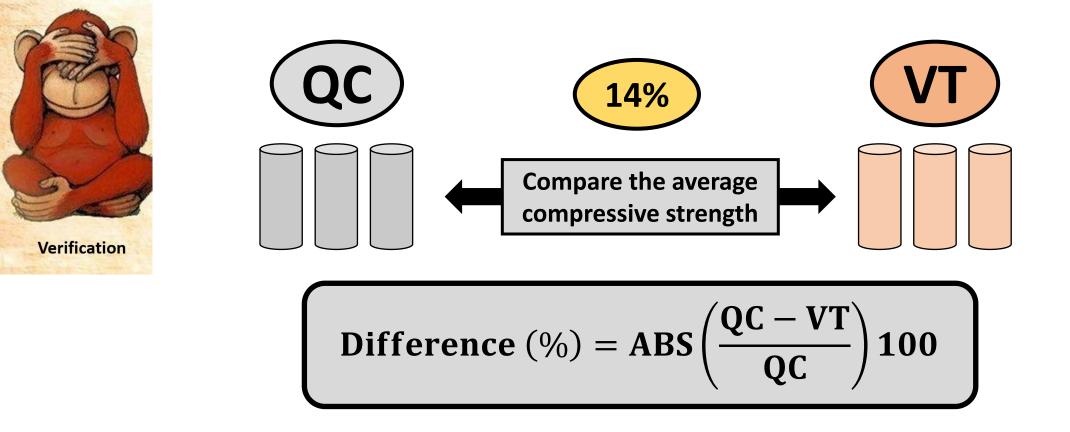


#### **IF Difference (%)** ≤ **14%**

QC test results are verified, the Engineer will accept the concrete based on QC test results.

#### **IF Difference (%) > 14%**

The QC data is not verified, and the Engineer will initiate the Resolution procedure.

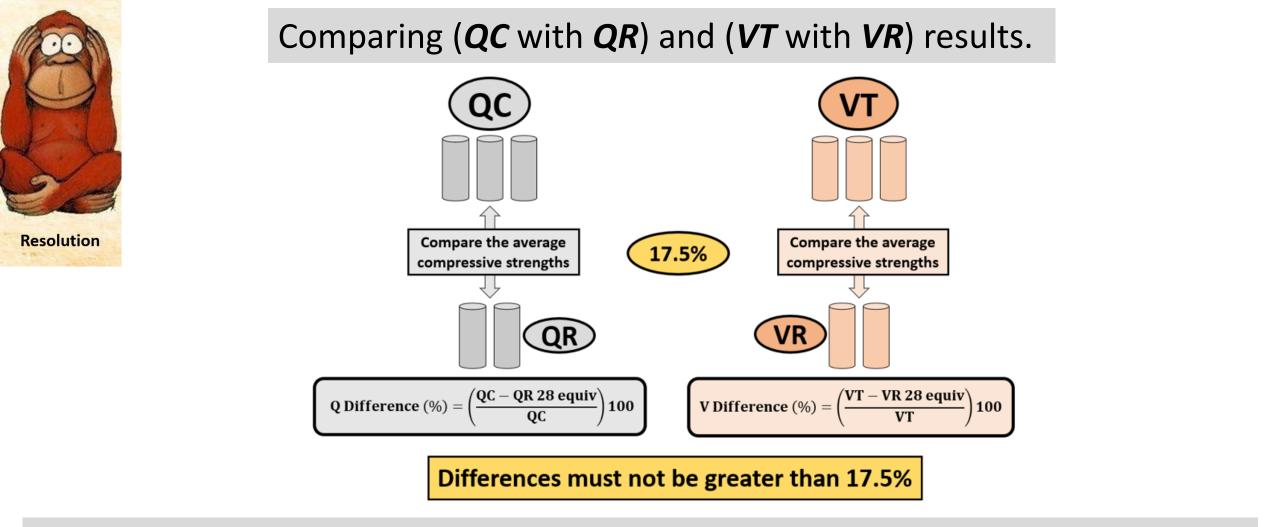

Based on the **Resolution** process, the Engineer will determine the most accurate strength test result (*QC* **or VT**) to represent the four or fewer consecutive LOT(s).

When the Engineer cannot determine which strength test results are the most accurate, the concrete represented by the four consecutive LOTs will be evaluated based on the **QC** data.



The Engineer will determine the most accurate strength test result to represent the LOTs as follows:

When both results meet the established comparison criteria, both are deemed accurate, and the QC strength will represent the LOTs. The Department will pay for cost of the resolution testing.

When only the QC result is within the established comparison criteria, the QC strength is deemed as most accurate and will represent the LOTs. The Department will pay for the cost of the resolution testing.

When only the VT result is within the established comparison criteria, the VT strength is deemed as most accurate and will represent the LOTs. The Department will assess a \$1,000 pay reduction for the cost of the Resolution Investigation.

When both results are outside the established comparison criteria, the Engineer, with input from the District Materials Office, will determine if any Department IA evaluations are required and which test results are most accurate. The Department will pay for the cost of the resolution testing.



17.5%

QC




Adequacy

28-Day

Average

The Engineer will accept the concrete of a given LOT when it meets the minimum specified compressive strength requirement (*f'c*) (SS 346-9.4)

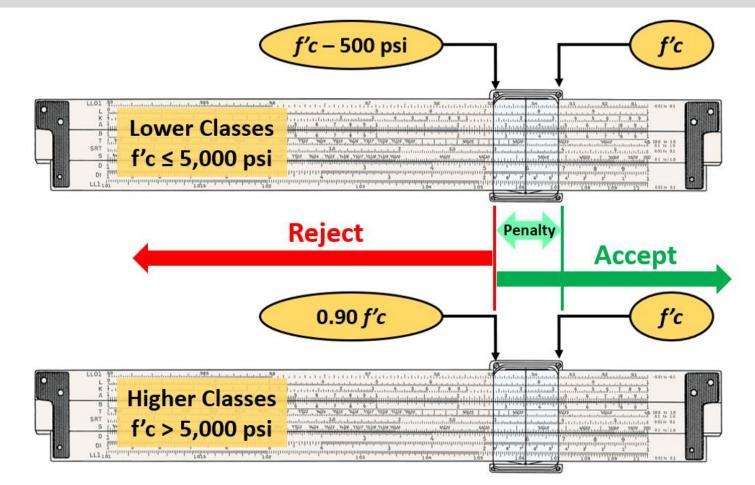



Reduction in Pay is equal to the reduction in percentage of concrete compressive strength below the specified minimum strength:


100

Reduction in Pay (%) =  $\left(\frac{f'c-28 \text{ day Strength}}{f'c}\right)$ 

## Summary




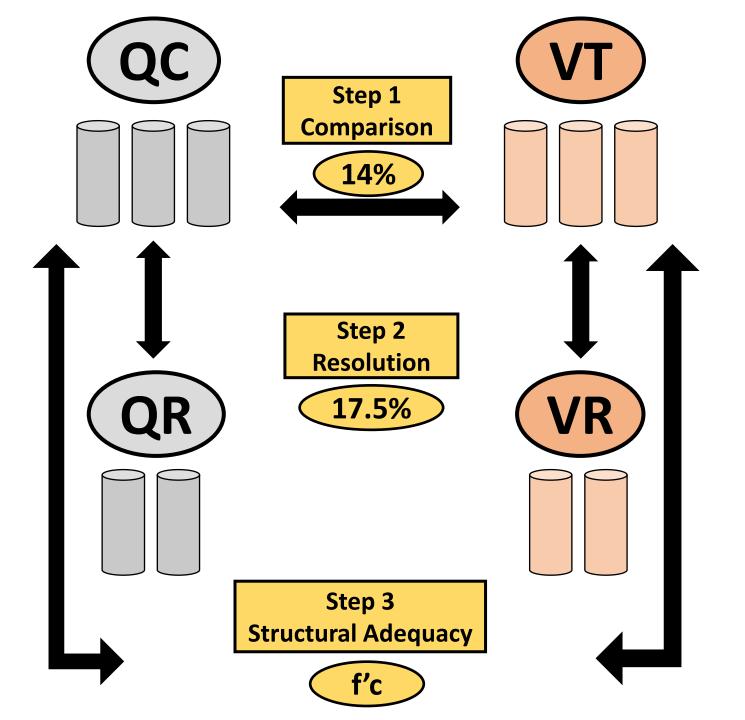

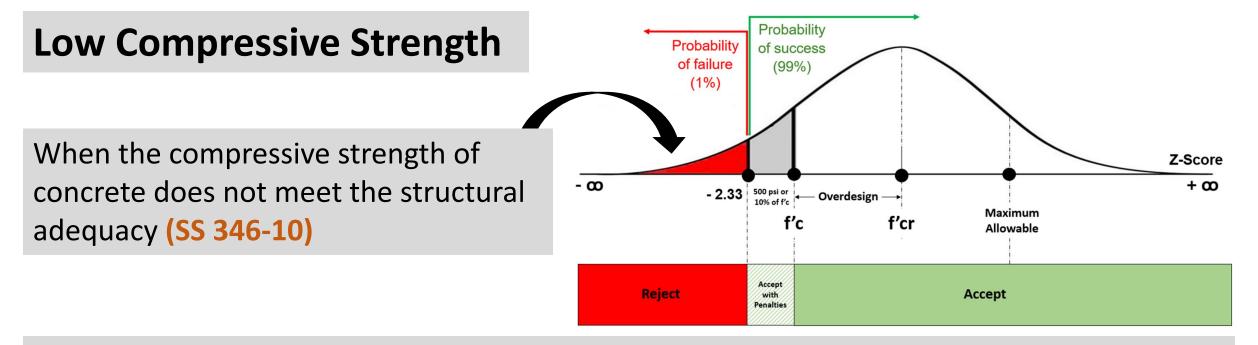

- 1. Submit an Engineering Analysis Scope to establish structural and durability adequacy. If the results of the structural analysis indicate adequate strength to serve its intended purpose with adequate durability, and is approved by the Engineer, the Contractor may leave the concrete in place, otherwise, remove and replace the LOT of concrete in question at no additional expense to the Department.
- 2. At the Engineer's discretion, obtain drilled core samples to determine the in-place strength of the LOT of concrete in question, at no additional expense to the Department.

## **Special Types of Concrete**

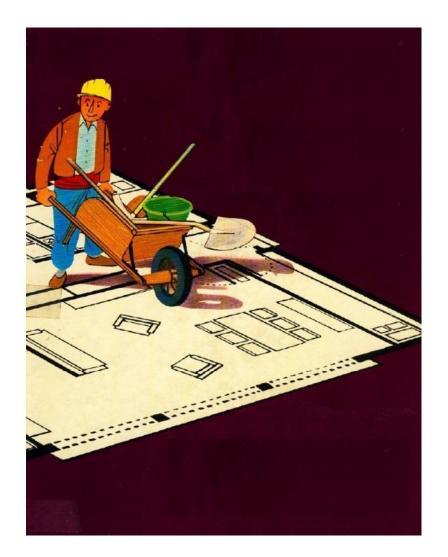

## **Drilled Shaft**

**Mass Concrete** 

**Fiber Reinforced Concrete (FRC)** 

**Ultra-High-Performance Concrete (UHPC)** 

# Drilled Shaft SS 346-4.1




Obtain *slump loss* tests results demonstrating that the drilled shaft concrete maintains a slump of at least 5 inches throughout the concrete *elapsed time* before drilled shaft concrete operations begin.





If the *elapsed time* during placement exceeds the *slump loss* test data, submit an Engineering Analysis Scope in accordance with 6-4

## **Drilled Shaft (Example)**

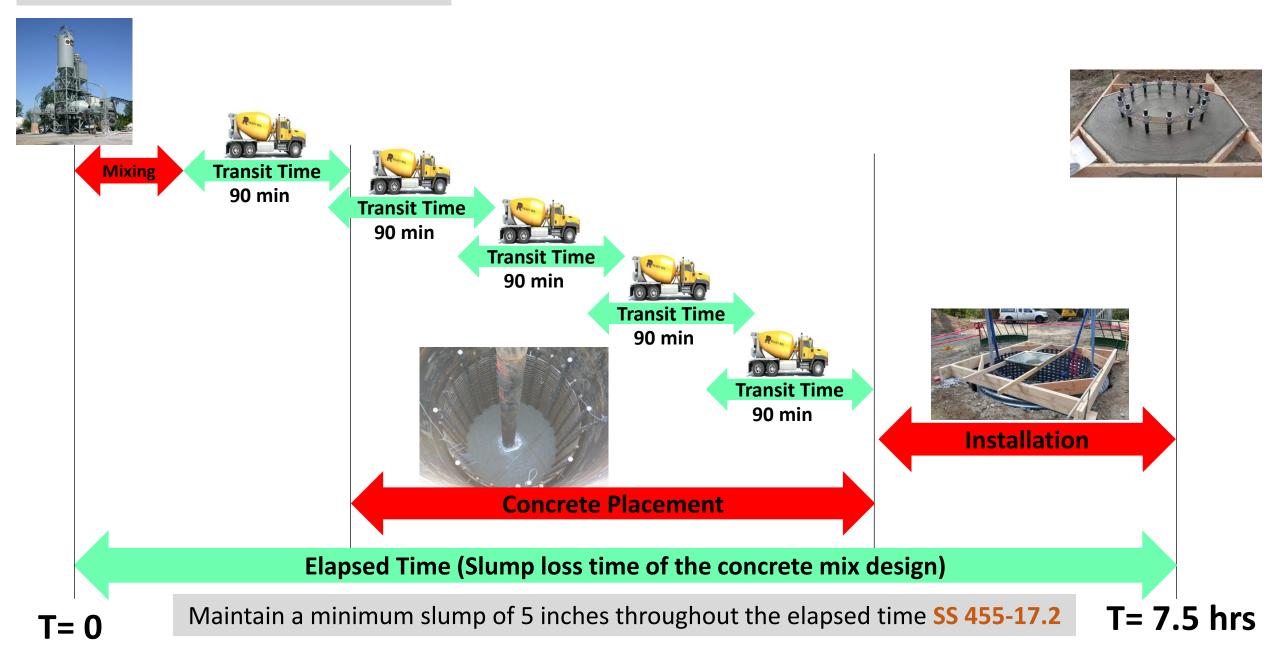

## Drilled Shaft (Elapsed Time) SS 355-17.2

**455-17.2 Placement Time Requirements:** The elapsed time for placing drilled shaft concrete includes the concrete mixing and transit time, the concrete placement time, the time required to remove any temporary casing that causes or could cause the concrete to flow into the space previously occupied by the casing, and the time to insert any required column steel, bolts, weldments, etc. The elapsed time begins at the time the first truck load placed in the shaft is batched. Maintain a minimum slump of 5 inches throughout the elapsed time. Use materials to produce and maintain the required slump through the elapsed time that meets the class of concrete specified. Provide slump loss tests that demonstrate to the Engineer that the concrete will maintain a 5 inch or greater slump for the anticipated elapsed time before beginning drilled shaft construction.






= 7.5 hrs

Elapsed Time (Slump loss time of the concrete mix design)

Mass Concrete SS 346-4.2

# Mass Concrete Designation The designer includes the designation in plan sheets. (SDG)

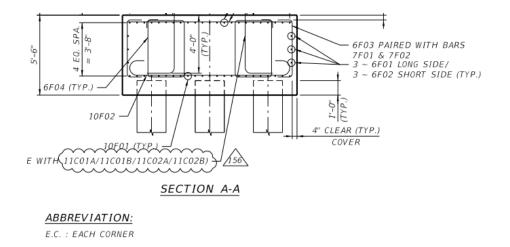

#### NOTES:


- 1. TOP REINFORCING STEEL MAY BE PLACED ± 2" FROM PLAN LOCATION TO CLEAR COLUMN DOWELS REINFORCING BARS.
- 2 ALL PLIES ARE 24" SOUARE PRESTRESSED CONCRETE
- 2. ALL PILES ARE 24" SQUARE PRESTRESSED CONCRETE PILES.
- 3. FOR LOCATION OF COLUMN DOWELS, SEE COLUMN REINFORCEMENT ON PIER DETAILS SHEETS. 4. FOR REQUIRED CONCRETE COVERS AND OTHER REQUIREMENTS SEE GENERAL NOTES SHEETS.
- . PILE CAP SHALL PROVIDE FOR MASS CONCRETE.

6. FOR WORKING POINT LOCATION, SEE FOUNDATION LAYOUT SHEET.

Mass Concrete Control Plan (MCCP) The Contractor uses a Specialty Engineer. (SS 346)



### **Mass Concrete. Placement and Surface Inspection**

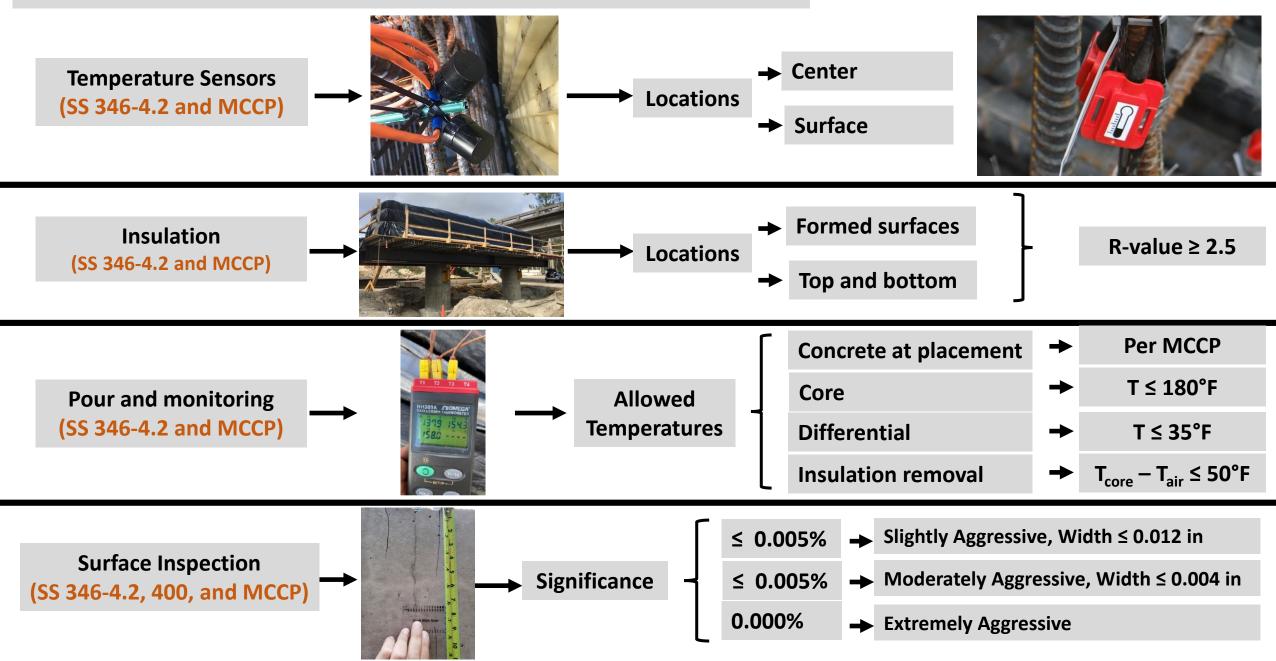

# Mass Concrete SS 346-4.2

Cooling Pipes (active cooling)

## Installation

Pumps, Pipes, Fittings, Meters



Operation Pumps, Pipes



## Monitoring

Temperature, Pressure (P), Flow Rate (F)









## **Fiber Reinforced Concrete (FPC)**




## **Developmental Specification 346 (FRC)**

https://www.fdot.gov/programmanagement/otherfdotlinks/developmental/default.shtm

Fiber Reinforced Concrete		
Calls for the use of Fiber		
Reinforced Concrete using		Dev346FRC
either polymeric fibers or steel	Jose Armenteros	
fibers in concrete bridge decks		Project List
on prestressed concrete slab		
units.		

## **Ultra-High Performance Concrete (UHPC)**



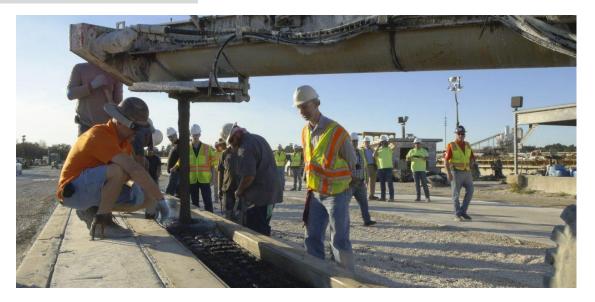


### **Developmental Specification 346 (UHPC)**

https://www.fdot.gov/programmanagement/otherfdotlinks/developmental/default.shtm

Ultra-High-Performance Concrete -	Jose Armenteros	Dev349UHPC Project List
Prepackaged Ultra-High- Performance Concrete Provide the material requirements for ultra-high- performance concrete. NOTE: Use with Dev 349UHPC	Jose Armenteros	Dev927UHPC Project List

# **Concrete Personnel Qualification Requirements**

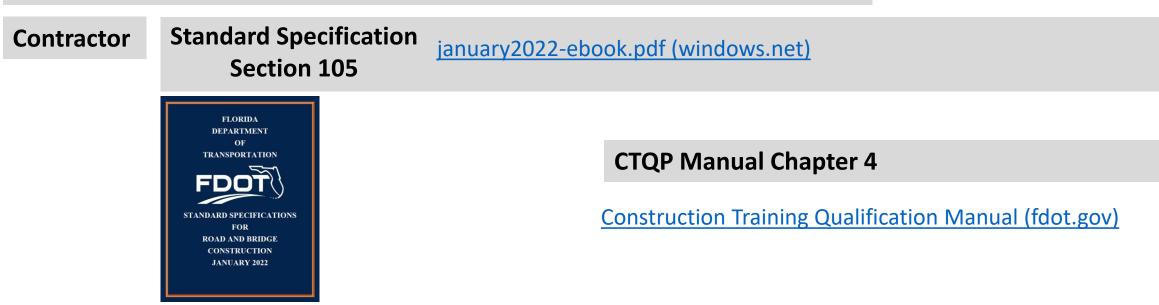

#### Department

#### **Materials Manual**

Volume I

SMO: Materials Manual (state.fl.us)

#### (Training Articles)

Section 6.2 Precast Concrete Pipe

Section 6.3 Precast Concrete Drainage Structures and Box Culverts

Section 8.1 Precast Prestressed Concrete Products

Section 8.2 Incidental Precast Concrete Products

Section 9.2 Concrete Production

Section 9.3 Concrete Pavement Production Facility Guide

# Part 2

# **Precast / Prestressed Concrete**



Thomas Frank Concrete Field Operations Manager <u>Thomas.Frank@dot.state.fl.us</u> (352) 955-6683

## **FDOT Precast Concrete**

Precast concrete Producers are required to have a Quality Control (QC) manager, and a QC Plan/Program.

District Materials personnel have Quality Control (QC) Plan acceptance authority over four categories of precast concrete Producers.

Materials personnel perform periodic verification inspections at the plants.

The QC stamp must be applied to the products by the Producer's QC staff after final inspection and prior to shipment to the project.

The QC stamp includes the Plant's Department-assigned Facility ID (e.g., Pl-18 for Precast Concrete Pipe) and may contain a company logo. Precast Concrete Pipe (PI) MM 6.2







## Precast Concrete Drainage Structures and Box Culverts (PC) MM 6.3






## Incidental Precast Concrete Products (IPC) MM 8.2






## Precast Prestressed Concrete Products (PCP) MM 8.1

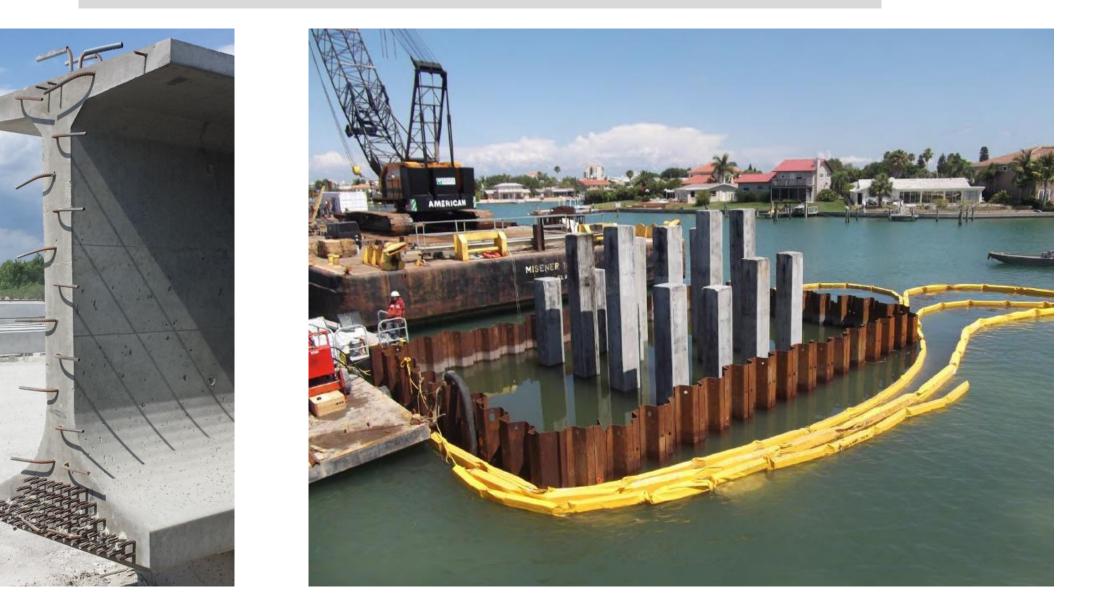

## **Production Facility QC Stamp**

At a minimum, the QC Stamp must contain the Department-issued Facility Identifier.

# Example of QC Stamp on wall of concrete pipe.

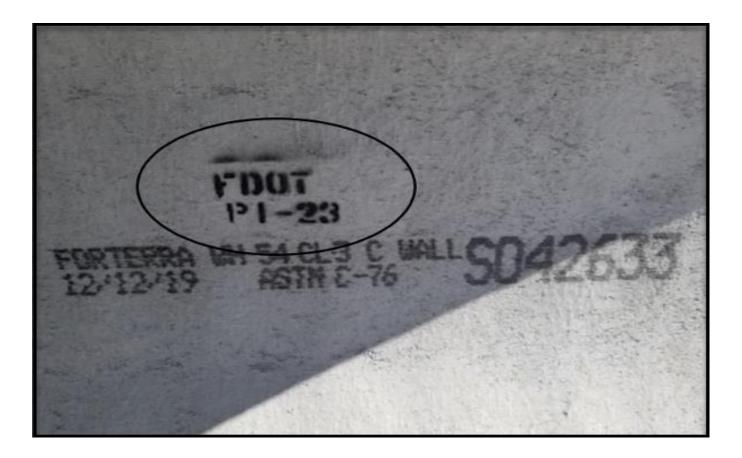

## **Verifying Precast Producer's QC Stamp**

Can be viewed from the Precast Concrete Production Facility on the Contractor QC Plan in MAC.

E6J5	3: DESIGN-BUILD CONTRACTS [ARCHER WESTERN-DE MOYA JOINT VE]			Go to	Type Contract Number/
F	Precast Drainage Structures				
	Production Facilities [2]				
	Production Facility	City	Status		
	PC-18 - UNITED CONCRETE PRODUCTS	MEDLEY, FLORIDA		C Stamp	
			[1/23/2020]		
			_		
	PC-43 - All American Precast Manufacturing Corp.	Homestead, FLORIDA	QC Plan Accepted for Precast Drainage Structures [2/25/2021]	C Stamp	

### Materials Acceptance and Certification System

https://mac.fdot.gov/

# Segmental Precast Concrete for Post-Tensioned Bridges SS 452





These items are produced by Contractor (or sub) and verified by CEI personnel.

## **Buy America requirements for Precast Concrete Products**

There are two documents sent from the precast concrete producer to the project which contain Buy America / source of steel references:

- **A.** *Material Certification* this document is <u>provided at the beginning of</u> <u>the project</u> stating that the Producer will manufacture the products in accordance with their QC Plan and the Contract Documents.
- B. Delivery Ticket(s) must contain a <u>Buy America compliance statement</u>, and the dollar amount of any foreign steel used (Producer must put \$0 if none).

## Material Certification provided at beginning of project SS 6-5.2 MM 6.2, 6.3, 8.1 & 8.2

#### "For Use on Producer's Letterhead"

#### MATERIAL CERTIFICATION

MANUFACTURED PRECAST PRESTRESSED CONCRETE PRODUCTS SPECIFICATION NUMBER \*(450)

FDOT Financial Identification Number (FIN):

FDOT Contract Number:

Project Location:

**Description of Products:** 

(Notarized)

We certify that the described precast prestressed concrete products will be manufactured by our plant in accordance with the requirements set forth in the Florida Department of Transportation Contract Documents, the plant's approved quality control plan, and Section 6 (Source of Supply–Steel) of the Florida Department of Transportation Standard Specifications. The plant's quality control manager or the inspectors under his/her direct supervision will stamp the products prior to their shipment to the project site. The quality control manager's stamp is confirmation of the <u>aforementioned certification</u>. Each shipment of the precast prestressed concrete products to the project site will be accompanied with a signed or stamped delivery ticket, which will provide the description and list of the products.

#### Manufacturer Officer or Designee:

Name (print):	
Signature:	
Date:	

Delivery Ticket provided with each shipment SS 6-5.2 MM 6.2, 6.3, 8.1 & 8.2

The dollar amount of any foreign steel and iron used in the delivered precast products must be declared so those amounts can be included in the project total for compliance with Section 6-5.2 Source of Supply-Steel.

					BC	DL/DOT-	Nº 4
OLD TO:				SHIP TO:			
IONE: X:				PHONE:			
DATE	DELIVERY	PICKUP	SHIP VIA		F.O.B.	TERMS	ORDER NO.
QTY	1	DESCRII	PTION			PRICE	AMOUNT
			25				
The do	COMPLIANCE ST. ollar amount of Ne prestressed produ	on-domestic	steel or iron i	ncorporate	ed in the		
certified accordanc	that the product( we with the Buy An described herein a of Transportation s	s) described a nerica provisi re in compliar	bove was (w ons of 23 CFF ace with all Fl	ere) manu 8 635.410,	factured in	n	
C. Manage		1	- 1999				
stomer Sign Represen	ature:					DATE:	

## **Buy America requirements for Precast Concrete Products**

#### SECTION 6 CONTROL OF MATERIALS

**6-5.2 Source of Supply-Steel:** Use steel and iron manufactured in the United States, in accordance with the Buy America provisions of 23 CFR 635.410, as amended. Ensure that all manufacturing processes for this material occur in the United States. As used in this specification, a manufacturing process is any process that modifies the chemical content, physical shape or size, or final finish of a product, beginning with the initial melting and continuing through the final shaping and coating. If a steel or iron product is taken outside the United States for any manufacturing process, it becomes foreign source material. When using steel or iron materials as a component of any manufactured product (e.g., concrete pipe, prestressed beams, corrugated steel pipe, etc.), these same provisions apply. Foreign steel and iron may be used when the total actual cost of such foreign materials does not exceed 0.1% of the total Contract amount or \$2,500, whichever is greater.


Foreign steel and iron may be used when the total actual cost of such foreign materials does not exceed 0.1% of the total Contract amount or \$2,500, whichever is greater.

# Part 3

## **Structural Materials**



### Richard DeLorenzo Structural Lab Manager <u>Richard.DeLorenzo@dot.state.fl.us</u> (352) 955-6667





Metal Accessory Materials for Concrete Pavement and Concrete Structures (SS 931)

Reinforcing Steel Bars Dowel Bars Meta

Metal Dowel Bar Assemblies Welded Wire Reinforcement

Prestressing Strand and Bar (SS 933)

Strand for Prestressing (Post-Tensioning)

Steel Bars for Prestressing (Post-Tensioning) Structural Steel and Miscellaneous Metal Items (Other than Aluminum) (SS 962)

Structural Steel, Steel Castings, Steel Forgings, Iron Castings, Bolts Nuts, Washers and Direct-Tension-Indicator (DTI) Devices, Anchor Rods, Bridge Bearing Materials, and Miscellaneous Metal Items



Components f	or Guardrail (SS 967)
Steel Posts	Steel Offset Blocks
Steel Panels	Bolts, nuts, washers, and other accessories

## **Approved Products List (APL)**

Curing Compound (SS 925)	Epoxy Bonding Compound (SS 926)	Materials for Concrete Repair
Non-Shrink Grout	<b>Epoxy Anchor</b>	(SS 930)
(SS 934)	(SS 937)	Post-Tensioning Grout (SS 938)

## Metal Accessory Materials for Concrete Pavement and Concrete Structures (SS 931)

- Reinforcing Steel Bars
- Dowel Bars
- Metal Dowel Bar Assemblies
- Welded Wire Reinforcement





## **Acceptance of Reinforcing Steel Bars**



## Manufacturer's certified mill analysis

• Provided to the Engineer prior to use, for each heat, size, and grade per shipment.


## Samples taken by the Department

- The Engineer will select samples representing each LOT of reinforcing steel. (Lot is defined as 100 tons or less).
- Projects with less than two tons of bars do not require Department sampling.

## Manufacturer's compliance with the National Transportation Product Evaluation Program (NTPEP)

• Verified by SMO for samples taken.

## **Acceptance of Reinforcing Steel Bars**





- Select 3 pieces, 7' long, randomly selected by Department.
- Sample the most frequently used bar size
- Mill Certificate, upload to MAC sample.
- Securely attach MAC ID to test samples.

## Send 1 bar, hold 2 (as check samples if needed)

- No preselected "test bars", "splice bars", or "FDOT test samples".
- Don't wait until the end of the project to submit samples.

	CMC STEEL FLORIDA 16770 Rebar Road Baldwin FL 32234-4100	CERTIFIED MILL TEST REPORT For additional copies call 904-266-1468	We hereby certify that the test results presented here are accurate and conform to the reported grade specification
		Heat Number	Alex Renesto
EAT NO.:5004371			Quality Assurance Manager
ECTION: REBAR 16MM ( RADE: ASTM A615-18e1		• Bar Size	Delivery#: BOL#: CUST PO#:
MELT DATE: 10/11/2019 Sert. No.: / 004371K002	T	Grade     Specification	CUST P/N: DLVRY LBS / HEAT: 0.000 LB DLVRY PCS / HEAT:
	0	Specification	
Charact	eristic Value	Characteristic Value	Characteristic Value
С	0.43%	Bend Test 1 Passed	
Mn	0.99%	Rebar Deformation Avg. Spaci 0.392IN	
P	0.015%	Rebar Deformation Avg. Heigh 0.041IN	
S	0.039%	Rebar Deformation Max. Gap 0.126IN	
SI	0.24%		
Cu	0.34%		
Cr	0.14%		· · · · · · · · · · · · · · · · · · ·
Ni	0.10%		
Mo	0.025%		The Following is true of the material represented by this MTR:
ν	0.004%		*Material is fully killed
СЬ	0.002%		*100% molted and rolled in the USA
Sn	0.022%		"EN10204:2004 3.1 compliant
Yield Strength test	1 65.9ksi		*Contains no weld repair
Yield Strength test 1	(metri 455MPa		*Contains no Mercury contamination
Tensile Strength tes	st 1 106.1ksi		*Manufactured in accordance with the latest version
Tensile Strength 1 (m	Y		of the plant quality manual
Elongation test 1	<ul> <li>Melted and</li> </ul>	Rolled in the USA	*Meets the "Buy America" requirements of 23 CFR635.410, 49 CFR 661
Elongation Gage Lgth	mented and		*Warning: This product can expose you to chemicals which are
Tensile to Yield ration			known to the State of Galifornia to cause cancer, birth defects
Elongation Gage Lgth	<ul> <li>Meets the "I</li> </ul>	Buy America"	or other reproductive harm. For more information go
		s of 23 CFR 635.410,	to www.P65Wamings.ca.gov
MARKS :	49 CFR 661 a		

## **Identification of Rebar**



The Concrete Reinforcing Steel Institute (CRSI)

**Manual of Standard Practice** 


Acts as a guide to available reinforcing steel and accepted industry practices.

Identifies the U.S. Manufactures of Concrete Reinforcing Steel Bars

**Manual of Standard Practice - CRSI Resource Materials** 

https://resources.crsi.org/resources/manu al-of-standard-practice/

## **Identification of Rebar**

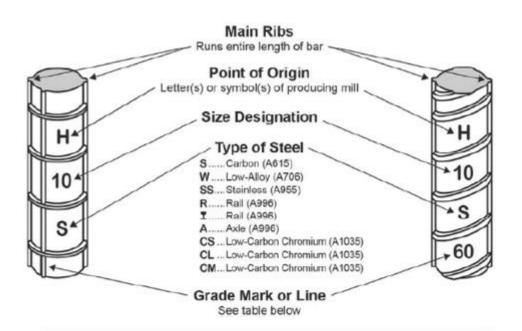

Grade of Steel	Grade Mark*	Grade Line**
40	blank	no lines
50	blank	no lines
60	60	1 line
75	75	2 lines
80	80	3 lines
100	100 or C (A615)	4 lines (A615)
100	100 (A1035)	3 lines (A1035)
120	120	4 lines

\*For stainless-steel (A955) reinforcing bars: Gr 60 = "•", for Gr 75 = "••"


"Grade lines must be at least 5 deformation spaces long

## **ASTM Identification Marks**

## **Bar Markings allows you to identify:**

- Producing Mill
- Bar Size
- Type of Steel
- Grade

# **Steel Mill Stamps**

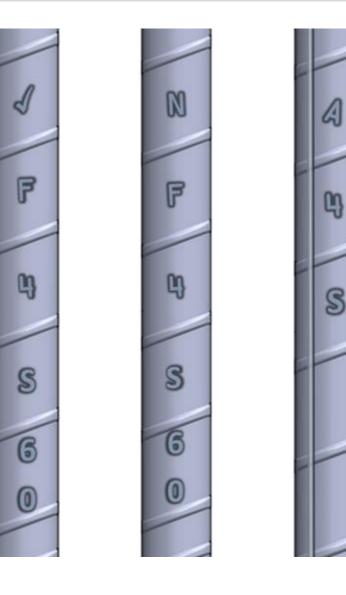


- Examples of common mill stamps used in Florida.
  - ✓ F CMC Steel Florida
  - NF Nucor Steel Florida
  - A Nucor Steel Alabama
- Foreign Steel will identify the country of origin.



#### Acceptance of Dowel Bars and Welded Wire Reinforcement

- Manufacturer's certified mill analysis.
- Provided to the Engineer prior to use, for each heat and size per shipment.



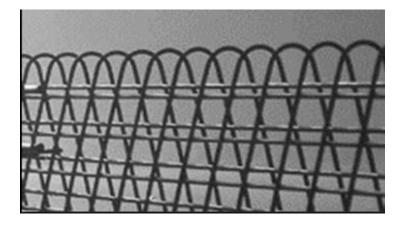



#### **Dowel Bar Assemblies**

 Product included on the Department's Approved Products List (APL).

#### Prestressing Strand and Bar (SS 933)

- Strands for Prestressing (Post-Tensioning).
- Steel Bars for Prestressing (Post-Tensioning).



#### **Steel Pre-Stressing Strand (Post-Tensioning)**

### Manufacturer's certified mill analysis.

 Provided to the Engineer prior to use, for each heat/ production lot, per shipment.

### Project personnel to collect samples.

- The Engineer will select one sample per producer, per size, per shipment.
- Select 3 pieces, 5' long, randomly selected by Department.
- Send 1 bar, hold 2 (as check samples if needed).
- Certified mill analysis, upload to MAC sample.
- Securely attach MAC ID to test samples.
- Don't wait until the end of the project to submit samples.



Steel Stressing Bars (Post-Tensioning)



### Manufacturer's certified mill analysis

 Provided to the Engineer prior to use, for each heat/production lot, per shipment.

#### **Project personnel to collect samples;**

- The Engineer will select one sample per heat or production lot producer, per size, per shipment.
- Select 3 pieces, 5' long, randomly selected by Department.
- Send 1 bar, hold 2 (as check samples if needed)
- Mill Certificate, upload to MAC sample.
- Securely attach MAC ID to test samples.
- Don't wait until the end of the project to submit samples.



## Structural Steel and Miscellaneous Metal Items (Other than Aluminum) (SS 962)

Includes Structural Steel, Steel Castings, Steel Forgings, Iron Castings, Bolts Nuts, Washers and Direct-Tension-Indicator (DTI) Devices, Anchor Rods, Bridge Bearing Materials, and Miscellaneous Metal Items.

### Manufacturer's certified mill analysis.

 Provided to the Engineer prior to use, for each heat/ production lot, per shipment.





#### When should you submit Certified Mill Analysis in MAC:

If the Certified Mill Analysis are reviewed through Commercial Inspection, No MAC entry is needed.

• The Commercial Inspection Report is retained in the construct file.

## When the Certified Mill Analysis is received directly from the Contractor.

- MAC entry is required.
- Mill Analysis, upload to MAC sample.
- Do Not wait until the end of the project to submit.

#### **Commercial Inspection Report**

- **Project Information**  $\bullet$
- Fabricator
- Materials
- Description
- **Inspection Status**
- Signature on Inspector

nda Department of International 2017 (FIGO COAST PRESSWAY) FROM EAST CR206 TO NORTH OF 15 PRESSWAY, FROM EAST CR206 TO NORTH OF 16 PRESSWAY, FROM EAST 17 PRESSWAY, FROM EAST 18 PRESSWAY, FROM EAST 19 PRESSWAY, FRO	HRV Servee Order : Report No : Inspector Inspector Period Location (onyistate) Hours: Berday Nanday Tuestey Wathwear	2044-028 000 Final William Finnen 01/110021 thru 01/15/0021 Briningham, AL PAGE 1 OF 0 1 5 5 6 5 6 0 0	CEI Coutor: 1 Participatian   Subcours Valiment Cost	5-52-60 akpar 201 dars 01-15-202 Kessay Generadorf Estimicator Facility screes (Fabrication	E. P.E. et: (lacert Sal L& Costiago)	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	Telà Work Imperator V Imperator V Imperato	Ageneradori State au the Ci	0 x05 pera bi magdaran, AL eff artist-cs com er are interaction inty de States where of was com	¢)
PRESIDWAY) FROM EAST CROOLTO NORTH OF 15 1936-5-52-517 T2724 / TWO 66 60 000 STATUS 1 Completed200% BOL 85703, 85705, 85706, 85706 CMTR3 for Handware Photos	Inspector Inspector Period Location (christane) Hours: Binday Winday Teaclay	William Finnen           01/110021 thru 01/15/0221           Brmögham, AL           0           1 <td< th=""><th>FDC 42:034- Counter 1212 Februarie: W/ Dres 01:11:20 CEI Counter 1 Subcount Vilinous Con Structural Falses</th><th>5-52-60 Migar 201 daw 04-13-202 Kenzy Generalorf Edenicator Z acidata actors (Palmication ago cation Status: (daw</th><th>E. P.E. ev. (Bacert Sal &amp; Costings) actify in the bo MTR.</th><th>ts if an NCR</th><th>Telà Work Imperator V Imperator V Imperato</th><th>Order TW/ Wilson Fan Mike Molin Wolper, Barn Ryroedorf State at the C</th><th>0 x)5 pro singlarm, AL df_rty3+cs com rt are ideatified ity dt Store When it was con Flant</th><th>e) anglieted)</th></td<>	FDC 42:034- Counter 1212 Februarie: W/ Dres 01:11:20 CEI Counter 1 Subcount Vilinous Con Structural Falses	5-52-60 Migar 201 daw 04-13-202 Kenzy Generalorf Edenicator Z acidata actors (Palmication ago cation Status: (daw	E. P.E. ev. (Bacert Sal & Costings) actify in the bo MTR.	ts if an NCR	Telà Work Imperator V Imperator V Imperato	Order TW/ Wilson Fan Mike Molin Wolper, Barn Ryroedorf State at the C	0 x)5 pro singlarm, AL df_rty3+cs com rt are ideatified ity dt Store When it was con Flant	e) anglieted)
836-5-53-51 / 12924 / TWO e6 ew Con STATUS COmpleted	Hoperton Period. Location (objistane) Hours: Senday Nonday	011110021 thu 01115/0021 Breitigham, AL PAGE 1 OF 0 Thursdy 0 15 Friday 0 5 Sectory 0	FDC 42:034- Counter 1212 Februarie: W/ Dres 01:11:20 CEI Counter 1 Subcount Vilinous Con Structural Falses	5-52-60 Migar 201 daw 04-13-202 Kenzy Generalorf Edenicator Z acidata actors (Palmication ago cation Status: (daw	E. P.E. ev. (Bacert Sal & Costings) actify in the bo MTR.	ts if an NCR	Telà Work Imperator V Imperator V Imperato	Order TW/ Wilson Fan Mike Molin Wolper, Barn Ryroedorf State at the C	0 x)5 pro singlarm, AL df_rty3+cs com rt are ideatified ity dt Store When it was con Flant	() angleted)
ON STATUS OF STATUS Completes _200% BOG, 85703, 85705, 85706 CMTRS for Handware Photos	Hoperton Period. Location (objistane) Hours: Senday Nonday	011110021 thu 01115/0021 Breitigham, AL PAGE 1 OF 0 Thursdy 0 15 Friday 0 5 Sectory 0	Felenceuer, Wa Deve, 01:11:20 CEE Context, 1 Subcours Visioneer Cont Structural Fabrie	Apur 221 davi 03 15 202 Kenzy Genesdorf Fabricator Facilitis scores (Fabrication lags	E. P.E. ev. (Bacert Sal & Costings) actify in the bo MTR.	to satisfie of the Second Seco	Locators 1 Locators 1 CEI Email Br City A e. AL	Mile Mills Nilper Burn Stote at the Collingua, and Fa-Up &	o maglam, AL ff availed com er are ideatified ay & State When it was on Final	() angleted)
ever Con STATUS Completed	Lecation (chy/stane) Hours: Sunday Winday Tuesday	Brinkgham, AL           PASE 1 OF           0         Transley         0           15         Frank         0           5         Safety         0	Den 01 11 20 CEI Center 1 Participattar 1 Subcom Veimen Con Structural Fabri	221 daw 00 23 202 Kenny Generadort Entricenter Facilités actors (Palmonting ing)	E. P.E. ev. (Bacert Sal & Costings) actify in the bo MTR.	to satisfiers	Lecision 7 CEI Email In City &	Kolper, Barn Approximation State at the C	naglam, AL Effectiones com er are ideatified ity & State When it was co Final	() angleted)
ON STATUS Completes <u>100%</u> BOL 85703, 86706, 96706 CMTRS for Handware Photos	Hours Sunday Worday Tuesday	PAGE 1 OF 1 Transay 0 13 Thing 0 1 Service 0	CEE Courses 1 Participation 1 Subcours Vielenge Cont	Kenny Genesdorf Editions (Fabrication ing) cation Status: (Ide	E. P.E. ev. (Bacert Sal & Costings) actify in the bo MTR.	contractors Smell	er an SFI	State at the City of the State at the City of the State at the State a	ff arva-es com er are ideantied ity & Some When it was co Final	() angleted)
BOL 65703, 55705, 55706, CMTRS for Hardware Photos	Norday	0 Thatslay 0 Pairs 0 0 Salard 0 0 Salard 0	Participatian Subcostra Valueur Cost	Entericative Excitent actives (Fabrication ages cation Status: (Edu	et: (lacent Sal a & Contings) entity in the bo MTR.	Street	br City &	State at the Ci began, and Fp-Up &	er are identified ity & State When it was co Final	() angleted)
BOL 65703, 55705, 55706, CMTRS for Hardware Photos	Norday	8.5 Price 6 0 Salutary 0	Subcoart Valmeer Coot	scrers (Fabrication Ings cathin Status: (Ade	atify in the bo	Street	er an RFT	Citegan, and Tri-Up &	when it was con Final	ung-leted)
Luthes.	=				MTR.		T	Fa-Up &	Final	<u> </u>
1/045										-
			5@# 715100	Cratileter :	8/28/20	In Process	10.16 20	10-30-20	11/24/29	#T1.1
fonday January 11, 2021.			Se# 715001	Caatileter	8/28/20	In Process	10.16	10 33 20	11:0+:20	9T1, 1 01.0
585-4C3, Cartilever Truss 2565-	-773.		5 <b>c</b> * 715302	Castleter	\$ 28/20	In Process	10.16	10 21 20	11/24/20	611 63.0
			Se# 715003	Caatlever	\$ 28 20	In Process	10.16 20	10/29/29	11/24/20	3C2.1
			58* 715104	CastOriac	\$ 28 20	In Process	10-16	10/28/20	13:24:00	4C1.0 7T10
		Null -	Se# 715305	Castilever	8-28-29	In Process	10.18 20	10.28.30	11/24/30	402.0
i and have	it is		5e# 715106	Captúrese	8-28-20	In Process	10.16 20	10:27:20	11/24/20	4C3 01/3
1		The second se	14	Walkney	\$3.20	La Process	11/12/ 20	11-16-20	11-18-29	1491
and the second se	5	63 4 177								
- City	and I	and a state of the	Action Deam: D	torms may 24CR 's o	er RIT's does a	bern (Add d	landon a	TOPRET.) (Far	Wed her Y	N or Dene
			Designation	Description						2.0
			9C1,3C2,4C1 4C2,4C3 9C1,9C2							Y 20 13 20
	505-4C3, Cartilever Truss 2565 Nembly 2565-16P1 # 01, Cartile	reas for FDOT propert 2005 continued 105-4C3. Cantiever Trans 2005-7T3. territy 2005-1007 = 0.0. Continuer Trans 2005-7T2. Continuer Trans 2005-7T2 Continuer Trans 2005-7	565-403. Carminer Taus 2955-773. Hereby 2565-1971 # 51. Carminer Taus 2565-773. Hereby 2565-1971 # 52. Carminer Taus 2565-773. Hereby 256-1971 # 52. Carminer Taus 256-1971 # 52. Carminer Taus 256-773. Hereby 256-1971 # 52. Carminer Taus 256-1971 # 52. Carminer Taus 256-773. Hereby 256-1971 # 52. Carminer Taus 256-1971 # 52. Carminer Taus 256-773. Hereby 256-1971 # 52. Carminer Taus 256-1971 # 52. Carminer Taus 256-773. Hereby 256-1971 # 52. Carminer Taus 256-1971 # 52. Carminer Taus 256-773. Hereby 256-1971 # 52. Carminer Taus 256-1971 # 52. Carmin	ares for FDO? project 2565 continued.         565-4C3. Cardiever Truss 2665-773.         semby 2665. VD?1 = 81. Cardiever Truss 2665-771.         semby 2665. VD?1 = 92. Cardiever Truss 2665.772.         Sem 715300         Sem 715300 <t< td=""><td>ares for FDO17 proper 2565 continued.         568-4C3. Cardiever Truss 2565-773.         seerby 2565.1691 # 0.1. Cardiever Truss 2565-773.         seerby 2565.1091 # 0.2. Cardiever Truss 2565-773.         See 715500         Cardiever Truss 2565.773.         seerby 2565.1091 # 0.2. Cardiever Truss 2565-773.         See 715500         Cardiever Truss 2565.773.         See 715500         Cardiever See 715500         See 715500         See 715500      <t< td=""><td>ares for FDO? proper 2505 continued         169-4C3, Cardiever Truss 2005-773         semby 2005, 1691 # 0.0, Cardiever Truss 2005-772         Semby 2005, 1091 # 0.0, Cardiever Truss 2005-773         Semby 2005, 1091 # 0.0, Cardiever Truss 2005-772         Semby 2005, 1091 # 0.0, Cardiever Truss 2005-773         Semby 2005, 1091 # 0.0, Cardiever Truss 2005-773         Semby 2005, 1091 # 0.0, Cardiever Truss 2005-773         Semby 2005, 1091 # 0.0, Cardiever Truss 2005-773</td></t<><td>pres for FDO17 project 2565 continued.         565-4C3. Continuer Truss 2565-773.         seerby 2565-1671 # 01. Continuer Truss 2565-773.         seerby 2565-1671 # 02. Continuer Truss 2565-773.         seerby 2565-1671 # 02.0 Continuer Truss 2565-773.         seerby 2565-1672 # 02.0 Continuer</td><td>pres for FDO1 project 2565 continued. 565-4C3. Continuer Truss 2565-773. terreby 2565-1071 # D2. Continuer Truss 2565-773. terreby 2565-1071 # D2. Continuer Truss 2565-773. Truss 2565-1071 # D2. Continuer Truss 2565-773. Ser 715306 Cautherer 8 28 20 la Process 10:16 5cm 715306 Cautherer 8 28 20 la Process 10:16 5cm 715306 Cautherer 8 28 20 la Process 10:16 5cm 715106 Cautherer 8 28 20 la Pr</td><td>pres for FDO17 proper 2565 continued         565-4C3, Cardiever Truss 2665-773         semby 2665, 1671 # 0.1, Cardiever Truss 2665-771         semby 2665, 1671 # 0.2, Cardiever Truss 2665-772         Sem 715:000       Cardiever # 0.28:20       hs Process       100:46       100:28:20         Sem 715:000       Cardiever # 0.28:20       hs Process       100:46       100:28:20         Sem 715:000       Cardiever # 0.28:20       hs Process       100:46       100:28:20         Sem 715:000       Cardiever # 0.28:20       hs Process       100:46       100:28:20         Sem 715:000       Cardiever # 0.28:20       hs Process       100:46       100:28:20         Sem 715:000       Cardiever # 0.28:20       hs Process       100:46       100:28:20         Sem 715:000       Cardiever # 0.28:20       hs Process       100:46       100:28:20         Sem 715:000       Cardiever # 0.28:20       hs Process       100:46       100:28:20         Sem 715:000       Cardiever # 0.28:20       hs Process       100:46       100:28:20         Sem 715:000       Cardiever # 0.28:20       hs Process       100:46       100:28:20         Sem 715:000       Cardiever # 0.28:20       hs Process       100:46       100:28:20         Sem 715:000</td><td>ares for FDO1<sup>2</sup> project 2565 continued         565-4C3. Cardiever Truss 2665-773.         seeredy 2665. NSP1 # 0.1. Cardiever Truss 2665.771.         seeredy 2665. NSP1 # 0.2. Cardiever Truss 2665.772.         Sime Truss 2665.773.         seeredy 2665. NSP1 # 0.2. Cardiever Truss 2665.772.         Sime Truss 2665.773.         seeredy 2665. NSP1 # 0.2. Cardiever Truss 2665.772.         Sime Truss 2665.773.         seeredy 2665. NSP1 # 0.2. Cardiever Truss 2665.772.         Sime Truss 2665.773.         Sime Truss 2665.773.         seeredy 2765.1091 # 0.2. Cardiever Truss 2665.772.         Sime Truss 2665.773.         Sime Truss 2665.773.</td></td></t<>	ares for FDO17 proper 2565 continued.         568-4C3. Cardiever Truss 2565-773.         seerby 2565.1691 # 0.1. Cardiever Truss 2565-773.         seerby 2565.1091 # 0.2. Cardiever Truss 2565-773.         See 715500         Cardiever Truss 2565.773.         seerby 2565.1091 # 0.2. Cardiever Truss 2565-773.         See 715500         Cardiever Truss 2565.773.         See 715500         Cardiever See 715500         See 715500         See 715500 <t< td=""><td>ares for FDO? proper 2505 continued         169-4C3, Cardiever Truss 2005-773         semby 2005, 1691 # 0.0, Cardiever Truss 2005-772         Semby 2005, 1091 # 0.0, Cardiever Truss 2005-773         Semby 2005, 1091 # 0.0, Cardiever Truss 2005-772         Semby 2005, 1091 # 0.0, Cardiever Truss 2005-773         Semby 2005, 1091 # 0.0, Cardiever Truss 2005-773         Semby 2005, 1091 # 0.0, Cardiever Truss 2005-773         Semby 2005, 1091 # 0.0, Cardiever Truss 2005-773</td></t<> <td>pres for FDO17 project 2565 continued.         565-4C3. Continuer Truss 2565-773.         seerby 2565-1671 # 01. Continuer Truss 2565-773.         seerby 2565-1671 # 02. Continuer Truss 2565-773.         seerby 2565-1671 # 02.0 Continuer Truss 2565-773.         seerby 2565-1672 # 02.0 Continuer</td> <td>pres for FDO1 project 2565 continued. 565-4C3. Continuer Truss 2565-773. terreby 2565-1071 # D2. Continuer Truss 2565-773. terreby 2565-1071 # D2. Continuer Truss 2565-773. Truss 2565-1071 # D2. Continuer Truss 2565-773. Ser 715306 Cautherer 8 28 20 la Process 10:16 5cm 715306 Cautherer 8 28 20 la Process 10:16 5cm 715306 Cautherer 8 28 20 la Process 10:16 5cm 715106 Cautherer 8 28 20 la Pr</td> <td>pres for FDO17 proper 2565 continued         565-4C3, Cardiever Truss 2665-773         semby 2665, 1671 # 0.1, Cardiever Truss 2665-771         semby 2665, 1671 # 0.2, Cardiever Truss 2665-772         Sem 715:000       Cardiever # 0.28:20       hs Process       100:46       100:28:20         Sem 715:000       Cardiever # 0.28:20       hs Process       100:46       100:28:20         Sem 715:000       Cardiever # 0.28:20       hs Process       100:46       100:28:20         Sem 715:000       Cardiever # 0.28:20       hs Process       100:46       100:28:20         Sem 715:000       Cardiever # 0.28:20       hs Process       100:46       100:28:20         Sem 715:000       Cardiever # 0.28:20       hs Process       100:46       100:28:20         Sem 715:000       Cardiever # 0.28:20       hs Process       100:46       100:28:20         Sem 715:000       Cardiever # 0.28:20       hs Process       100:46       100:28:20         Sem 715:000       Cardiever # 0.28:20       hs Process       100:46       100:28:20         Sem 715:000       Cardiever # 0.28:20       hs Process       100:46       100:28:20         Sem 715:000       Cardiever # 0.28:20       hs Process       100:46       100:28:20         Sem 715:000</td> <td>ares for FDO1<sup>2</sup> project 2565 continued         565-4C3. Cardiever Truss 2665-773.         seeredy 2665. NSP1 # 0.1. Cardiever Truss 2665.771.         seeredy 2665. NSP1 # 0.2. Cardiever Truss 2665.772.         Sime Truss 2665.773.         seeredy 2665. NSP1 # 0.2. Cardiever Truss 2665.772.         Sime Truss 2665.773.         seeredy 2665. NSP1 # 0.2. Cardiever Truss 2665.772.         Sime Truss 2665.773.         seeredy 2665. NSP1 # 0.2. Cardiever Truss 2665.772.         Sime Truss 2665.773.         Sime Truss 2665.773.         seeredy 2765.1091 # 0.2. Cardiever Truss 2665.772.         Sime Truss 2665.773.         Sime Truss 2665.773.</td>	ares for FDO? proper 2505 continued         169-4C3, Cardiever Truss 2005-773         semby 2005, 1691 # 0.0, Cardiever Truss 2005-772         Semby 2005, 1091 # 0.0, Cardiever Truss 2005-773         Semby 2005, 1091 # 0.0, Cardiever Truss 2005-772         Semby 2005, 1091 # 0.0, Cardiever Truss 2005-773	pres for FDO17 project 2565 continued.         565-4C3. Continuer Truss 2565-773.         seerby 2565-1671 # 01. Continuer Truss 2565-773.         seerby 2565-1671 # 02. Continuer Truss 2565-773.         seerby 2565-1671 # 02.0 Continuer Truss 2565-773.         seerby 2565-1672 # 02.0 Continuer	pres for FDO1 project 2565 continued. 565-4C3. Continuer Truss 2565-773. terreby 2565-1071 # D2. Continuer Truss 2565-773. terreby 2565-1071 # D2. Continuer Truss 2565-773. Truss 2565-1071 # D2. Continuer Truss 2565-773. Ser 715306 Cautherer 8 28 20 la Process 10:16 5cm 715306 Cautherer 8 28 20 la Process 10:16 5cm 715306 Cautherer 8 28 20 la Process 10:16 5cm 715106 Cautherer 8 28 20 la Pr	pres for FDO17 proper 2565 continued         565-4C3, Cardiever Truss 2665-773         semby 2665, 1671 # 0.1, Cardiever Truss 2665-771         semby 2665, 1671 # 0.2, Cardiever Truss 2665-772         Sem 715:000       Cardiever # 0.28:20       hs Process       100:46       100:28:20         Sem 715:000       Cardiever # 0.28:20       hs Process       100:46       100:28:20         Sem 715:000       Cardiever # 0.28:20       hs Process       100:46       100:28:20         Sem 715:000       Cardiever # 0.28:20       hs Process       100:46       100:28:20         Sem 715:000       Cardiever # 0.28:20       hs Process       100:46       100:28:20         Sem 715:000       Cardiever # 0.28:20       hs Process       100:46       100:28:20         Sem 715:000       Cardiever # 0.28:20       hs Process       100:46       100:28:20         Sem 715:000       Cardiever # 0.28:20       hs Process       100:46       100:28:20         Sem 715:000       Cardiever # 0.28:20       hs Process       100:46       100:28:20         Sem 715:000       Cardiever # 0.28:20       hs Process       100:46       100:28:20         Sem 715:000       Cardiever # 0.28:20       hs Process       100:46       100:28:20         Sem 715:000	ares for FDO1 <sup>2</sup> project 2565 continued         565-4C3. Cardiever Truss 2665-773.         seeredy 2665. NSP1 # 0.1. Cardiever Truss 2665.771.         seeredy 2665. NSP1 # 0.2. Cardiever Truss 2665.772.         Sime Truss 2665.773.         seeredy 2665. NSP1 # 0.2. Cardiever Truss 2665.772.         Sime Truss 2665.773.         seeredy 2665. NSP1 # 0.2. Cardiever Truss 2665.772.         Sime Truss 2665.773.         seeredy 2665. NSP1 # 0.2. Cardiever Truss 2665.772.         Sime Truss 2665.773.         Sime Truss 2665.773.         seeredy 2765.1091 # 0.2. Cardiever Truss 2665.772.         Sime Truss 2665.773.         Sime Truss 2665.773.

Shipped ET1, 1071, HC1

01-05-21 9T1, 11TL 9C1

01-07-2022

#T1.5C2

63-07-2621

3C2, 8T2, 10T2 01 08 2021

4C1, 01 08 2021

771 01 11 2021

402,01.08/2021

772, 01 11 2021

403.773.

01 11 0021

1691.1.8.2 00 11 2021

Residued

10 13 20

#### **Commercial Inspection Report**

- **Project Information**
- **Fabricator Approval**  $\bullet$
- **Bill of Lading**  $\bullet$
- **Certified Mill Test** Reports

	NORFO 54H To: NUEDR FANTENED	1 E NUCO PO OLK, NE ( 4024 Fax: 4024
	Outer ID         INCODE/ASTINER         Bhp To:         NACODE FASTENER           6730 CR 40         6730 CR 40         6730 CR 40         6730 CR 40           53NNT JOE, IN 46785 US         SAINT JOE, IN 46785 US         SAINT JOE, IN 46785 US	
	Product Group Med Ball, Casherman Rev. Sales Order # 1000004	41 - 11.15
Wind par Walpar Marstein Regen Con Net Location: 11.00 P. + 10371-3310 Constant P.O. + 10371-3310	Grade 1037ML Photoct # 309994	1
M2 144	Size         1.0156"         Lot #         1008352           BOL #         Doc 100045         Heat #         1008552	19420
JCANT JCANT		94
walpar Neget Toler - Ingenese Con He Lauster TO + 1000000	Description         HR-EB RD 1.0156* 1037ML COIL 5200 Bit         Load #         8296           Production Date         01/30/2017         Customer Part #         000016	
Waller Comment	Product Country Oty Shipped LBS 47130	
www.ust organist organist 2214	Of Origin United States Otly Shipped EA 9	
11/2011 429/01M0 11/2011 429/01M0 11/2011 429/01M0 12/2012 12/2014 12/2014 12/2014 12/2014	Original tem Description Original tem	
Seb Description 2204	Inergy way, for the wave destruction to be the service of the particulation of the particulation of services but does not find the service of the particulation of services but does not find the service of the service	
WALK LUTE TRUSS	Intering Date: 01/26/201	117
Quality Mulk 01 TRUSS 267	C (5) Mn (5) P (5) S (5) S (5) N (5) C (5)	
	M2 (%) Be (%) AI (%) Pp (%) Ca (%) 0.06 0.31 0.02 0.11 0.001 0.024	8 (%) 0.000
	0.000 0.007 0.00 0.001	
	Cu + N + Mo (%) : 0.21	
	Reduction Ratio 64.39: 1	
Iob #:         2565 T2724,422938-5-52-01 Customer P.O. #: 10378-28390         VII/2021 8:29.03AH           Load #:         15 BOL #: 86705 Customer S&D         Customer P.O. #: 15 Customer S&D	the second	130 Dat
Shipped From: 44000.008	Annual States	2-3.
Weight Loaden Assembly Quantity:	(Airel)+DQ	
Sold To: 11609 Columbia James D. Hinson Electrical 11609 Columbia 11609 Columbia Park Drive, West Jacksonville, FL 32258 Jacksonville, FL 32258 Phone: (904) 262-3805		Page 1
A Shipping Signature: Mail Mar. Received Signature: Date: 1-11-2021		
APPROVED		

NUCOR

r Steel Nebraska

Mill Certification

02/02/2011

31304

MTR#: 6288

2911 E NUCOR ROAD PO BOX 309 RFOLK, NE 68701 U 402-644-020 Fax: 402-644-032

- MM 31304

Date

23-17

2-3-17

Page 1 of 1

#### **Components for Guardrail (SS 967)**

- Steel Posts.
- Steel Offset Blocks.
- Steel Panels.
- Bolts, nuts, washers, and other accessories.



#### 536-4 Acceptance.

Acceptance of materials and installation of guardrail will be based on conformance with the requirements of this Section and visual inspection by the Engineer.

#### **Components for Guardrail**

- Approved Metals Production Facility.
- Identify and record the manufacturer's mill stamp on panels.
- Randomly select 1 Stamp Number per 1000 feet of installed guardrail, up to a maximum of 10 Samples per Project.
- Create a sample in MAC for Steel Panel Stamp Number Review.
- Approved Products Listing (APL) for Approach Terminal Assemblies, Delineators, and Composite Offset Blocks.



#### **Guardrail Panel Stamp**

## GH M180 A2 M 5243 44 20

- GH Manufacturer
- M180 AASHTO Specification
- A2 Class and Type
- M Operator ID
- 5243 Mill Heat Number
- 44 20 Week/ Year Galvanized Lot

#### **Approved Product List (APL)**

#### Curing Compound (SS 925)





Non-Shrink Grout (SS 934)

#### Epoxy Bonding Compound (SS 926)





Epoxy Anchor (SS 937)

#### Materials for Concrete Repair (SS 930)





Post-Tensioning Grout (SS 938)

## **2021 Construction Academy**

October 2022

# QUESTIONS

Jose Armenteros Concrete Materials Engineer

Thomas Frank Concrete Field Operations Manager

Richard DeLorenzo Structural Materials Lab Manager

