


- Notes:
1. With the approval of the resident engineer, the service head hole for joint use poles may be drilled by the utility company at an angle of 90° but not less than 45° to the face of the pole.
 2. Lashing wire should normally be used for distances of 12' or greater.
 3. The overlapped connection of adjustable hangers shall use a minimum of 2 bolts with a minimum spacing of 2" between bolts.
 4. Meet all grounding requirements of Section 620 of the Standard Specifications.

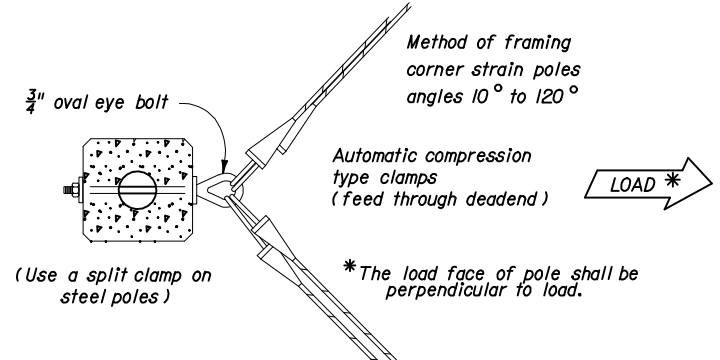


SINGLE POINT ATTACHMENT


STATE OF FLORIDA DEPARTMENT OF TRANSPORTATION

**SIGNAL CABLE & SPAN WIRE
INSTALLATION DETAILS**

Names	Dates	Approved By		
Designed By		 State Traffic Standards Engineer		
Drawn By		Revision	Sheet No.	Index No.
Checked By		02	1 of 2	17727

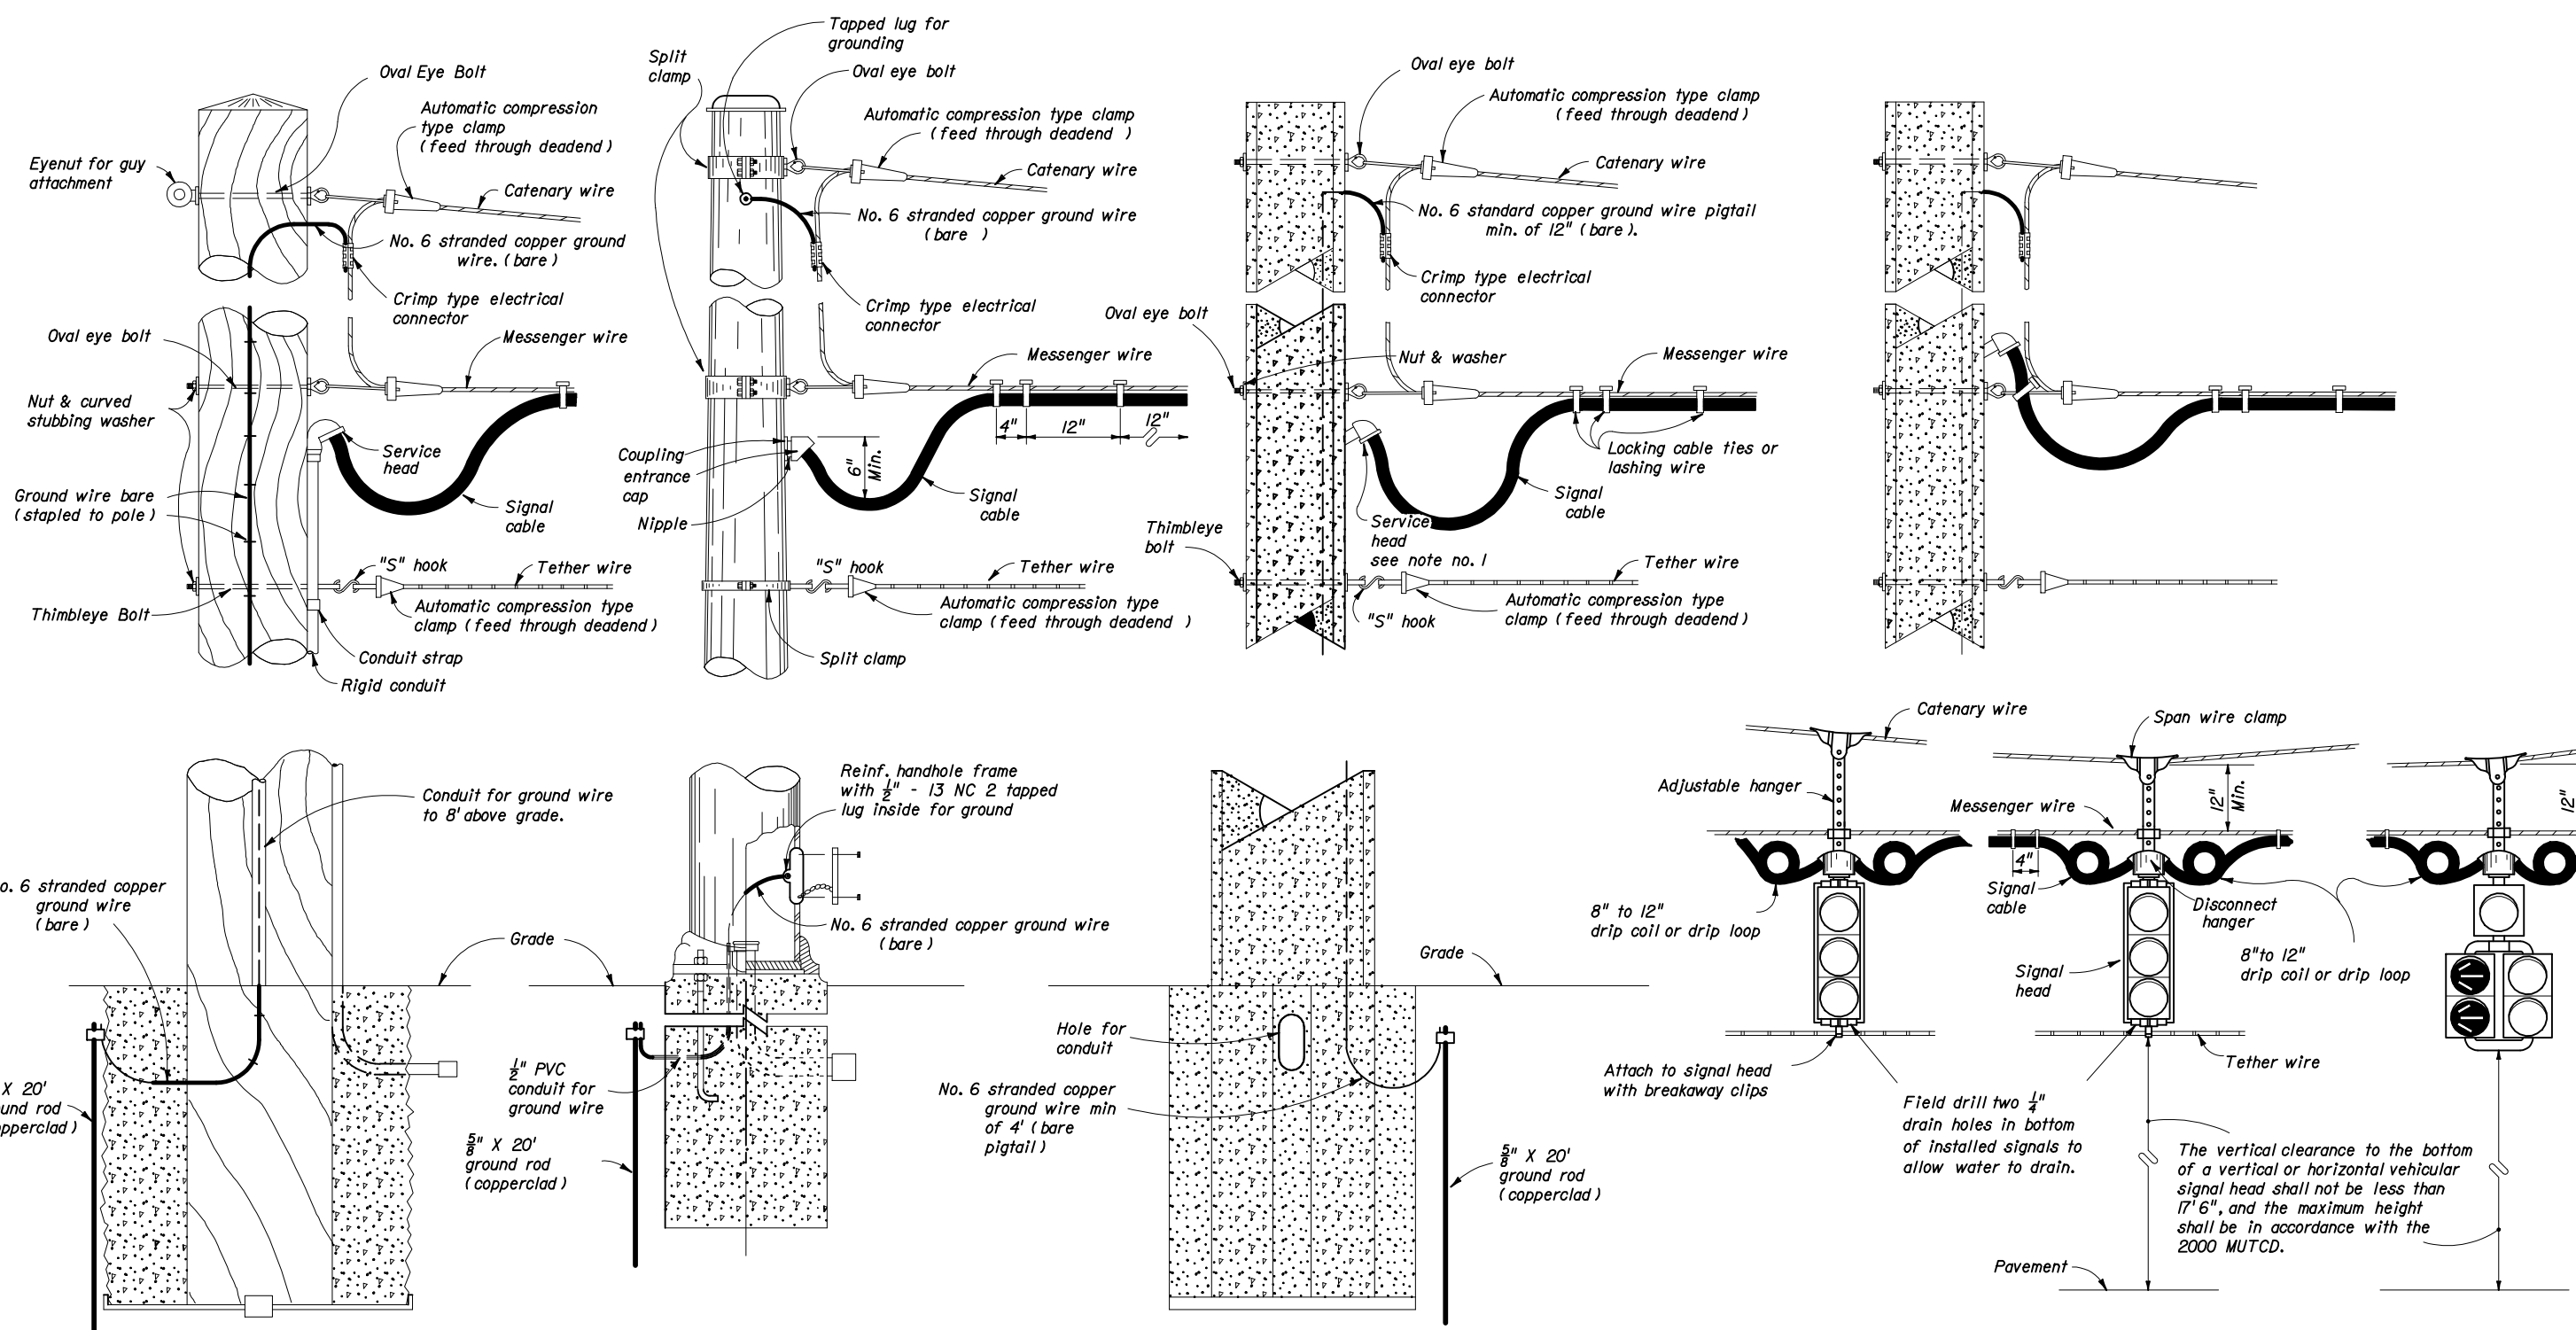

- Notes:
1. With the approval of the resident engineer. The service head hole for joint use poles may be drilled by the utility company at an angle of 90° but not less than 45° to the face of the pole.
 2. Lashing wire should normally be used for distances of 12' or greater.
 3. The overlapped connection of adjustable hangers shall use a minimum of 2 bolts with a minimum spacing of 2" between bolts.
 4. Meet all grounding requirements of Section 620 of the Standard Specifications.

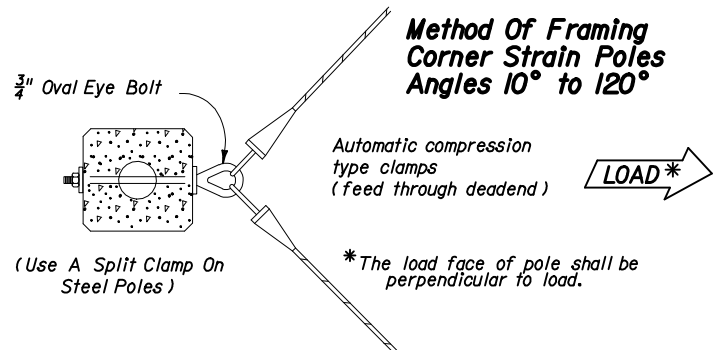

TWO POINT ATTACHMENT

STATE OF FLORIDA DEPARTMENT OF TRANSPORTATION

**SIGNAL CABLE & SPAN WIRE
INSTALLATION DETAILS**

Designed By		Names	Dates	Approved By		<i>Clark A. Scott</i> State Traffic Standards Engineer			
Drawn By		Revision	Sheet No.	Index No.					
Checked By		02	2 of 2	17727					