


State of Florida Department of Transportation



Flexible Pavement Smoothness Acceptance Report Ride Number Edition



FDOT Office
State Materials Office

Research Report Number
FL/DOT/SMO/11-547

Authors
Charles Holzschuher
Stacy Scott
Kyle Kroodsma

Date of Publication
September 2011

PAGE

LEFT

BLANK

This report is a result of the dedicated effort and contribution by the following individuals:

Gregory Beckner
William Bryant
Charles Holzschuher
Kyle Kroodsma
Melissa Lira
Alexander Mraz
Glenn Salvo
John Schifermuller
Stacy Scott

To access the electronic copy of this and other reports, please follow the steps below:

- 1) Logon to the State Materials Office's website, located at the following URL:
<http://www.dot.state.fl.us/statematerialsoffice>
- 2) Under **Most Requested**, select **Research Reports**

** Title 23, U.S.C., Section 409, provides that this information provided to you is not subject to discovery nor is it admissible into evidence.

PAGE

LEFT

BLANK

Table of Contents

List of Figures	v
List of Tables	vii
Executive Summary	1
Introduction	3
Observations	7
Statewide Ride Statistics	9
District 1 Ride Statistics	19
District 2 Ride Statistics	25
District 3 Ride Statistics	31
District 4 Ride Statistics	37
District 5 Ride Statistics	43
District 6 Ride Statistics	49
District 7 Ride Statistics	55
Appendix - A: International Roughness Index Report Summary	A1
Appendix - B: Customer Service Form	B1

PAGE

LEFT

BLANK

List of Figures

<u>No.</u>		<u>Page</u>
1	Statewide Ride Distribution	9
2	Statewide Ride Distribution by Friction Course and System	10
3	District 1 Ride Distribution	19
4	District 1 Ride Distribution by Friction Course and System	20
5	District 2 Ride Distribution	25
6	District 2 Ride Distribution by Friction Course and System	26
7	District 3 Ride Distribution	31
8	District 3 Ride Distribution by Friction Course and System	32
9	District 4 Ride Distribution	37
10	District 4 Ride Distribution by Friction Course and System	38
11	District 5 Ride Distribution	43
12	District 5 Ride Distribution by Friction Course and System	44
13	District 6 Ride Distribution	49
14	District 6 Ride Distribution by Friction Course and System	50
15	District 7 Ride Distribution	55
16	District 7 Ride Distribution by Friction Course and System	56

PAGE

LEFT

BLANK

List of Tables

<u>No.</u>		<u>Page</u>
1	Statewide Statistical Summary by Friction Course, System, Year, and Aggregate	11
2	Statewide Statistical Summary by Friction Course, System, Aggregate, and Material Transfer Device Status	13
3	Statewide Statistical Summary by Friction Course, System, Aggregate, and Paving Time	14
4	Lane Miles Tested Per District by Friction Course and System	15
5	Statewide Statistical Summary by Contractor, Friction Course, Aggregate, and Material Transfer Device Status	16
6	District 1 Statistical Summary by Friction Course, System, Year, and Aggregate	21
7	District 1 Statistical Summary by Friction Course, System, Aggregate, and Material Transfer Device Status	22
8	District 1 Statistical Summary by Friction Course, System, Aggregate, and Paving Time	23
9	District 1 Statistical Summary by Contractor, Friction Course, Aggregate, and Material Transfer Device Status	24
10	District 2 Statistical Summary by Friction Course, System, Year, and Aggregate	27
11	District 2 Statistical Summary by Friction Course, System, Aggregate, and Material Transfer Device Status	28
12	District 2 Statistical Summary by Friction Course, System, Aggregate, and Paving Time	29
13	District 2 Statistical Summary by Contractor, Friction Course, Aggregate, and Material Transfer Device Status	30
14	District 3 Statistical Summary by Friction Course, System, Year, and Aggregate	33
15	District 3 Statistical Summary by Friction Course, System, Aggregate, and Material Transfer Device Status	34
16	District 3 Statistical Summary by Friction Course, System, Aggregate, and Paving Time	35
17	District 3 Statistical Summary by Contractor, Friction Course, Aggregate, and Material Transfer Device Status	36
18	District 4 Statistical Summary by Friction Course, System, Year, and Aggregate	39
19	District 4 Statistical Summary by Friction Course, System, Aggregate, and Material Transfer Device Status	40
20	District 4 Statistical Summary by Friction Course, System, Aggregate, and Paving Time	41
21	District 4 Statistical Summary by Contractor, Friction Course, Aggregate, and Material Transfer Device Status	42
22	District 5 Statistical Summary by Friction Course, System, Year, and Aggregate	45
23	District 5 Statistical Summary by Friction Course, System, Aggregate, and Material Transfer Device Status	46
24	District 5 Statistical Summary by Friction Course, System, Aggregate, and Paving Time	47
25	District 5 Statistical Summary by Contractor, Friction Course, Aggregate, and Material Transfer Device Status	48
26	District 6 Statistical Summary by Friction Course, System, Year, and Aggregate	51
27	District 6 Statistical Summary by Friction Course, System, Aggregate, and Material Transfer Device Status	52
28	District 6 Statistical Summary by Friction Course, System, Aggregate, and Paving Time	53

<u>No.</u>		<u>Page</u>
29	District 6 Statistical Summary by Contractor, Friction Course, Aggregate, and Material Transfer Device Status	54
30	District 7 Statistical Summary by Friction Course, System, Year, and Aggregate	54
31	District 7 Statistical Summary by Friction Course, System, Aggregate, and Material Transfer Device Status	54
32	District 7 Statistical Summary by Friction Course, System, Aggregate, and Paving Time	54
33	District 7 Statistical Summary by Contractor, Friction Course, Aggregate, and Material Transfer Device Status	54

Executive Summary

The traveling public wants smooth, safe, and long lasting pavements. Initial pavement smoothness has been shown to improve the overall pavement performance. The Florida Department of Transportation (FDOT) has developed smoothness specifications for the acceptance of asphalt pavements on high-speed facilities that incorporate smoothness results obtained with high-speed inertial laser profilers.

This report is a synthesis of statewide project smoothness data collected from January 2005 through December 2010, including more than 7,900 miles and 81,000 lots. It provides the end user with basic statistics on the Ride quality of projects tested for Ride Acceptance (RA). The data analyzed herein consists of all lots greater than or equal to 0.01 mile and less than or equal to 0.1 mile in length.

This report expresses ride quality using Ride Number (RN). Currently, FDOT's smoothness specifications use RN to indicate the level of smoothness present on newly placed asphalt pavements. RN, however, is greatly influenced by differences in texture, especially dense-graded versus open-graded pavements.

** Title 23, U.S.C., Section 409, provides that this information provided to you is not subject to discovery nor is it admissible into evidence.

PAGE

LEFT

BLANK

Introduction

According to National Cooperative Highway Research Program (NCHRP) project 1-31, conducted between February 1994 and December 1996 and published as NCHRP Web Document 1, "Smoothness Specifications for Pavements," the importance of pavement smoothness to the traveling public is undisputed. Smooth-riding pavements provide comfort, allow more efficient movement of vehicles over the roadway, raise optimum travel speeds, maintain traffic flow, reduce safety hazards to users and their vehicles, and may increase fuel efficiency, leading to lower traveling costs to roadway users. Pavement smoothness also imparts a positive reflection on the construction and maintenance proficiency of the owner agency, be it a state agency, city, county, or toll authority. In addition, American Association of State Highway and Transportation Officials (AASHTO) pavement design models suggest that initially smooth pavements last longer than initially rough pavements, though this has been never confirmed through long-term field investigation (AASHTO design equations are based on only 2 years of performance data).

FDOT RIDE QUALITY

Ride quality has been used by FDOT for evaluating new construction, overlay projects, special ride quality evaluations used for informational purposes, and for monitoring long-term pavement performance at the network level. To measure pavement ride quality, automated or manual methods can be used to measure roadway profiles from which a roughness value is calculated. Most states, including Florida, use high-speed inertial profilers to measure smoothness. The commonly used measures of roughness (or smoothness) are the International Roughness Index (IRI) and Ride Number (RN). Since 1998, FDOT has been using the RN for project level acceptance and evaluation in accordance with American Society for Testing and Materials (ASTM) E1489.

The FDOT has worked very closely with the Federal Highway Administration (FHWA) and the construction industry to improve pavement smoothness on Florida's state highways. To this end, a smoothness task team was created with representatives from FDOT, FHWA, and the paving industry to develop and implement non-contact profiler based smoothness specifications. Sub-article 330-12.4.6 of the FDOT Standard Specifications sets the requirements for Acceptance Testing for Pavement Smoothness by Laser Profiler.

RIDE QUALITY EVALUATION PROCESS

The Pavement Condition Unit of the State Materials (SMO) is responsible for conducting smoothness evaluation using an high-speed inertial laser profiler. Florida Test Method Fm 5-549, "Laser Profiler Roughness Evaluation," provides the method by which a pavement section is evaluated for smoothness using the longitudinal profiles recorded from each wheel path using as inertial profiler test vehicle.

The test vehicle is driven along the wheel paths of the pavement section to be evaluated and uses a system of three laser sensors and two accelerometers mounted in the front bumper of a full-size van. One laser is mounted in front of each tire to measure the longitudinal profile in the left and right wheel paths of the traveled surface. These 32 kHz lasers measure the vertical distance between the sensor and the pavement surface at a rate of 30 readings per inch as the vehicle travels at 60 mph. An accelerometer is mounted atop each of these two lasers to isolate the vehicle's vertical motion and thus provide a "zero" reference plane. The third laser, mounted equidistant from the two wheel path lasers, provides a height reading from which to calculate rut depth in each wheel path. The vehicle's data acquisition system uses the accelerometer data to provide a correction to the laser data, eliminating the effects of vehicle movement, and uses a Distance Measuring Instrument (DMI) connected to the vehicle transmission or axle to record the longitudinal distance traveled to summarize the corrected laser data into approximately 1 inch intervals. The exact interval is a function of each individual vehicle's DMI calibration settings. These summary values are then post-processed into exactly 6 inch intervals to generate a longitudinal profile for each wheel path as well as a combined value for both wheel paths, and an average rut depth.

The laser profilers currently in use by FDOT are manufactured by International Cybernetics Corporation (ICC) of Largo, Florida. All of these profilers are owned by FDOT with the exception of one unit that is provided through a contract with Applied Research Associates, Inc. (ARA). Currently, this profiler is the primary unit used by the SMO for the collection of project level smoothness data.

District project personnel may submit all requests for pavement evaluation using online request forms available at the SMO's website:

Intranet: <http://materials.dot.state.fl.us/SMO/pavement/pavementhome.htm>

Internet: <http://www.dot.state.fl.us/statematerialsoffice/pavement/index.shtm>

WHAT IS RIDE NUMBER?

The Pavement Serviceability Index (PSI) has been used by engineers since the AASHTO road test in the 1950's as an estimate of the opinion of the traveling public on the roughness (or lack of smoothness) of roads. The Ride Number (RN) is a profile index similar to the PSI, and was a result of NCHRP projects 1-23, conducted between January 1982 and November 1984 and published as NCHRP report 275, "Pavement Roughness and Rideability," and 1-23(2), conductd between January 1986 and December 1987 and published as NCHRP Report 308, "Pavement Roughness and Rideability - Field Evaluation." It is an index that rates rideability of a road using a 0 to 5 scale, where an RN of 5.0 is considered to be a perfect ride quality road, and an RN of zero is an impassable road. The RN was chosen because it corresponds to users' perception of pavement roughness. The definition of this method is given in Section 4.3.2 of ASTM E1489. The Profile Index (PI), equation (2), statistic is derived from the longitudinal profile and then processed through a non-linear mathematical transformation, equation (1), to yield RN value(s) for each 0.1 mile or any other desired reporting interval.

The RN is defined by the following equation:

$$RN = 5e^{-160PI} \quad \dots \quad (1)$$

Where:

$$PI = \sqrt{\frac{(PI_L^2 + PI_R^2)}{2}} \quad \dots \quad (2)$$

PI_L = Profile Index in the Left wheel path (ft/ft)

PI_R = Profile Index in the Right wheel path (ft/ft)

PAGE

LEFT

BLANK

Observations

Many roadway characteristics and construction practices are being monitored and included in the FDOT's smoothness database. Some of these have proven to be significant contributors to the ride quality of the pavements tested, and some factors have not been so valuable. Below is a summary list of key variables being monitored with a brief explanation of their effect on pavement smoothness.

- Average Annual Daily Traffic (AADT) - Analysis on Interstate pavements has shown that there does not appear to be any correlation between AADT and RN.
- Material Transfer Device (MTD) Usage - Data shows that pavements placed using this equipment can be smoother. Overall, full MTD usage on the entire project shows no significant improvement over no MTD usage, both having an average RN of 4.2. MTD usage on the Interstate system yielded some benefit; 4.2 RN with full-project MTD usage versus 4.0 for Interstate projects where the MTD was not used at all.
- Aggregate Type - Based on summary data from Florida projects, smooth pavements can be constructed regardless of the aggregate type used. However, on average, pavements using Granite aggregate in friction courses are smoother. Granite pavements have an average RN of 4.2, compared to an RN of 4.0 for Limestone pavements.
- Data by Year - No significant improvement was found when comparing the average RN over time.
- Binder Type - No significant difference was found when comparing the smoothness of pavements using polymer-modified binders in the friction course to pavements using other types of binders.
- Paving Time - No significant difference was found when comparing the smoothness of pavements placed at Night to those placed during the Day.
- System - No significant difference was found when comparing the smoothness of Primary and Interstate systems.
- Surface Type - It is well documented that pavements with dense-graded friction courses are consistently smoother than those with open-graded friction courses.. Dense-graded friction courses have an average RN of 4.3, compared to 4.1 for open-graded friction courses.

In addition to these factors, there are many other variables that the data can be subdivided by. If any additional information is needed, please contact the following people.

Stacy Scott	stacy.scott@dot.state.fl.us	(352) 955-6328
Kyle Kroodsma	kyle.kroodsma@dot.state.fl.us	(352) 955-6332
Charles Holzschuher	charles.holzschuher@dot.state.fl.us	(352) 955-6341

PAGE

LEFT

BLANK

Ride Distribution of All Lots

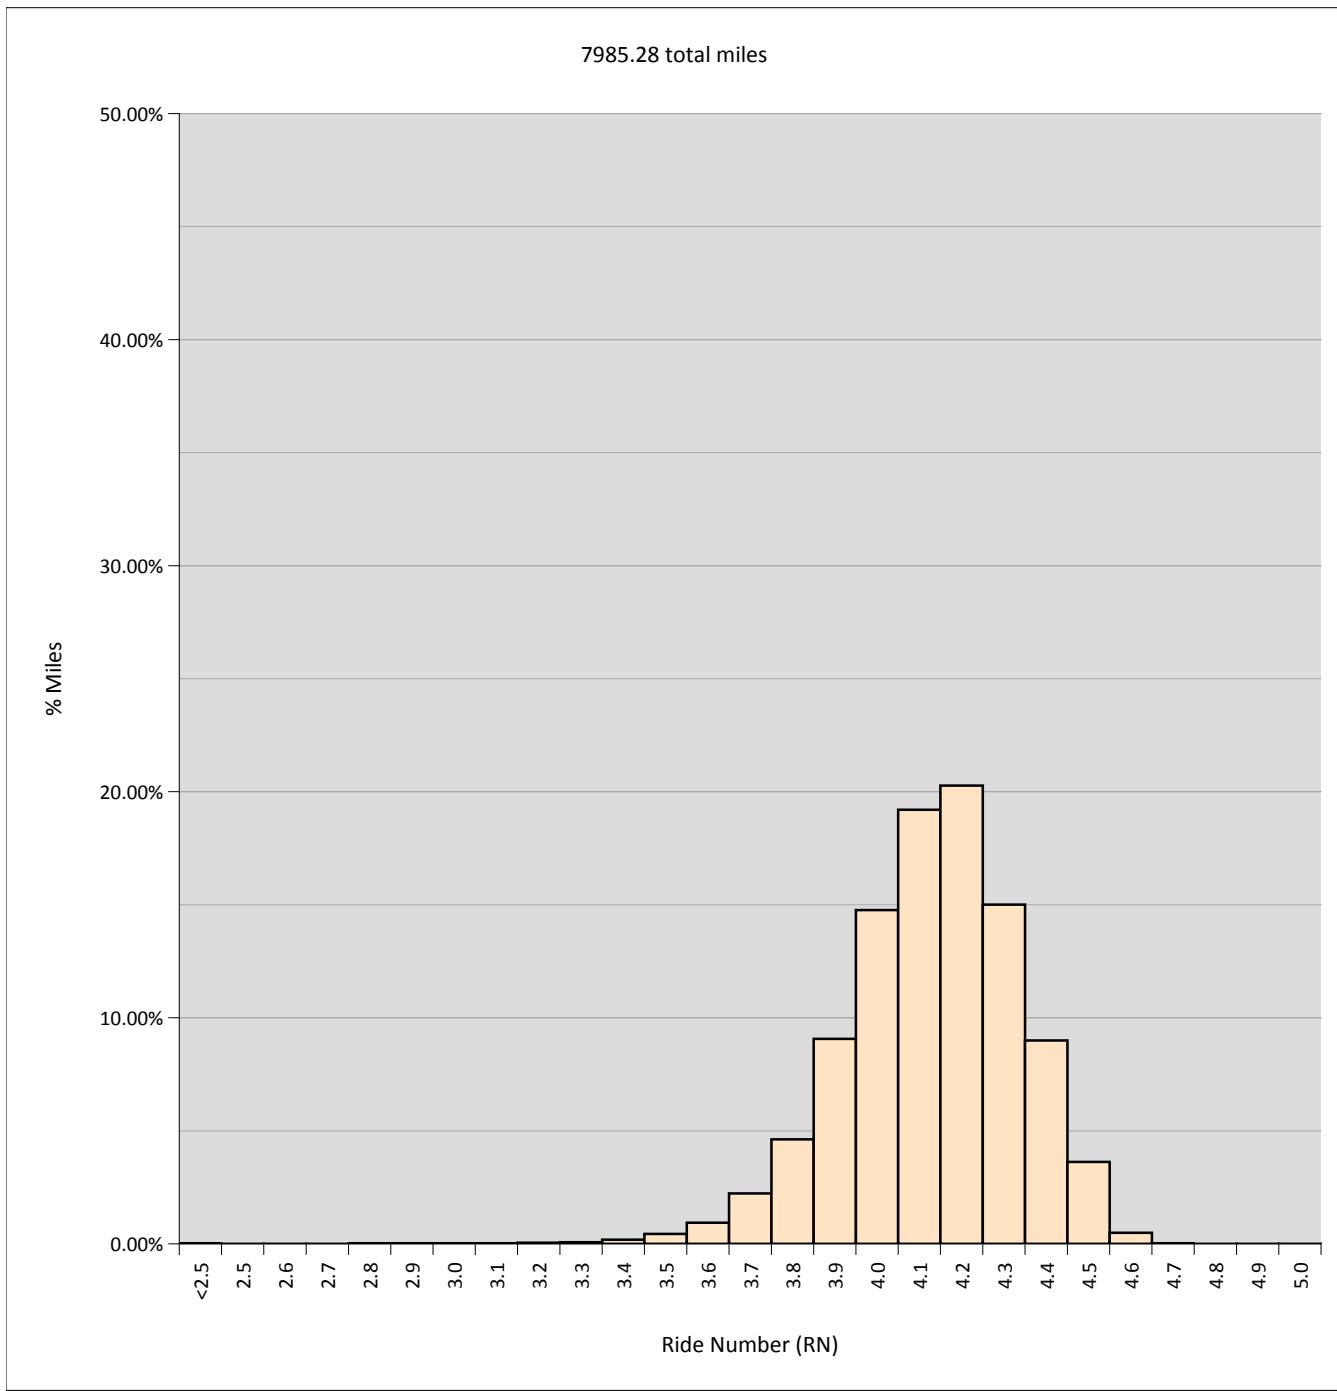


Figure 1: Statewide Ride Distribution, All Lots

Type	Total Lots	Total Miles	Min	Mean	Max	St. Dev	RN ≤3.5		
							Lots	Miles	% Miles
All Lots	81850	7985.28	1.2	4.1	4.7	0.20	703	63.34	0.79%

Ride Distribution by Friction Course and System

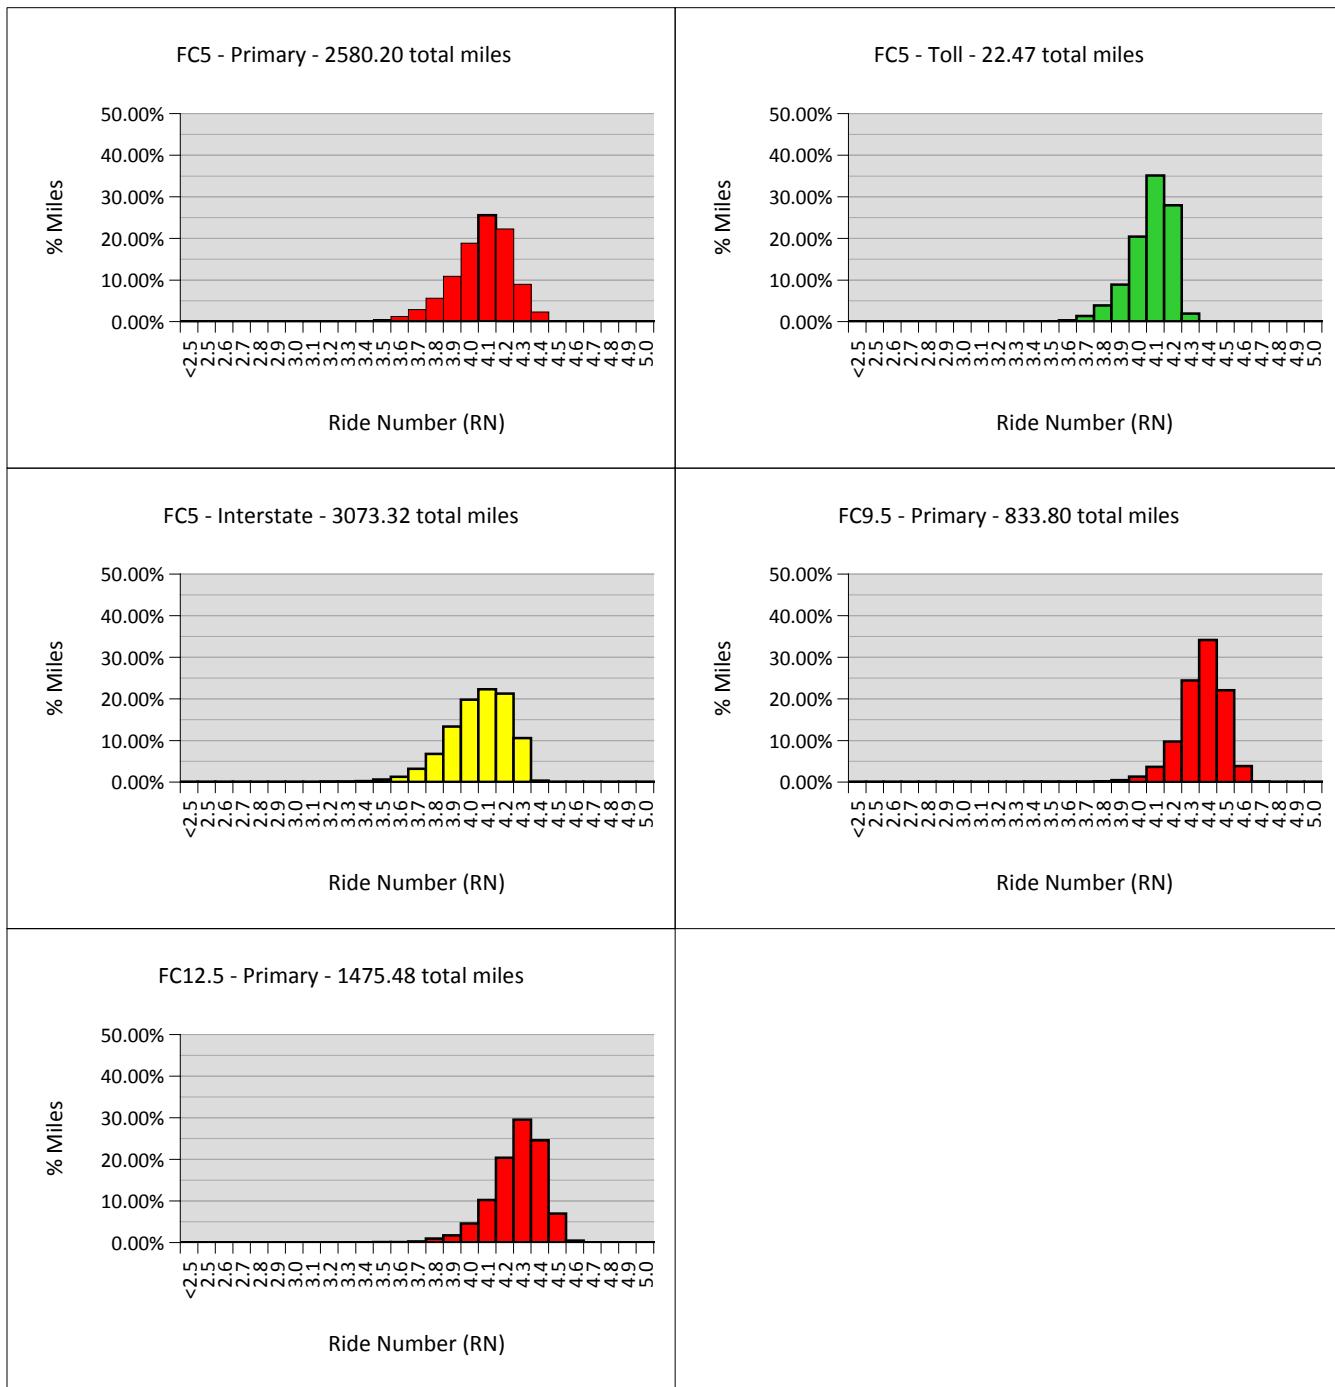


Figure 2: Statewide Ride Distribution by Friction Course and System

Friction Course	System	Total Lots	Total Miles	Min	Mean	Max	St. Dev	RN ≤ 3.5		
								Lots	Miles	% Miles
FC5	Primary	26353	2580.20	1.2	4.1	4.5	0.18	289	25.82	1.00%
FC5	Toll	243	22.47	3.3	4.1	4.3	0.12	1	0.02	0.07%
FC5	Interstate	31731	3073.32	2.1	4.1	4.4	0.18	356	32.61	1.06%
FC9.5	Primary	8485	833.80	2.1	4.4	4.7	0.13	8	0.55	0.07%
FC12.5	Primary	15038	1475.48	2.9	4.3	4.6	0.16	49	4.35	0.29%

Table 1: Statewide Statistical Summary by Friction Course, System, Year, and Aggregate

Friction Course	System	Year	Aggregate	Total Lots	Total Miles	Mean	Max	St. Dev	RN ≤ 3.5			
				Lots	Miles				Lots	Miles	% Miles	
FC5	Primary	2005	Granite	1184	117.11	3.3	4.1	4.3	0.13	7	0.61	0.52%
FC5	Primary	2005	Limestone	929	87.51	3.3	3.9	4.3	0.15	15	1.16	1.32%
FC5	Primary	2006	Granite	1477	144.73	2.2	4.0	4.3	0.16	12	0.99	0.68%
FC5	Primary	2006	Limestone	1750	171.24	1.2	4.0	4.3	0.17	40	3.24	1.89%
FC5	Primary	2007	Granite	3744	369.77	2.4	4.1	4.4	0.11	7	0.59	0.16%
FC5	Primary	2007	Limestone	3049	300.31	2.4	3.9	4.3	0.18	90	8.43	2.81%
FC5	Primary	2008	Granite	3206	314.84	3.3	4.1	4.4	0.12	5	0.38	0.12%
FC5	Primary	2008	Limestone	1433	139.66	2.8	4.0	4.3	0.15	26	2.09	1.50%
FC5	Primary	2009	Granite	3617	352.57	3.3	4.1	4.4	0.13	4	0.32	0.09%
FC5	Primary	2009	Limestone	1813	178.34	3.1	3.9	4.4	0.21	78	7.65	4.29%
FC5	Primary	2010	Granite	2578	250.59	3.2	4.2	4.5	0.14	1	0.10	0.04%
FC5	Primary	2010	Limestone	1459	142.76	3.2	4.1	4.5	0.14	3	0.22	0.15%
FC5	Toll	2006	Granite	207	19.47	3.8	4.1	4.3	0.10	0	0.00	0.00%
FC5	Toll	2006	Limestone	36	3.00	3.3	3.9	4.1	0.11	1	0.02	0.53%
FC5	Interstate	2005	Granite	870	82.94	3.5	4.0	4.4	0.15	1	0.10	0.12%
FC5	Interstate	2005	Limestone	2205	212.41	2.8	4.0	4.4	0.19	37	3.45	1.62%
FC5	Interstate	2006	Granite	2669	261.44	2.8	4.0	4.4	0.16	16	1.54	0.59%
FC5	Interstate	2006	Limestone	1420	138.50	3.1	3.8	4.2	0.16	90	8.71	6.29%
FC5	Interstate	2007	Granite	4190	410.21	3.1	4.1	4.4	0.16	16	1.47	0.36%
FC5	Interstate	2007	Limestone	1721	164.78	3.2	3.9	4.2	0.18	100	9.21	5.59%
FC5	Interstate	2008	Granite	3640	355.96	3.2	4.1	4.4	0.14	3	0.29	0.08%
FC5	Interstate	2008	Limestone	3500	333.75	2.9	4.0	4.4	0.16	57	4.84	1.45%
FC5	Interstate	2009	Granite	3560	343.91	3.2	4.1	4.3	0.12	7	0.65	0.19%
FC5	Interstate	2009	Limestone	2231	215.02	2.1	4.0	4.3	0.14	14	1.24	0.57%
FC5	Interstate	2010	Granite	3708	361.27	3.2	4.2	4.4	0.13	6	0.43	0.12%
FC5	Interstate	2010	Limestone	2017	193.14	2.2	4.0	4.3	0.14	9	0.68	0.35%
FC9.5	Primary	2005	Granite	625	60.77	3.2	4.3	4.6	0.14	2	0.05	0.08%
FC9.5	Primary	2006	Limestone	919	89.86	2.1	4.4	4.6	0.15	3	0.20	0.22%
FC9.5	Primary	2007	Granite	980	96.45	3.8	4.3	4.6	0.11	0	0.00	0.00%
FC9.5	Primary	2008	Granite	1319	130.15	3.9	4.4	4.6	0.10	0	0.00	0.00%
FC9.5	Primary	2008	Limestone	918	89.06	3.4	4.3	4.6	0.11	1	0.10	0.11%
FC9.5	Primary	2009	Granite	1560	154.14	3.6	4.3	4.6	0.13	0	0.00	0.00%
FC9.5	Primary	2009	Limestone	464	45.63	3.8	4.3	4.5	0.10	0	0.00	0.00%
FC9.5	Primary	2010	Granite	751	74.22	3.6	4.4	4.6	0.12	0	0.00	0.00%
FC12.5	Primary	2010	Limestone	502	49.27	3.9	4.4	4.7	0.12	0	0.00	0.00%
FC12.5	Primary	2005	Granite	606	59.51	3.0	4.1	4.5	0.19	14	1.21	2.03%
FC12.5	Primary	2005	Limestone	486	47.94	3.9	4.4	4.5	0.08	0	0.00	0.00%
FC12.5	Primary	2006	Granite	1643	161.45	3.0	4.3	4.6	0.14	4	0.40	0.25%

Table 1: Statewide Statistical Summary by Friction Course, System, Year, and Aggregate, continued

Friction Course	System	Year	Aggregate	Total Lots	Total Miles	Min	Mean	Max	St. Dev	Lots	Miles	RN ≤ 3.5 % Miles
FC12.5	Primary	2006	Limestone	1052	102.94	3.0	4.2	4.5	0.17	9	0.81	0.79%
FC12.5	Primary	2007	Granite	1843	180.77	3.3	4.2	4.5	0.14	1	0.10	0.06%
FC12.5	Primary	2007	Limestone	247	24.03	3.6	4.3	4.5	0.14	0	0.00	0.00%
FC12.5	Primary	2008	Granite	2535	249.74	3.1	4.3	4.6	0.13	2	0.14	0.06%
FC12.5	Primary	2008	Limestone	490	47.62	3.2	4.2	4.5	0.20	10	0.93	1.96%
FC12.5	Primary	2009	Granite	1788	175.21	2.9	4.3	4.6	0.14	3	0.30	0.17%
FC12.5	Primary	2009	Limestone	136	13.53	3.7	4.2	4.4	0.13	0	0.00	0.00%
FC12.5	Primary	2010	Granite	3693	362.11	3.1	4.3	4.6	0.14	6	0.46	0.13%
FC12.5	Primary	2010	Limestone	42	4.10	3.6	4.0	4.5	0.23	0	0.00	0.00%

Aggregate Type of "Mixed" has been excluded from this report.

Table 2: Statewide Statistical Summary by Friction Course, System, Aggregate, and Material Transfer Device Status

Friction Course	System	Aggregate	Material Transfer Device Status	Total Lots	Total Miles	Min	Mean	Max	St. Dev	RN ≤ 3.5	
										Lots	Miles
FC5	Primary	Granite	Fully Used	4233	414.36	3.3	4.2	4.5	0.15	2	0.20
		Granite	Not Used	1353	129.55	3.2	4.1	4.5	0.15	3	0.22
FC5	Primary	Limestone	Fully Used	2625	259.03	3.1	4.0	4.4	0.20	68	6.65
		Limestone	Not Used	490	46.74	3.4	4.0	4.5	0.20	7	0.62
FC5	Interstate	Granite	Fully Used	4735	458.70	3.2	4.2	4.4	0.12	7	0.57
		Granite	Not Used	692	67.34	3.7	4.1	4.4	0.13	0	0.00
FC5	Interstate	Limestone	Fully Used	1040	100.58	3.7	4.1	4.2	0.09	0	0.00
		Limestone	Not Used	1429	136.56	2.2	4.0	4.3	0.14	13	1.08
FC9.5	Primary	Granite	Fully Used	1473	146.09	3.6	4.4	4.6	0.12	0	0.00
		Granite	Not Used	320	31.34	4.0	4.4	4.6	0.10	0	0.00
FC9.5	Primary	Limestone	Fully Used	404	39.78	3.9	4.5	4.7	0.10	0	0.00
		Limestone	Not Used	80	7.68	3.8	4.4	4.6	0.15	0	0.00
FC12.5	Primary	Granite	Fully Used	1839	180.47	3.6	4.3	4.6	0.13	0	0.00
		Granite	Not Used	2662	260.55	3.1	4.3	4.6	0.14	7	0.57
FC12.5	Primary	Limestone	Fully Used	146	14.46	3.7	4.2	4.5	0.14	0	0.00
		Limestone	Not Used	32	3.16	3.6	3.8	4.1	0.12	0	0.00
All	All	Granite & Limestone	Fully Used	16495	1613.47	3.1	4.2	4.7	0.19	77	7.42
All	All	Granite & Limestone	Not Used	7058	682.92	2.2	4.2	4.6	0.19	30	2.48

Aggregate Type of "Mixed" has been excluded from this report.

Material Transfer Device Statuses of "Partially Used" and "Unknown" have been excluded from this report.

Table 3: Statewide Statistical Summary by Friction Course, System, Aggregate, and Paving Time

Friction Course	System	Aggregate	Paving Time	Total Miles		Min	Mean	Max	St. Dev	RN ≤ 3.5	
				Total Lots	Total Miles					Lots	Miles
FC5	Primary	Granite	Day	8636	848.20	3.3	4.2	4.5	0.13	8	0.80
FC5	Primary	Granite	Night	2736	263.96	3.2	4.1	4.4	0.13	8	0.60
FC5	Primary	Limestone	Day	4902	483.57	1.8	4.0	4.4	0.18	135	12.92
FC5	Primary	Limestone	Night	2174	210.89	2.8	3.9	4.5	0.18	57	5.02
FC5	Toll	Granite	Night	207	19.47	3.8	4.1	4.3	0.10	0	0.00
FC5	Toll	Limestone	Night	36	3.00	3.3	3.9	4.1	0.11	1	0.02
FC5	Interstate	Granite	Day	2556	251.37	3.5	4.2	4.4	0.10	1	0.10
FC5	Interstate	Granite	Night	9761	945.66	2.9	4.1	4.4	0.14	16	1.24
FC5	Interstate	Limestone	Day	3436	332.28	2.2	4.0	4.3	0.11	15	1.28
FC5	Interstate	Limestone	Night	6593	631.29	2.1	3.9	4.4	0.19	243	22.62
FC9.5	Primary	Granite	Day	2583	254.90	3.6	4.4	4.6	0.12	0	0.00
FC9.5	Primary	Granite	Night	1033	101.67	3.6	4.4	4.6	0.14	0	0.00
FC9.5	Primary	Limestone	Day	2473	241.81	2.1	4.4	4.7	0.13	3	0.20
FC9.5	Primary	Limestone	Night	238	23.08	3.4	4.3	4.6	0.17	1	0.10
FC12.5	Primary	Granite	Day	9152	900.95	3.0	4.3	4.6	0.14	11	1.00
FC12.5	Primary	Granite	Night	847	81.22	2.9	4.2	4.6	0.19	3	0.21
FC12.5	Primary	Limestone	Day	1287	126.40	3.0	4.2	4.5	0.17	8	0.80
FC12.5	Primary	Limestone	Night	113	10.46	3.5	4.3	4.5	0.16	1	0.01
All	All	Granite & Limestone	Day	35025	3439.46	1.8	4.2	4.7	0.20	181	17.10
All	All	Granite & Limestone	Night	23738	2290.70	2.1	4.1	4.6	0.20	330	29.82

Aggregate Type of "Mixed" has been excluded from this report.
 Paving Times of "Both" and "Unknown" have been excluded from this report.

Table 4: Lane Miles Tested Per District by Friction Course and System

Friction Course	System	Total Lane Miles Tested						
		District 1	District 2	District 3	District 4	District 5	District 6	District 7
FC5	Interstate	637.10	453.99	283.05	765.87	629.55	54.71	249.06
FC5	Toll	0.00	0.00	0.00	0.00	22.47	0.00	0.00
FC5	Primary	474.56	592.31	248.02	352.83	644.95	76.10	191.43
FC9.5	Primary	178.28	80.65	242.41	107.22	167.11	0.00	58.13
FC12.5	Primary	426.85	639.68	118.11	14.48	201.91	10.54	63.92
Total		1,716.79	1,766.62	891.59	1,240.41	1,665.98	141.35	562.54

Table 5: Statewide Statistical Summary by Contractor, Friction Course, Aggregate, and Material Transfer Device Status

Contractor	Friction Course	Aggregate	Material Transfer Device Status	Total Lots	Total Miles	Min	Mean	Max	St. Dev	RN ≤ 3.5	
										Lots	Miles
A.P.A.C.	FC5	Granite	Fully Used	1338	131.74	3.7	4.2	4.4	0.10	0	0.00
A.P.A.C.	FC5	Granite	Not Used	565	53.94	3.2	4.1	4.4	0.13	1	0.10
A.P.A.C.	FC5	Limestone	Not Used	278	27.16	3.7	4.0	4.2	0.10	0	0.00
A.P.A.C.	FC9.5	Granite	Fully Used	124	12.27	4.1	4.4	4.6	0.09	0	0.00
A.P.A.C.	FC9.5	Granite	Not Used	41	3.83	4.2	4.5	4.6	0.10	0	0.00
A.P.A.C.	FC12.5	Granite	Fully Used	60	5.85	4.1	4.4	4.5	0.09	0	0.00
A.P.A.C.	FC12.5	Granite	Not Used	668	64.90	3.1	4.3	4.6	0.11	1	0.01
Ajax Paving Industry	FC5	Granite	Fully Used	3117	301.47	3.3	4.2	4.4	0.12	3	0.25
Ajax Paving Industry	FC5	Limestone	Fully Used	452	44.81	3.5	4.0	4.3	0.10	1	0.10
Ajax Paving Industry	FC12.5	Granite	Fully Used	373	36.56	3.7	4.4	4.6	0.15	0	0.00
Anderson Columbia	FC5	Granite	Fully Used	1778	174.73	3.3	4.2	4.5	0.17	2	0.20
Anderson Columbia	FC5	Granite	Not Used	270	25.93	3.8	4.1	4.3	0.10	0	0.00
Anderson Columbia	FC9.5	Granite	Fully Used	273	26.99	3.8	4.4	4.6	0.14	0	0.00
Anderson Columbia	FC12.5	Granite	Fully Used	719	70.53	3.6	4.3	4.5	0.11	0	0.00
Anderson Columbia	FC12.5	Granite	Not Used	473	46.84	3.8	4.3	4.6	0.12	0	0.00
Asphalt Group, Inc.	FC5	Limestone	Not Used	670	64.46	2.2	4.0	4.3	0.13	4	0.25
Atlantic Coast	FC5	Granite	Fully Used	482	45.71	3.8	4.2	4.4	0.08	0	0.00
Better Roads Inc.	FC5	Limestone	Not Used	350	33.65	3.6	4.0	4.3	0.10	0	0.00
Better Roads Inc.	FC9.5	Limestone	Not Used	12	1.17	3.8	4.2	4.3	0.18	0	0.00
C. W. Roberts Contracting	FC5	Granite	Fully Used	760	75.30	3.8	4.2	4.4	0.09	0	0.00
C. W. Roberts Contracting	FC9.5	Granite	Fully Used	312	30.91	4.0	4.4	4.5	0.09	0	0.00
C. W. Roberts Contracting	FC12.5	Granite	Fully Used	172	16.98	4.0	4.3	4.6	0.12	0	0.00
Community Asphalt Corp.	FC5	Limestone	Fully Used	894	88.61	3.1	3.8	4.2	0.19	60	5.93
Community Asphalt Corp.	FC5	Limestone	Not Used	239	21.43	2.8	4.0	4.3	0.18	6	0.44
Community Asphalt Corp.	FC12.5	Limestone	Fully Used	136	13.53	3.7	4.2	4.4	0.13	0	0.00
D.A.B. Constructors	FC5	Granite	Not Used	152	14.99	3.9	4.3	4.4	0.06	0	0.00
D.A.B. Constructors	FC12.5	Granite	Not Used	20	1.86	4.1	4.4	4.5	0.10	0	0.00
Dickerson Asphalt	FC5	Limestone	Fully Used	1086	105.64	3.7	4.1	4.4	0.09	0	0.00
Dickerson Asphalt	FC9.5	Limestone	Fully Used	146	14.20	3.9	4.4	4.5	0.08	0	0.00
Dickerson Asphalt	FC12.5	Limestone	Fully Used	10	0.94	4.0	4.3	4.5	0.16	0	0.00
Duval Asphalt	FC5	Granite	Fully Used	274	25.71	3.6	4.1	4.3	0.07	0	0.00
Duval Asphalt	FC12.5	Granite	Fully Used	82	8.02	3.9	4.3	4.4	0.07	0	0.00
Duval Asphalt	FC12.5	Granite	Not Used	50	4.77	3.1	4.0	4.2	0.19	1	0.10
GAC Contractors	FC5	Granite	Fully Used	260	25.61	4.1	4.3	4.5	0.08	0	0.00
General Asphalt Company	FC5	Limestone	Fully Used	133	13.04	3.5	3.8	4.2	0.15	3	0.30
General Asphalt Company	FC5	Limestone	Not Used	53	5.03	3.4	3.7	4.1	0.17	5	0.50
Halifax Paving Inc.	FC5	Granite	Not Used	516	50.58	3.7	4.2	4.5	0.12	0	0.00
Harddrives of Delray	FC12.5	Limestone	Not Used	32	3.16	3.6	3.8	4.1	0.12	0	0.00

Table 5: Statewide Statistical Summary by Contractor, Friction Course, Aggregate, and Material Transfer Device Status, continued

Contractor	Friction Course	Aggregate	Material Transfer Device Status	Total Lots	Total Miles	Min	Mean	Max	St. Dev	RN ≤ 3.5	
										Lots	Miles
Hubbard Construction	FC5	Granite	Fully Used	40	3.81	3.9	4.2	4.3	0.09	0	0.00
Hubbard Construction	FC5	Granite	Not Used	70	6.10	3.7	4.1	4.3	0.16	0	0.00%
Hubbard Construction	FC5	Limestone	Fully Used	238	23.09	3.5	4.1	4.3	0.14	2	0.20
J. W. Cheatham, LLC.	FC9.5	Limestone	Not Used	16	1.43	4.2	4.4	4.4	0.06	0	0.00
Lane Construction Corp.	FC5	Granite	Fully Used	186	18.16	3.2	4.0	4.3	0.18	4	0.31
Lane Construction Corp.	FC5	Limestone	Fully Used	96	9.59	3.5	3.9	4.2	0.15	1	0.10
Lane Construction Corp.	FC9.5	Granite	Not Used	166	16.44	4.1	4.3	4.4	0.07	0	0.00
Lane Construction Corp.	FC12.5	Granite	Fully Used	80	7.97	3.8	4.1	4.5	0.15	0	0.00%
Lane Construction Corp.	FC12.5	Granite	Not Used	56	5.41	3.8	4.1	4.3	0.11	0	0.00
Middlesex Corp.	FC5	Granite	Not Used	100	9.65	3.8	4.1	4.3	0.11	0	0.00
Middlesex Corp.	FC9.5	Granite	Not Used	113	11.07	4.0	4.4	4.5	0.11	0	0.00
Middlesex Corp.	FC12.5	Granite	Not Used	115	11.04	3.8	4.2	4.4	0.10	0	0.00
Orlando Paving Company	FC5	Granite	Fully Used	155	15.48	3.6	4.0	4.3	0.15	0	0.00
P & S Paving	FC5	Granite	Not Used	150	14.38	3.5	4.0	4.3	0.13	1	0.10
P & S Paving	FC12.5	Granite	Fully Used	253	24.75	4.1	4.4	4.5	0.09	0	0.00
P & S Paving	FC12.5	Granite	Not Used	388	37.65	3.4	4.3	4.5	0.12	1	0.09
Panhandle Grading & Paving	FC9.5	Granite	Fully Used	452	44.86	3.6	4.4	4.6	0.14	0	0.00
Peavy and Sons	FC5	Granite	Fully Used	578	55.36	3.9	4.1	4.4	0.09	0	0.00%
Peavy and Sons	FC9.5	Granite	Fully Used	312	31.06	4.1	4.4	4.6	0.10	0	0.00
Peavy and Sons	FC12.5	Granite	Fully Used	100	9.81	4.0	4.2	4.4	0.11	0	0.00
Ranger Construction	FC5	Granite	Not Used	222	21.33	3.5	4.1	4.3	0.17	1	0.02
Ranger Construction	FC5	Limestone	Fully Used	748	73.17	3.4	4.1	4.3	0.11	1	0.02
Ranger Construction	FC5	Limestone	Not Used	133	12.90	3.4	4.0	4.4	0.24	4	0.40
Ranger Construction	FC9.5	Limestone	Fully Used	258	25.57	4.1	4.5	4.7	0.09	0	0.00
Ranger Construction	FC9.5	Limestone	Not Used	52	5.08	4.0	4.4	4.6	0.10	0	0.00
Ranger Construction	FC12.5	Granite	Not Used	70	6.87	4.0	4.2	4.5	0.09	0	0.00
S. T. Wooten Corp.	FC5	Limestone	Not Used	36	3.21	3.6	4.0	4.5	0.27	0	0.00
Steven Counts Inc.	FC12.5	Granite	Not Used	28	2.63	3.3	4.1	4.4	0.28	2	0.16
Superior Asphalt Inc.	FC12.5	Granite	Not Used	597	58.90	3.4	4.3	4.5	0.12	2	0.20
Weekly Asphalt Paving	FC5	Limestone	Fully Used	18	1.66	3.6	3.8	4.0	0.12	0	0.00
Weekly Asphalt Paving	FC5	Limestone	Not Used	160	15.46	3.4	3.8	4.1	0.12	1	0.10
Whitehurst	FC12.5	Granite	Not Used	197	19.67	3.8	4.2	4.4	0.10	0	0.00

Aggregate Type of "Mixed" has been excluded from this report.
 Material Transfer Device Statuses of "Partially Used" and "Unknown" have been excluded from this report.

PAGE

LEFT

BLANK

Ride Distribution of All Lots

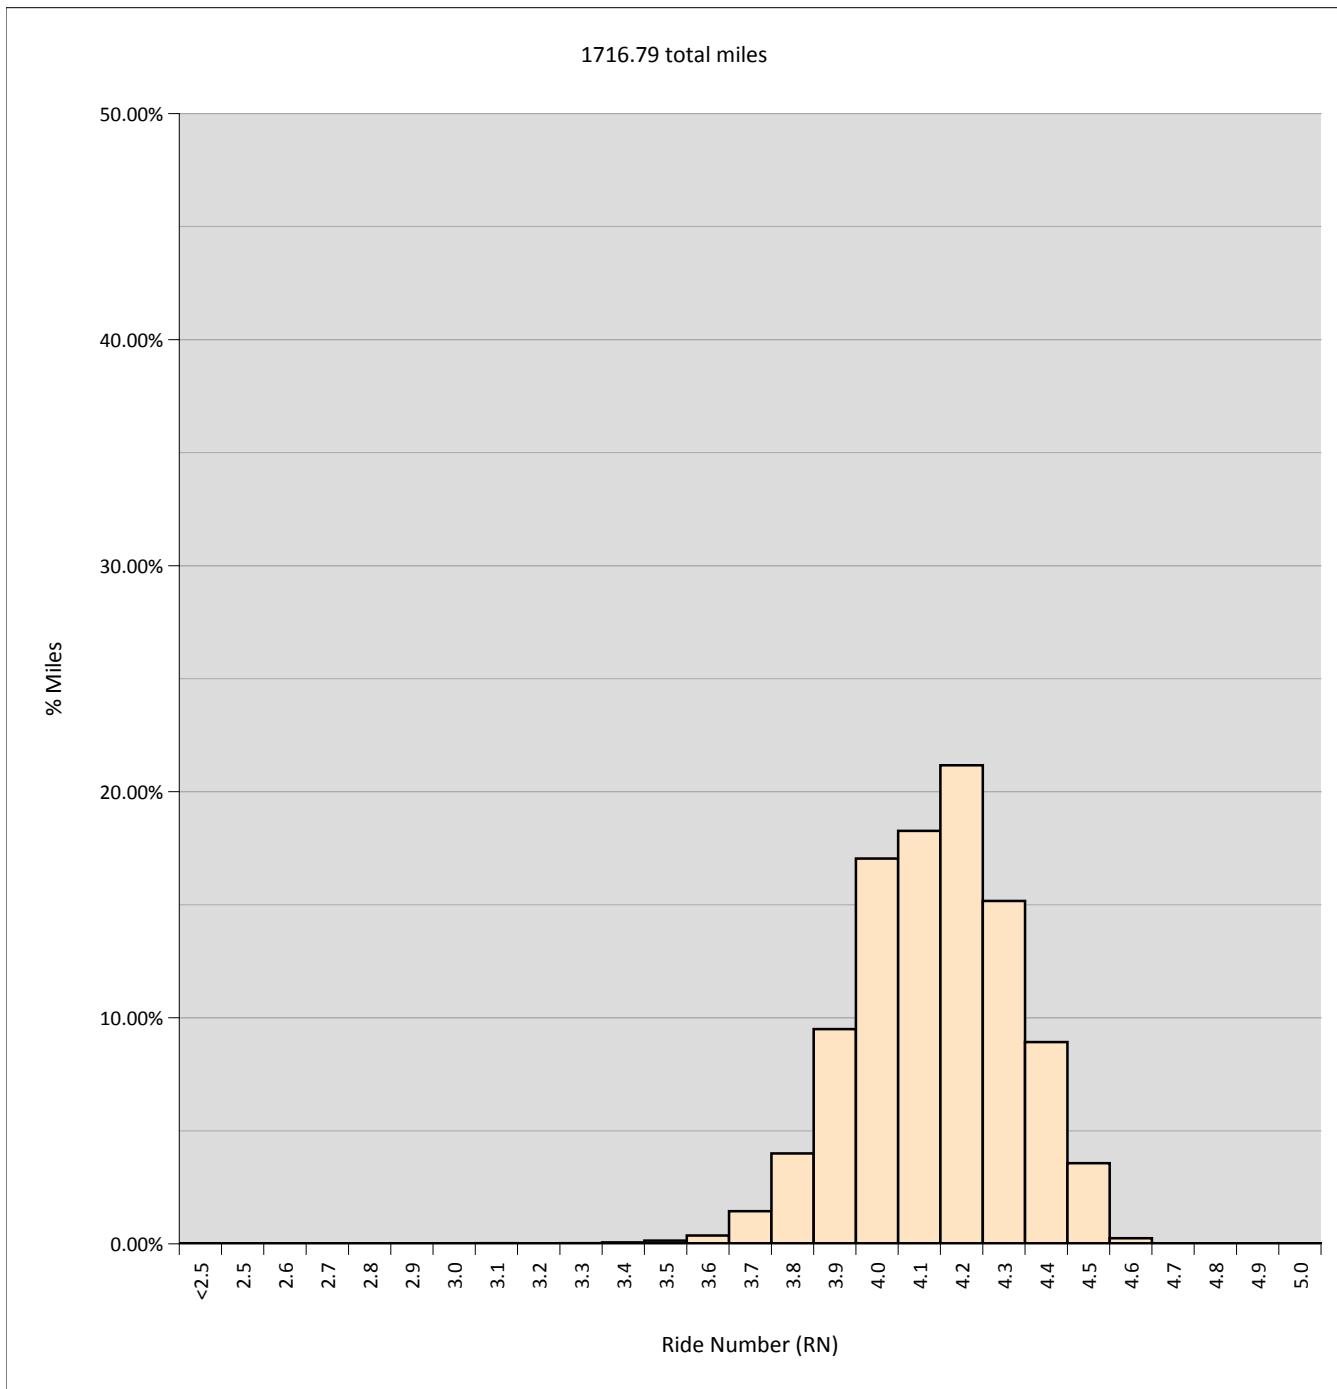


Figure 3: District 1 Ride Distribution, All Lots

Type	Total Lots	Total Miles	Min	Mean	Max	St. Dev	RN ≤3.5		
							Lots	Miles	% Miles
All Lots	17644	1716.79	2.1	4.1	4.6	0.19	63	5.22	0.30%

Ride Distribution by Friction Course and System

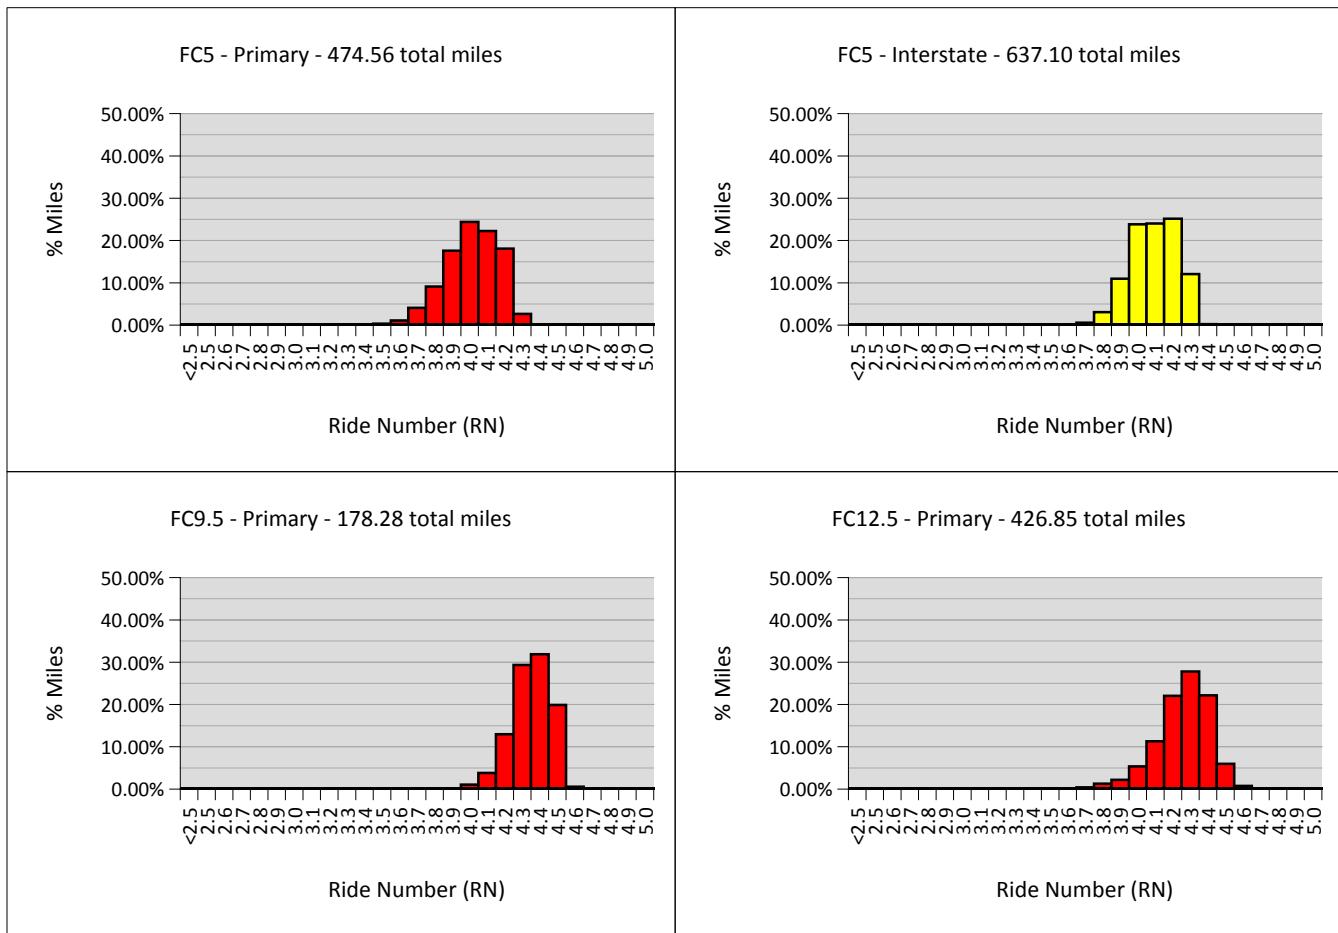


Figure 4: District 1 Ride Distribution by Friction Course and System

Friction Course	System	Total Lots	Total Miles	Min	Mean	Max	St. Dev	RN ≤ 3.5		
								Lots	Miles	% Miles
FC5	Primary	4854	474.56	2.4	4.0	4.5	0.16	33	2.56	0.54%
FC5	Interstate	6601	637.10	3.3	4.1	4.4	0.14	4	0.35	0.06%
FC9.5	Primary	1826	178.28	2.1	4.3	4.6	0.12	2	0.10	0.06%
FC12.5	Primary	4363	426.85	3.0	4.3	4.6	0.17	24	2.20	0.52%

Table 6: District 1 Statistical Summary by Friction Course, System, Year, and Aggregate

Friction Course	System	Year	Aggregate	Total Lots	Total Miles	Min	Max	St. Dev	RN ≤ 3.5		
				Lots	Miles	Mean	Max		Lots	Miles	% Miles
FC5	Primary	2005	Limestone	410	39.25	3.3	4.2	0.13	3	0.22	0.56%
FC5	Primary	2006	Limestone	843	81.95	2.8	4.0	0.13	10	0.46	0.57%
FC5	Primary	2007	Granite	14	1.40	3.4	3.8	0.19	2	0.20	14.29%
FC5	Primary	2007	Limestone	1325	130.65	2.4	4.0	0.17	10	0.91	0.70%
FC5	Primary	2008	Granite	136	13.23	3.8	4.1	0.08	0	0.00	0.00%
FC5	Primary	2008	Limestone	293	28.22	3.4	3.9	0.15	6	0.57	2.00%
FC5	Primary	2009	Granite	961	94.38	3.6	4.1	0.12	0	0.00	0.00%
FC5	Primary	2009	Limestone	434	42.51	3.5	4.0	0.14	2	0.20	0.47%
FC5	Primary	2010	Granite	78	7.63	3.8	4.1	0.14	0	0.00	0.00%
FC5	Primary	2010	Limestone	360	35.35	3.6	4.0	0.13	0	0.00	0.00%
FC5	Interstate	2005	Limestone	595	58.43	3.7	4.0	0.08	0	0.00	0.00%
FC5	Interstate	2006	Granite	91	8.04	3.9	4.1	0.08	0	0.00	0.00%
FC5	Interstate	2006	Limestone	56	5.27	3.6	3.9	0.11	0	0.00	0.00%
FC5	Interstate	2007	Limestone	728	71.72	3.4	4.0	0.11	1	0.10	0.14%
FC5	Interstate	2008	Granite	49	4.12	3.9	4.1	0.06	0	0.00	0.00%
FC5	Interstate	2008	Limestone	1056	99.13	3.6	4.0	0.09	0	0.00	0.00%
FC5	Interstate	2009	Granite	1556	150.28	3.3	4.1	0.13	3	0.25	0.17%
FC5	Interstate	2009	Limestone	418	40.57	3.8	4.0	0.08	0	0.00	0.00%
FC5	Interstate	2010	Granite	2052	199.54	3.7	4.2	0.08	0	0.00	0.00%
FC9.5	Primary	2005	Granite	53	5.01	3.8	4.2	0.11	0	0.00	0.00%
FC9.5	Primary	2006	Limestone	697	68.21	2.1	4.4	0.13	2	0.10	0.15%
FC9.5	Primary	2008	Granite	176	17.53	4.1	4.3	0.07	0	0.00	0.00%
FC9.5	Primary	2008	Limestone	780	75.57	3.6	4.3	0.11	0	0.00	0.00%
FC9.5	Primary	2009	Limestone	12	1.17	3.8	4.2	0.18	0	0.00	0.00%
FC12.5	Primary	2005	Granite	198	19.49	3.0	4.0	0.24	12	1.18	6.05%
FC12.5	Primary	2005	Limestone	486	47.94	3.9	4.4	0.08	0	0.00	0.00%
FC12.5	Primary	2006	Granite	253	24.88	3.8	4.2	0.13	0	0.00	0.00%
FC12.5	Primary	2006	Limestone	962	94.34	3.0	4.2	0.17	9	0.81	0.86%
FC12.5	Primary	2007	Granite	94	9.25	3.7	4.0	0.14	0	0.00	0.00%
FC12.5	Primary	2007	Limestone	133	12.71	3.6	4.3	0.11	0	0.00	0.00%
FC12.5	Primary	2008	Limestone	382	37.08	3.7	4.3	0.12	0	0.00	0.00%
FC12.5	Primary	2009	Granite	379	36.31	3.7	4.3	0.13	0	0.00	0.00%
FC12.5	Primary	2009	Limestone	136	13.53	3.7	4.2	0.13	0	0.00	0.00%
FC12.5	Primary	2010	Granite	1284	126.00	3.1	4.3	0.15	3	0.21	0.17%
FC12.5	Primary	2010	Limestone	10	0.94	4.0	4.3	0.16	0	0.00	0.00%

Aggregate Type of "Mixed" has been excluded from this report.

Table 7: District 1 Statistical Summary by Friction Course, System, Aggregate, and Material Transfer Device Status

Friction Course	System	Aggregate	Material Transfer Device Status	RN ≤ 3.5							
				Total Lots	Total Miles	Min	Mean	Max	St. Dev	Lots	Miles
FC5	Primary	Granite	Fully Used	1039	102.00	3.6	4.1	4.3	0.12	0	0.00
FC5	Primary	Limestone	Fully Used	548	54.40	3.5	4.0	4.3	0.12	2	0.20
FC5	Primary	Limestone	Not Used	246	23.46	3.6	4.0	4.5	0.17	0	0.00
FC5	Interstate	Granite	Fully Used	2867	277.18	3.3	4.2	4.4	0.11	3	0.25
FC5	Interstate	Granite	Not Used	270	26.43	3.7	4.0	4.2	0.10	0	0.00
FC5	Interstate	Limestone	Not Used	418	40.57	3.8	4.0	4.2	0.08	0	0.00
FC9.5	Primary	Limestone	Not Used	12	1.17	3.8	4.2	4.3	0.18	0	0.00
FC12.5	Primary	Granite	Fully Used	453	44.53	3.7	4.3	4.6	0.17	0	0.00
FC12.5	Primary	Granite	Not Used	1042	101.48	3.1	4.3	4.5	0.12	3	0.21
FC12.5	Primary	Limestone	Fully Used	146	14.46	3.7	4.2	4.5	0.14	0	0.00
All	All	Granite & Limestone	Fully Used	5053	492.57	3.3	4.2	4.6	0.14	5	0.45
All	All	Granite & Limestone	Not Used	1988	193.10	3.1	4.1	4.5	0.18	3	0.21

Aggregate Type of "Mixed" has been excluded from this report.
 Material Transfer Device Statuses of "Partially Used" and "Unknown" have been excluded from this report.

Table 8: District 1 Statistical Summary by Friction Course, System, Aggregate, and Paving Time

Friction Course	System	Aggregate	Paving Time	Total Lots	Total Miles	Min	Mean	Max	St. Dev	RN ≤ 3.5	
										Lots	Miles
FC5	Primary	Granite	Day	500	48.78	3.4	4.1	4.3	0.12	2	0.20
FC5	Primary	Granite	Night	118	111.57	3.8	4.1	4.3	0.12	0	0.00%
FC5	Primary	Limestone	Day	1062	104.67	2.4	3.9	4.3	0.14	7	0.53
FC5	Primary	Limestone	Night	878	85.30	3.0	3.9	4.5	0.15	14	1.28
FC5	Interstate	Granite	Night	3748	361.98	3.3	4.2	4.4	0.12	3	0.25
FC5	Interstate	Limestone	Day	1964	190.10	3.4	4.0	4.2	0.09	1	0.10
FC5	Interstate	Limestone	Night	154	14.85	3.8	4.0	4.1	0.09	0	0.00%
FG9.5	Primary	Limestone	Day	1397	136.02	2.1	4.3	4.6	0.13	2	0.10
FC12.5	Primary	Granite	Day	1621	158.75	3.4	4.3	4.6	0.15	2	0.20
FC12.5	Primary	Granite	Night	274	26.65	3.1	4.4	4.6	0.16	1	0.01
FC12.5	Primary	Limestone	Day	1203	118.27	3.0	4.2	4.5	0.16	8	0.80
FC12.5	Primary	Limestone	Night	75	6.83	3.5	4.2	4.4	0.17	1	0.01
All	All	Granite & Limestone	Day	7747	756.58	2.1	4.1	4.6	0.20	22	1.93
All	All	Granite & Limestone	Night	5247	507.18	3.0	4.1	4.6	0.17	19	1.55
											0.31%

Aggregate Type of "Mixed" has been excluded from this report.
 Paving Times of "Both" and "Unknown" have been excluded from this report.

Table 9: District 1 Statistical Summary by Contractor, Friction Course, Aggregate, and Material Transfer Device Status

Contractor	Friction Course	Aggregate	Material Transfer Device Status	Total Lots	Total Miles	Min	Mean	Max	St. Dev	RN ≤ 3.5	
										Lots	Miles
A.P.A.C.	FC5	Granite	Fully Used	634	62.23	3.7	4.2	4.3	0.09	0	0.00
A.P.A.C.	FC5	Granite	Not Used	270	26.43	3.7	4.0	4.2	0.10	0	0.00%
A.P.A.C.	FC5	Limestone	Not Used	278	27.16	3.7	4.0	4.2	0.10	0	0.00
A.P.A.C.	FC12.5	Granite	Not Used	330	31.53	3.1	4.2	4.4	0.10	1	0.01
Ajax Paving Industry	FC5	Granite	Fully Used	3117	301.47	3.3	4.2	4.4	0.12	3	0.25
Ajax Paving Industry	FC5	Limestone	Fully Used	452	44.81	3.5	4.0	4.3	0.10	1	0.10
Ajax Paving Industry	FC12.5	Granite	Fully Used	373	36.56	3.7	4.4	4.6	0.15	0	0.00
Better Roads Inc.	FC5	Limestone	Not Used	350	33.65	3.6	4.0	4.3	0.10	0	0.00%
Better Roads Inc.	FC9.5	Limestone	Not Used	12	1.17	3.8	4.2	4.3	0.18	0	0.00
Community Asphalt Corp.	FC12.5	Limestone	Fully Used	136	13.53	3.7	4.2	4.4	0.13	0	0.00
Dickerson Asphalt	FC12.5	Limestone	Fully Used	10	0.94	4.0	4.3	4.5	0.16	0	0.00
Lane Construction Corp.	FC5	Limestone	Fully Used	96	9.59	3.5	3.9	4.2	0.15	1	0.10
Lane Construction Corp.	FC12.5	Granite	Fully Used	80	7.97	3.8	4.1	4.5	0.15	0	0.00
Middlesex Corp.	FC12.5	Granite	Not Used	115	11.04	3.8	4.2	4.4	0.10	0	0.00%
Orlando Paving Company	FC5	Granite	Fully Used	155	15.48	3.6	4.0	4.3	0.15	0	0.00%
S.T. Wooten Corp.	FC5	Limestone	Not Used	36	3.21	3.6	4.0	4.5	0.27	0	0.00%
Superior Asphalt Inc.	FC12.5	Granite	Not Used	597	58.90	3.4	4.3	4.5	0.12	2	0.20

Aggregate Type of "Mixed" has been excluded from this report.
 Material Transfer Device Statuses of "Partially Used" and "Unknown" have been excluded from this report.

Ride Distribution of All Lots

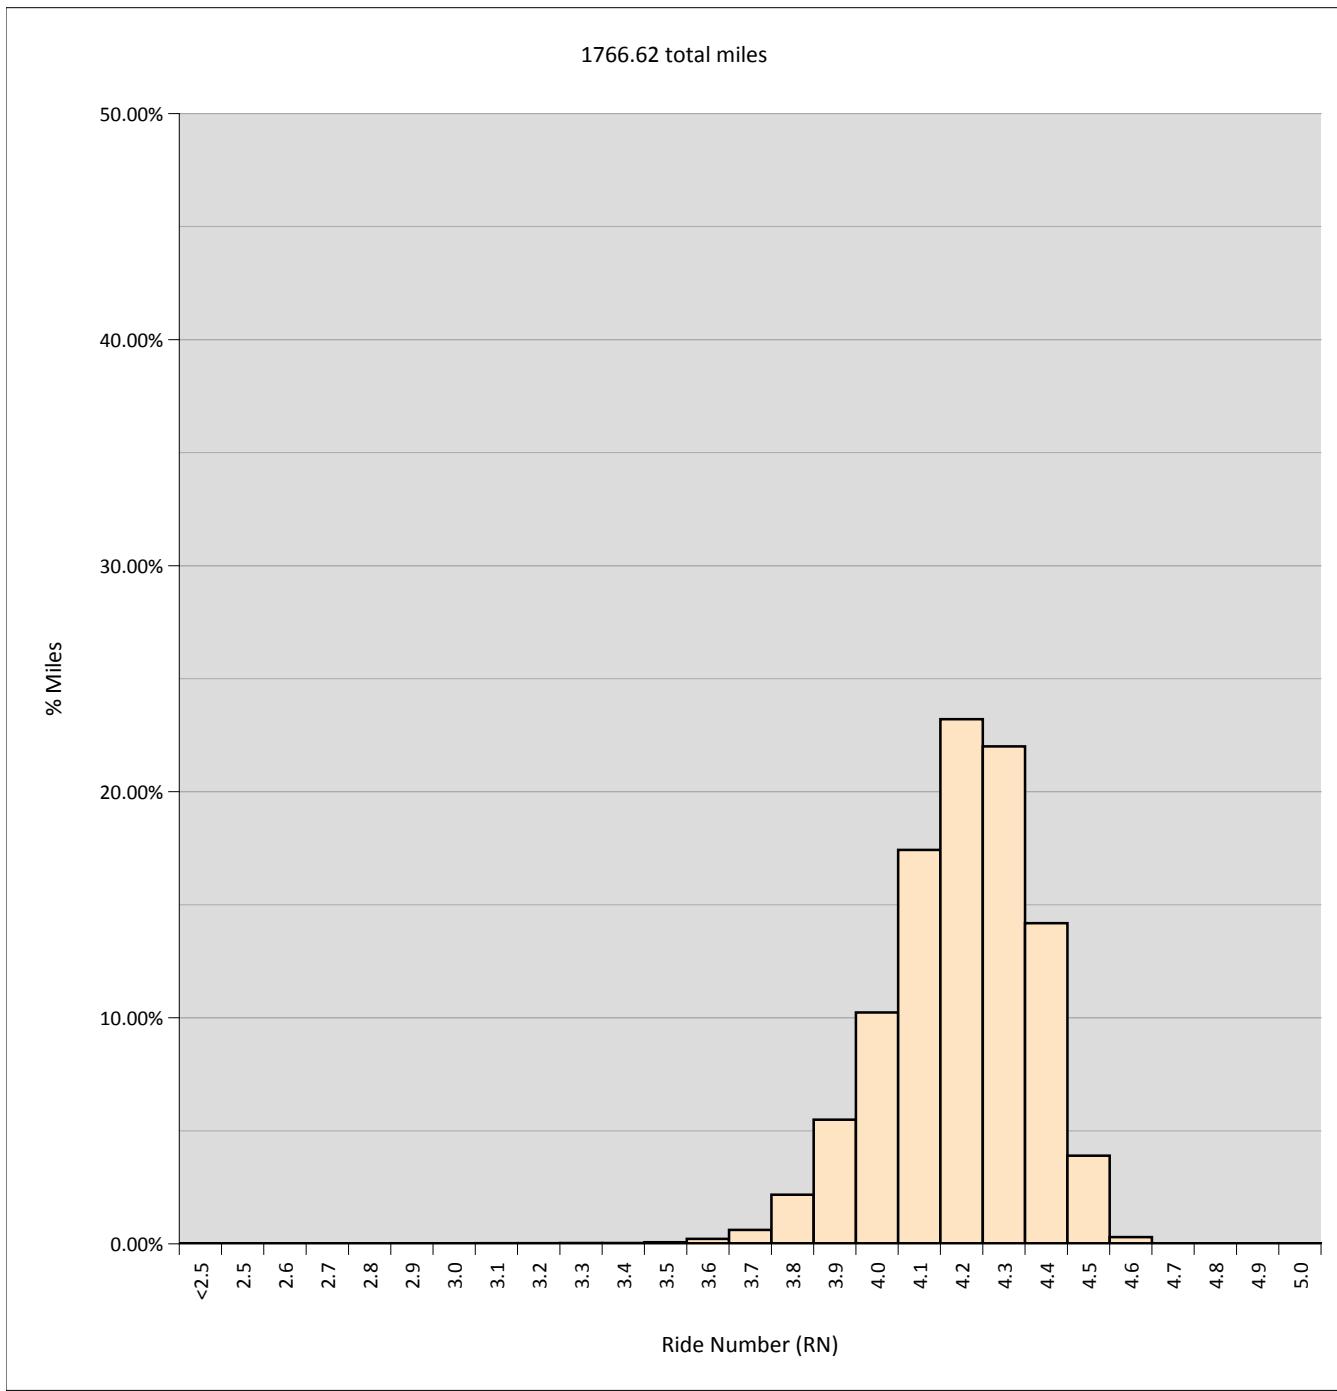


Figure 5: District 2 Ride Distribution, All Lots

Type	Total Lots	Total Miles	Min	Mean	Max	St. Dev	RN ≤3.5		
							Lots	Miles	% Miles
All Lots	18020	1766.62	1.8	4.2	4.6	0.18	50	4.28	0.24%

Ride Distribution by Friction Course and System

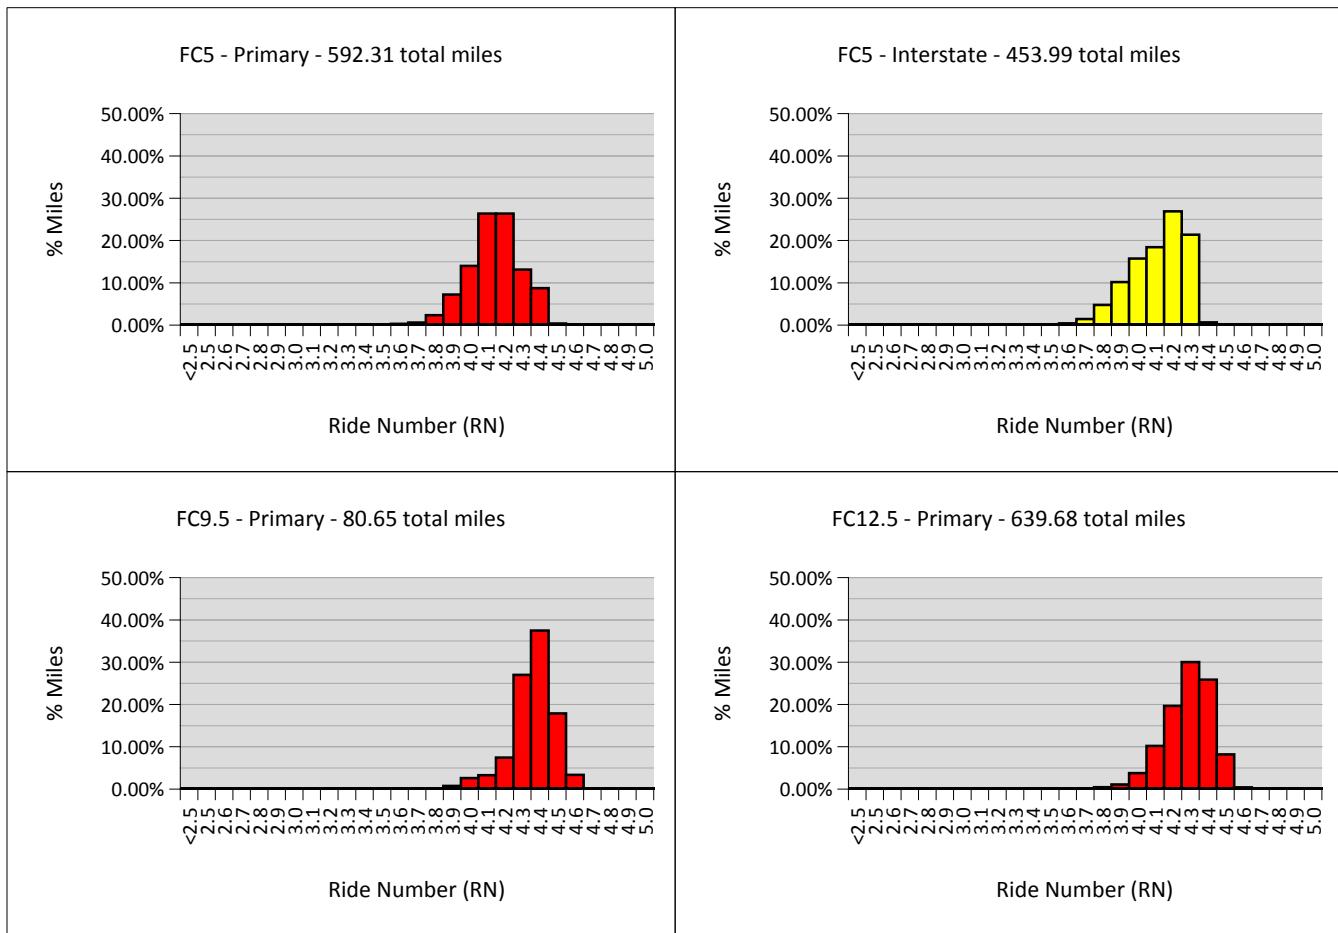


Figure 6: District 2 Ride Distribution by Friction Course and System

Friction Course	System	Total Lots	Total Miles	Min	Mean	Max	St. Dev	RN ≤ 3.5		
								Lots	Miles	% Miles
FC5	Primary	6032	592.31	1.8	4.1	4.5	0.17	33	2.86	0.48%
FC5	Interstate	4669	453.99	3.2	4.1	4.4	0.16	6	0.51	0.11%
FC9.5	Primary	827	80.65	3.2	4.4	4.6	0.13	1	0.01	0.01%
FC12.5	Primary	6492	639.68	2.9	4.3	4.6	0.14	10	0.90	0.14%

Table 10: District 2 Statistical Summary by Friction Course, System, Year, and Aggregate

Friction Course	System	Year	Aggregate	Total Lots	Total Miles	Min	Max	St. Dev	RN ≤ 3.5	
				Lots	Miles	Mean	Max	Lots	Miles	% Miles
FC5	Primary	2005	Granite	536	52.95	3.3	4.1	4.3	0.13	2
FC5	Primary	2005	Limestone	72	6.13	3.3	4.0	4.2	0.18	4
FC5	Primary	2006	Granite	445	44.07	3.4	4.1	4.3	0.16	2
FC5	Primary	2006	Limestone	276	27.26	1.8	3.9	4.2	0.30	21
FC5	Primary	2007	Granite	1563	154.56	3.5	4.1	4.3	0.10	1
FC5	Primary	2008	Granite	577	55.94	3.5	4.0	4.2	0.11	1
FC5	Primary	2009	Granite	847	83.48	3.3	4.1	4.4	0.14	2
FC5	Primary	2010	Granite	1716	167.93	3.6	4.3	4.5	0.13	0
FC5	Interstate	2005	Granite	492	47.04	3.5	4.0	4.4	0.17	1
FC5	Interstate	2006	Granite	420	41.53	3.9	4.2	4.4	0.08	0
FC5	Interstate	2007	Granite	2033	198.08	3.2	4.1	4.4	0.16	3
FC5	Interstate	2008	Granite	1039	101.55	3.2	4.2	4.4	0.15	2
FC5	Interstate	2009	Granite	296	29.00	3.7	4.2	4.3	0.10	0
FC5	Interstate	2010	Granite	389	36.79	4.0	4.2	4.4	0.09	0
FG9.5	Primary	2005	Granite	397	38.85	3.2	4.3	4.6	0.14	1
FG9.5	Primary	2007	Granite	224	22.04	4.0	4.3	4.5	0.08	0
FG9.5	Primary	2008	Granite	165	15.92	4.2	4.5	4.6	0.07	0
FG9.5	Primary	2010	Granite	41	3.83	4.2	4.5	4.6	0.10	0
FC12.5	Primary	2005	Granite	196	19.48	3.5	4.2	4.5	0.13	1
FC12.5	Primary	2006	Granite	1346	132.38	3.0	4.3	4.6	0.14	4
FC12.5	Primary	2006	Limestone	10	0.95	4.1	4.3	4.4	0.08	0
FC12.5	Primary	2007	Granite	1117	109.87	3.3	4.2	4.5	0.12	1
FC12.5	Primary	2008	Granite	1687	166.43	3.1	4.3	4.6	0.13	1
FC12.5	Primary	2009	Granite	825	81.71	2.9	4.3	4.6	0.16	2
FC12.5	Primary	2010	Granite	1199	117.76	3.1	4.3	4.5	0.13	1

Aggregate Type of "Mixed" has been excluded from this report.

Table 11: District 2 Statistical Summary by Friction Course, System, Aggregate, and Material Transfer Device Status

Friction Course	System	Aggregate	Material Transfer Device Status	Total Miles				RN ≤ 3.5			
				Total Lots	Min	Mean	Max	St. Dev	Lots	Miles	% Miles
FC5	Primary	Granite	Fully Used	1997	195.94	3.3	4.2	4.5	0.17	2	0.20
FC5	Interstate	Granite	Fully Used	605	57.91	4.0	4.2	4.4	0.08	0	0.00
FC9.5	Primary	Granite	Not Used	41	3.83	4.2	4.5	4.6	0.10	0	0.00
FC12.5	Primary	Granite	Fully Used	298	29.31	3.9	4.3	4.5	0.11	0	0.00
FC12.5	Primary	Granite	Not Used	914	90.15	3.1	4.3	4.6	0.16	1	0.10
All	All	Granite	Fully Used	2900	283.16	3.3	4.2	4.5	0.15	2	0.20
All	All	Granite	Not Used	955	93.98	3.1	4.3	4.6	0.16	1	0.10

Aggregate Type of "Mixed" has been excluded from this report.

Material Transfer Device Statuses of "Partially Used" and "Unknown" have been excluded from this report.

Table 12: District 2 Statistical Summary by Friction Course, System, Aggregate, and Paving Time

Friction Course	System	Aggregate	Paving Time	Total Miles		Min	Mean	Max	St. Dev	RN ≤ 3.5	
				Total Lots	Total Miles					Lots	Miles
FC5	Primary	Granite	Day	3738	367.83	3.3	4.1	4.5	0.15	4	0.40
FC5	Primary	Granite	Night	205	18.82	3.5	4.0	4.2	0.13	1	0.05
FC5	Primary	Limestone	Day	276	27.26	1.8	3.9	4.2	0.30	21	1.99
FC5	Interstate	Granite	Day	420	41.53	3.9	4.2	4.4	0.08	0	0.00
FC5	Interstate	Granite	Night	988	93.93	3.5	4.2	4.4	0.12	2	0.12
FC9.5	Primary	Granite	Day	224	22.04	4.0	4.3	4.5	0.08	0	0.00
FC9.5	Primary	Granite	Night	206	19.75	4.2	4.5	4.6	0.08	0	0.00
FC12.5	Primary	Granite	Day	5475	540.38	3.0	4.3	4.6	0.13	6	0.60
FC12.5	Primary	Granite	Night	157	14.70	2.9	4.1	4.4	0.20	2	0.20
FC12.5	Primary	Limestone	Day	10	0.95	4.1	4.3	4.4	0.08	0	0.00
All	All	Granite & Limestone	Day	10143	999.99	1.8	4.2	4.6	0.17	31	2.99
All	All	Granite & Limestone	Night	1566	147.20	2.9	4.2	4.6	0.18	5	0.37

Aggregate Type of "Mixed" has been excluded from this report.

Paving Times of "Both" and "Unknown" have been excluded from this report.

Table 13: District 2 Statistical Summary by Contractor, Friction Course, Aggregate, and Material Transfer Device Status

Contractor	Friction Course	Aggregate	Material Transfer Device Status	Total Lots	Total Miles	Min	Mean	Max	St. Dev	RN ≤ 3.5	
										Lots	Miles
A.P.A.C.	FC5	Granite	Fully Used	402	39.48	4.0	4.2	4.4	0.08	0	0.00
	FC9.5	Granite	Not Used	41	3.83	4.2	4.5	4.6	0.10	0	0.00%
A.P.A.C.	FC12.5	Granite	Not Used	174	17.40	4.1	4.4	4.6	0.09	0	0.00
	FC5	Granite	Fully Used	1184	117.34	3.3	4.2	4.5	0.19	2	0.20
Anderson Columbia	FC12.5	Granite	Fully Used	116	11.48	4.1	4.3	4.5	0.08	0	0.00
	FC12.5	Granite	Not Used	473	46.84	3.8	4.3	4.6	0.12	0	0.00%
Anderson Columbia	FC5	Granite	Fully Used	482	45.71	3.8	4.2	4.4	0.08	0	0.00%
	FC5	Granite	Fully Used	274	25.71	3.6	4.1	4.3	0.07	0	0.00%
Duval Asphalt	FC12.5	Granite	Fully Used	82	8.02	3.9	4.3	4.4	0.07	0	0.00%
	FC12.5	Granite	Not Used	50	4.77	3.1	4.0	4.2	0.19	1	0.10
Duval Asphalt	FC5	Granite	Fully Used	260	25.61	4.1	4.3	4.5	0.08	0	0.00%
	FC12.5	Granite	Not Used	20	1.47	3.7	4.1	4.3	0.17	0	0.00%
Peavy and Sons	FC12.5	Granite	Fully Used	100	9.81	4.0	4.2	4.4	0.11	0	0.00%
	FC12.5	Granite	Not Used	197	19.67	3.8	4.2	4.4	0.10	0	0.00%
Whitehurst	FC12.5	Granite	Fully Used	197	19.67	3.8	4.2	4.4	0.10	0	0.00%
	FC12.5	Granite	Not Used	197	19.67	3.8	4.2	4.4	0.10	0	0.00%

Aggregate Type of "Mixed" has been excluded from this report.
 Material Transfer Device Statuses of "Partially Used" and "Unknown" have been excluded from this report.

Ride Distribution of All Lots

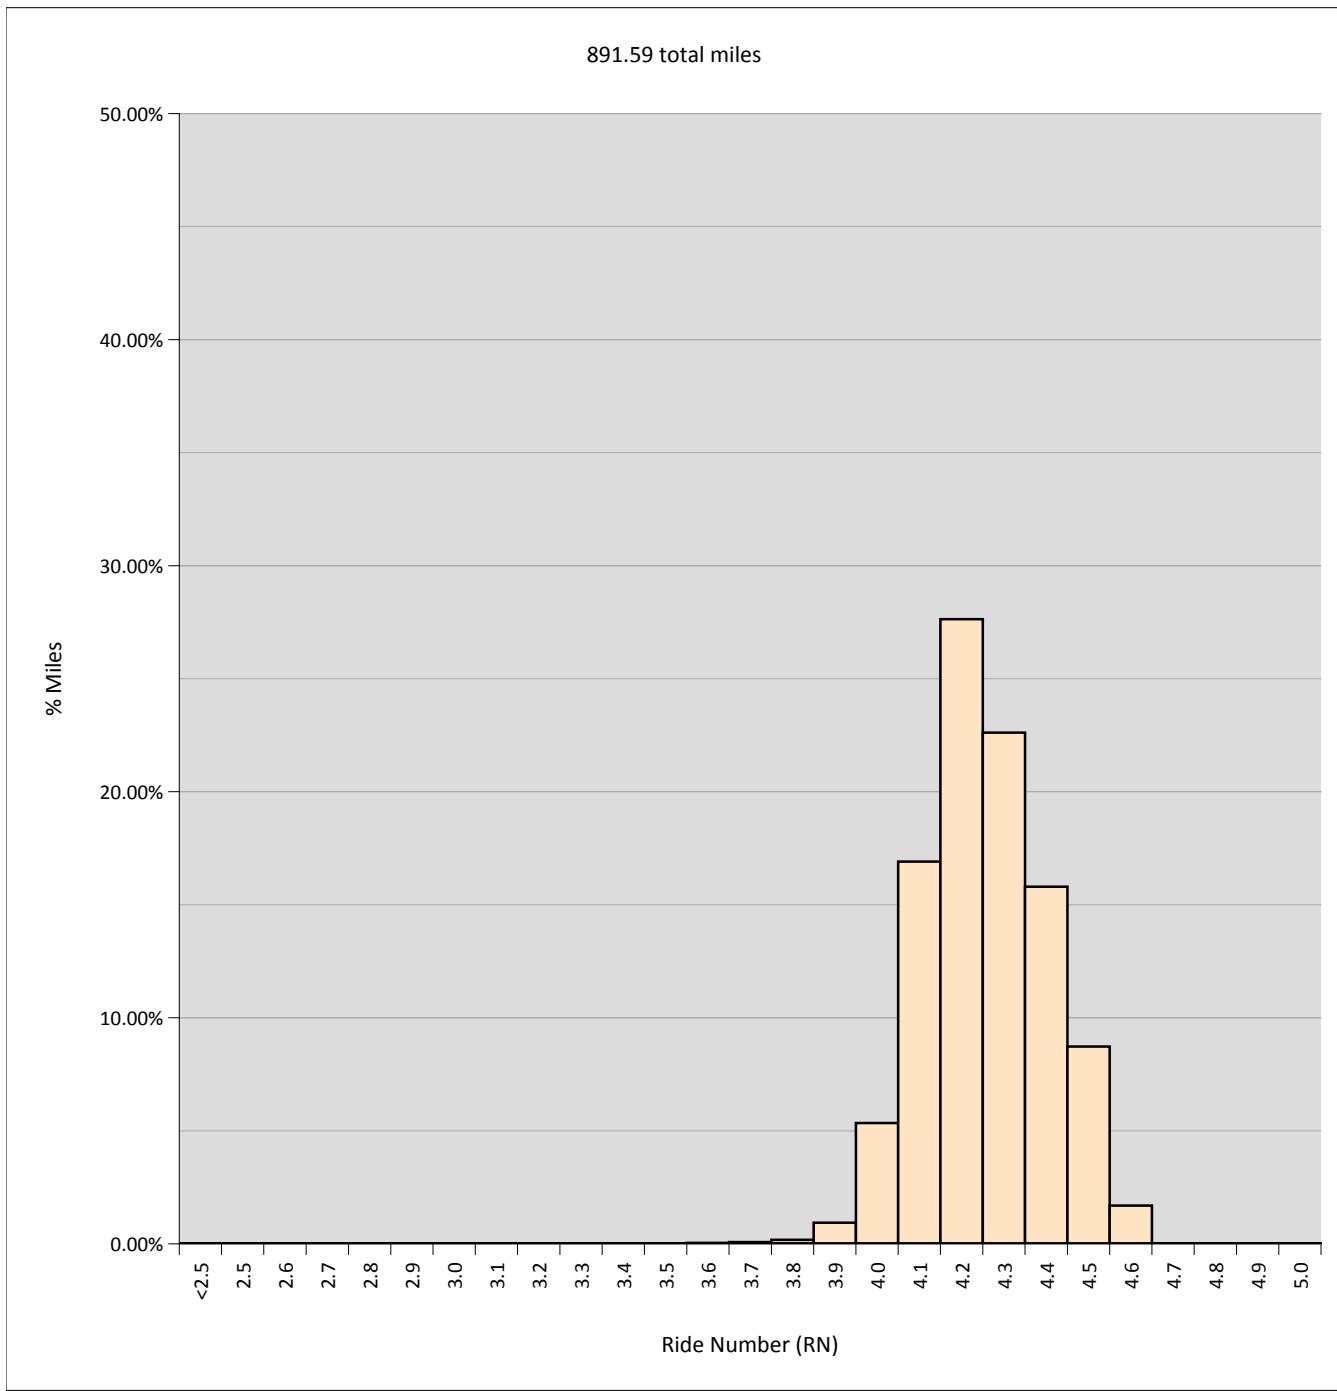


Figure 7: District 3 Ride Distribution, All Lots

Type	Total Lots	Total Miles	Min	Mean	Max	St. Dev	RN ≤3.5		
							Lots	Miles	% Miles
All Lots	9081	891.59	2.4	4.3	4.6	0.15	5	0.39	0.04%

Ride Distribution by Friction Course and System

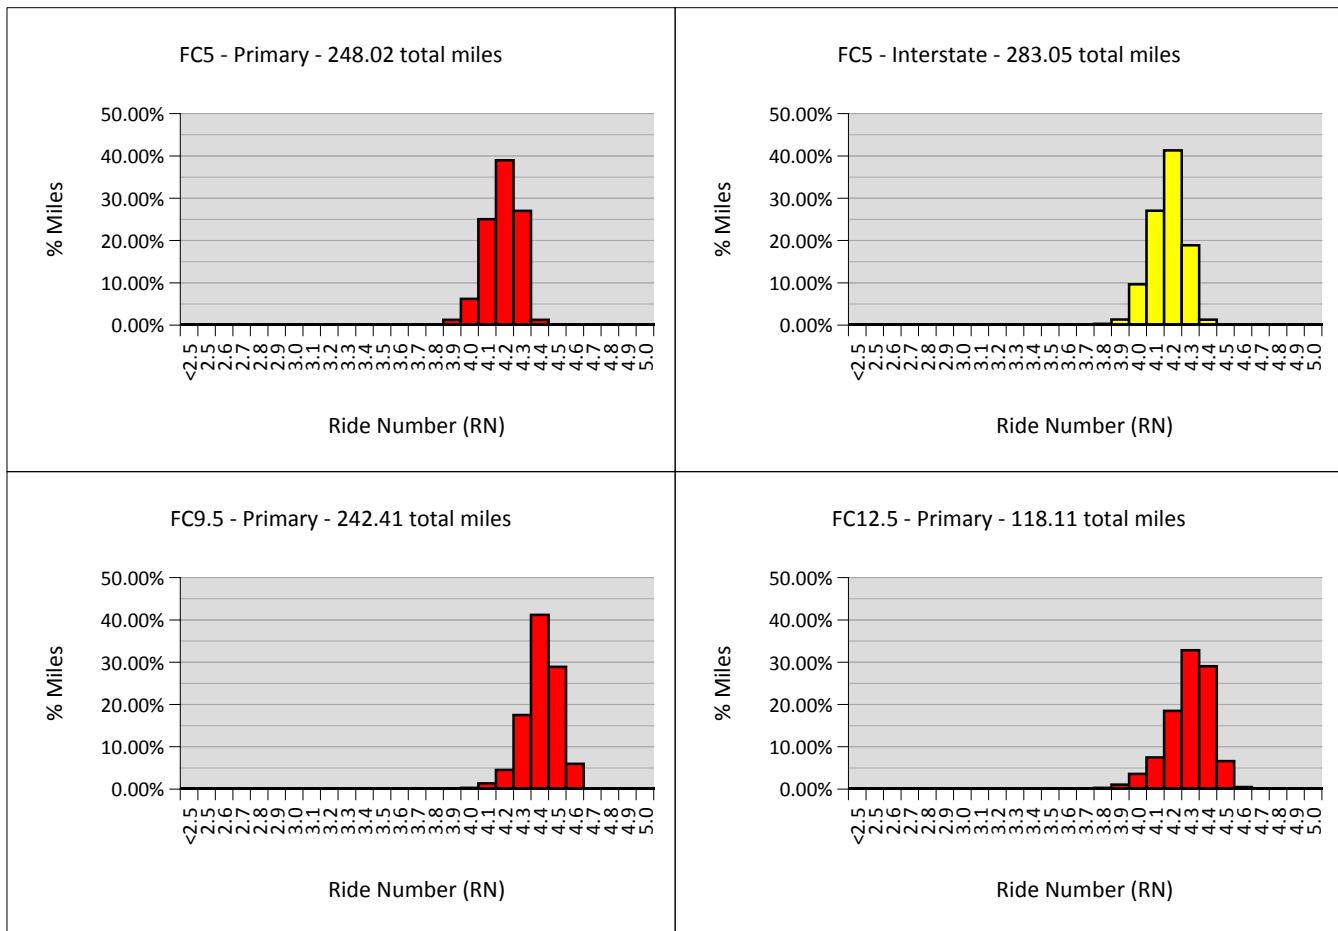


Figure 8: District 3 Ride Distribution by Friction Course and System

Friction Course	System	Total Lots	Total Miles	Min	Mean	Max	St. Dev	RN ≤ 3.5		
								Lots	Miles	% Miles
FC5	Primary	2521	248.02	2.4	4.2	4.4	0.11	4	0.29	0.12%
FC5	Interstate	2904	283.05	3.5	4.2	4.4	0.10	1	0.10	0.04%
FC9.5	Primary	2452	242.41	3.6	4.4	4.6	0.11	0	0.00	0.00%
FC12.5	Primary	1204	118.11	3.6	4.3	4.6	0.13	0	0.00	0.00%

Table 14: District 3 Statistical Summary by Friction Course, System, Year, and Aggregate

Friction Course	System	Year	Aggregate	Total Lots	Total Miles	Min	Mean	Max	St. Dev	RN ≤ 3.5	
				Lots	Miles	Mean	Max	St. Dev	Lots	Miles	% Miles
FC5	Primary	2007	Granite	1170	115.87	2.4	4.2	4.4	0.11	4	0.29
FC5	Primary	2008	Granite	266	26.30	3.7	4.1	4.3	0.09	0	0.00%
FC5	Primary	2009	Granite	737	72.06	3.8	4.2	4.4	0.08	0	0.00
FC5	Primary	2010	Granite	348	33.79	3.9	4.2	4.4	0.12	0	0.00
FC5	Interstate	2006	Granite	341	32.78	3.6	4.1	4.3	0.09	0	0.00
FC5	Interstate	2007	Granite	371	36.22	3.5	4.2	4.3	0.08	1	0.10
FC5	Interstate	2008	Granite	1115	108.59	3.6	4.2	4.4	0.10	0	0.00
FC5	Interstate	2009	Granite	775	75.43	3.9	4.2	4.3	0.08	0	0.00
FC5	Interstate	2010	Granite	302	30.03	4.1	4.3	4.4	0.06	0	0.00
FC9.5	Primary	2007	Granite	496	48.70	3.9	4.4	4.6	0.09	0	0.00
FC9.5	Primary	2008	Granite	498	49.08	4.1	4.5	4.6	0.09	0	0.00
FC9.5	Primary	2009	Granite	748	74.25	4.0	4.4	4.6	0.10	0	0.00
FC9.5	Primary	2010	Granite	710	70.39	3.6	4.4	4.6	0.13	0	0.00
FC12.5	Primary	2005	Granite	78	7.68	3.9	4.2	4.4	0.12	0	0.00
FC12.5	Primary	2007	Granite	197	19.24	3.7	4.2	4.5	0.16	0	0.00
FC12.5	Primary	2008	Granite	224	22.20	3.9	4.3	4.5	0.10	0	0.00
FC12.5	Primary	2009	Granite	184	18.16	4.0	4.3	4.6	0.11	0	0.00
FC12.5	Primary	2010	Granite	521	50.84	3.6	4.3	4.5	0.12	0	0.00

Aggregate Type of "Mixed" has been excluded from this report.

Table 15: District 3 Statistical Summary by Friction Course, System, Aggregate, and Material Transfer Device Status

Friction Course	System	Aggregate	Material Transfer Device Status	Total Miles				RN ≤ 3.5				
				Total Lots	Total Miles	Min	Mean	Max	St. Dev	Lots	Miles	% Miles
FC5	Primary	Granite	Fully Used	1085	105.85	3.8	4.2	4.4	0.10	0	0.00	0.00%
FC5	Interstate	Granite	Fully Used	1077	105.46	3.9	4.2	4.4	0.10	0	0.00	0.00%
FC9.5	Primary	Granite	Fully Used	1410	139.93	3.6	4.4	4.6	0.11	0	0.00	0.00%
FC12.5	Primary	Granite	Fully Used	705	69.00	3.6	4.3	4.6	0.12	0	0.00	0.00%
All	All	Granite	Fully Used	4277	420.23	3.6	4.3	4.6	0.14	0	0.00	0.00%

Aggregate Type of "Mixed" has been excluded from this report.

Material Transfer Device Statuses of "Partially Used" and "Unknown" have been excluded from this report.

Table 16: District 3 Statistical Summary by Friction Course, System, Aggregate, and Paving Time

Friction Course	System	Aggregate	Paving Time	Total Lots	Total Miles	Min	Mean	Max	St. Dev	RN ≤ 3.5	
										Lots	Miles
FC5	Primary	Granite	Day	2095	205.88	3.7	4.2	4.4	0.10	0	0.00
FC5	Primary	Granite	Night	126	12.43	3.7	4.1	4.3	0.10	0	0.00%
FC5	Interstate	Granite	Day	2136	209.84	3.5	4.2	4.4	0.11	1	0.10
FC5	Interstate	Granite	Night	429	41.24	3.9	4.2	4.4	0.09	0	0.00
FC9.5	Primary	Granite	Day	1646	162.41	3.6	4.4	4.6	0.11	0	0.00
FC9.5	Primary	Granite	Night	80	7.99	4.1	4.5	4.6	0.08	0	0.00%
FC12.5	Primary	Granite	Day	842	82.39	3.6	4.3	4.6	0.13	0	0.00
FC12.5	Primary	Granite	Night	92	8.97	4.1	4.4	4.5	0.08	0	0.00%
All	All	Granite	Day	6719	660.52	3.5	4.2	4.6	0.14	1	0.10
All	All	Granite	Night	727	70.63	3.7	4.2	4.6	0.15	0	0.00

Aggregate Type of "Mixed" has been excluded from this report.
 Paving Times of "Both" and "Unknown" have been excluded from this report.


Table 17: District 3 Statistical Summary by Contractor, Friction Course, Aggregate, and Material Transfer Device Status

Contractor	Friction Course	Aggregate	Material Transfer Device Status	Total Lots	Total Miles	Min	Mean	Max	St. Dev	RN ≤ 3.5	
										Lots	Miles
A.P.A.C.	FC5	Granite	Fully Used	302	30.03	4.1	4.3	4.4	0.06	0	0.00
A.P.A.C.	FC9.5	Granite	Fully Used	124	12.27	4.1	4.4	4.6	0.09	0	0.00%
A.P.A.C.	FC12.5	Granite	Fully Used	60	5.85	4.1	4.4	4.5	0.09	0	0.00
Anderson Columbia	FC5	Granite	Fully Used	522	50.62	4.0	4.2	4.4	0.08	0	0.00
Anderson Columbia	FC9.5	Granite	Fully Used	210	20.82	4.1	4.4	4.6	0.10	0	0.00
Anderson Columbia	FC12.5	Granite	Fully Used	603	59.05	3.6	4.3	4.5	0.11	0	0.00
C. W. Roberts Contracting	FC5	Granite	Fully Used	760	75.30	3.8	4.2	4.4	0.09	0	0.00
C. W. Roberts Contracting	FC9.5	Granite	Fully Used	312	30.91	4.0	4.4	4.5	0.09	0	0.00
C. W. Roberts Contracting	FC12.5	Granite	Fully Used	42	4.10	4.1	4.5	4.6	0.10	0	0.00
Panhangle Grading & Paving	FC9.5	Granite	Fully Used	452	44.86	3.6	4.4	4.6	0.14	0	0.00
Peavy and Sons	FC5	Granite	Fully Used	578	55.36	3.9	4.1	4.4	0.09	0	0.00
Peavy and Sons	FC9.5	Granite	Fully Used	312	31.06	4.1	4.4	4.6	0.10	0	0.00

Aggregate Type of "Mixed" has been excluded from this report.

Material Transfer Device Statuses of "Partially Used" and "Unknown" have been excluded from this report.

Ride Distribution of All Lots

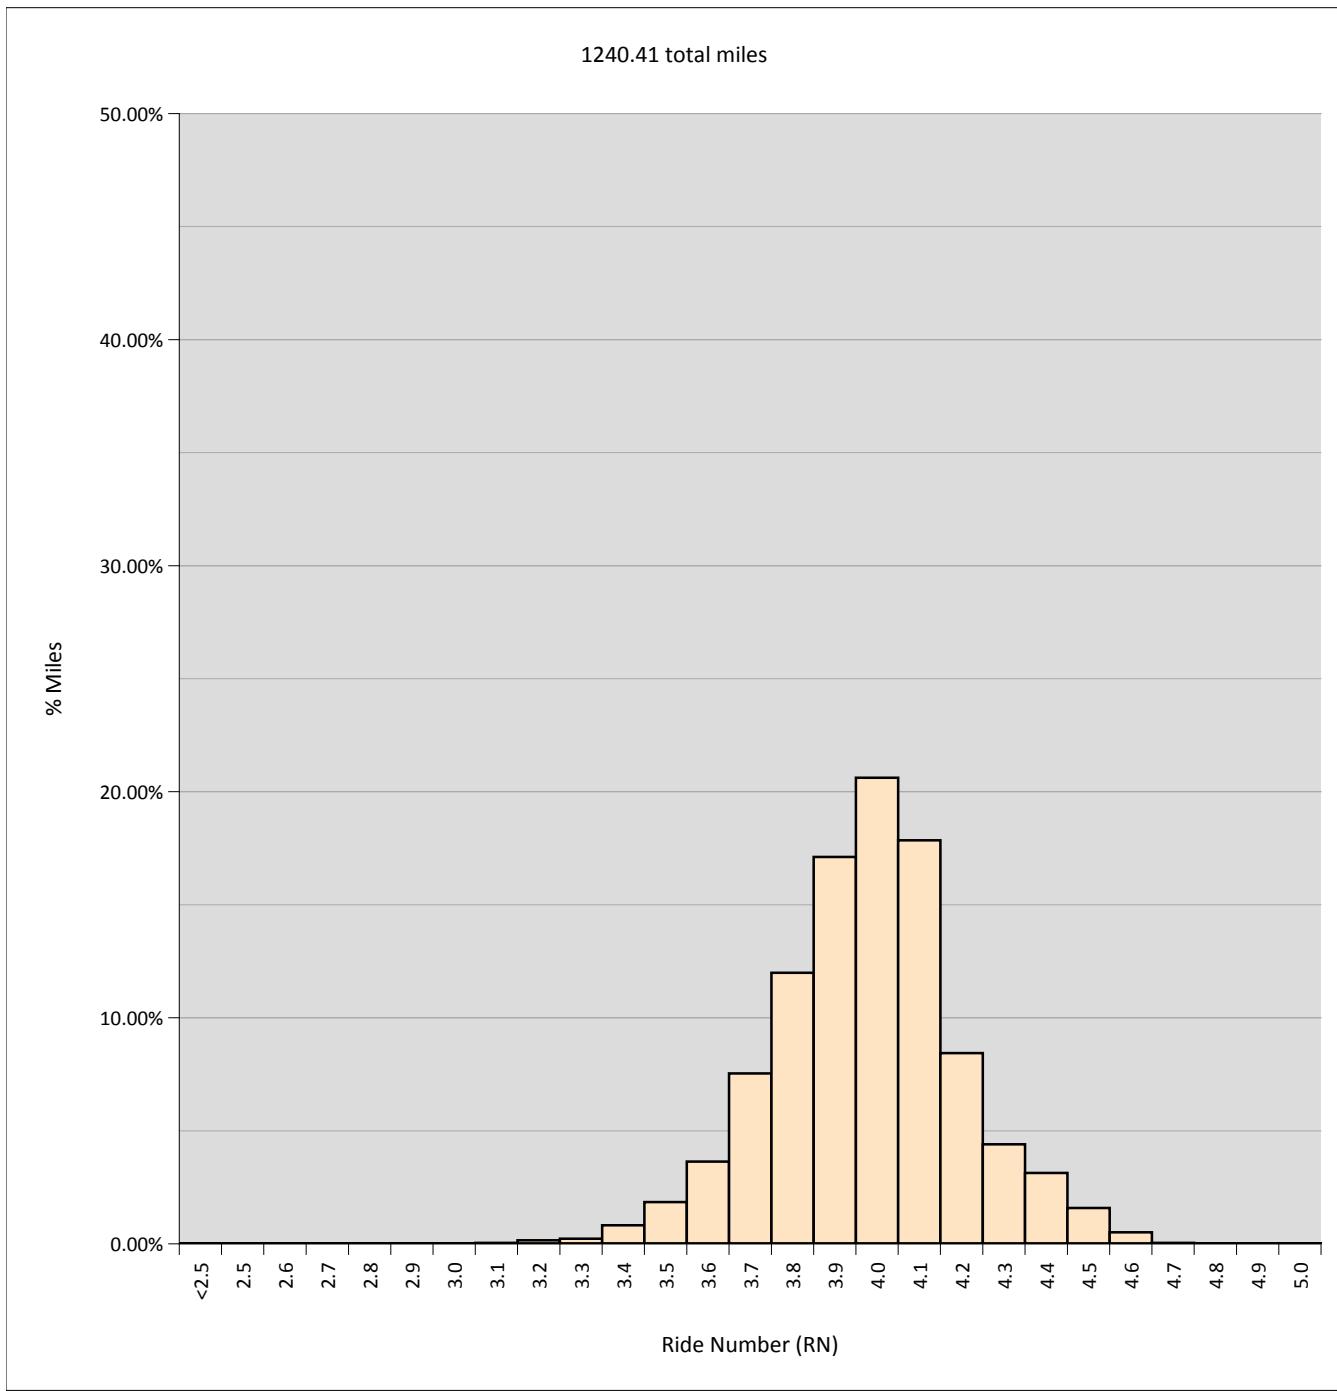**Figure 9: District 4 Ride Distribution, All Lots**

Type	Total Lots	Total Miles	Min	Mean	Max	St. Dev	RN ≤3.5		
							Lots	Miles	% Miles
All Lots	12846	1240.41	2.1	4.0	4.7	0.22	422	38.95	3.14%

Ride Distribution by Friction Course and System

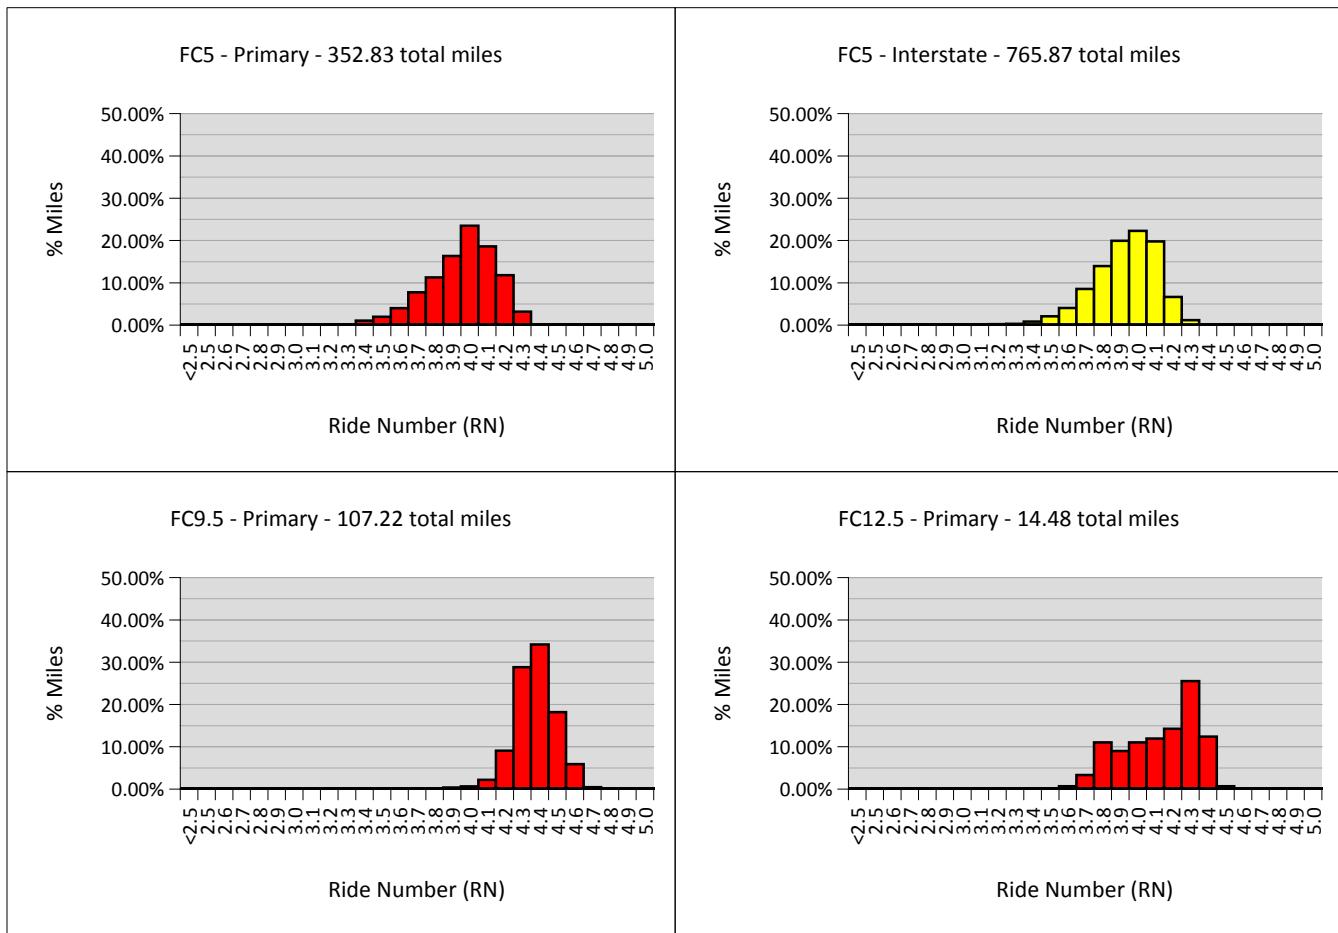


Figure 10: District 4 Ride Distribution by Friction Course and System

Friction Course	System	Total Lots	Total Miles	Min	Mean	Max	St. Dev	RN ≤ 3.5		
								Lots	Miles	% Miles
FC5	Primary	3592	352.83	2.8	4.0	4.4	0.19	128	11.77	3.34%
FC5	Interstate	8016	765.87	2.1	3.9	4.4	0.19	293	27.08	3.54%
FC9.5	Primary	1092	107.22	3.4	4.4	4.7	0.12	1	0.10	0.09%
FC12.5	Primary	146	14.48	3.6	4.1	4.5	0.21	0	0.00	0.00%

Table 18: District 4 Statistical Summary by Friction Course, System, Year, and Aggregate

Friction Course	System	Year	Aggregate	Total Lots	Total Miles	Min	Max	St. Dev	RN ≤ 3.5		
				Lots	Miles	Mean	Max	Lots	Miles	% Miles	
FC5	Primary	2007	Limestone	1252	123.36	3.0	4.2	0.17	60	5.52	4.47%
FC5	Primary	2008	Limestone	485	46.64	2.8	4.0	0.13	7	0.30	0.65%
FC5	Primary	2009	Limestone	998	98.92	3.1	3.9	0.21	60	5.93	6.00%
FC5	Primary	2010	Limestone	857	83.92	3.4	4.1	0.11	1	0.02	0.02%
FC5	Interstate	2005	Limestone	806	74.37	2.8	3.8	0.15	37	3.45	4.63%
FC5	Interstate	2006	Limestone	1364	133.23	3.1	3.8	0.17	90	8.71	6.54%
FC5	Interstate	2007	Limestone	993	93.05	3.2	3.8	0.17	99	9.11	9.79%
FC5	Interstate	2008	Limestone	1886	180.18	2.9	4.0	0.19	52	4.45	2.47%
FC5	Interstate	2009	Limestone	1351	129.05	2.1	4.0	0.15	12	1.12	0.87%
FC5	Interstate	2010	Limestone	1616	155.99	2.2	4.0	0.13	3	0.24	0.15%
FC9.5	Primary	2008	Limestone	138	13.49	3.4	4.3	0.13	1	0.10	0.74%
FC9.5	Primary	2009	Limestone	452	44.46	3.9	4.3	0.10	0	0.00	0.00%
FC9.5	Primary	2010	Limestone	502	49.27	3.9	4.4	0.12	0	0.00	0.00%
FC12.5	Primary	2007	Limestone	114	11.32	3.8	4.2	0.16	0	0.00	0.00%
FC12.5	Primary	2010	Limestone	32	3.16	3.6	3.8	0.12	0	0.00	0.00%

Aggregate Type of "Mixed" has been excluded from this report.

Table 19: District 4 Statistical Summary by Friction Course, System, Aggregate, and Material Transfer Device Status

Friction Course	System	Aggregate	Material Transfer Device Status	Total Miles				RN ≤ 3.5			
				Total Lots	Min	Mean	Max	St. Dev	Lots	Miles	% Miles
FC5	Primary	Limestone	Fully Used	1688	166.84	3.1	4.0	4.4	61	5.95	3.57%
FC5	Primary	Limestone	Not Used	167	16.00	3.8	4.2	4.4	0.11	0	0.00%
FC5	Interstate	Limestone	Fully Used	794	77.04	3.7	4.1	4.2	0.08	0	0.00%
FC5	Interstate	Limestone	Not Used	856	82.38	2.2	4.0	4.3	0.16	7	0.64
FC9.5	Primary	Limestone	Fully Used	404	39.78	3.9	4.5	4.7	0.10	0	0.00%
FC9.5	Primary	Limestone	Not Used	68	6.51	4.0	4.4	4.6	0.10	0	0.00%
FC12.5	Primary	Limestone	Not Used	32	3.16	3.6	3.8	4.1	0.12	0	0.00%
All	All	Limestone	Fully Used	2886	283.66	3.1	4.1	4.7	0.24	61	5.95
All	All	Limestone	Not Used	1123	108.05	2.2	4.0	4.6	0.19	7	0.64

Aggregate Type of "Mixed" has been excluded from this report.

Material Transfer Device Statuses of "Partially Used" and "Unknown" have been excluded from this report.

Table 20: District 4 Statistical Summary by Friction Course, System, Aggregate, and Paving Time

Friction Course	System	Aggregate	Paving Time	Total Miles			Max	St. Dev	RN ≤ 3.5	
				Total Lots	Total Miles	Min			Mean	% Miles
FC5	Primary	Limestone	Day	2324	229.11	3.1	4.4	0.21	95	9.20
FC5	Primary	Limestone	Night	740	71.48	2.8	4.0	0.15	7	0.30
FC5	Interstate	Limestone	Day	1472	142.18	2.2	4.0	0.14	14	1.18
FC5	Interstate	Limestone	Night	5512	527.33	2.1	3.9	0.20	230	21.68
FC9.5	Primary	Limestone	Day	1076	105.79	3.4	4.4	0.13	1	0.10
FC9.5	Primary	Limestone	Night	16	1.43	4.2	4.4	0.06	0	0.00
FC12.5	Primary	Limestone	Day	32	3.16	3.6	3.8	0.12	0	0.00
All	All	Limestone	Day	4904	480.24	2.2	4.0	0.24	110	10.48
All	All	Limestone	Night	6268	600.24	2.1	3.9	0.19	237	21.98

Aggregate Type of "Mixed" has been excluded from this report.
 Paving Times of "Both" and "Unknown" have been excluded from this report.

Table 21: District 4 Statistical Summary by Contractor, Friction Course, Aggregate, and Material Transfer Device Status

Contractor	Friction Course	Aggregate	Material Transfer Device Status	Total Lots	Total Miles	Min	Mean	Max	St. Dev	RN ≤ 3.5	
										Lots	Miles
Asphalt Group, Inc.	FC5	Limestone	Not Used	646	62.21	2.2	4.0	4.3	0.13	2	0.14
Community Asphalt Corp.	FC5	Limestone	Fully Used	894	88.61	3.1	3.8	4.2	0.19	60	5.93
Community Asphalt Corp.	FC5	Limestone	Not Used	84	7.81	3.8	4.1	4.3	0.11	0	0.00
Dickerson Asphalt	FC5	Limestone	Fully Used	1086	105.64	3.7	4.1	4.4	0.09	0	0.00
Dickerson Asphalt	FC9.5	Limestone	Fully Used	146	14.20	3.9	4.4	4.5	0.08	0	0.00
Harddrives of Delray	FC12.5	Limestone	Not Used	32	3.16	3.6	3.8	4.1	0.12	0	0.00
J. W. Cheatham, LLC.	FC9.5	Limestone	Not Used	16	1.43	4.2	4.4	4.4	0.06	0	0.00
Ranger Construction	FC5	Limestone	Fully Used	502	49.63	3.4	4.1	4.3	0.11	1	0.02
Ranger Construction	FC5	Limestone	Not Used	133	12.90	3.4	4.0	4.4	0.24	4	0.40
Ranger Construction	FC9.5	Limestone	Fully Used	258	25.57	4.1	4.5	4.7	0.09	0	0.00
Ranger Construction	FC9.5	Limestone	Not Used	52	5.08	4.0	4.4	4.6	0.10	0	0.00
Weekly Asphalt Paving	FC5	Limestone	Not Used	160	15.46	3.4	3.8	4.1	0.12	1	0.10

Aggregate Type of "Mixed" has been excluded from this report.

Material Transfer Device Statuses of "Partially Used" and "Unknown" have been excluded from this report.

Ride Distribution of All Lots

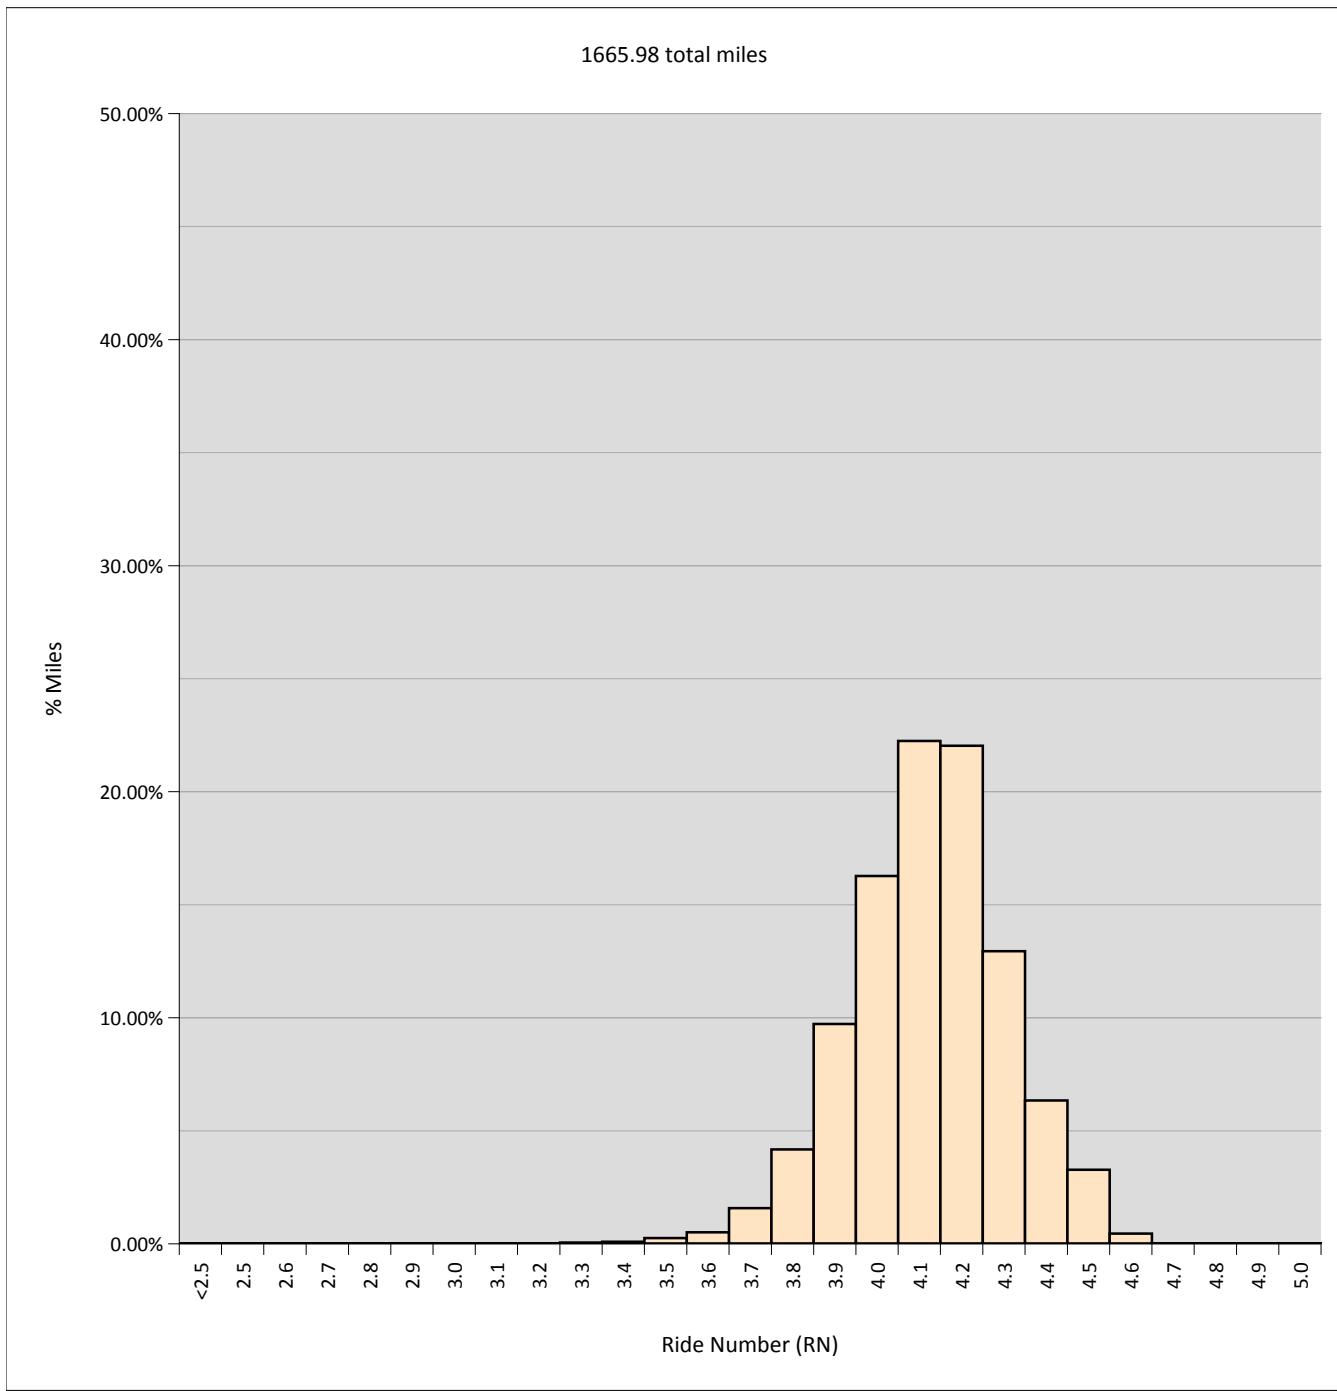


Figure 11: District 5 Ride Distribution, All Lots

Type	Total Lots	Total Miles	Min	Mean	Max	St. Dev	RN ≤3.5		
							Lots	Miles	% Miles
All Lots	17012	1665.98	1.2	4.1	4.6	0.19	83	7.41	0.45%

Ride Distribution by Friction Course and System

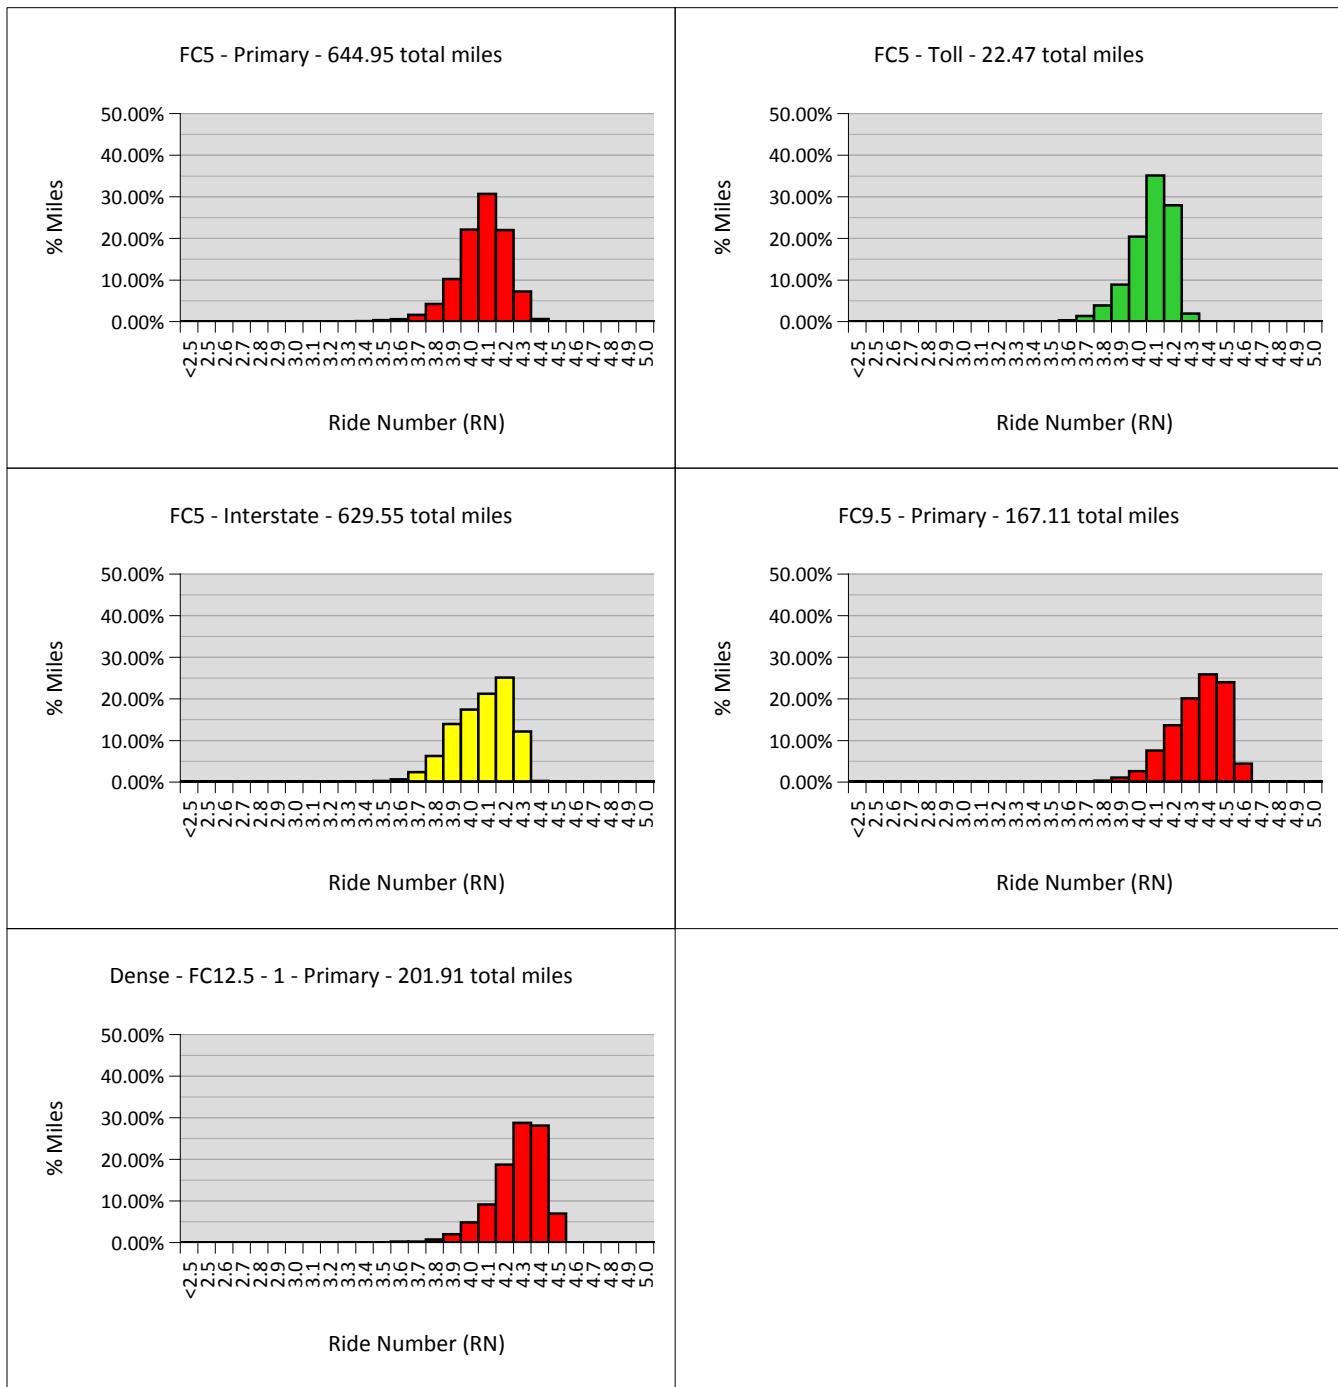


Figure 12: District 5 Ride Distribution by Friction Course and System

Friction Course	System	Total Lots	Total Miles	Min	Mean	Max	St. Dev	RN ≤ 3.5		
								Lots	Miles	% Miles
FC5	Primary	6602	644.95	1.2	4.1	4.5	0.15	40	3.63	0.56%
FC5	Toll	243	22.47	3.3	4.1	4.3	0.12	1	0.02	0.07%
FC5	Interstate	6402	629.55	2.8	4.1	4.4	0.17	33	3.12	0.50%
FC9.5	Primary	1696	167.11	3.2	4.3	4.6	0.16	4	0.34	0.20%
FC12.5	Primary	2069	201.91	3.2	4.3	4.6	0.15	5	0.31	0.15%

Table 22: District 5 Statistical Summary by Friction Course, System, Year, and Aggregate

Friction Course	System	Year	Aggregate	Total Lots	Total Miles	Min	Max	St. Dev	RN ≤ 3.5			
				Lots	Miles	Mean	Max	Lots	Miles	% Miles		
FC5	Primary	2005	Granite	648	64.16	3.3	4.1	4.3	0.12	5	0.50	0.78%
FC5	Primary	2005	Limestone	447	42.13	3.3	4.0	4.3	0.14	8	0.73	1.73%
FC5	Primary	2006	Granite	718	70.31	3.3	4.0	4.3	0.14	3	0.27	0.38%
FC5	Primary	2006	Limestone	631	62.04	1.2	4.0	4.3	0.14	9	0.79	1.28%
FC5	Primary	2007	Granite	785	77.22	3.7	4.1	4.3	0.10	0	0.00	0.00%
FC5	Primary	2007	Limestone	234	23.13	3.4	3.9	4.2	0.16	9	0.90	3.89%
FC5	Primary	2008	Granite	1139	112.15	3.4	4.1	4.3	0.12	2	0.13	0.11%
FC5	Primary	2008	Limestone	497	49.20	3.6	4.0	4.2	0.09	0	0.00	0.00%
FC5	Primary	2009	Granite	981	94.59	3.5	4.1	4.3	0.12	2	0.12	0.13%
FC5	Primary	2009	Limestone	238	23.09	3.5	4.1	4.3	0.14	2	0.20	0.87%
FC5	Primary	2010	Granite	284	26.96	3.7	4.2	4.5	0.14	0	0.00	0.00%
FC5	Toll	2006	Granite	207	19.47	3.8	4.1	4.3	0.10	0	0.00	0.00%
FC5	Toll	2006	Limestone	36	3.00	3.3	3.9	4.1	0.11	1	0.02	0.53%
FC5	Interstate	2005	Limestone	804	79.62	3.6	4.2	4.4	0.09	0	0.00	0.00%
FC5	Interstate	2006	Granite	1306	128.49	2.8	3.9	4.3	0.14	16	1.54	1.20%
FC5	Interstate	2007	Granite	1691	167.21	3.1	4.0	4.3	0.16	12	1.16	0.69%
FC5	Interstate	2008	Granite	1417	139.74	3.5	4.1	4.4	0.16	1	0.10	0.07%
FC5	Interstate	2008	Limestone	248	24.36	3.6	4.1	4.3	0.12	0	0.00	0.00%
FC5	Interstate	2009	Granite	412	39.44	3.5	4.1	4.3	0.12	2	0.20	0.51%
FC5	Interstate	2009	Limestone	248	24.40	3.7	4.1	4.3	0.10	0	0.00	0.00%
FC5	Interstate	2010	Granite	30	2.76	3.4	4.0	4.2	0.18	2	0.12	4.32%
FC5	Interstate	2010	Limestone	246	23.54	3.7	4.0	4.2	0.12	0	0.00	0.00%
FC9.5	Primary	2005	Granite	60	5.63	3.2	4.3	4.5	0.18	1	0.04	0.66%
FC9.5	Primary	2006	Limestone	99	9.78	3.4	4.4	4.6	0.15	1	0.10	1.02%
FC9.5	Primary	2007	Granite	260	25.71	3.8	4.2	4.5	0.13	0	0.00	0.00%
FC9.5	Primary	2008	Granite	480	47.63	3.9	4.5	4.6	0.10	0	0.00	0.00%
FC9.5	Primary	2009	Granite	458	44.91	3.6	4.3	4.5	0.15	0	0.00	0.00%
FC12.5	Primary	2005	Granite	134	12.87	3.4	4.0	4.4	0.11	1	0.01	0.09%
FC12.5	Primary	2006	Limestone	80	7.65	3.6	4.2	4.5	0.18	0	0.00	0.00%
FC12.5	Primary	2007	Granite	435	42.41	3.6	4.2	4.5	0.14	0	0.00	0.00%
FC12.5	Primary	2008	Granite	480	47.25	3.2	4.3	4.6	0.11	1	0.04	0.08%
FC12.5	Primary	2009	Granite	236	23.07	3.4	4.3	4.5	0.12	1	0.09	0.41%
FC12.5	Primary	2010	Granite	503	49.22	3.3	4.3	4.5	0.14	2	0.16	0.33%

Aggregate Type of "Mixed" has been excluded from this report.

Table 23: District 5 Statistical Summary by Friction Course, System, Aggregate, and Material Transfer Device Status

Friction Course	System	Aggregate	Material Transfer Device Status	Total Miles				RN ≤ 3.5			
				Total Lots	Min	Mean	Max	St. Dev	Lots	Miles	% Miles
FC5	Primary	Granite	Fully Used	112	10.58	3.7	4.1	4.3	0.10	0	0.00
FC5	Primary	Granite	Not Used	1110	107.20	3.5	4.1	4.5	0.15	2	0.12
FC5	Primary	Limestone	Fully Used	238	23.09	3.5	4.1	4.3	0.14	2	0.20
FC5	Interstate	Granite	Not Used	270	25.93	3.8	4.1	4.3	0.10	0	0.00
FC5	Interstate	Limestone	Fully Used	246	23.54	3.7	4.0	4.2	0.12	0	0.00
FC9.5	Primary	Granite	Fully Used	63	6.16	3.8	4.3	4.5	0.16	0	0.00
FC9.5	Primary	Granite	Not Used	113	11.07	4.0	4.4	4.5	0.11	0	0.00
FC12.5	Primary	Granite	Fully Used	253	24.75	4.1	4.4	4.5	0.09	0	0.00
FC12.5	Primary	Granite	Not Used	486	47.54	3.3	4.3	4.5	0.14	3	0.26
All	All	Granite & Limestone	Fully Used	912	88.11	3.5	4.2	4.5	0.18	2	0.20
All	All	Granite & Limestone	Not Used	1979	191.74	3.3	4.2	4.5	0.16	5	0.38
Aggregate Type of "Mixed" has been excluded from this report.				Material Transfer Device Statuses of "Partially Used" and "Unknown" have been excluded from this report.							

Table 24: District 5 Statistical Summary by Friction Course, System, Aggregate, and Paving Time

Friction Course	System	Aggregate	Paving Time	Total Miles		Min	Mean	Max	St. Dev	RN ≤ 3.5	
				Total Lots	Total Miles					Lots	Miles
FC5	Primary	Granite	Day	2163	212.14	3.5	4.1	4.5	0.12	2	0.20
FC5	Primary	Granite	Night	1225	118.33	3.4	4.1	4.3	0.13	4	0.25
FC5	Primary	Limestone	Day	1182	116.77	3.3	4.0	4.3	0.12	10	1.00
FC5	Toll	Granite	Night	207	19.47	3.8	4.1	4.3	0.10	0	0.00
FC5	Toll	Limestone	Night	36	3.00	3.3	3.9	4.1	0.11	1	0.02
FC5	Interstate	Granite	Night	2524	247.30	2.9	4.1	4.4	0.15	5	0.36
FC5	Interstate	Limestone	Night	248	24.40	3.7	4.1	4.3	0.10	0	0.00
FO9.5	Primary	Granite	Day	713	70.45	3.8	4.4	4.6	0.16	0	0.00
FO9.5	Primary	Granite	Night	393	38.94	3.6	4.3	4.6	0.15	0	0.00
FO9.5	Primary	Limestone	Night	99	9.78	3.4	4.4	4.6	0.15	1	0.10
FC12.5	Primary	Granite	Day	1170	115.24	3.2	4.3	4.6	0.12	3	0.20
FC12.5	Primary	Granite	Night	268	25.49	3.6	4.2	4.5	0.15	0	0.00
FC12.5	Primary	Limestone	Day	42	4.02	3.6	4.2	4.5	0.20	0	0.00
FC12.5	Primary	Limestone	Night	38	3.63	3.8	4.3	4.5	0.14	0	0.00
All	All	Granite & Limestone	Day	5270	518.61	3.2	4.2	4.6	0.19	15	1.40
All	All	Granite & Limestone	Night	5038	490.34	2.9	4.1	4.6	0.15	11	0.72

Aggregate Type of "Mixed" has been excluded from this report.

Paving Times of "Both" and "Unknown" have been excluded from this report.

Table 25: District 5 Statistical Summary by Contractor, Friction Course, Aggregate, and Material Transfer Device Status

Contractor	Friction Course	Aggregate	Material Transfer Device Status	Total Lots	Total Miles	Min	Mean	Max	St. Dev	RN ≤ 3.5	
										Lots	Miles
A.P.A.C.	FC5	Granite	Not Used	52	5.17	3.9	4.1	4.3	0.11	0	0.00
Anderson Columbia	FC5	Granite	Fully Used	72	6.77	3.7	4.1	4.3	0.11	0	0.00%
Anderson Columbia	FC5	Granite	Not Used	270	25.93	3.8	4.1	4.3	0.10	0	0.00
Anderson Columbia	FC9.5	Granite	Fully Used	63	6.16	3.8	4.3	4.5	0.16	0	0.00%
D.A.B. Constructors	FC12.5	Granite	Not Used	20	1.86	4.1	4.4	4.5	0.10	0	0.00%
Halifax Paving Inc.	FC5	Granite	Not Used	516	50.58	3.7	4.2	4.5	0.12	0	0.00
Hubbard Construction	FC5	Granite	Fully Used	40	3.81	3.9	4.2	4.3	0.09	0	0.00
Hubbard Construction	FC5	Granite	Not Used	70	6.10	3.7	4.1	4.3	0.16	0	0.00%
Hubbard Construction	FC5	Limestone	Fully Used	238	23.09	3.5	4.1	4.3	0.14	2	0.20
Middlesex Corp.	FC5	Granite	Not Used	100	9.65	3.8	4.1	4.3	0.11	0	0.00%
Middlesex Corp.	FC9.5	Granite	Not Used	113	11.07	4.0	4.4	4.5	0.11	0	0.00%
P & S Paving	FC5	Granite	Not Used	150	14.38	3.5	4.0	4.3	0.13	1	0.10
P & S Paving	FC12.5	Granite	Fully Used	253	24.75	4.1	4.4	4.5	0.09	0	0.00%
P & S Paving	FC12.5	Granite	Not Used	368	36.18	3.4	4.3	4.5	0.11	1	0.09
Ranger Construction	FC5	Granite	Not Used	222	21.33	3.5	4.1	4.3	0.17	1	0.02
Ranger Construction	FC5	Limestone	Fully Used	246	23.54	3.7	4.0	4.2	0.12	0	0.00%
Ranger Construction	FC12.5	Granite	Not Used	70	6.87	4.0	4.2	4.5	0.09	0	0.00%
Steven Counts Inc.	FC12.5	Granite	Not Used	28	2.63	3.3	4.1	4.4	0.28	2	0.16

Aggregate Type of "Mixed" has been excluded from this report.

Material Transfer Device Statuses of "Partially Used" and "Unknown" have been excluded from this report.

Ride Distribution of All Lots

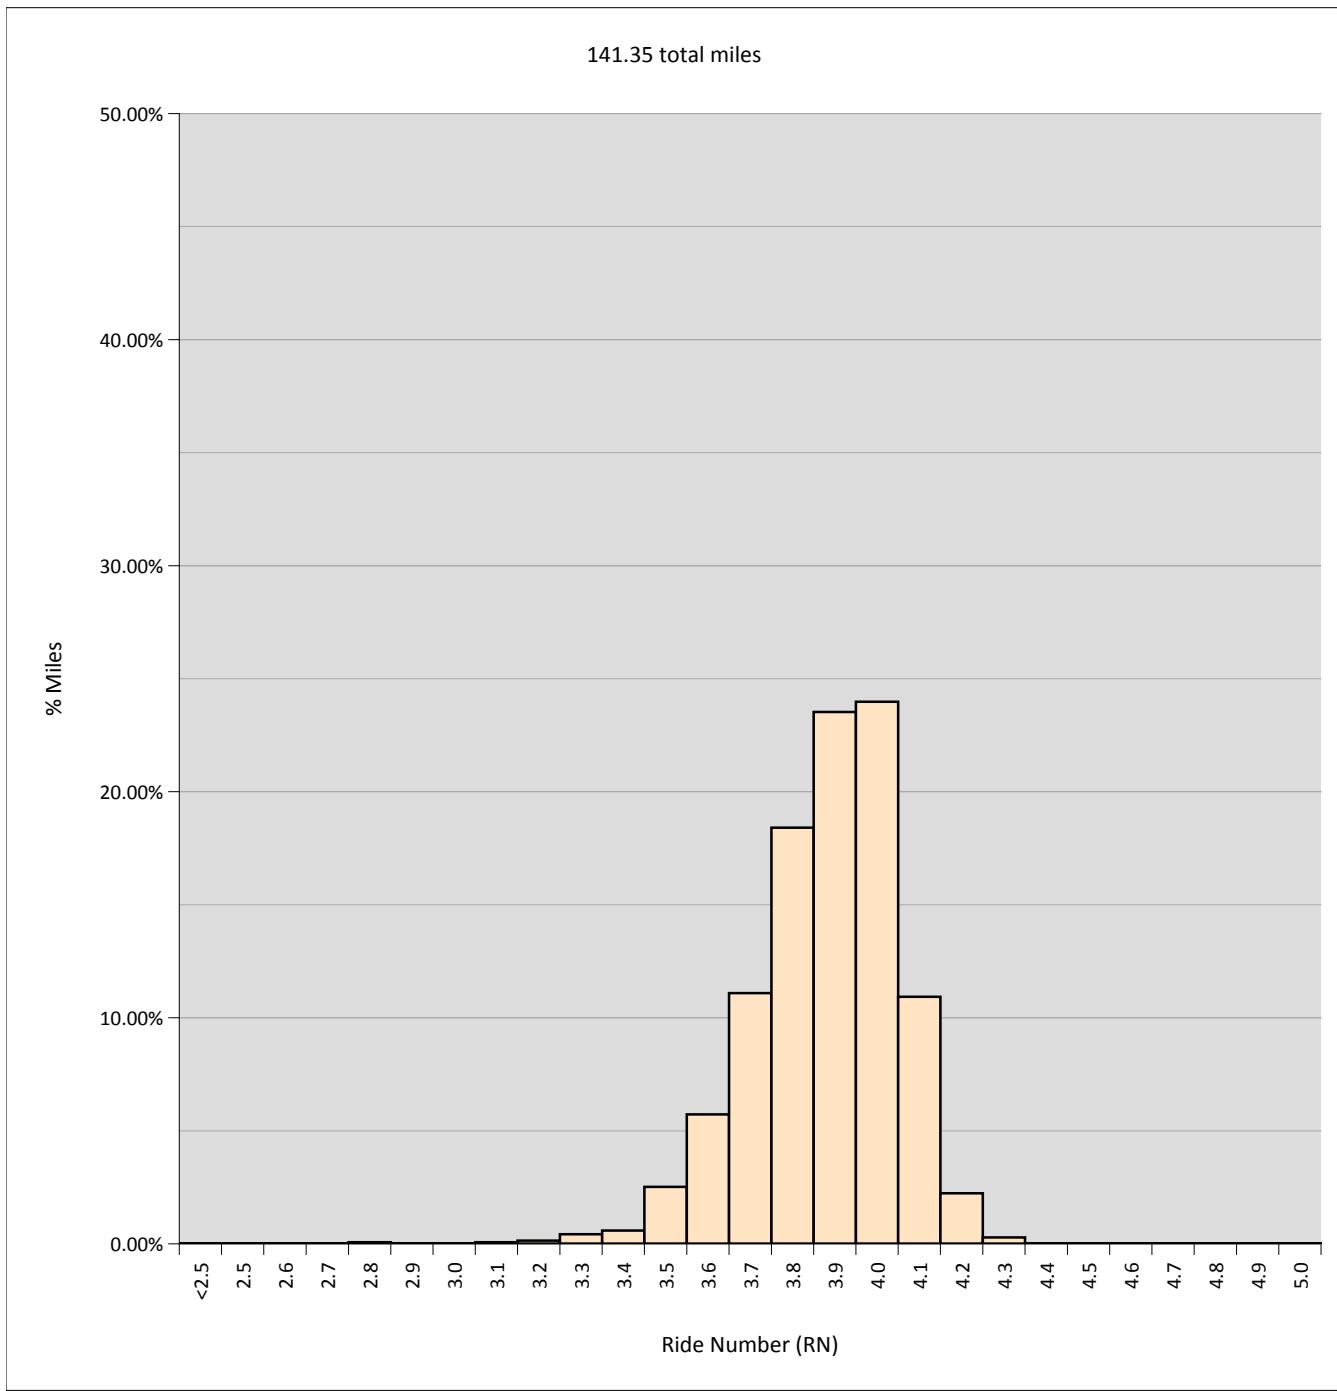


Figure 13: District 6 Ride Distribution, All Lots

Type	Total Lots	Total Miles	Min	Mean	Max	St. Dev	RN ≤3.5		
							Lots	Miles	% Miles
All Lots	1464	141.35	2.8	3.9	4.3	0.17	59	5.40	3.82%

Ride Distribution by Friction Course and System

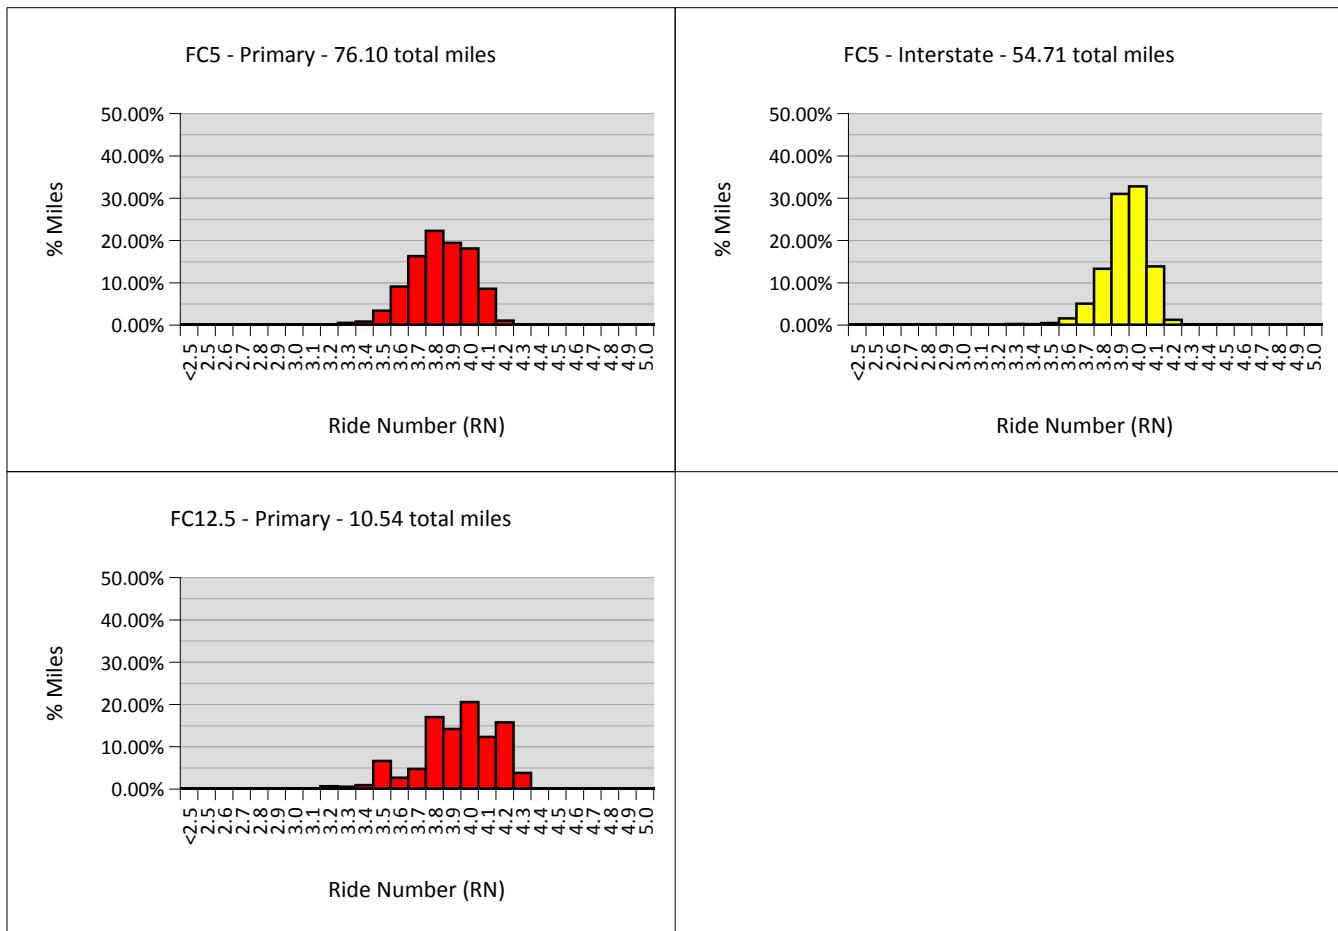


Figure 14: District 6 Ride Distribution by Friction Course and System

Friction Course	System	Total Lots	Total Miles	Min	Mean	Max	St. Dev	RN ≤ 3.5		
								Lots	Miles	% Miles
FC5	Primary	781	76.10	3.1	3.8	4.2	0.17	40	3.84	5.05%
FC5	Interstate	575	54.71	2.8	3.9	4.2	0.14	9	0.62	1.14%
FC12.5	Primary	108	10.54	3.2	3.9	4.3	0.22	10	0.93	8.83%

Table 26: District 6 Statistical Summary by Friction Course, System, Year, and Aggregate

Friction Course	System	Year	Aggregate	Total Lots	Total Miles	Min	Mean	Max	St. Dev	RN ≤ 3.5		
				Lots	Miles	Mean	Max	St. Dev	Lots	Miles	% Miles	
FC5	Primary	2007	Limestone	238	23.18	3.3	3.8	4.0	0.12	11	1.10	4.75%
FC5	Primary	2008	Limestone	158	15.61	3.1	3.8	4.1	0.17	13	1.22	7.84%
FC5	Primary	2009	Limestone	143	13.82	3.4	3.7	4.1	0.15	14	1.32	9.54%
FC5	Primary	2010	Limestone	242	23.49	3.2	4.0	4.2	0.15	2	0.20	0.85%
FC5	Interstate	2008	Limestone	206	20.10	3.5	3.9	4.1	0.11	1	0.07	0.34%
FC5	Interstate	2009	Limestone	214	21.00	3.4	3.9	4.2	0.11	2	0.11	0.54%
FC5	Interstate	2010	Limestone	155	13.62	2.8	4.0	4.2	0.19	6	0.44	3.23%
FC12.5	Primary	2008	Limestone	108	10.54	3.2	3.9	4.3	0.22	10	0.93	8.83%

Aggregate Type of "Mixed" has been excluded from this report.

Table 27: District 6 Statistical Summary by Friction Course, System, Aggregate, and Material Transfer Device Status

Friction Course	System	Aggregate	Material Transfer Device Status	Total Miles						RN ≤ 3.5		
				Total Lots	Min	Mean	Max	St. Dev	Lots	Miles	% Miles	
FC5	Primary	Limestone	Fully Used	151	14.70	3.5	4.2	0.15	3	0.30	2.04%	
FC5	Primary	Limestone	Not Used	77	7.28	3.4	3.8	0.18	7	0.62	8.50%	
FC5	Interstate	Limestone	Not Used	155	13.62	2.8	4.0	4.2	0.19	6	0.44	3.23%
All	All	Limestone	Fully Used	151	14.70	3.5	3.8	0.15	3	0.30	2.04%	
All	All	Limestone	Not Used	232	20.90	2.8	3.9	4.2	0.21	13	1.06	5.07%

Aggregate Type of "Mixed" has been excluded from this report.

Material Transfer Device Statuses of "Partially Used" and "Unknown" have been excluded from this report.

Table 28: District 6 Statistical Summary by Friction Course, System, Aggregate, and Paving Time

Friction Course	System	Aggregate	Paving Time	Total Lots	Total Miles	Min	Mean	Max	St. Dev	RN ≤ 3.5	
										Lots	Miles
FC5	Primary	Limestone	Day	58	5.76	3.1	3.9	4.1	0.15	2	0.20
FC5	Primary	Limestone	Night	556	54.12	3.2	3.8	4.2	0.15	36	3.44
FC5	Interstate	Limestone	Night	575	54.71	2.8	3.9	4.2	0.14	9	0.62
All	All	Limestone	Day	58	5.76	3.1	3.9	4.1	0.15	2	0.20
All	All	Limestone	Night	1131	108.83	2.8	3.9	4.2	0.16	45	4.07

Aggregate Type of "Mixed" has been excluded from this report.
Paving Times of "Both" and "Unknown" have been excluded from this report.

Table 29: District 6 Statistical Summary by Contractor, Friction Course, Aggregate, and Material Transfer Device Status

Contractor	Friction Course	Aggregate	Material Transfer Device Status	Total Lots	Total Miles	Min	Mean	Max	St. Dev	RN ≤ 3.5	
										Lots	Miles
Asphalt Group, Inc.	FC5	Limestone	Not Used	24	2.25	3.4	3.9	4.1	0.15	2	0.12
Community Asphalt Corp.	FC5	Limestone	Not Used	155	13.62	2.8	4.0	4.2	0.19	6	0.44
General Asphalt Company	FC5	Limestone	Fully Used	133	13.04	3.5	3.8	4.2	0.15	3	0.30
General Asphalt Company	FC5	Limestone	Not Used	53	5.03	3.4	3.7	4.1	0.17	5	0.50
Weekly Asphalt Paving	FC5	Limestone	Fully Used	18	1.66	3.6	3.8	4.0	0.12	0	0.00

Aggregate Type of "Mixed" has been excluded from this report.

Material Transfer Device Statuses of "Partially Used" and "Unknown" have been excluded from this report.

Ride Distribution of All Lots

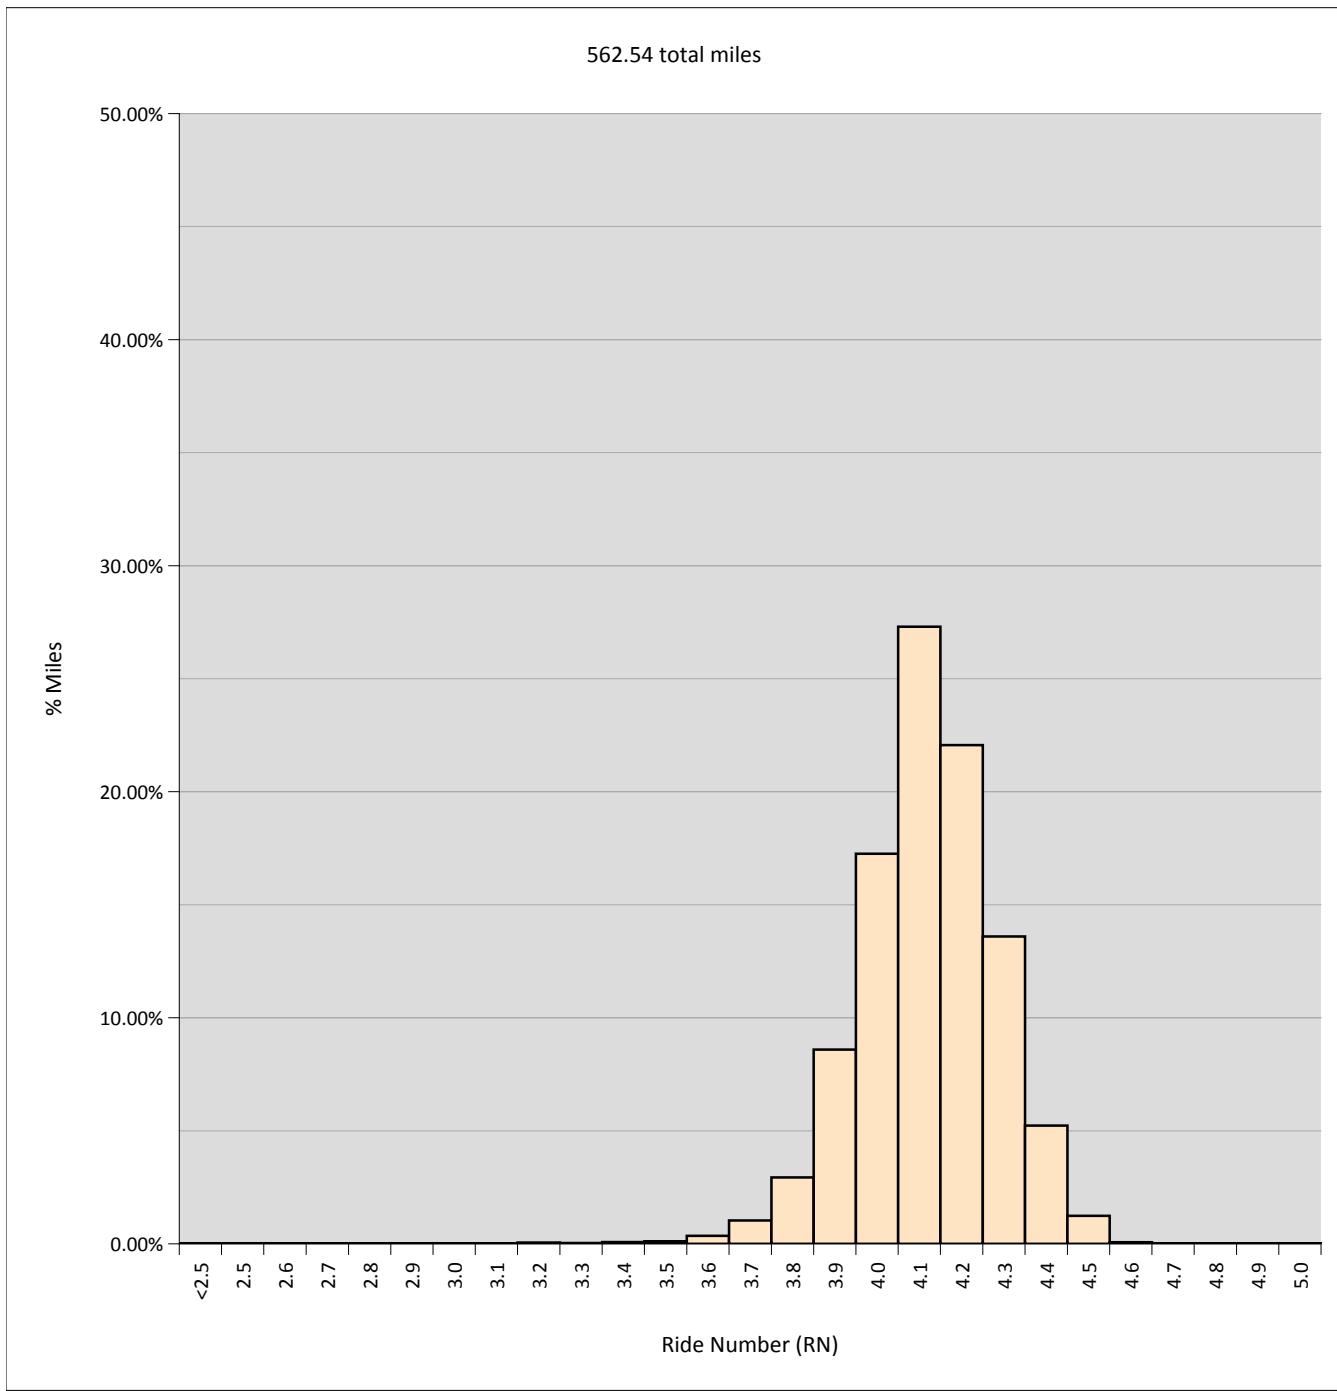


Figure 15: District 7 Ride Distribution, All Lots

Type	Total Lots	Total Miles	Min	Mean	Max	St. Dev	RN ≤3.5		
							Lots	Miles	% Miles
All Lots	5783	562.54	2.2	4.1	4.6	0.16	21	1.70	0.30%

Ride Distribution by Friction Course and System

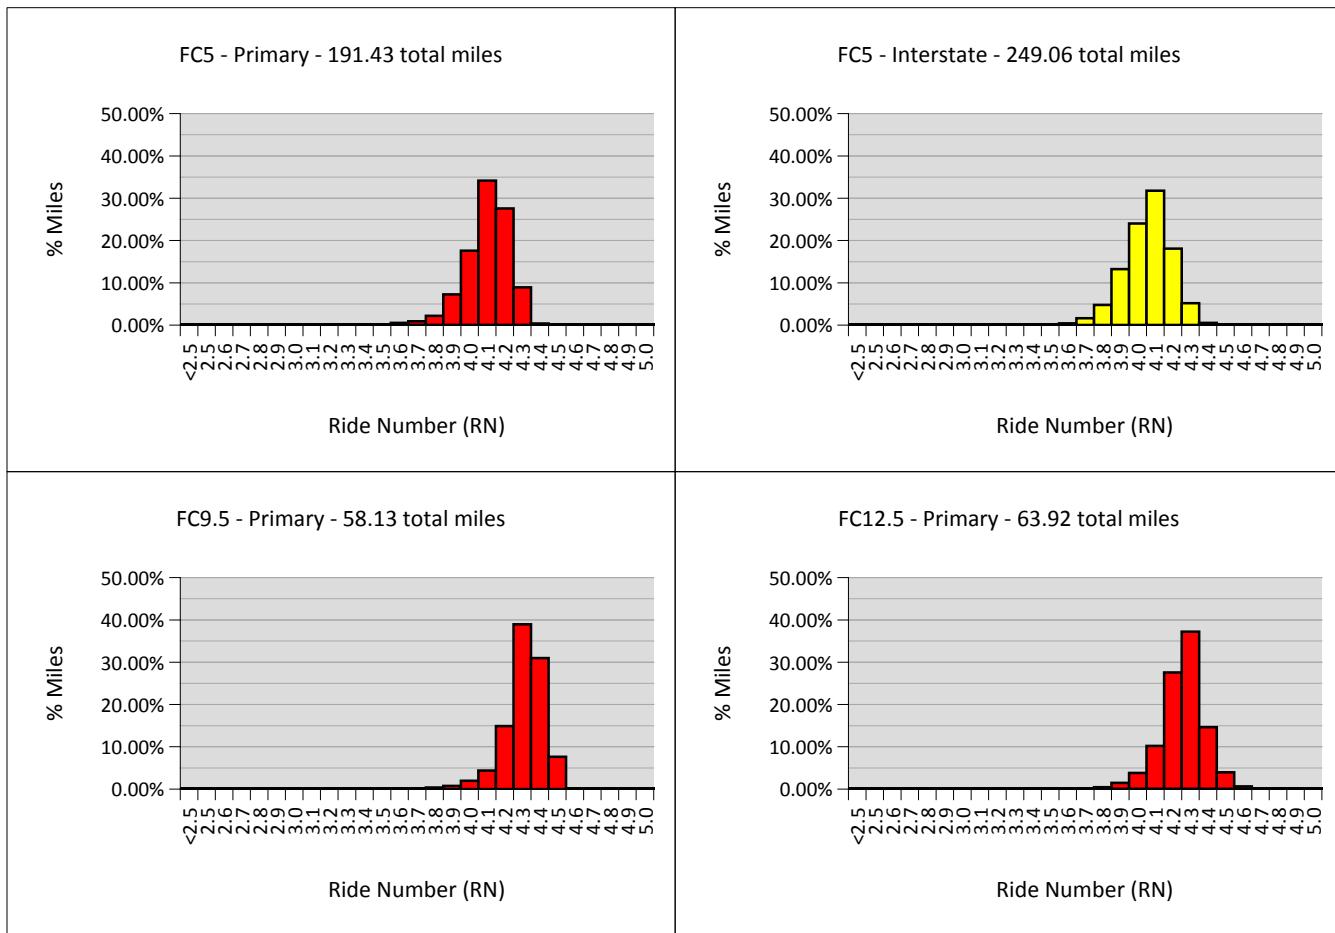


Figure 16: District 7 Ride Distribution by Friction Course and System

Friction Course	System	Total Lots	Total Miles	Min	Mean	Max	St. Dev	RN ≤ 3.5		
								Lots	Miles	% Miles
FC5	Primary	1971	191.43	2.2	4.1	4.4	0.14	11	0.86	0.45%
FC5	Interstate	2564	249.06	3.2	4.1	4.4	0.14	10	0.83	0.33%
FC9.5	Primary	592	58.13	3.8	4.3	4.5	0.11	0	0.00	0.00%
FC12.5	Primary	656	63.92	3.8	4.3	4.6	0.12	0	0.00	0.00%

Table 30: District 7 Statistical Summary by Friction Course, System, Year, and Aggregate

Friction Course	System	Year	Aggregate	Total Lots	Total Miles	Min	Max	St. Dev	RN ≤ 3.5		
				Lots	Miles	Mean	Max	Lots	Miles	% Miles	
FC5	Primary	2006	Granite	314	30.36	2.2	4.0	0.19	7	0.52	1.73%
FC5	Primary	2007	Granite	212	20.73	3.6	4.1	0.10	0	0.00	0.00%
FC5	Primary	2008	Granite	1088	107.23	3.3	4.1	0.13	2	0.20	0.19%
FC5	Primary	2009	Granite	91	8.06	3.8	4.1	0.11	0	0.00	0.00%
FC5	Primary	2010	Granite	152	14.28	3.2	4.2	0.14	1	0.10	0.70%
FC5	Interstate	2005	Granite	378	35.90	3.6	4.0	0.12	0	0.00	0.00%
FC5	Interstate	2006	Granite	511	50.61	3.6	4.1	0.12	0	0.00	0.00%
FC5	Interstate	2007	Granite	95	8.69	3.6	4.0	0.12	0	0.00	0.00%
FC5	Interstate	2008	Granite	20	1.95	3.7	3.9	0.07	0	0.00	0.00%
FC5	Interstate	2008	Limestone	104	9.99	3.4	3.9	0.12	4	0.32	3.19%
FC5	Interstate	2009	Granite	521	49.77	3.2	4.1	0.12	2	0.20	0.40%
FC5	Interstate	2010	Granite	935	92.15	3.2	4.1	0.16	4	0.31	0.34%
FC9.5	Primary	2005	Granite	115	11.28	3.8	4.3	0.11	0	0.00	0.00%
FC9.5	Primary	2006	Limestone	123	11.87	3.8	4.2	0.13	0	0.00	0.00%
FC9.5	Primary	2009	Granite	354	34.99	4.1	4.4	0.08	0	0.00	0.00%
FC12.5	Primary	2006	Granite	44	4.19	3.8	4.2	0.16	0	0.00	0.00%
FC12.5	Primary	2008	Granite	144	13.86	3.9	4.3	0.15	0	0.00	0.00%
FC12.5	Primary	2009	Granite	164	15.97	4.0	4.3	0.09	0	0.00	0.00%
FC12.5	Primary	2010	Granite	186	18.29	3.8	4.2	0.12	0	0.00	0.00%

Aggregate Type of "Mixed" has been excluded from this report.

Table 31: District 7 Statistical Summary by Friction Course, System, Aggregate, and Material Transfer Device Status

Friction Course	System	Aggregate	Material Transfer Device Status	Total Miles						RN ≤ 3.5		
				Total Lots	Total Miles	Min	Mean	Max	St. Dev	Lots	Miles	% Miles
FC5	Primary	Granite	Not Used	243	22.35	3.2	4.2	4.4	0.13	1	0.10	0.45%
FC5	Interstate	Granite	Fully Used	186	18.16	3.2	4.0	4.3	0.18	4	0.31	1.73%
FC5	Interstate	Granite	Not Used	152	14.99	3.9	4.3	4.4	0.06	0	0.00	0.00%
FC9.5	Primary	Granite	Not Used	166	16.44	4.1	4.3	4.4	0.07	0	0.00	0.00%
FC12.5	Primary	Granite	Fully Used	130	12.88	4.0	4.3	4.4	0.08	0	0.00	0.00%
FC12.5	Primary	Granite	Not Used	220	21.39	3.8	4.2	4.5	0.11	0	0.00	0.00%
All	All	Granite	Fully Used	316	31.03	3.2	4.1	4.4	0.21	4	0.31	1.01%
All	All	Granite	Not Used	781	75.16	3.2	4.2	4.5	0.12	1	0.10	0.13%

Aggregate Type of "Mixed" has been excluded from this report.

Material Transfer Device Statuses of "Partially Used" and "Unknown" have been excluded from this report.

Table 32: District 7 Statistical Summary by Friction Course, System, Aggregate, and Paving Time

Friction Course	System	Aggregate	Paving Time	Total Miles		Min	Mean	Max	St. Dev	RN ≤ 3.5	
				Total Lots	Total Miles					Lots	Miles
FC5	Primary	Granite	Day	140	13.57	3.9	4.1	4.4	0.10	0	0.00
FC5	Primary	Granite	Night	1062	102.82	3.2	4.1	4.4	0.13	3	0.30
FC5	Interstate	Granite	Night	2062	201.22	3.2	4.1	4.4	0.14	6	0.51
FC5	Interstate	Limestone	Night	104	9.99	3.4	3.9	4.1	0.12	4	0.32
FC9.5	Primary	Granite	Night	354	34.99	4.1	4.4	4.5	0.08	0	0.00
FC9.5	Primary	Limestone	Night	123	11.87	3.8	4.2	4.5	0.13	0	0.00
FC12.5	Primary	Granite	Day	44	4.19	3.8	4.2	4.4	0.16	0	0.00
FC12.5	Primary	Granite	Night	56	5.41	3.8	4.1	4.3	0.11	0	0.00
All	All	Granite & Limestone	Day	184	17.76	3.8	4.1	4.4	0.11	0	0.00
All	All	Granite & Limestone	Night	3761	366.29	3.2	4.1	4.5	0.16	13	1.13

Aggregate Type of "Mixed" has been excluded from this report.
 Paving Times of "Both" and "Unknown" have been excluded from this report.

Table 33: District 7 Statistical Summary by Contractor, Friction Course, Aggregate, and Material Transfer Device Status

Contractor	Friction Course	Aggregate	Material Transfer Device Status	Total Lots	Total Miles	Min	Mean	Max	St. Dev	RN ≤ 3.5	
										Lots	Miles
A.P.A.C.	FC5	Granite	Not Used	243	22.35	3.2	4.2	4.4	0.13	1	0.10
A.P.A.C.	FC12.5	Granite	Not Used	164	15.97	4.0	4.3	4.5	0.09	0	0.00
C.W.Roberts Contracting	FC12.5	Granite	Fully Used	130	12.88	4.0	4.3	4.4	0.08	0	0.00
D.A.B. Constructors	FC5	Granite	Not Used	152	14.99	3.9	4.3	4.4	0.06	0	0.00
Lane Construction Corp.	FC5	Granite	Fully Used	186	18.16	3.2	4.0	4.3	0.18	4	0.31
Lane Construction Corp.	FC9.5	Granite	Not Used	166	16.44	4.1	4.3	4.4	0.07	0	0.00
Lane Construction Corp.	FC12.5	Granite	Not Used	56	5.41	3.8	4.1	4.3	0.11	0	0.00

Aggregate Type of "Mixed" has been excluded from this report.

Material Transfer Device Statuses of "Partially Used" and "Unknown" have been excluded from this report.

Appendix
A

INTERNATIONAL ROUGHNESS INDEX REPORT SUMMARY

PAGE

LEFT

BLANK

WHAT IS THE INTERNATIONAL ROUGHNESS INDEX?

In "Guidelines for Conducting and Calibrating Road Roughness Measurements," published by the World Bank in 1986 as Technical Paper 46, International Roughness Index (IRI) is defined as a mathematical transform (a property) of a true profile describing surface roughness that causes vehicle vibration.

The underlying IRI model is a series of differential equations that relate the motions of a simulated quarter-car to a road profile. The IRI is computed as a linear accumulation of the simulated suspension motion, normalized by the length of the profile. IRI therefore has units of slope, typically "in/mi" or "m/km", and is computed from a single longitudinal wheel path profile. It has a demonstrated strong compatibility with the equipment used to develop pavement management systems. IRI is sensitive to wavelengths between 4 and 100 feet and is most sensitive to wavelengths of 7 and 50 feet.

All data is analyzed according to ASTM E1926, "Standard Practice for Computing International Roughness Index of Roads from Longitudinal Profile Measurements".

This summary expresses ride quality using International Roughness Index (IRI). This index was chosen to be used in future versions of FDOT's smoothness specifications because it is not influenced by differences in texture. Currently, FDOT's smoothness specifications use Ride Number (RN) to indicate the level of smoothness present on newly placed asphalt pavements. RN, however, is greatly influenced by differences in texture, especially dense graded versus open graded pavements.

The full International Roughness Index edition of this report can be found at the following link and is titled "Flexible Pavement Smoothness Acceptance Report - International Roughness Index Edition".

<http://materials.dot.state.fl.us/smo/administration/resources/library/publications/researchreports/2011-2015.htm>

International Roughness Index Report Observations

Many roadway characteristics and construction practices are being monitored and included in the FDOT's smoothness database. Some of these have proven to be significant contributors to the ride quality of the pavements tested, and some factors have not been so valuable. Below is a summary list of key variables being monitored with a brief explanation of their effect on pavement smoothness.

- Average Annual Daily Traffic (AADT) - Analysis on Interstate pavements has shown that 150,000 AADT or greater exhibit higher average IRIs.
- Material Transfer Device (MTD) Usage - Data shows that pavements placed using this equipment are typically smoother. When the MTD was used on the entire project, the average IRI is 45, versus 55 IRI when the MTD was not used at all. MTD usage on the Interstate system yielded even more benefit: 41 IRI with full-project MTD usage versus 55 for Interstate projects where the MTD was not used at all.
- Aggregate Type - Based on summary data from Florida projects, smooth pavements can be constructed regardless of the aggregate type used. However, on average, pavements using Granite aggregate in friction courses are smoother. Granite pavements have an average IRI of 48, compared to an IRI of 56 for Limestone pavements.
- Data by Year - Pavements placed in 2005 averaged 54 IRI, and have consistently improved slightly each year. Pavements placed in 2010 averaged 48 IRI.
- Binder Type - No significant difference was found when comparing the smoothness of pavements using polymer-modified binders in the friction course to pavements using other types of binders.
- Paving Time - No significant difference was found when comparing the smoothness of pavements placed at Night to those placed during the Day.
- System - No significant difference was found when comparing the smoothness of Primary and Interstate systems.
- Surface Type - No significant difference was found when comparing the smoothness of pavements with open-graded friction courses and dense-graded friction courses.

In addition to these factors, there are many other variables that the data can be subdivided by. If any additional information is needed, please use the contact information located at the bottom of page 7.

Appendix
B

CUSTOMER SERVICE FORM

Customer Service Form

In an effort to continuously improve our customer service, the Pavement Material Systems section of the State Materials Office requests your input by filling out and returning this survey form.

(Optional)

Company/Office/Organization: _____

Address: _____

City: _____ State: _____ ZIP: _____

Your Name: _____ Title: _____

Phone: _____ E-Mail: _____

*Please rate each of the following factors using the scale provided. A "1" corresponds to **Very Poor**, and a "5" corresponds to **Excellent**.*

Usefulness of Content	1	2	3	4	5
Organization of Information	1	2	3	4	5
Clarity of Graphical Information	1	2	3	4	5
Format of Tables	1	2	3	4	5
Overall Value of this Report	1	2	3	4	5

Please provide an answer to the following questions. Use additional sheet(s) if necessary.

What was the most useful/informative part of this report? _____

What was the least useful/informative part of this report? _____

What changes would you recommend to improve this report? _____

Detach and mail to:

FDOT State Materials Office

Attn: Stacy Scott

5007 NE 39th Ave.

Gainesville, FL 32609

Or E-Mail to: stacy.scott@dot.state.fl.us