


Post (Options: 2" x 4" Or 2½" Min. Dia. Wood; Steel I.33 Lbs/Ft. Min.)

18 Oz. Nylon Reinforced PVC Fabric (300 psi Test)

STAKED TURBIDITY BARRIER

NOTICE: COMPONENTS OF TYPES I AND I MAY BE SIMILAR OR IDENTICAL TO PROPRIETARY DESIGNS. ANY INFRINGEMENT ON THE PROPRIETARY RIGHTS OF THE DESIGNER SHALL BE THE SOLE RESPONSIBILITY OF THE USER. SUBSTITUTIONS FOR TYPES I AND I SHALL BE AS APPROVED BY THE ENGINEER.

FLOATING TURBIDITY BARRIERS

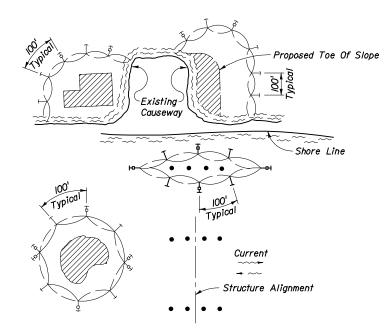


NOTES

- I. Turbidity barriers are to be used in all permanent bodies of water regardless of water depth.
- 2. Number and spacing of anchors dependent on current velocities.
- 3. Deployment of barrier around pile locations may vary to accommodate construction operations.
- 4. Navigation may require segmenting barrier during construction operations.
- 5. For additional information see Section 104 of the Standard Specifications.

LEGEND

- Pile Locations
- Dredge Or Fill Area
- → Mooring Buoy w/Anchor
- → Anchor
- Barrier Movement Due
 To Current Action

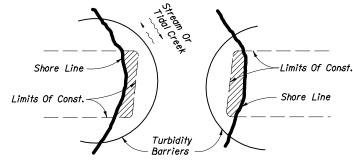

Note:
Turbidity barriers for flowing streams and tidal creeks may be either floating, or staked types or any combinations of types that will suit site conditions and meet erosion control and water quality requirements. The barrier type(s) will be at the Contractors option unless otherwise specified in the plans, however payment will be under the pay item(s) established in the plans for Floating Turbidity Barrier and/or Staked Turbidity Barrier. Posts in staked turbidity barriers to be installed in vertical position unless otherwise directed by the Engineer.

GENERAL NOTES

- I. Floating turbidity barriers are to be paid for under the contract unit price for Floating Turbidity Barrier, LF.
- 2. Staked turbidity barriers are to be paid for under the contract unit price for Staked Turbidity Barrier, LF.

STATE OF FLORIDA DEPARTMENT OF TRANSPORTATION

TURBIDITY BARRIERS

	Names	Dates	Approved By		
Designed By	RAA/CJA	9/85	State Drainage Engineer		
Drawn By	LRE	9/85	Revision	Sheet No.	Index No.
Checked By	RAA	10/85	00	l of l	103

TURBIDITY BARRIER APPLICATIONS