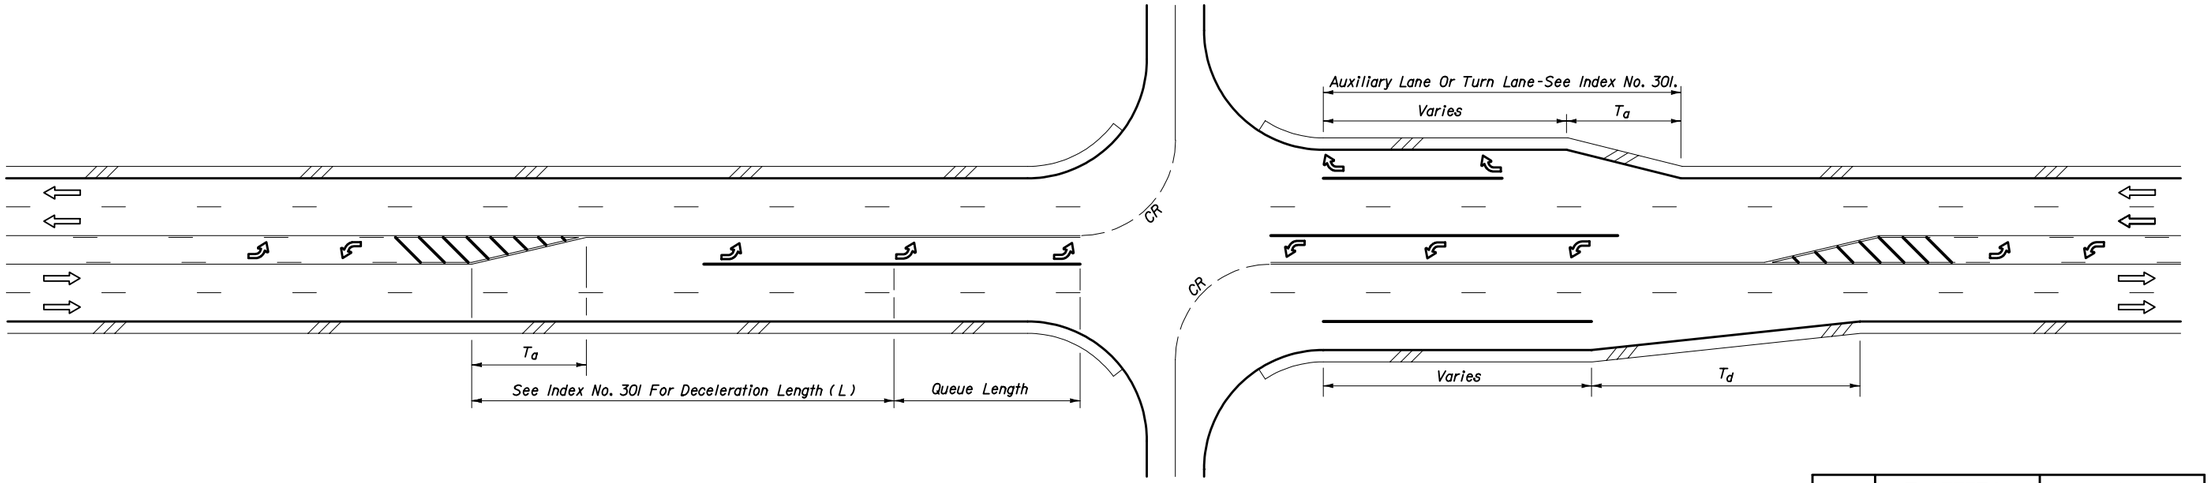

DESIGN SPEED (mph)	T_a (FEET)	T_d
	ADD LANE	LANE DROP
< 30	50' (±1 : 4)	1 : 25
30-45		1 : 30
> 45		1 : 40

Note: For locations with unrelocatable control points minimum taper rates for lane drop (T_d) will be 1 : 20.

4-LANE WITH TWO-WAY LEFT-TURN LANES

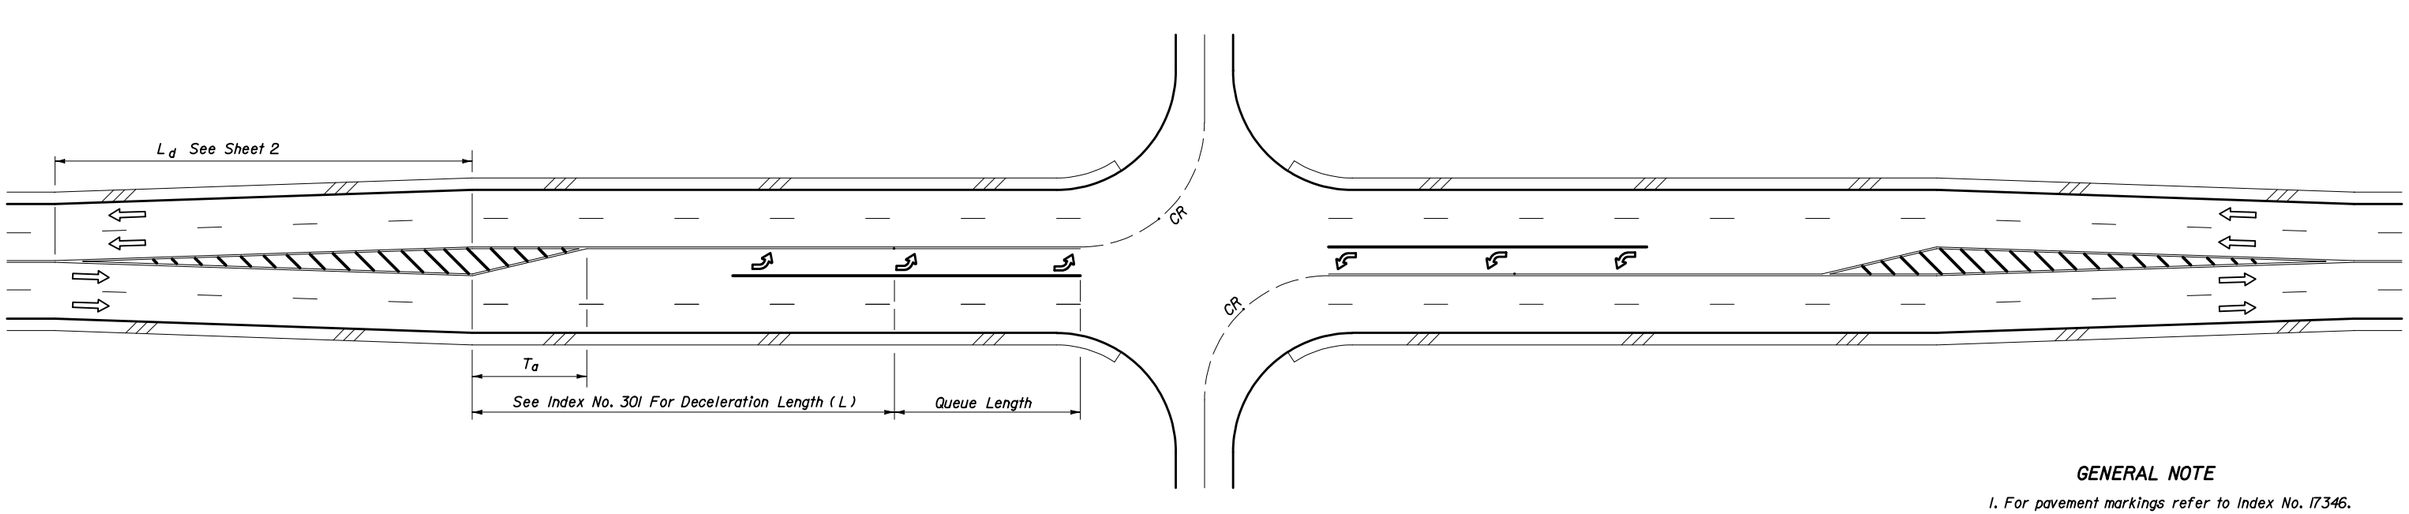

4-LANE UNDIVIDED FLARED - SYMMETRICAL

INTERSECTION TURNS AND STORAGE

GENERAL NOTE

1. For pavement markings refer to Index No. 17346.

STATE OF FLORIDA DEPARTMENT OF TRANSPORTATION

ROADWAY TRANSITIONS

	Names	Dates
Designed By	KNM	9/89
Drawn By	JBW	9/89
Checked By	KNM/JVG	

Approved By
Roadway Design Engineer

Revision	Sheet No.	Index No.
00	1 of 8	526

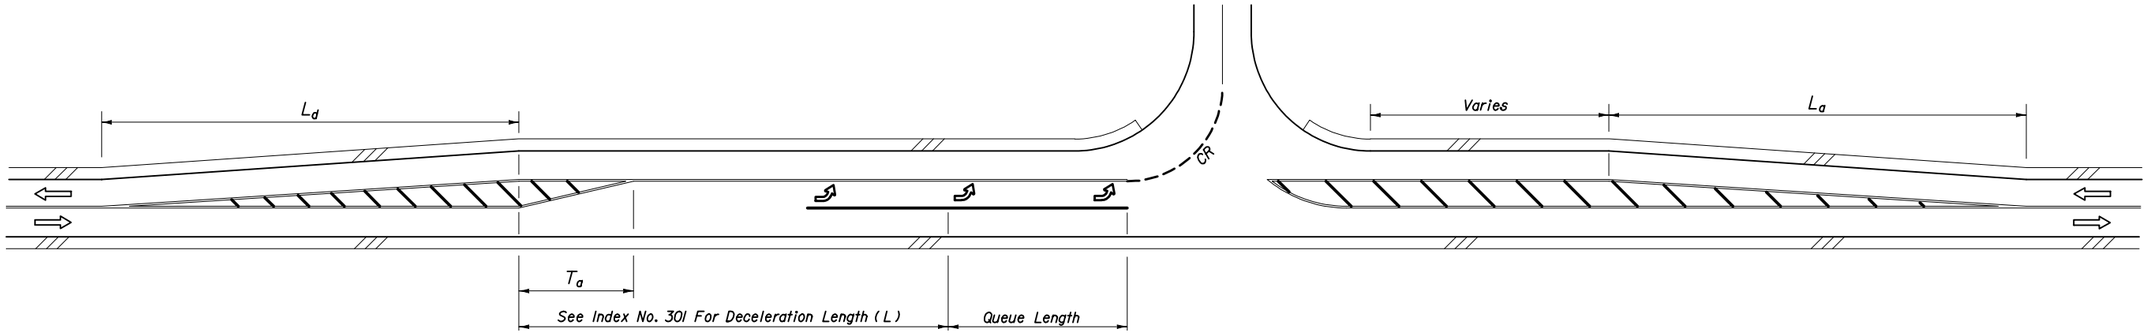

LEFT SIDE WIDENING

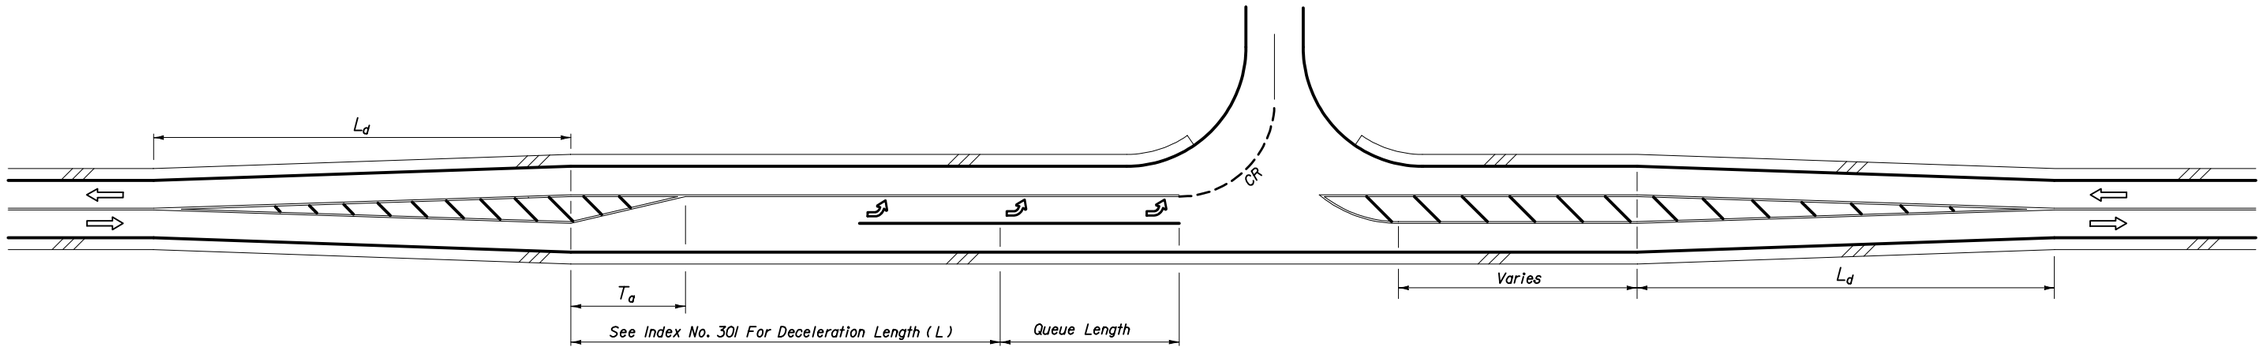

CENTERED WIDENING

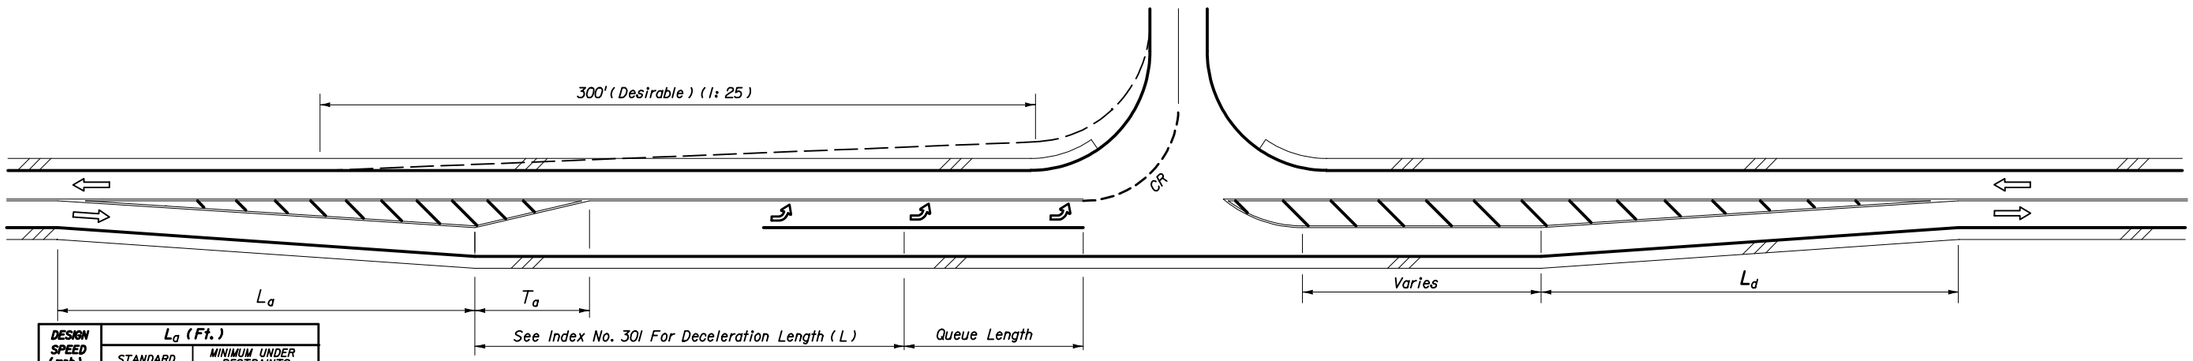

RIGHT SIDE WIDENING

DESIGN SPEED (mph)	L_a (Ft.)	
	STANDARD	MINIMUM UNDER RESTRAINTS
30	180	120
40	320	150
50	500	180
60	720	240

(mph)	L_d (Ft.)	
30	180	120
40	240	150
50	360	180
60	480	240

FLARED & PAINTED LEFT TURNS FOR 2-LANE 2-WAY ROADWAYS

STATE OF FLORIDA DEPARTMENT OF TRANSPORTATION

ROADWAY TRANSITIONS

	Names	Dates
Designed By	RER/JVG	9/98
Drawn By	JBW	9/98
Checked By	RER/JVG	9/98

Approved By
Roadway Design Engineer

Revision	Sheet No.	Index No.
00	2 of 8	526

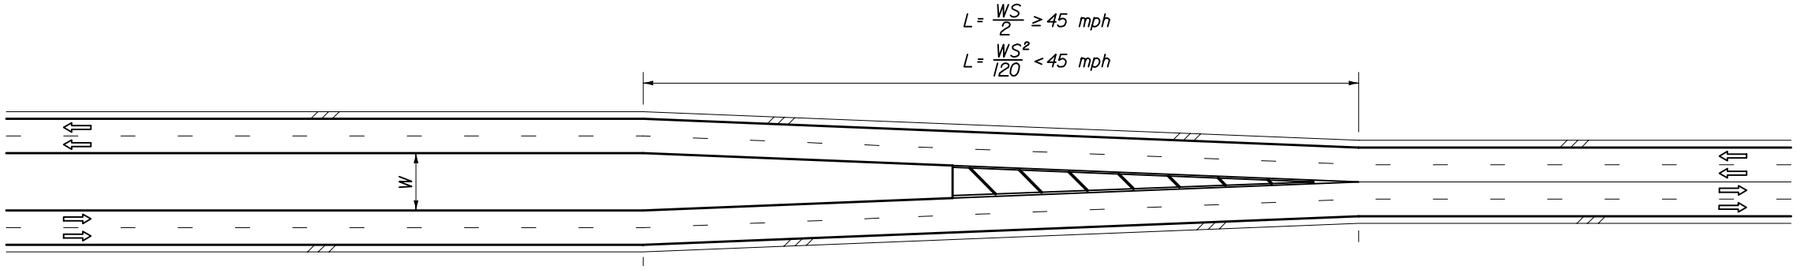

4-LANE DIVIDED TO 4-LANE UNDIVIDED

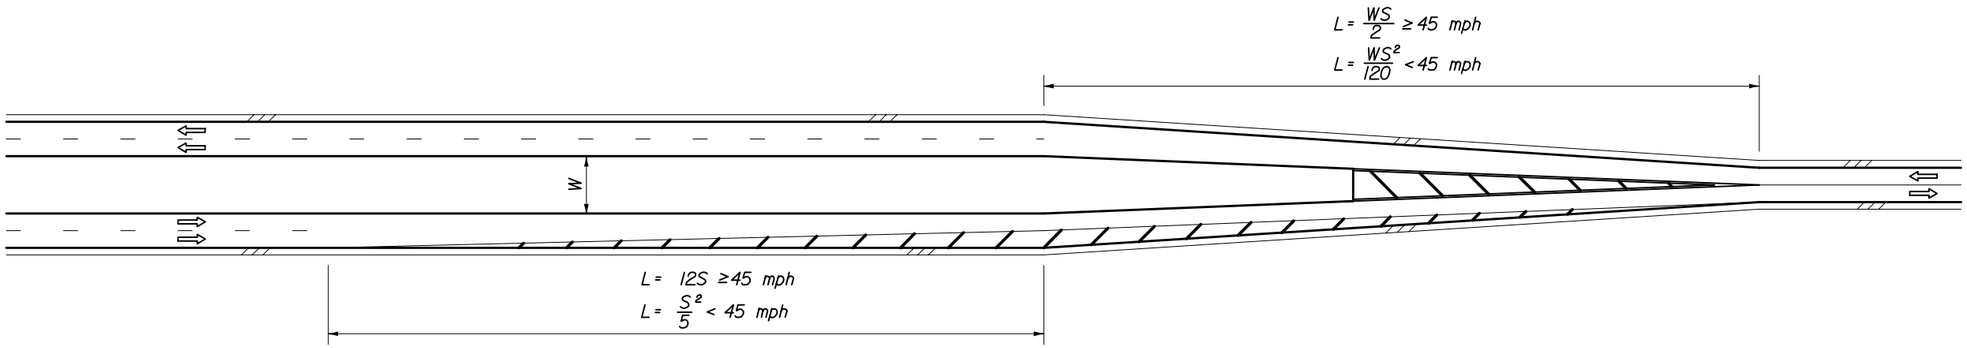

4-LANE DIVIDED TO 2-LANE UNDIVIDED

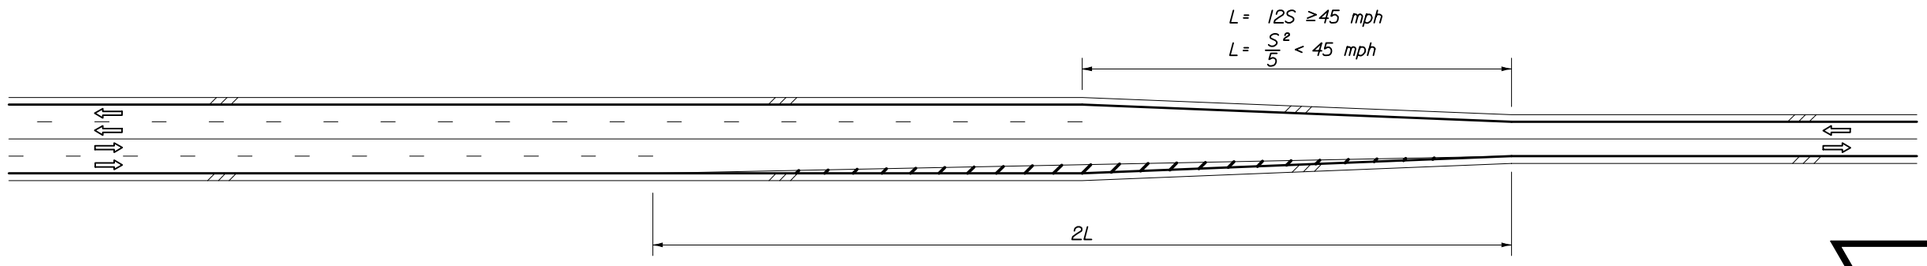

4-LANE UNDIVIDED TO 2-LANE UNDIVIDED

S = Design speed (mph).

LANE DIVERGENCE AND CONVERGENCE FOR CENTERED ROADWAYS

STATE OF FLORIDA DEPARTMENT OF TRANSPORTATION

ROADWAY TRANSITIONS

	Names	Dates
Designed By	KNM	9/89
Drawn By	JBW	9/89
Checked By	KNM/JVG	9/89

Approved By
Roadway Design Engineer

Revision	Sheet No.	Index No.
00	3 of 8	526

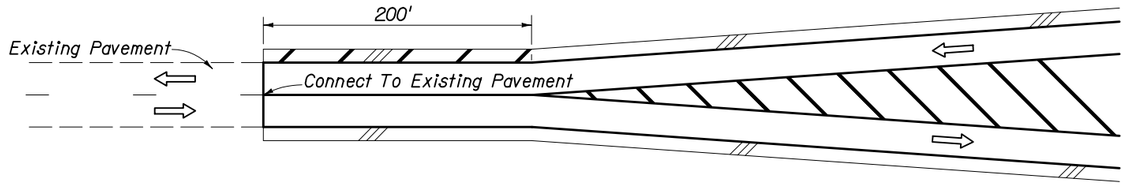

CONNECTING FLARE WITH PAVED SHOULDERS TO EXISTING ROADWAY WITHOUT PAVED SHOULDERS

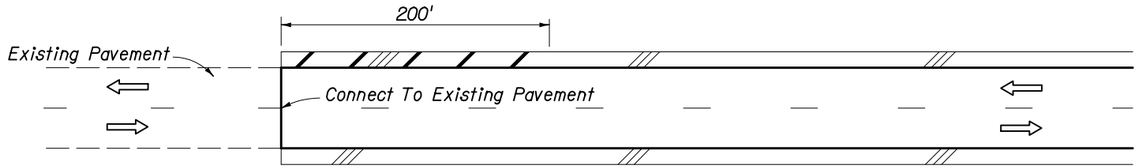

CONNECTING SIMILAR WIDTH PAVEMENTS

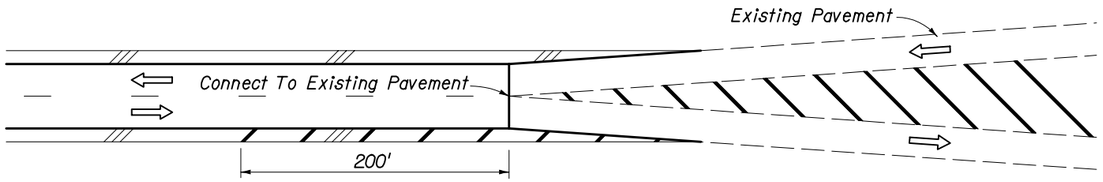

CONNECTING ROADWAY WITH PAVED SHOULDERS TO EXISTING SYMMETRICAL FLARE WITHOUT PAVED SHOULDERS

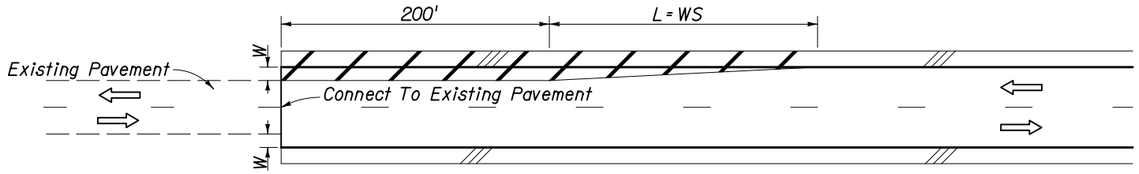

CONNECTING DIFFERENT WIDTH PAVEMENTS

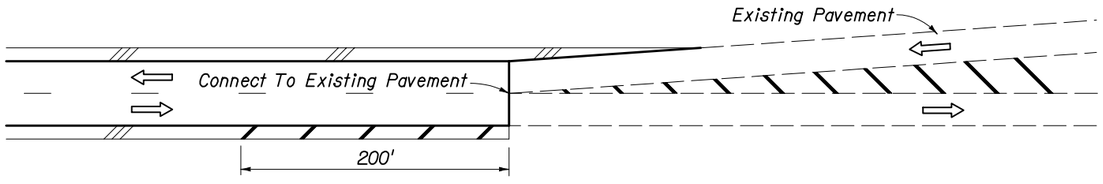

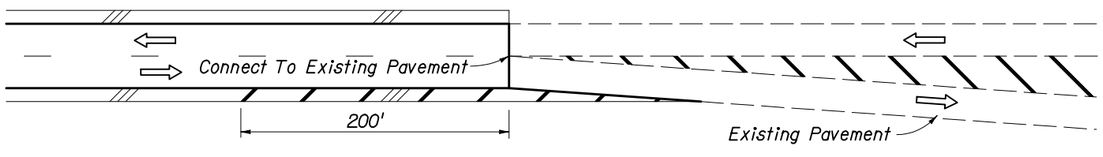

CONNECTING ROADWAY WITH PAVED SHOULDERS TO EXISTING ASYMMETRICAL FLARE WITHOUT PAVED SHOULDERS

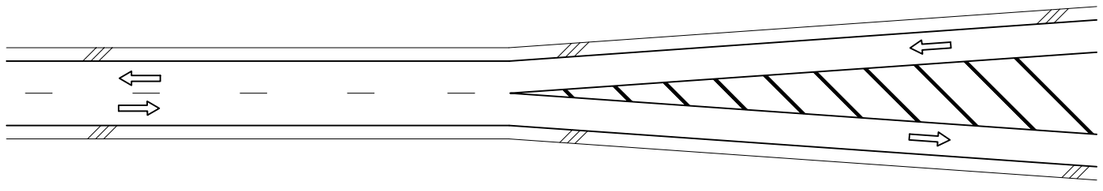

FLARED - PAVED SHOULDERS

S = Design speed (mph).

STATE OF FLORIDA DEPARTMENT OF TRANSPORTATION

ROADWAY TRANSITIONS

	Names	Dates
Designed By	KNM	9/89
Drawn By	JBW	9/89
Checked By	KNM/JVG	9/98

Approved By
Roadway Design Engineer

Revision	Sheet No.	Index No.
00	4 of 8	526

PAVED SHOULDER TREATMENT AT TRANSITIONS AND CONNECTIONS

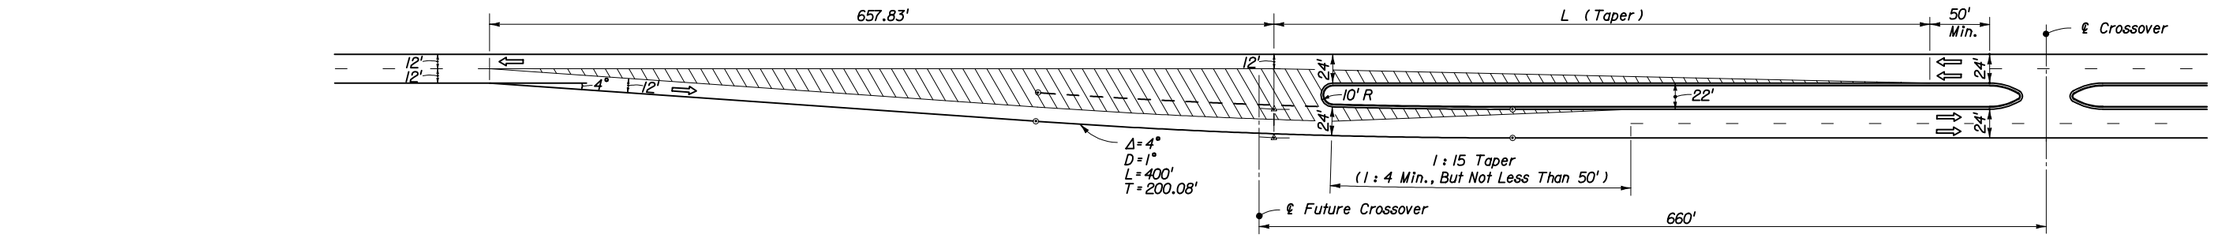

22' MEDIAN

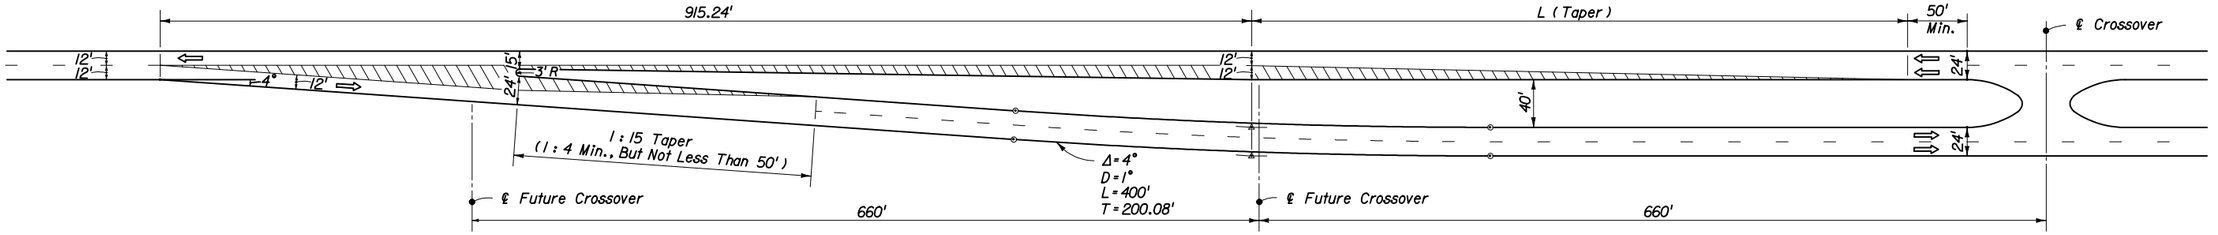

40' MEDIAN

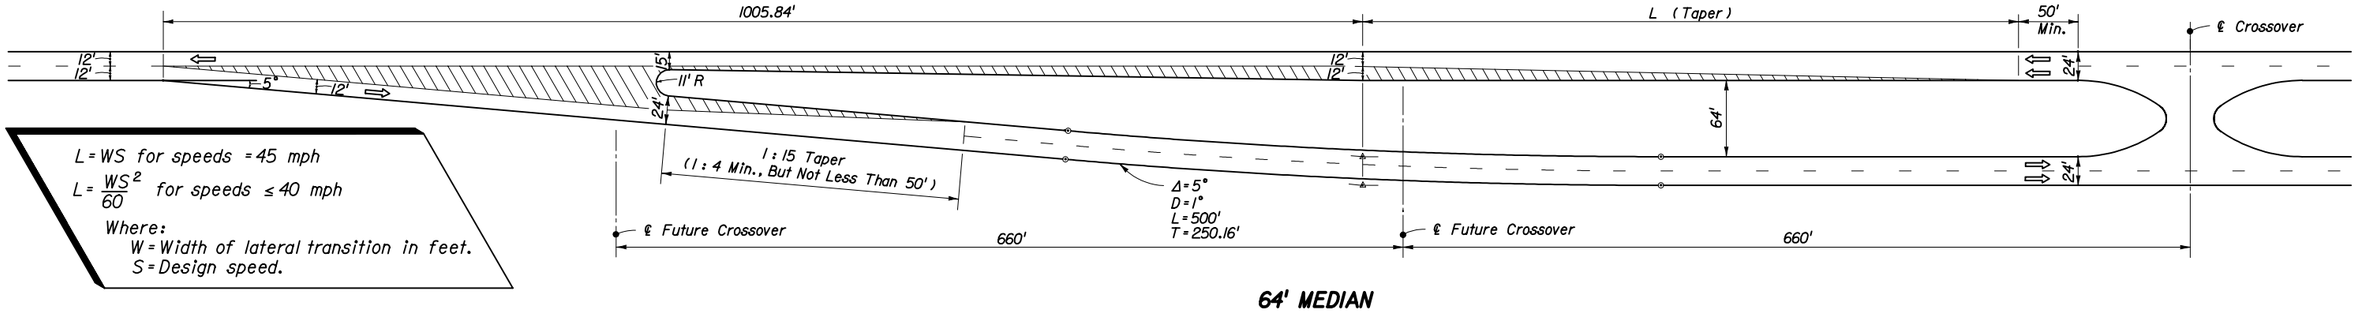

$L = WS$ for speeds = 45 mph

$L = \frac{WS^2}{60}$ for speeds ≤ 40 mph

Where:
W = Width of lateral transition in feet.
S = Design speed.

64' MEDIAN

NOTES FOR SHEETS 5 THRU 8

1. The transition details as represented on sheets 5 thru 8 are intended as guidelines only. The transition lengths, curve data, nose radii and offsets are valid only for tangent alignment, design speeds ≤45 mph, the median widths and lane widths shown.
2. Approach lane departures ($\Delta = 5°$) are suitable for design speeds up to 60 mph. Interior curves ($D = 1°$) are suitable for normal crown for design speeds up to 50 mph. Merging curves ($D \geq 5°$) will require superelevation.
3. The geometrics of these schemes are associated with the standard subsectional spacing for sideroads, but in any case will require modification to accommodate sideroad location, multilane and/or divided sideroads, oblique sideroads, crossover widths, storage and speed change lane requirements, and, other related features.

LEFT ROADWAY CENTERED ON APPROACH ROADWAY
TWO LANE TO FOUR LANE TRANSITION

STATE OF FLORIDA DEPARTMENT OF TRANSPORTATION

ROADWAY TRANSITIONS

	Names	Dates
Designed By	KNM	9/89
Drawn By	HKH	2/94
Checked By	JVG	2/94

Approved By _____
Roadway Design Engineer

Revision	Sheet No.	Index No.
00	5 of 8	526

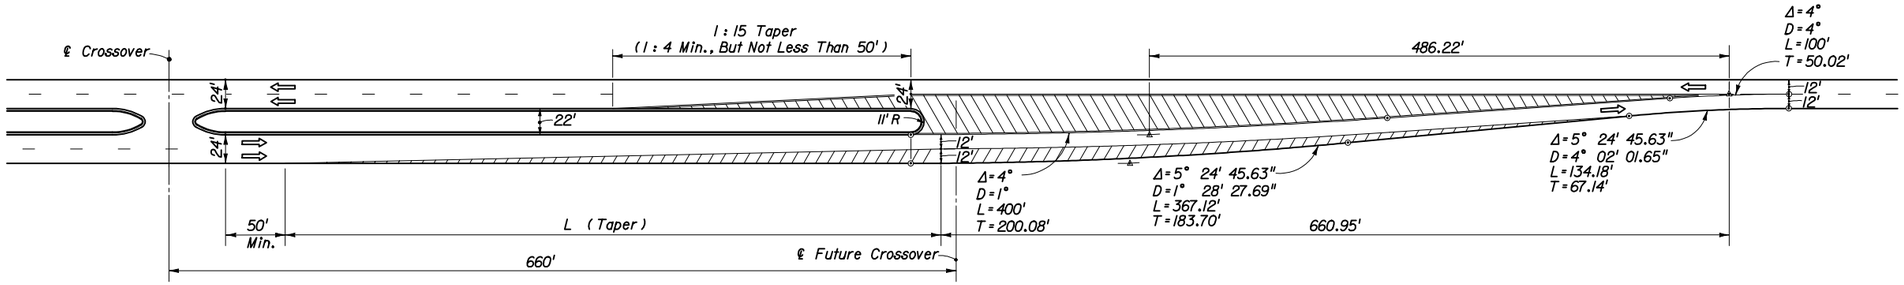

22' MEDIAN

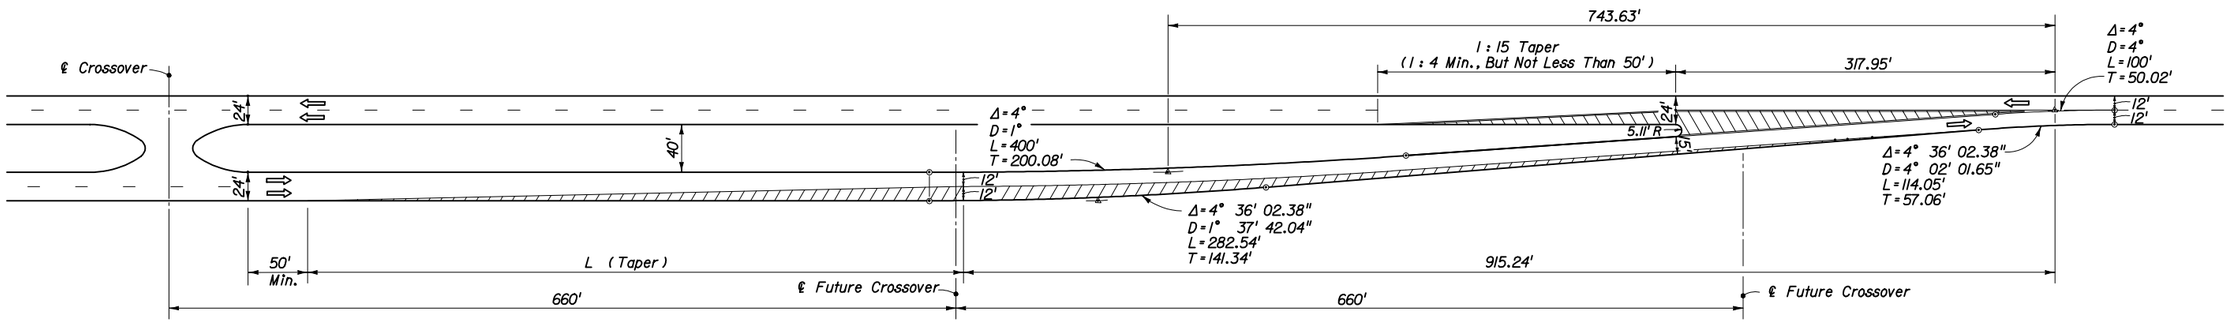

40' MEDIAN

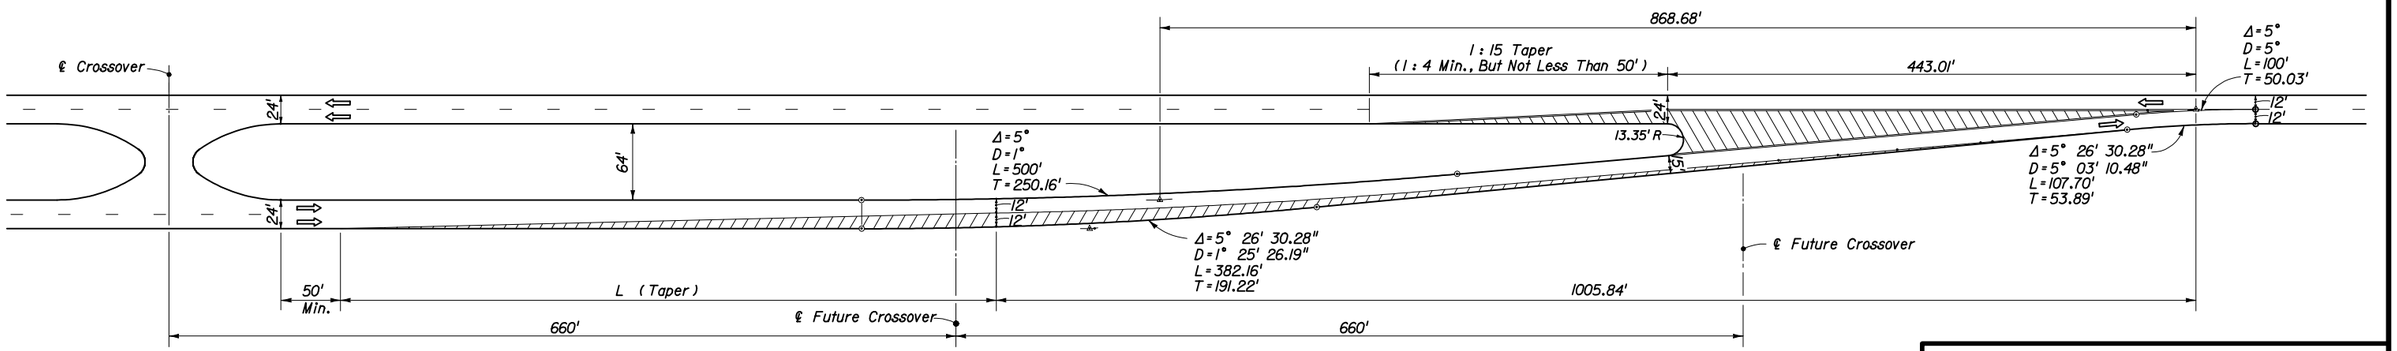

64' MEDIAN

$L = WS$ for speeds = 45 mph

$L = \frac{WS^2}{60}$ for speeds ≤ 40 mph

Where:
W = Width of lateral transition in feet.
S = Design speed.

LEFT ROADWAY CENTERED ON THRU ROADWAY
FOUR LANE TO TWO LANE TRANSITION

STATE OF FLORIDA DEPARTMENT OF TRANSPORTATION

ROADWAY TRANSITIONS

	Names	Dates
Designed By	KNM	9/89
Drawn By	HKH	2/94
Checked By	JVG	2/94

Approved By
Roadway Design Engineer

Revision	Sheet No.	Index No.
00	6 of 8	526

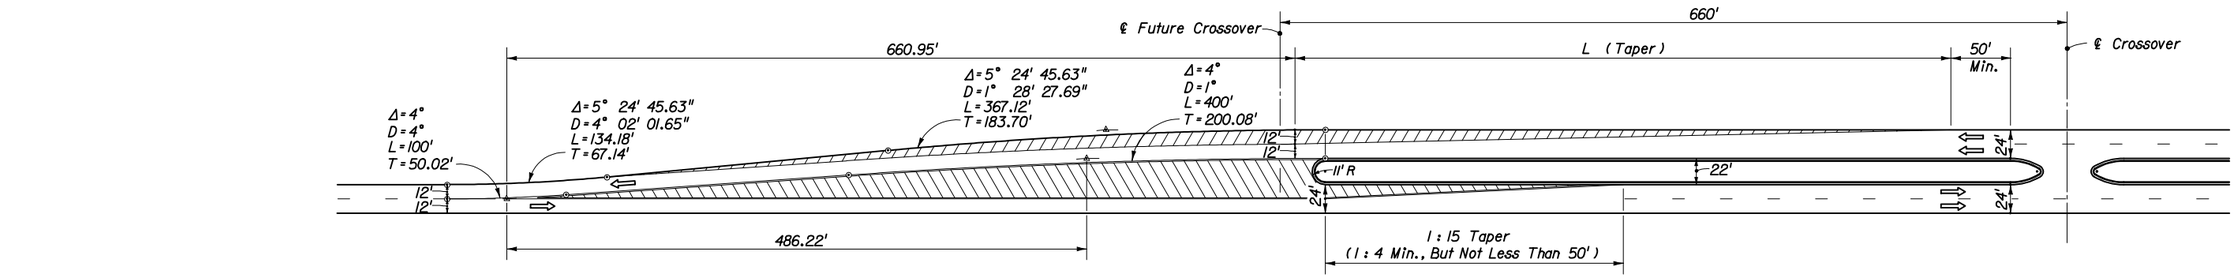

22' MEDIAN

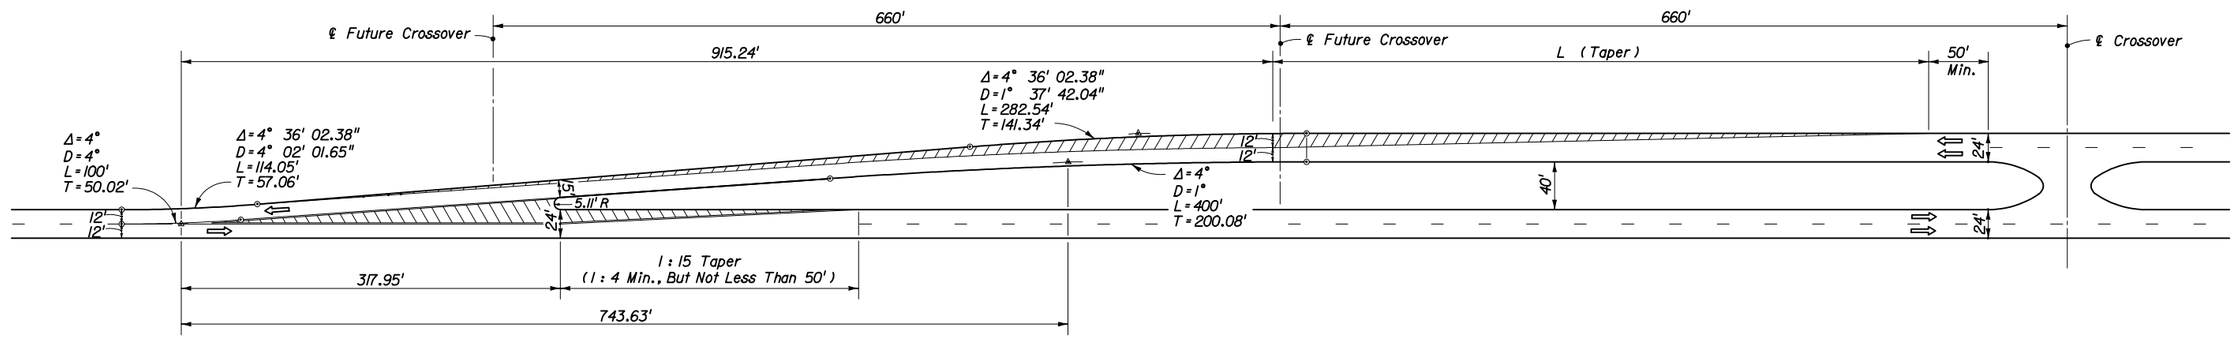

40' MEDIAN

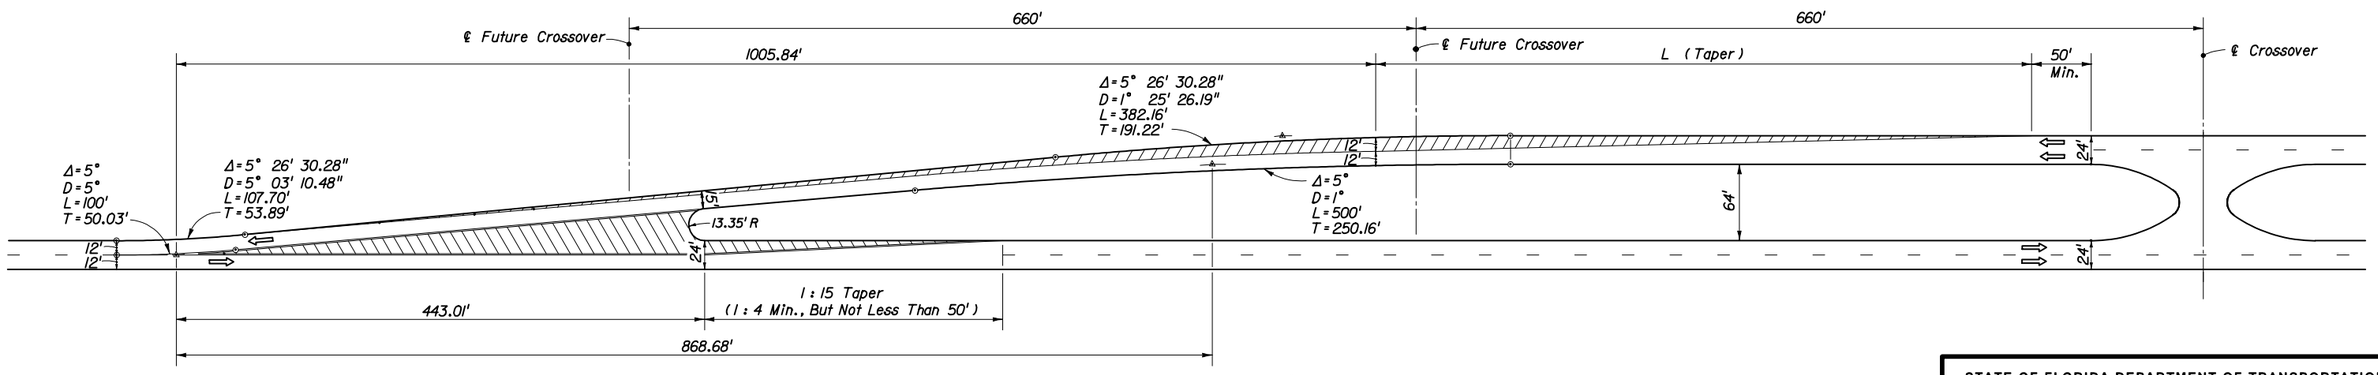

64' MEDIAN

$L = WS$ for speeds ≤ 45 mph

$L = \frac{WS^2}{60}$ for speeds ≤ 40 mph

Where:
W = Width of lateral transition in feet.
S = Design speed.

RIGHT ROADWAY CENTERED ON APPROACH ROADWAY
TWO LANE TO FOUR LANE TRANSITION

STATE OF FLORIDA DEPARTMENT OF TRANSPORTATION

ROADWAY TRANSITIONS

	Names	Dates
Designed By	KNM	9/89
Drawn By	HKH	2/94
Checked By	JVG	2/94

Approved By
Roadway Design Engineer

Revision	Sheet No.	Index No.
00	7 of 8	526

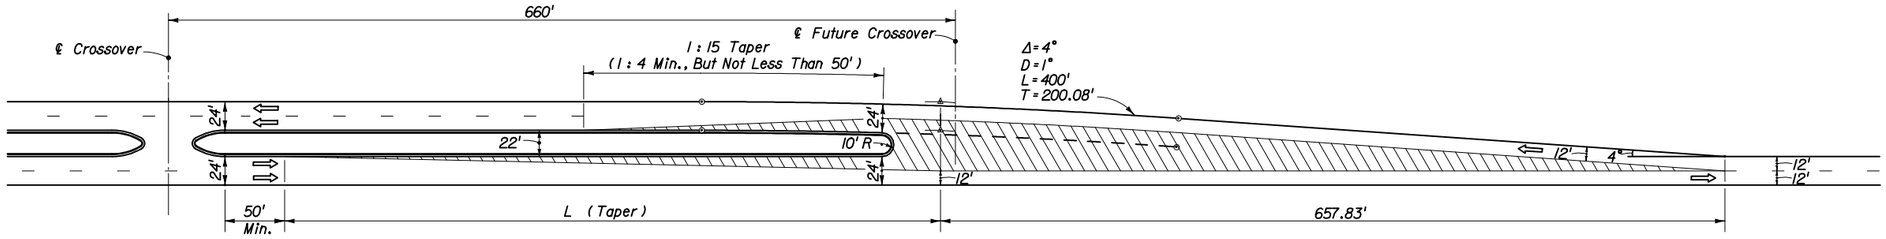

22' MEDIAN

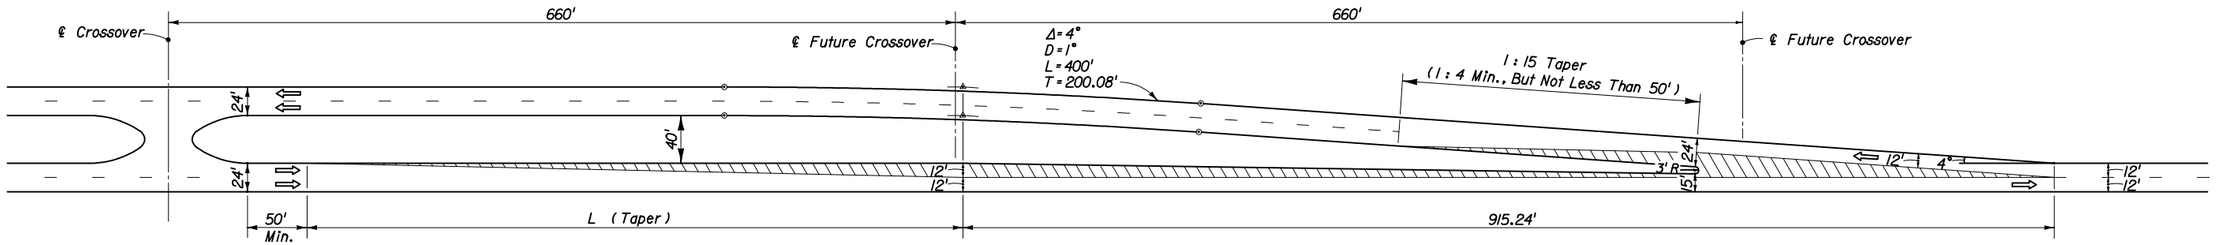

40' MEDIAN

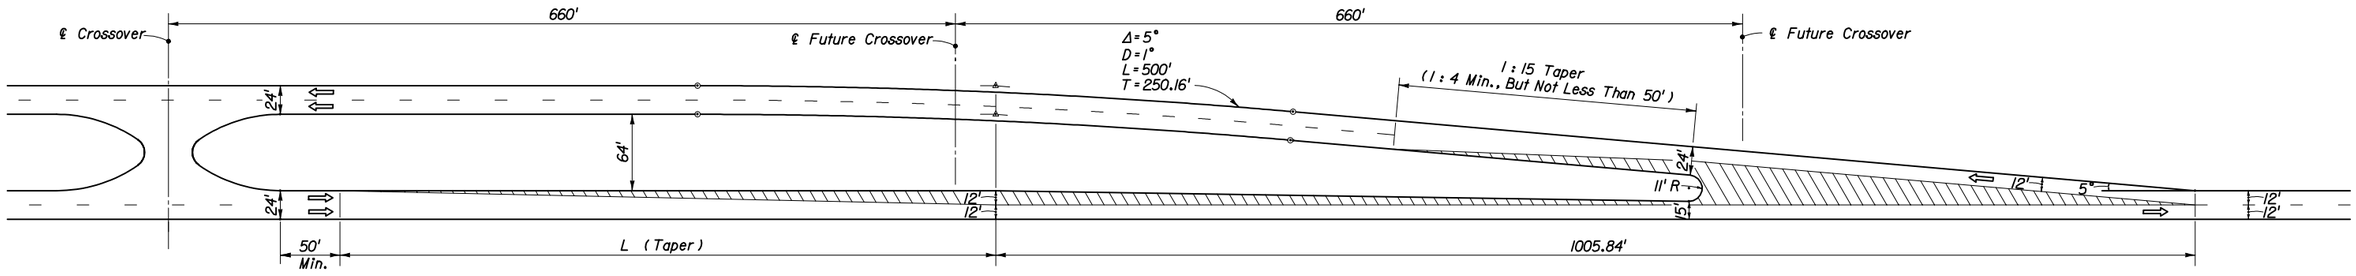

64' MEDIAN

$L = WS$ for speeds ≤45 mph

$L = \frac{WS^2}{60}$ for speeds ≤40 mph

Where:
W = Width of lateral transition in feet.
S = Design speed.

RIGHT ROADWAY CENTERED ON THRU ROADWAY

FOUR LANE TO TWO LANE TRANSITION

STATE OF FLORIDA DEPARTMENT OF TRANSPORTATION

ROADWAY TRANSITIONS

	Names	Dates
Designed By	KNM	9/89
Drawn By	HKH	2/94
Checked By	JVG	2/94

Approved By
Roadway Design Engineer

Revision	Sheet No.	Index No.
00	8 of 8	526