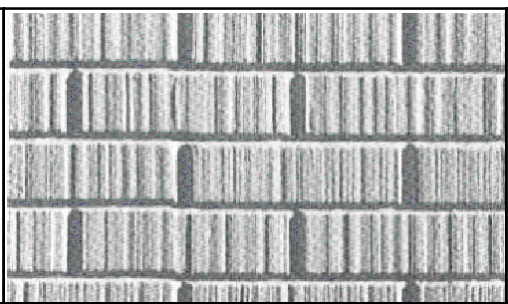
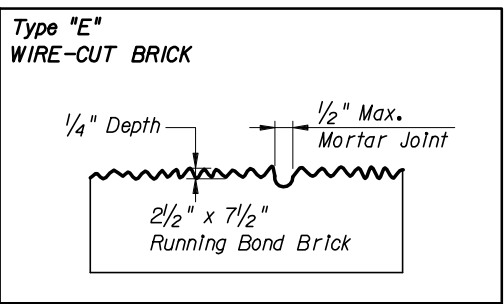
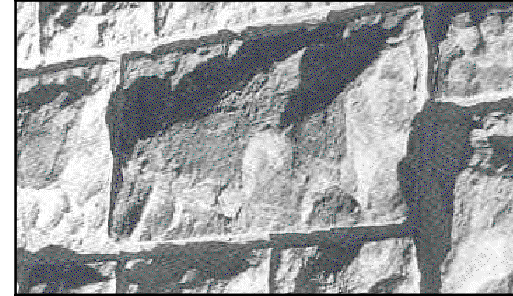
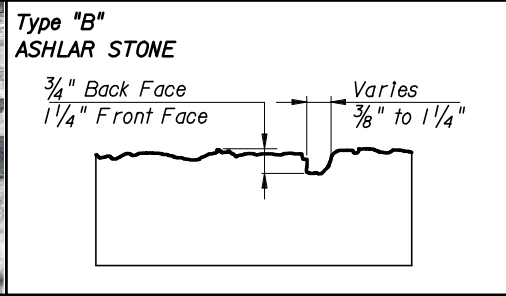
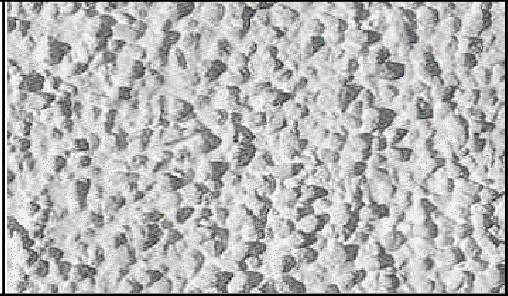
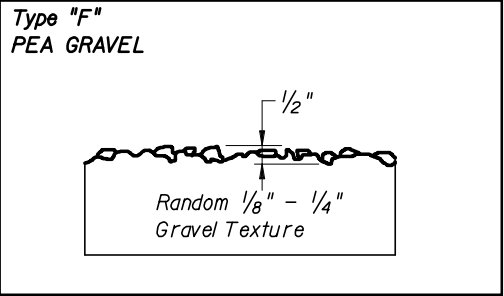
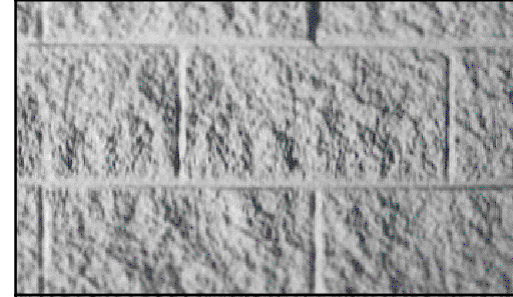
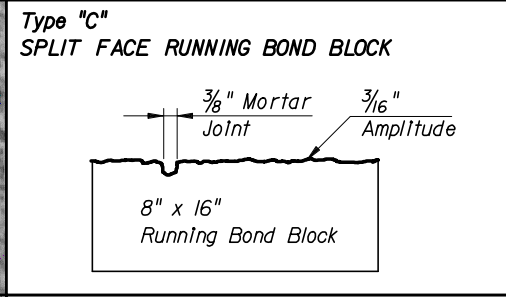
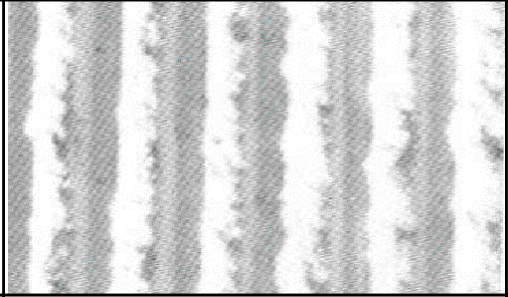
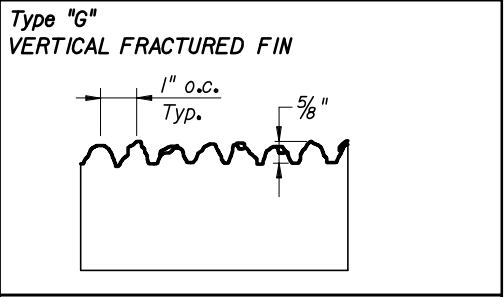

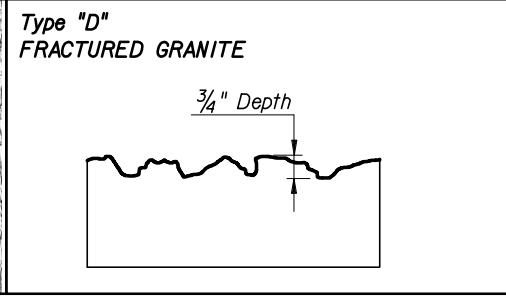
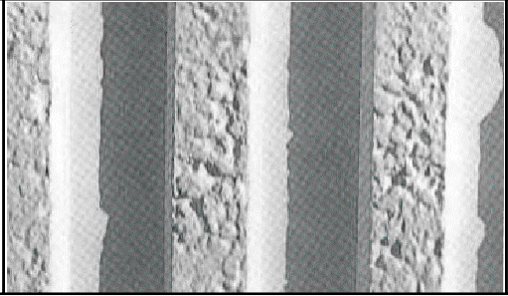
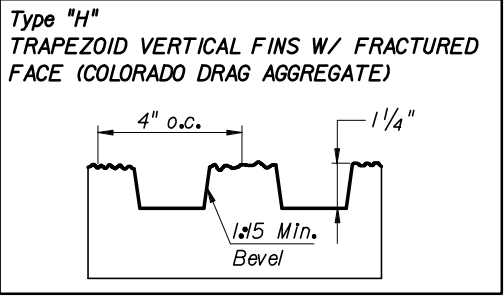


	<p>Type "A" SMOOTH</p>		<p>Type "E" WIRE-CUT BRICK</p>  <p>1/4" Depth 1/2" Max. Mortar Joint 2 1/2" x 7 1/2" Running Bond Brick</p>
	<p>Type "B" ASHLAR STONE</p>  <p>3/4" Back Face 1 1/4" Front Face Varies 3/8" to 1 1/4"</p>		<p>Type "F" PEA GRAVEL</p>  <p>1/2" Random 1/8" - 1/4" Gravel Texture</p>
	<p>Type "C" SPLIT FACE RUNNING BOND BLOCK</p>  <p>3/8" Mortar Joint 3/16" Amplitude 8" x 16" Running Bond Block</p>		<p>Type "G" VERTICAL FRACTURED FIN</p>  <p>1" O.C. Typ. 5/8"</p>
	<p>Type "D" FRACTURED GRANITE</p>  <p>3/4" Depth</p>		<p>Type "H" TRAPEZOID VERTICAL FINS W/ FRACTURED FACE (COLORADO DRAG AGGREGATE)</p>  <p>4" O.C. 1 1/4" 1/5 Min. Bevel</p>

NOTES:

1. Surfaces shall be formed, rolled, or pressed using form liners in accordance with the Plans and Specifications (Class 3 Surface Finish).
2. See Wall Control Drawings for project aesthetic requirements.