| FINANCIAL PROJECT ID | STATE PROJ. NO. | SHEET NO. |
|---|---|---|
| | | |

1. Sign height shall be 7' minimum. Sign offset from edge of travel way should be between 6' and 10' and relatively consistent through the project phase.

2. Place one business sign for each driveway entrance affected. When several businesses share a common driveway entrance, place one sign per common driveway entrance.

3. Channelizing devices should be placed at a reduced spacing on each side of the driveway entrance.

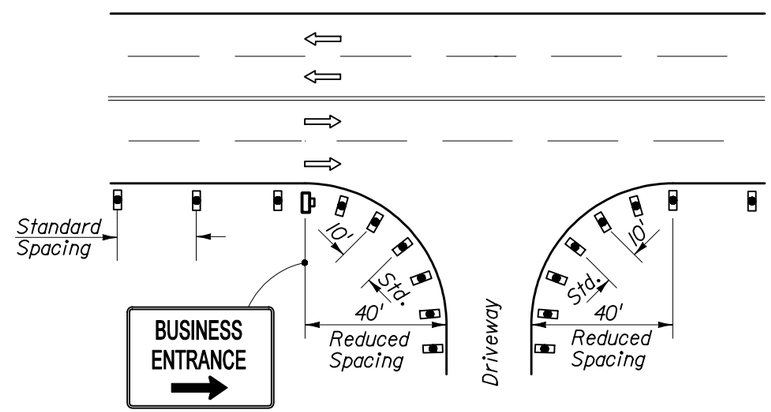


PLACEMENT OF BUSINESS ENTRANCE SIGNS AND CHANNELIZING DEVICES AT BUSINESS ENTRANCE

INTERIM STANDARD IN ENGLISH UNITS APPLICABLE TO DESIGN STANDARDS BOOKLET PUBLISHED IN ENGLISH UNITS.

STATE OF FLORIDA DEPARTMENT OF TRANSPORTATION

TRAFFIC CONTROL THROUGH WORK ZONES

# GENERAL INFORMATION FOR TRAFFIC CONTROL THROUGH WORK ZONES

INTERIM STANDARD

THIS SHEET IS A SUPPLEMENT TO INDEX NO. 600 OF THE DESIGN STANDARDS, BOOKLET DATED JANUARY 2002.

APPROVED BY Roadway Design Engineer

| REVISION NO. | SHEET NO. | INDEX NO. |
|---|---|---|
| 02 | 1 of 1 | 0600 |

Revised: 04-28-03