

TRAFFIC RAILING/SOUND BARRIER NOTES

This railing has been structurally evaluated to be equivalent or greater in strength to a safety shape/sound barrier combination railing which has been crash tested to NCHRP Report 350 TL-4 Criteria. The Transverse Design Force for the design of bridge deck overhang shall be 54 kips applied horizontally at 3'-6" height above the deck.

CONSTRUCTION REQUIREMENTS : The Traffic Railing/Sound Barrier and joints shall be constructed plumb, they shall not be constructed perpendicular to the roadway surface. Slip forming is not permitted.


CONCRETE AND REINFORCING STEEL : For Railing/Sound Barrier on bridges see General Notes. For Wall and Footing mounted Railing/Sound Barrier, concrete shall be Class II for slightly aggressive environments and Class IV for moderately or extremely aggressive environments. All reinforcing steel shall be Grade 60.

NAME, DATE AND BRIDGE NUMBER : For Railing/Sound Barrier on bridges, the Name and Bridge Number shall be placed on the Traffic Railing so as to be seen on the driver's right side when approaching the bridge. The Date shall be placed on the driver's left side when approaching the bridge. The Name shall be as shown in the General Notes in the Structures Plans. The Date shall be the year the bridge is completed. For a widening when the existing railing is removed, use both the existing date and the year of the widening. Black plastic letters and figures 3" in height may be used, as approved by the Engineer, in lieu of the letters and figures formed by 3/8" V-Grooves. V-Grooves shall be formed by preformed letters and figures.

MARKERS : For Railing/Sound Barrier on bridges, Elevation Markers shall be placed on top of the Traffic Railing/Sound Barrier or Bridge Deck at the end bents as directed by the Engineer. Markers are to be furnished by the Florida Department of Transportation and installed by the Contractor. The cost of installing the markers shall be included in the Contract Unit Price for the Railing/Sound Barrier.

REFLECTIVE RAILING MARKERS : Reflective Railing Markers shall meet Specification Section 993. Install markers 2'-4" above the riding surface at the spacing shown in the table below. Reflector color (white or yellow) shall match the color of the near edgeline. The cost of the reflective markers shall be included in the Contract Unit Price for the Traffic Railing/Sound Barrier.

REFLECTIVE RAILING MARKER SPACING	
Distance - Edge of Travel Lane to Face of Railing	Spacing (Ft.)
< 4'	40'
4' to 8'	80'
> than 8'	None Required




DETAIL "B" - SECTION AT INTERMEDIATE OPEN JOINT


NOTE: At Intermediate Open Joints, the lower 3" portion of the open joint shall be plugged by filling it with mortar in accordance with Section 400 of the Specifications.

ESTIMATED TRAFFIC RAILING/SOUND BARRIER QUANTITIES		
ITEM	UNIT	QUANTITY
Concrete (Railing)	CY/LF	0.104
Concrete (Sound Barrier)	CY/LF	0.145
Reinforcing Steel (Typical)	LB/LF	78.57
Additional Reinf. @ Open Joint	LB	430.24

(The above quantities are based on the bridge mounted typical section, 2% deck cross slope and railing on low side of deck.)

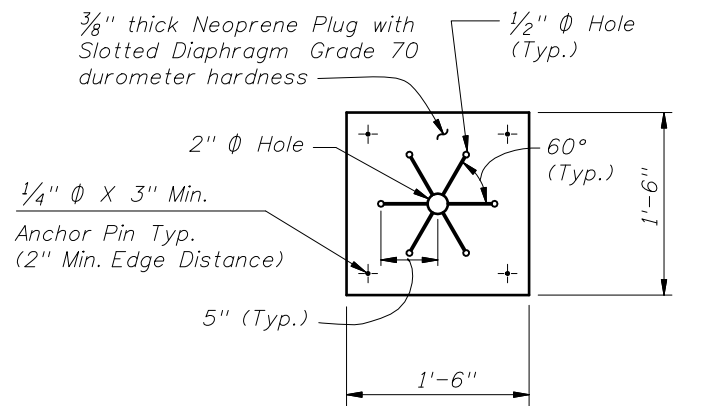

NEOPRENE DIAPHRAGM PLUG DETAIL

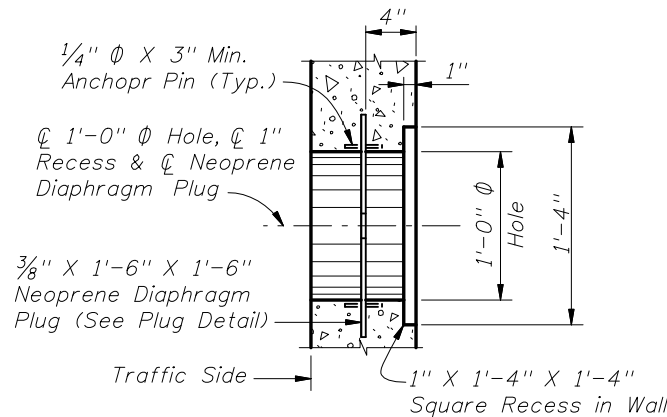


TYPICAL SECTION FIRE HOSE ACCESS DETAIL

NOTE: Fire hose access holes are required at or near fire hydrant locations. Field cut reinforcement as required to maintain 2" minimum cover at access holes. Locate fire hose access holes a minimum of 10'-0" from 3/4" open joints when possible.


REINFORCING STEEL BENDING DIAGRAMS

BILL OF REINFORCING STEEL		
MARK	SIZE	LENGTH
P	5	5'-7"
R	5	7'-9"
S1	5	As Req'd.
S2	5	7'-3"
V (Bridge and Wall)	5	5'-1"
V (Footing)	5	7'-7"


BRIDGE CROSS-SLOPE		LOW GUTTER		HIGH GUTTER	
		ØA	ØB	ØA	ØB
BRIDGE MOUNTED	0% to 2%	90°	90°	90°	90°
	2% to 6%	93°	87°	87°	93°
	6% to 10%	96°	84°	84°	96°
WALL & FOOTING MOUNTED		90°	90°	90°	90°




BARS 5S1 & 5S2

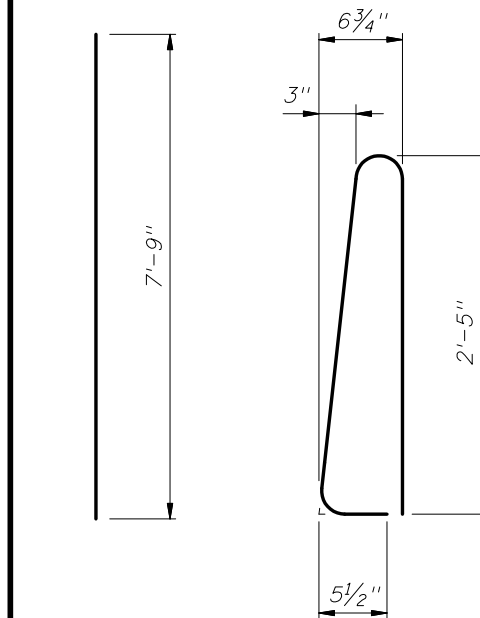

BAR 5R (Field Cut for End Taper)

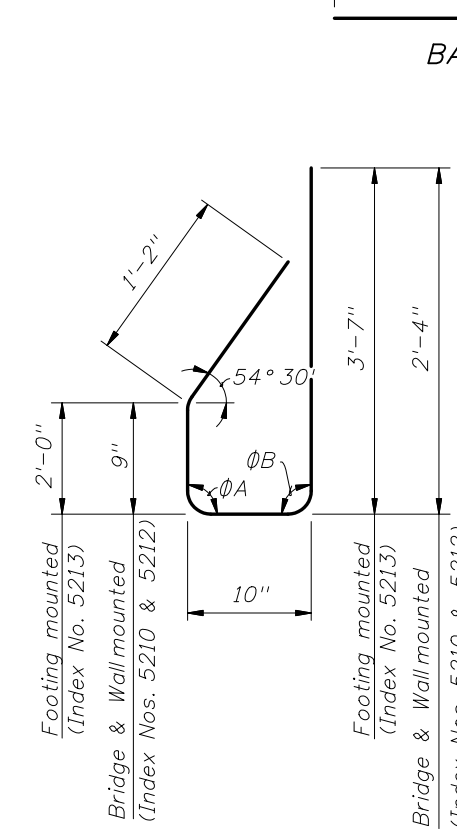


STIRRUP BAR 5P

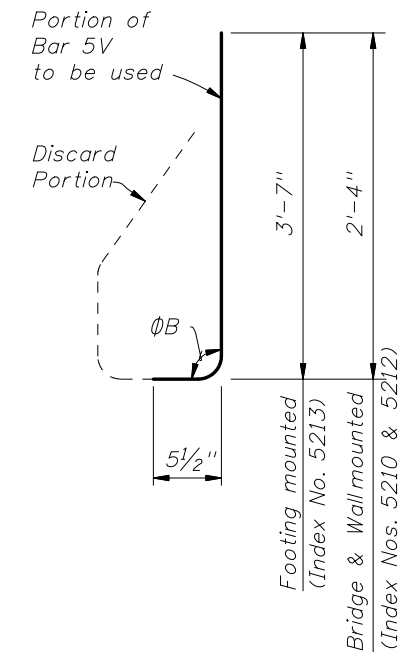

END STIRRUP BAR 5V To Be Field Cut (One Required per Railing End Transition)

REINFORCING STEEL NOTES:

- All bar dimensions in the bending diagrams are out to out.
- All reinforcing steel at the open joints shall have a 2" minimum cover.
- Bars 5S1 may be continuous or spliced at the construction joints. Lap splices for Bars 5S1 shall be a minimum of 2'-2".
- The Contractor may use Welded Wire Reinforcement when approved by the Engineer. Welded Wire Reinforcement shall conform to ASTM A 497.
- Bars 5R shall be one continuous bar. No mechanical couplers or lap splices are permitted.
- See Index Nos. 5214 and 5215 for Bars 5V and 5T in L-shaped and Trench footings.

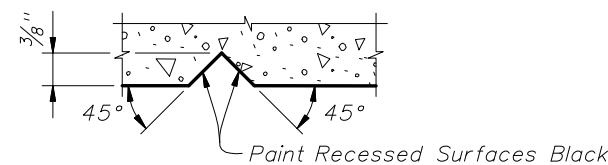


SECTION THRU RECESSED "V" GROOVE TO FORM INSCRIBED LETTERS AND FIGURES

CROSS REFERENCE: For locations of Detail "B", see Sheet 1.

REVISIONS

DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION
01/01/09	SUN	Changed "NAME, DATE AND BRIDGE NUMBER" note. Added "REFLECTIVE RAILING" note and "REFLECTIVE RAILING MARKER SPACING" table.			



2008 Interim Design Standard

TRAFFIC RAILING/SOUND BARRIER (8'-0")

Interim Date	Sheet No.
01/01/09	2 of 5
Index No.	
5210	