


OPTION 1
(For Span Wire Assembly)

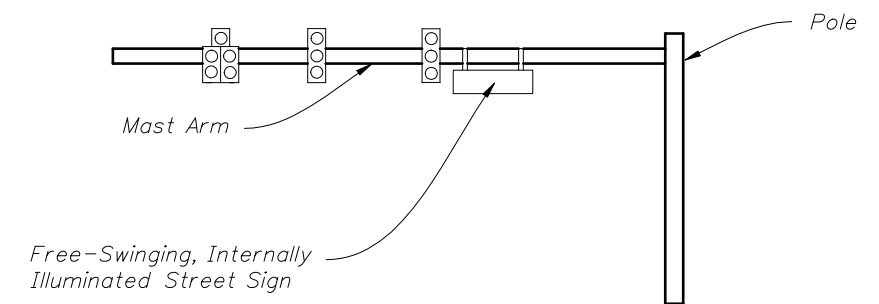


OPTION 2
(For Mast Arm Assembly)

NOTES:

1. Free-swinging, internally-illuminated street signs shall only be installed on the signal pole for span wire assemblies. For mast arm assemblies the street sign may be installed on the arm or pole.
2. Free-swinging, internally-illuminated street signs shall meet the requirements of Section 699 of the Standard Specifications for Road and Bridge Construction.
3. Pole attachments and cantilever arm (or truss) assemblies may be accepted by Contractor certification provided the signs being supported meet the weight and area limitations included in Section 699 for "Acceptance by Certification".
4. Pole attachments and cantilever arm (or truss) assemblies supporting signs not meeting the weight or area limitations included in Section 699 for "Acceptance by Certification" require the submittal of structural calculations and Shop Drawings that have been prepared by and sealed by the Specialty Engineer.

REVISIONS

DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION
01/10/08	LW	Option 1 was deleted option 2 and 3 were renumbered to 1 and 2. Note 1. was completely revised.			



2008 Interim Design Standard

**FREE - SWINGING, INTERNALLY - ILLUMINATED
STREET SIGN ASSEMBLIES**

Interim Date	Sheet No.
01/01/08	1 of 1
Index No.	
17748	