


C:\projects\standards\roadway\17700-s\17745-01.dgn  
r0960rh  
11:49:33 AM  
12/30/2011

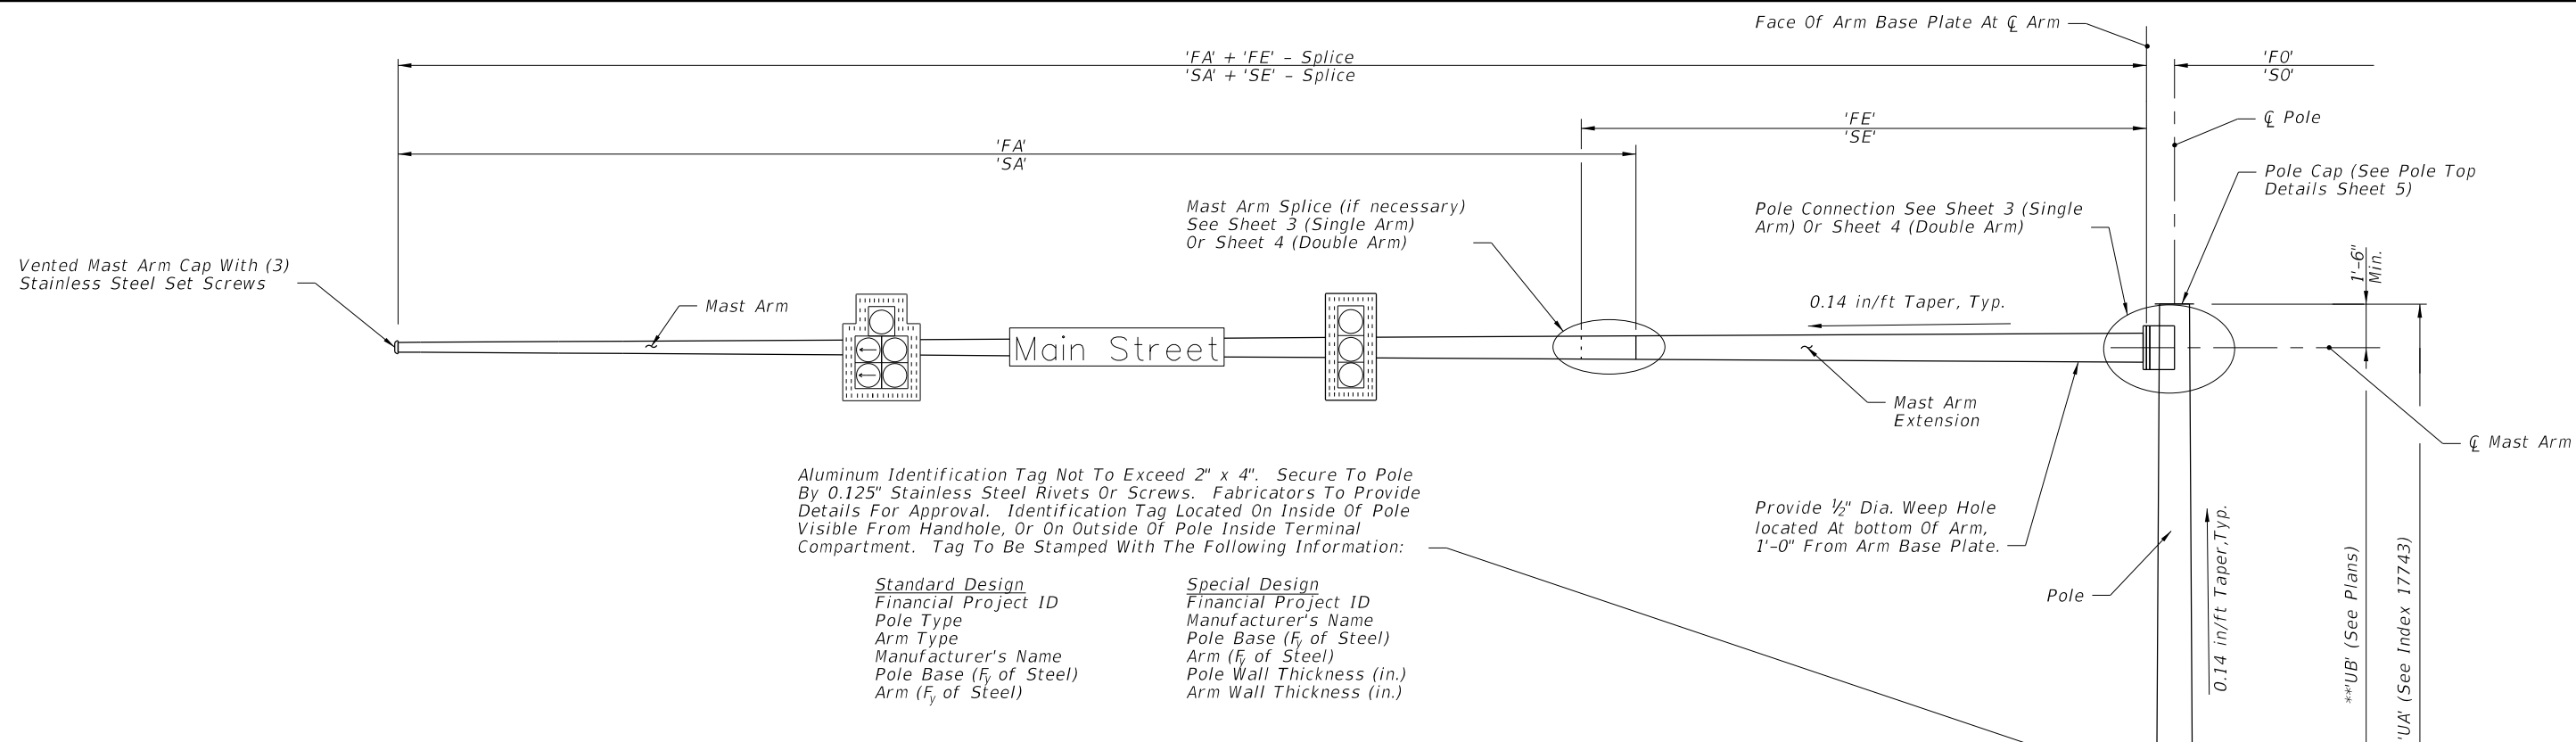

Aluminum Identification Tag Not To Exceed 2" x 4". Secure To Pole By 0.125" Stainless Steel Rivets Or Screws. Fabricators To Provide Details For Approval. Identification Tag Located On Inside Of Pole Visible From Handhole, Or On Outside Of Pole Inside Terminal Compartment. Tag To Be Stamped With The Following Information:


- |                                     |                                     |
|-------------------------------------|-------------------------------------|
| <b>Standard Design</b>              | <b>Special Design</b>               |
| Financial Project ID                | Financial Project ID                |
| Pole Type                           | Manufacturer's Name                 |
| Arm Type                            | Pole Base (F <sub>y</sub> of Steel) |
| Manufacturer's Name                 | Arm (F <sub>y</sub> of Steel)       |
| Pole Base (F <sub>y</sub> of Steel) | Pole Wall Thickness (in.)           |
| Arm (F <sub>y</sub> of Steel)       | Arm Wall Thickness (in.)            |

**MAST ARM ASSEMBLIES GENERAL NOTES**

- 1) Signal Structure Materials shall be as follows:
 

Poles & Mast Arms & Backing Rings	->	ASTM A1011 Grade 50, 55, 60 or 65 (less than 1/4") or ASTM A572 Grade 50, 55, 60 or 65 (1/4" and over) or ASTM A595 Grade A (55 ksi yield) or Grade B (60 ksi yield)
Steel Plates	->	ASTM A36
Weld Metal	->	E70XX
Bolts (except Anchor Bolts)	->	ASTM A325 Type 1
Anchor Bolts	->	ASTM F1554 Grade 55 ksi
Nuts for Anchor Bolts	->	ASTM A563 Grade A Heavy Hex
Handhole Frame	->	ASTM A709 Grade 36 ksi or ASTM A36
Handhole Cover	->	ASTM A1011 Grade 50, 55, 60 or 65 ksi
Caps	->	ASTM A1011 Grade 50, 55, 60 or 65 ksi or ASTM B209
Nut Covers	->	ASTM B26 (319-F)
Stainless Steel Screws	->	AISI Type 316
Threaded Bars/Studs	->	ASTM A36 or ASTM A307
- 2) Reinforcing Steel shall be ASTM A615 Grade 60 ksi.
- 3) Concrete shall be Class IV (Drilled Shaft) with a minimum 28-day compressive strength of 4,000 psi for all environmental classifications.
- 4) All welding shall conform to American Welding Society Structural Welding Code (Steel) ANSI/AWS D1.1 (current edition).
- 5) All steel items shall be galvanized as follows:
 

All Nuts, Bolts, Washers and Threaded Bars/Studs	->	F2329
All other steel items (including Pole & Mast Arm)	->	ASTM A123
- 6) Locate handhole 180° from arm on single arm poles or 180° from first arm of double arm poles or see special instructions on Mast Arm Tabulation Sheet.
- 7) Except for Anchor Bolts, all bolt hole diameters shall be equal to the bolt diameter plus 1/16", prior to galvanizing. Hole diameters for Anchor Bolts shall not exceed the bolt diameter plus 1/2".
- 8) Sign Panels and Signals attached to the Mast Arm shall be centered in elevation on the arm. Wire access holes shall not exceed 1 1/2" in diameter.
- 9) Mast Arms and Poles shall be tapered with the diameter changing at a rate of 0.14 inch per foot.
- 10) The Pole shall be installed vertically. Camber shall be accounted for in the Mast Arm connection as detailed.
- 11) If a Mast Arm damping device is required by the Engineer, it shall be installed within eight feet of the Mast Arm tip.
- 12) Design according to FDOT Structures Manual. Alternate Designs for Special Mast Arm Assemblies are not allowed.
- 13) Provide "J", or "C"-Hook at top of pole for signal cable support.
- 14) First and Second Arm Camber Angle = 2°.
- 15) Details for Signal and Sign Locations, Signal Head attachment, Sign Attachment, Pedestrian Head Attachment, and Foundation Conduit are not shown for clarity.
- 16) One hundred percent of full-penetration groove welds and a random 25 percent of partial penetration groove welds shall be inspected. Full-penetration groove weld inspection shall be performed by nondestructive methods of radiography or ultrasonics.
- 17) Use of split lock washer is not permitted.
- 18) In accordance with Specifications 5-1.4.2, Shop Drawings are only required for additions, deletions, or modifications to this Design Standard.
- 19) Verify CSL access tubes will not interfere with anchor bolt installation before excavating the shaft. When CSL access tube locations conflict with anchor bolt locations, move the CSL access tube location +/- two inches along the inner circumference of the reinforcing cage. Notify the Engineer before excavating the shaft if the CSL access tube locations cannot be moved out of conflict with anchor bolt locations.

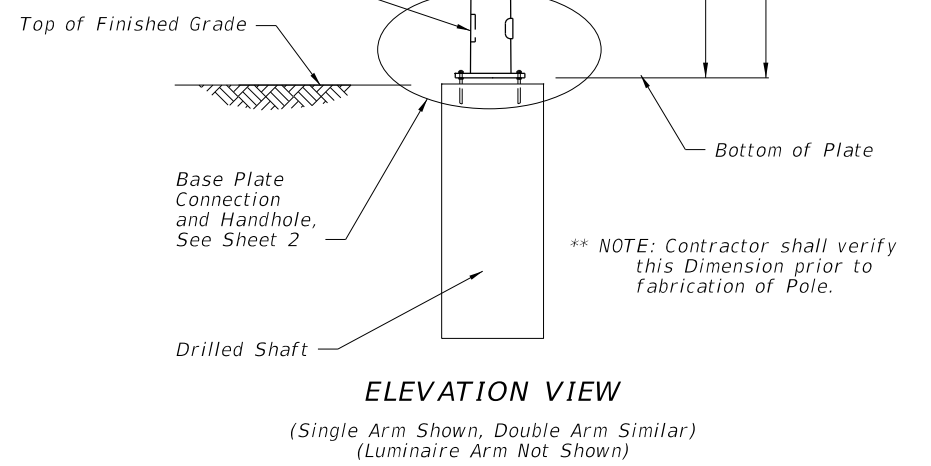


**ELEVATION VIEW**  
(Single Arm Shown, Double Arm Similar)  
(Luminaire Arm Not Shown)

\*\* NOTE: Contractor shall verify this Dimension prior to fabrication of Pole.


**TYPICAL ELEVATION AND NOTES**

LAST REVISION	01/01/12	DESCRIPTION:		<b>FDOT DESIGN STANDARDS</b> <b>FY 2012/2013</b>	<b>MAST ARM ASSEMBLIES</b>	INDEX NO.	17745	SHEET NO.	1
---------------	----------	--------------	--	---	----------------------------	-----------	-------	-----------	---


12/30/2011 11:49:34 AM r19960/h C:\projects\standards\roadway\17700-s\17745-02.dgn

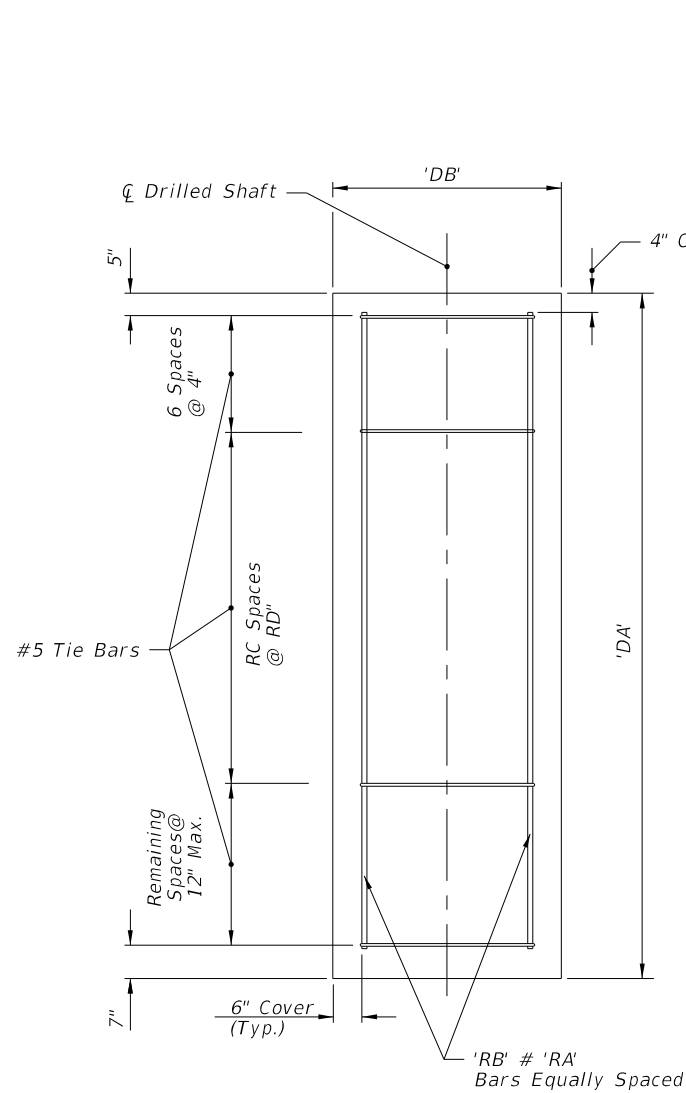


**SECTION A-A**

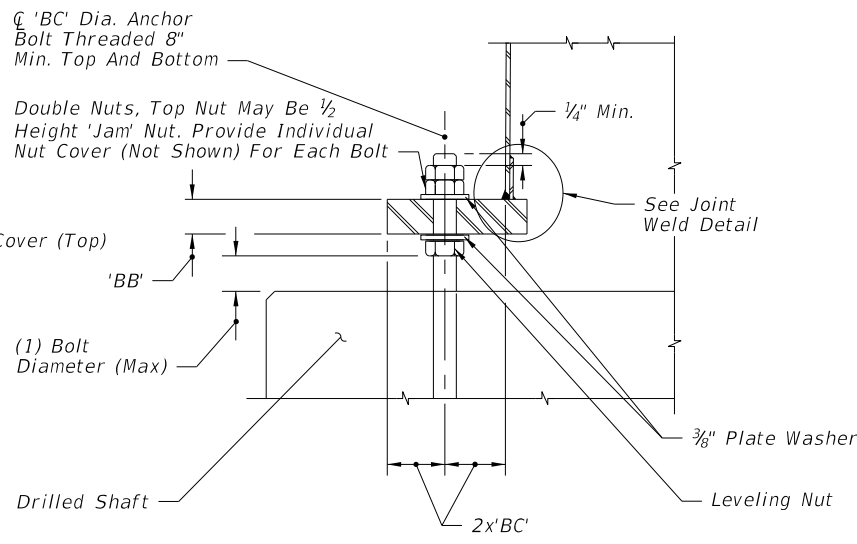

**SECTION D-D**

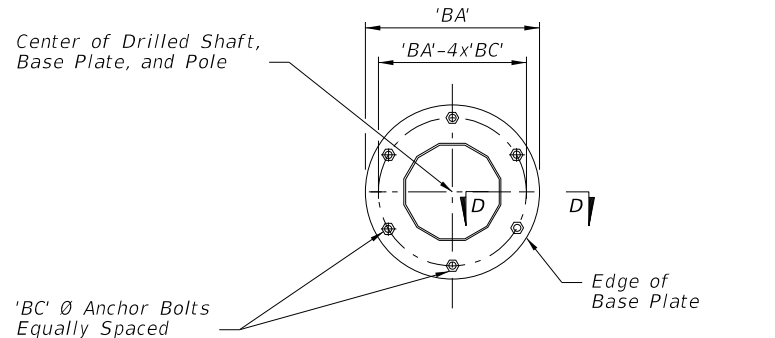


**SECTION C-C (6 Anchor Bolts)**

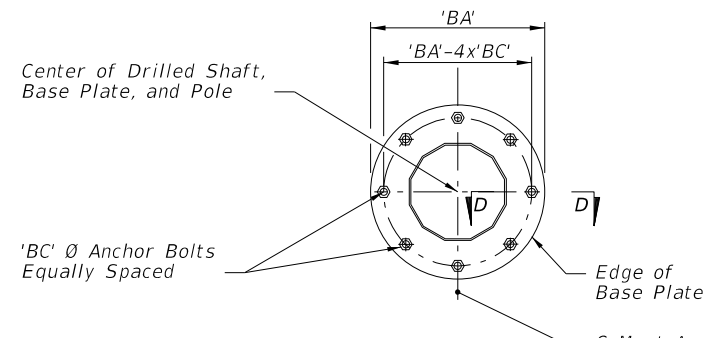


**SECTION C-C Alternate Detail (8 Anchor Bolts)**

NOTE: See Index No. 17743 and the plans for actual quantity of bolts.

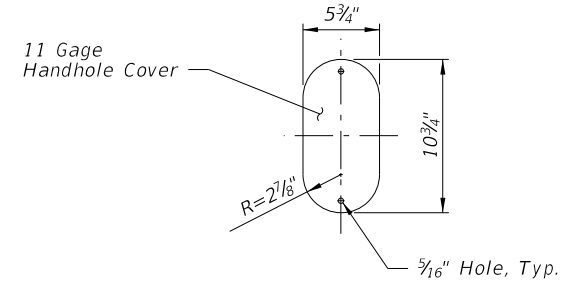


**HANDHOLE COVER**


Note: Handhole Cover may be omitted when Terminal Compartment is provided.

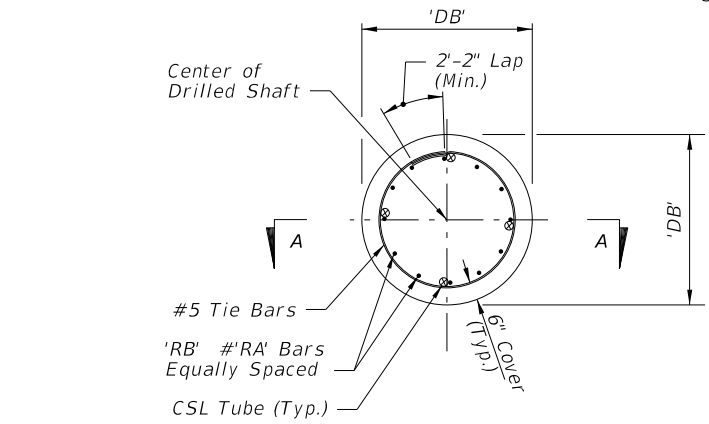

**FOUNDATION PLAN**

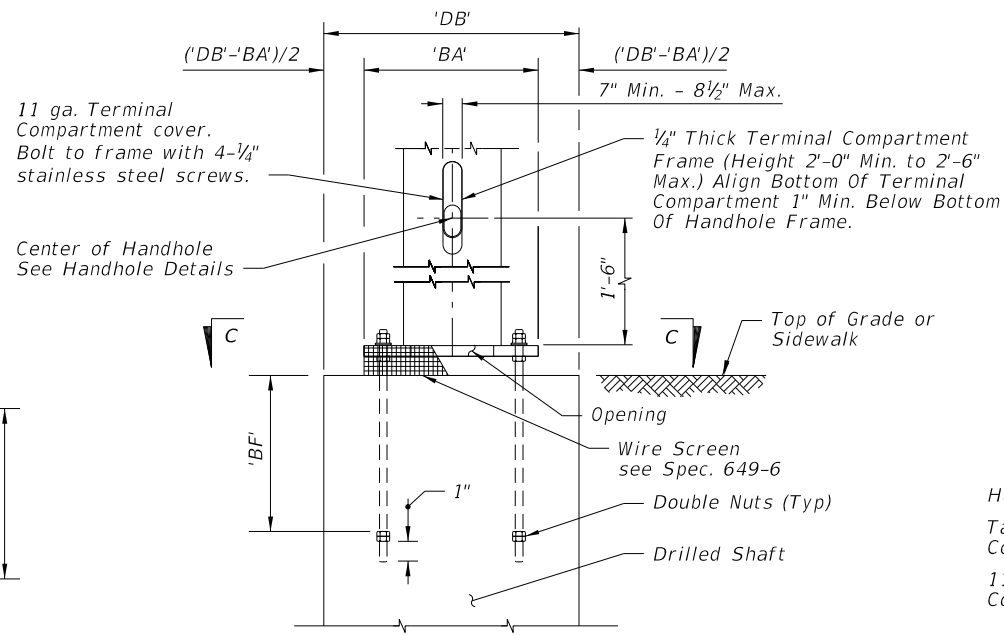


**BASE PLATE AND ANCHORAGE ELEVATION (Reinforcement Not Shown)**

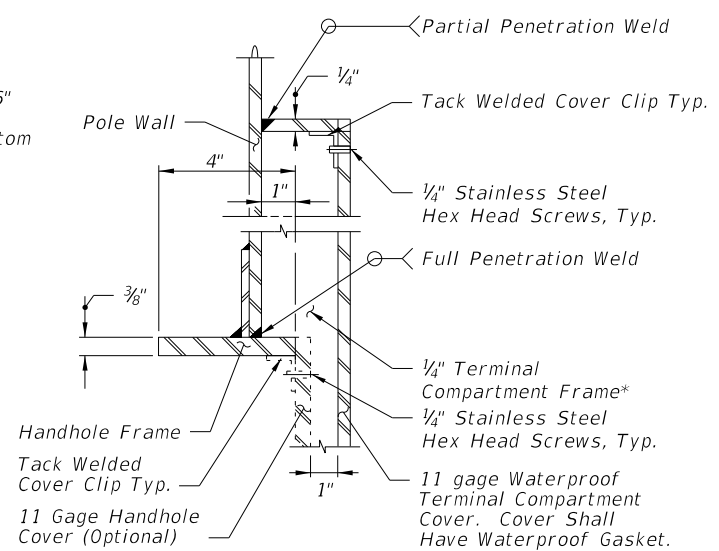

**SECTION E-E (Thru Handhole & Terminal Compartment)**

\* Terminal Compartment is optional. See Mast Arm Tabulation to see if required and for locations.

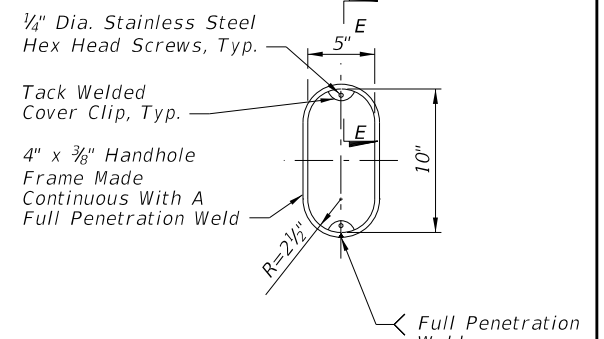


**HANDHOLE FRAME (w/Terminal Compartment Omitted)**


**TYPICAL FOUNDATION AND BASE PLATE DETAILS**

LAST REVISION	DESCRIPTION:		<b>FDOT DESIGN STANDARDS</b> FY 2012/2013	<b>MAST ARM ASSEMBLIES</b>	INDEX NO.	SHEET NO.
01/01/12					17745	2


12/30/2011 11:49:35 AM r19960/h C:\projects\standards\roadway\17700-s\17745-03.dgn

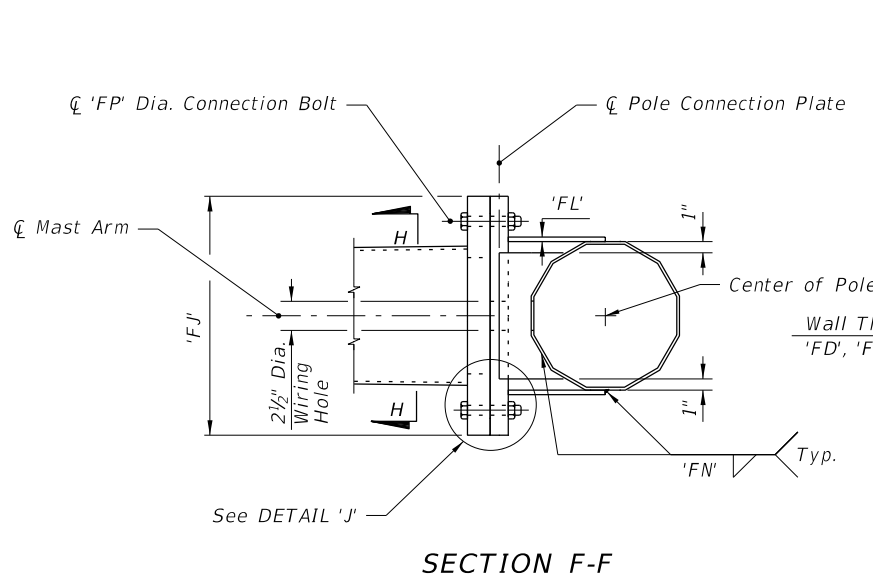

**SECTION F-F**

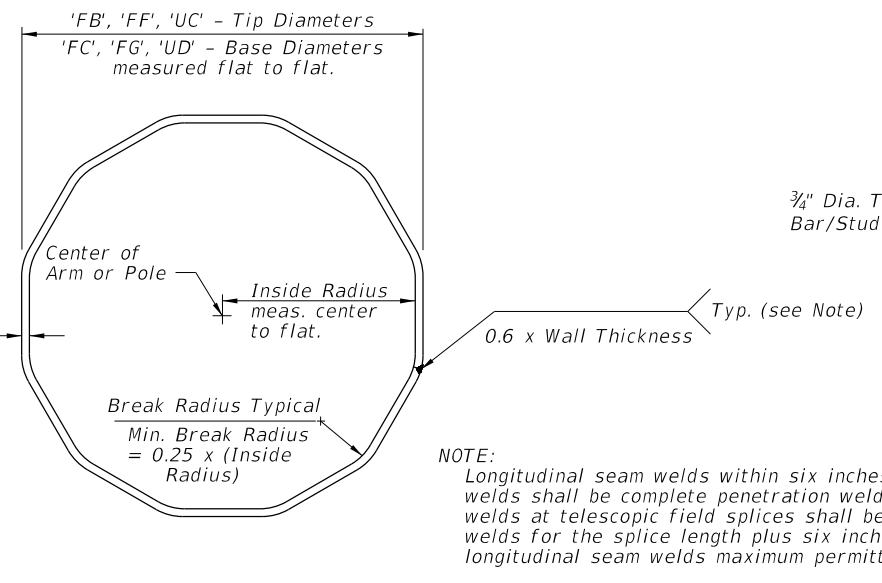


**SECTION H-H**

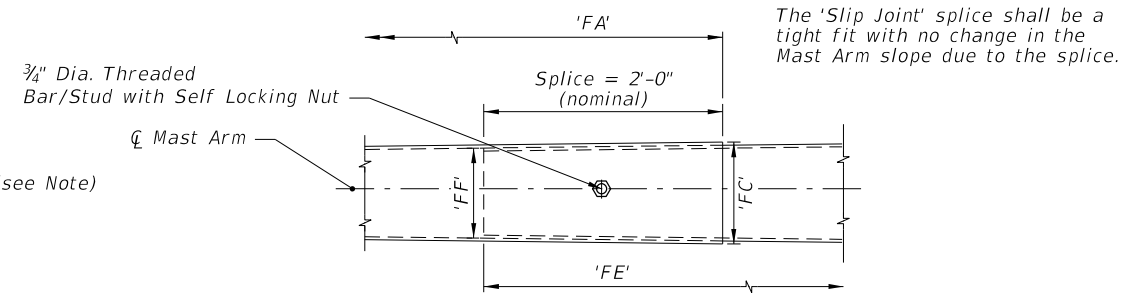


**Arm Splice Detail**


**NOTE:**  
 Longitudinal seam welds within six inches of circumferential welds shall be complete penetration welds. Longitudinal seam welds at telescopic field splices shall be complete penetration welds for the splice length plus six inches. Up to two longitudinal seam welds maximum permitted.

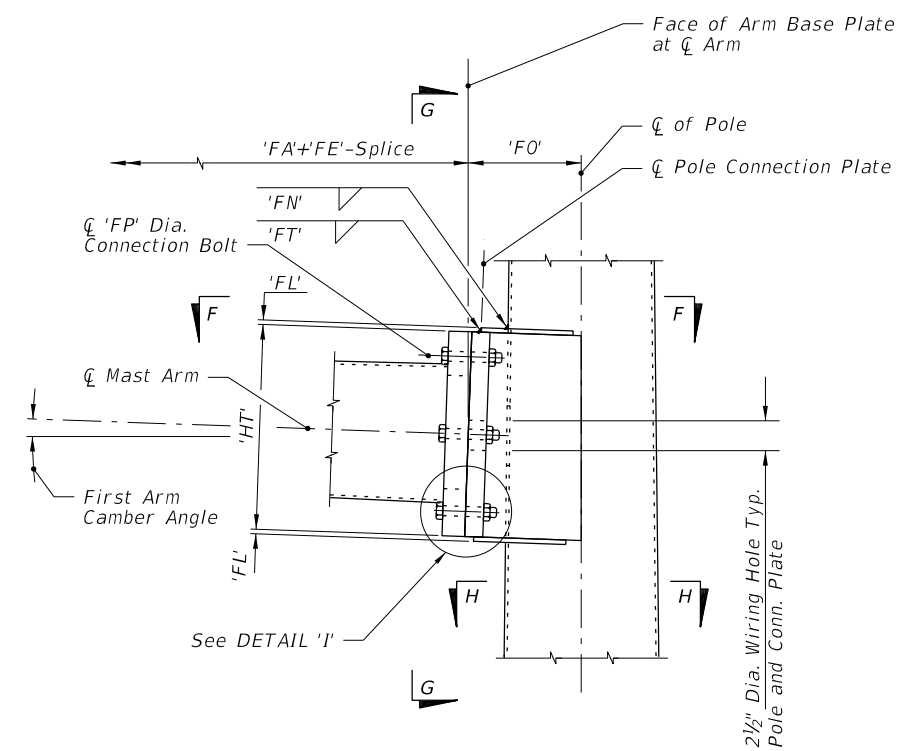


**ELEVATION**  
(Single Arm Connection)

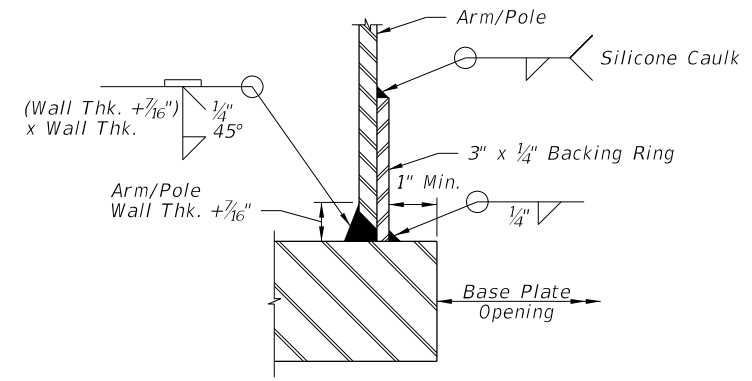


**JOINT WELD DETAIL**

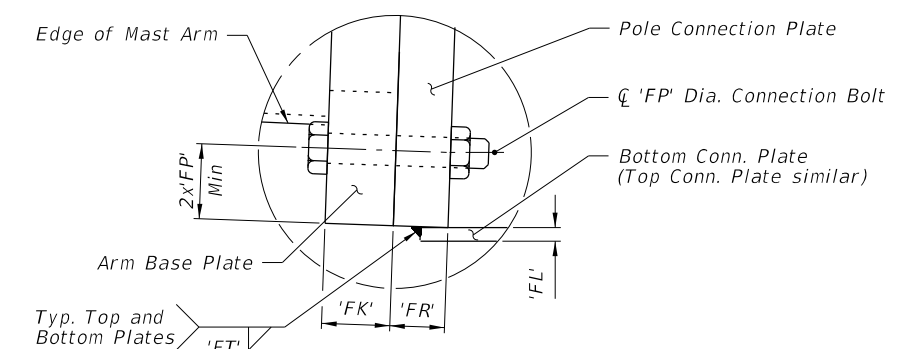

**DETAIL 'I'**

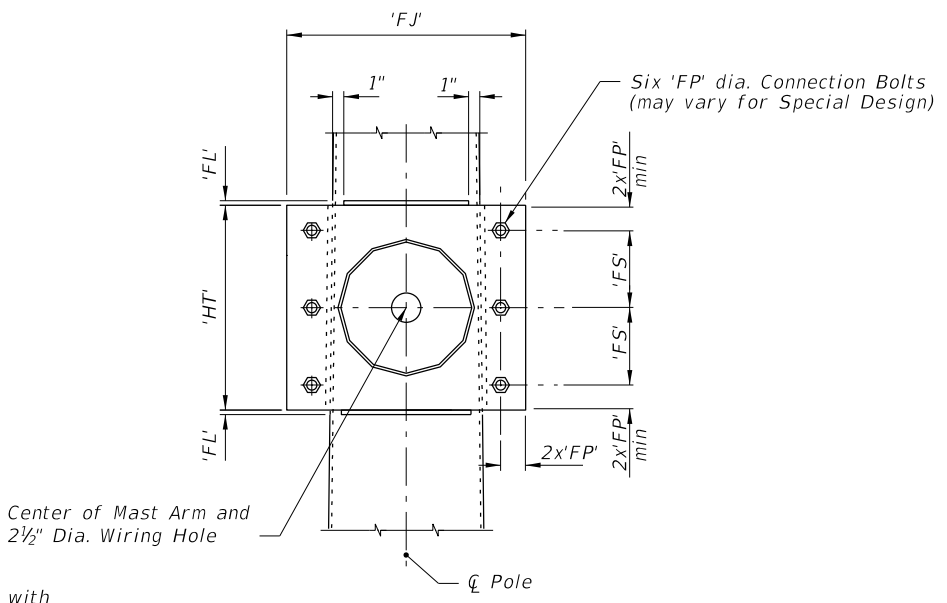

**SECTION G-G**

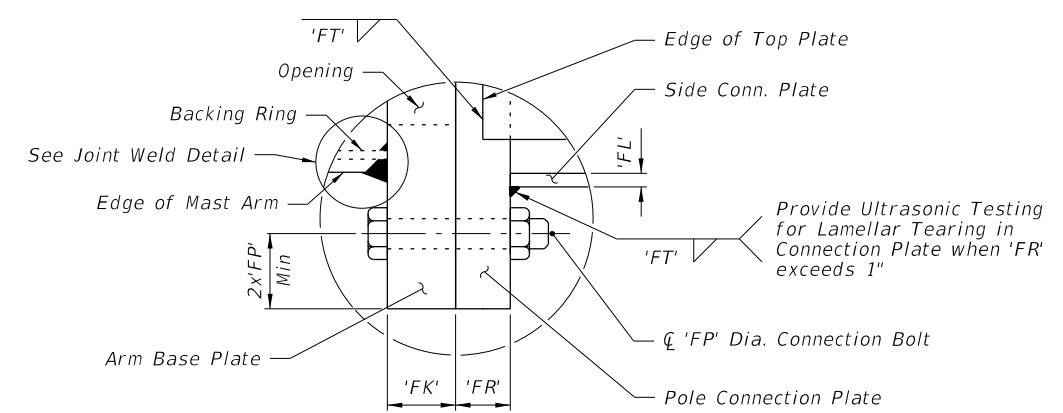


**DETAIL 'J'**

**TYPICAL SINGLE ARM CONNECTION DETAILS**


- NOTE:**
- Details shown on this sheet are for 12 sided pole sections. However, sections with more than 12 sides and round sections are permitted provided outside diameter and wall thickness are not reduced.
  - Mast Arm and Connection Plates shall be match marked to ensure proper assembly.

<b>LAST REVISION</b>	<b>REVISION</b>	<b>DESCRIPTION:</b>	<b>FDOT DESIGN STANDARDS</b> FY 2012/2013	<b>MAST ARM ASSEMBLIES</b>	<b>INDEX NO.</b>	<b>SHEET NO.</b>
01/01/12					17745	3


12/30/2011 11:49:36 AM r10960/h C:\projects\standards\roadway\17700-s\17745-04.dgn

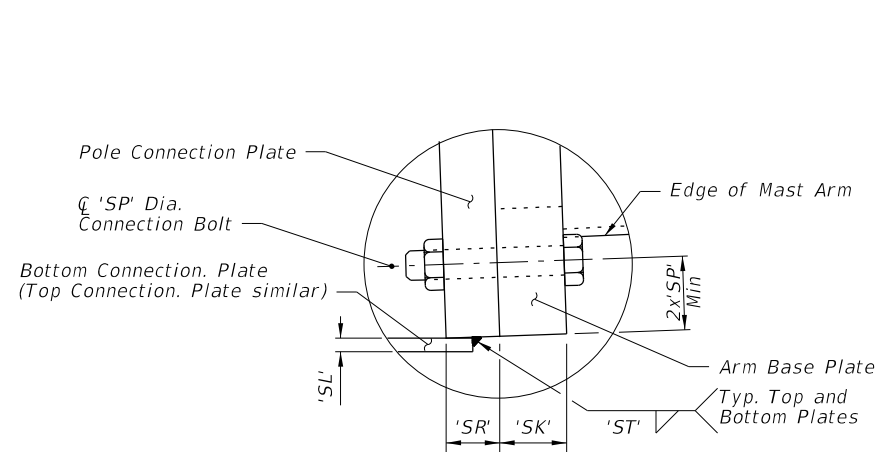

DETAIL 'N'

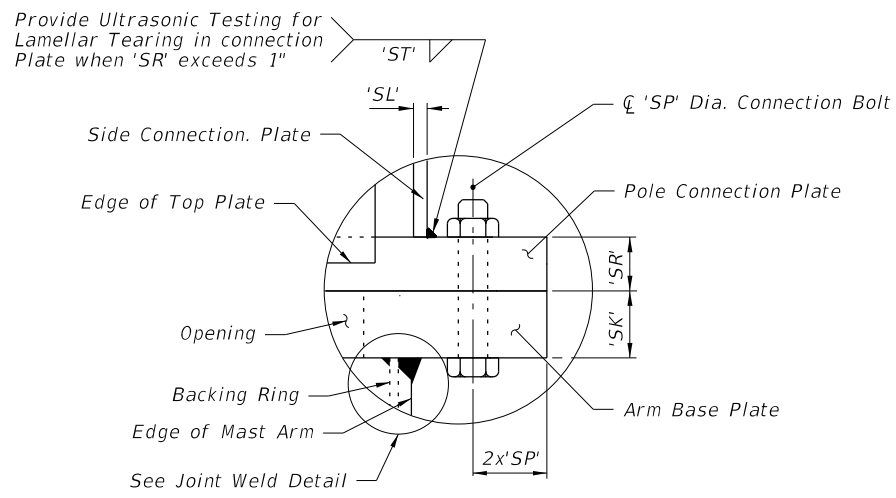


DETAIL 'O'

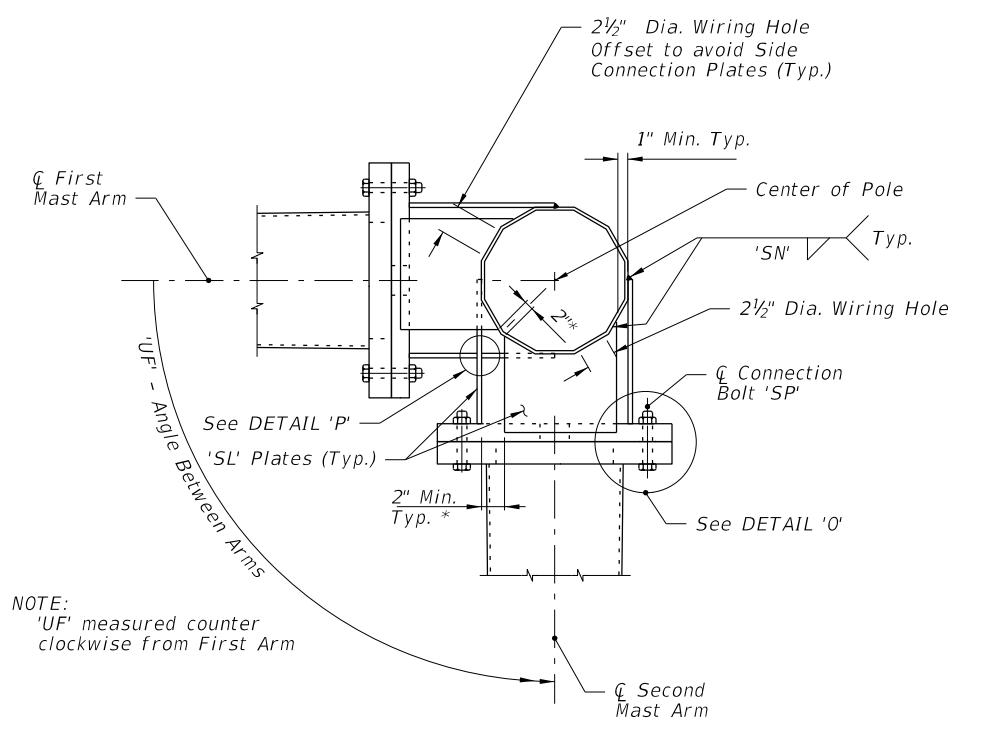


SECTION K-K

NOTE:  
'UF' measured counter clockwise from First Arm


\* Adjust width of top and bottom Connection Plates to maintain minimum clearance shown

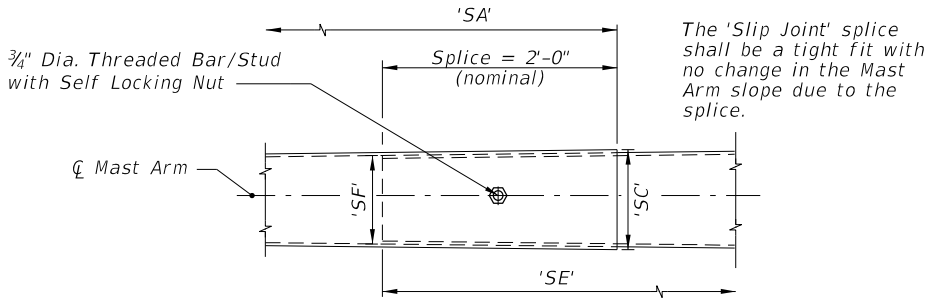

Arm Splice Detail

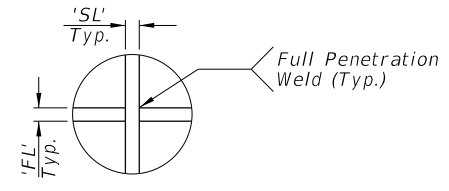


DETAIL 'P'

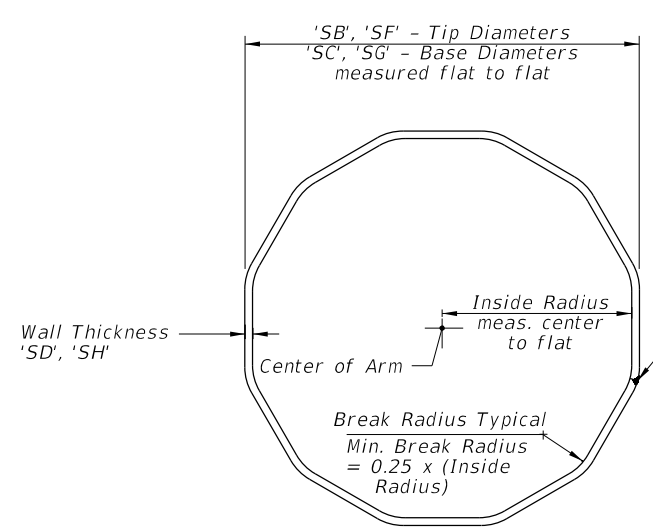


SECTION M-M

NOTE:  
Longitudinal seam welds within six inches of circumferential welds shall be complete penetration welds.  
Longitudinal seam welds at telescopic field splices shall be complete penetration welds for the splice length plus six inches.  
Up to two longitudinal seam welds maximum permitted.

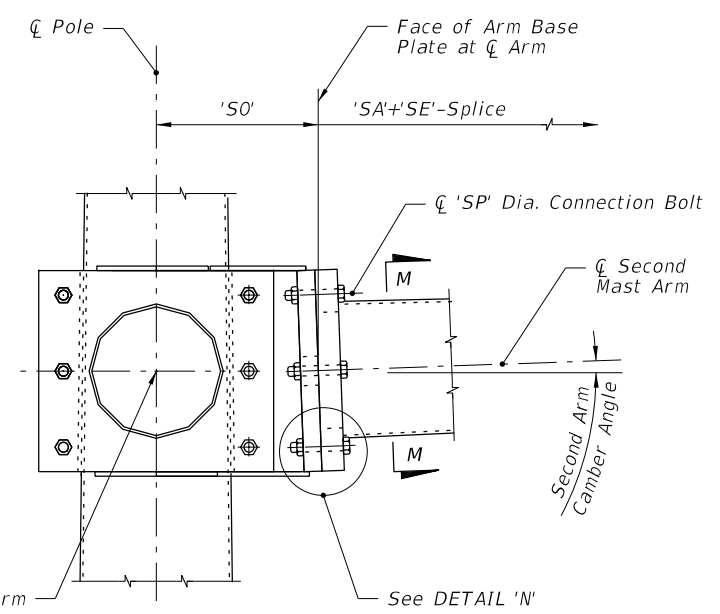

SECTION L-L

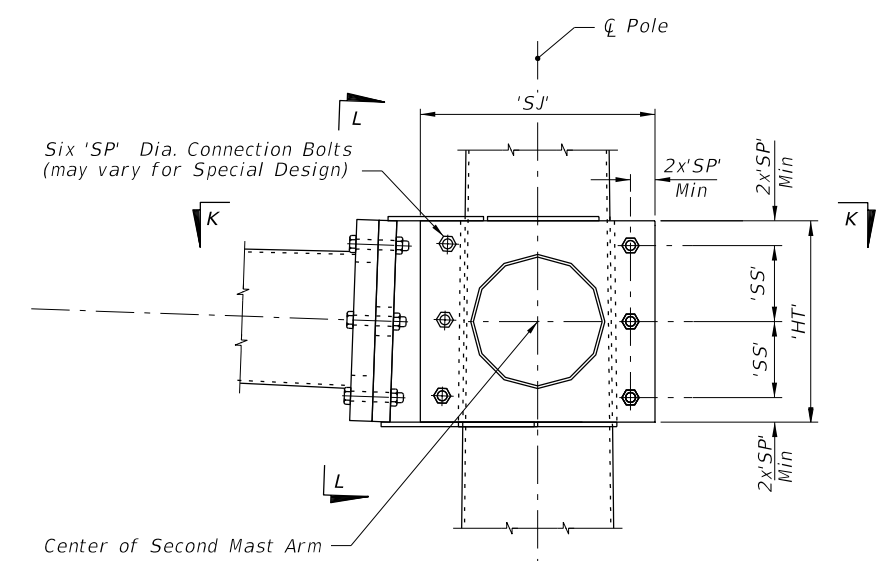

ELEVATION

(Double Arm Connection)

NOTE:  
1. Details shown on this sheet are for 12 sided pole sections. However, sections with more than 12 sides and round sections are permitted provided outside diameter and wall thickness are not reduced.  
2. Mast Arm and Connection Plates shall be match marked to ensure proper assembly.

TYPICAL DOUBLE ARM CONNECTION DETAILS

LAST REVISION	DESCRIPTION:	<b>FDOT DESIGN STANDARDS</b> FY 2012/2013	<b>MAST ARM ASSEMBLIES</b>	INDEX NO.	SHEET NO.
01/01/12				17745	4

