NOTES

A. DESIGN SPECIFICATIONS:
1. AASHTO LRFD Specifications for Highway Bridges.
2. FDOT Structures Manual (Current Edition).
3. Florida Department of Transportation's Plans Preparation Manual, Volume I (Current Edition).

B. DESIGN CRITERIA:
The Precast Sound Barriers are pre-designed based on criteria in the Structures Manual, Volume I.

C. CONCRETE AND GROUT:
1. Concrete Class and Compressive Strength:
   a. Cast-In-Place Collars: Class IV (f'c = 5500 psi)
   b. Precast Panels, Collars and Post Caps: Class IV (f'c = 5500 psi)
   c. Posts: Class IV (f'c = 5500 psi)
2. Grout for Auger Cast Piles:
   a. Maximum Working Compressive Strength = 2200 psi
   b. Minimum 28 Day Strength = 5500 psi
3. Minimum Compressive Strength for Form Removal and Handling of Posts and Panels:
   a. 2,500 psi for horizontally cast post and panels.
   b. 2,000 psi for vertically cast panels or when tilt-up form tables are used for horizontally cast panels.

D. REINFORCING STEEL:
1. In addition to the requirements of Specification Section 415, tie post and pile stirrups at the following locations as a minimum:
   a. Post Stirrups – Tie at all four corner bars and at every third interior bar intersection.
   b. Pile Stirrups – Tie to the main vertical reinforcing at alternate intersections for circular configurations and for rectangular configurations at the four corners and at every third interior bar intersection.

E. SURFACE FINISHES AND AESTHETIC REQUIREMENTS:
1. See Sound Barrier Data Tables in the Plans for project requirements.

F. PILING:
Construct Auger Cast Piling in accordance with the Plans and Specification Section 455.

G. UTILITIES:
Field verify the locations of all overhead and underground utilities shown in the Wall Control Drawings.

H. NEOPRENE PADS AND RESILIENT PADS:
1. Neoprene Pads for Panel Bearing Points Between the Stacked Panels:
   The Neoprene pads for the panel bearing points shall be Plain Pads, Grade 50 durometer hardness in accordance with Specifications Sections 932-2.
2. Neoprene Pads for Collar Bearing Points:
   Neoprene Pads shall be Fiber Reinforced Pads, with a durometer hardness between Grade 50 and Grade 80, in accordance with Specification Section 932-2. Plain Pads may be substituted for Fiber Reinforced Pads when sufficient bearing area is available on the concrete collar, as follows:
   a. 10' post spacing: 4" x 4" x ½" Plain Pads, Grade 50 durometer hardness.
   b. 20' post spacing and < 18' wall height: 4" x 4" x ½" Plain Pads, Grade 50 durometer hardness.
   c. 20' post spacing and ≥ 18' wall height: 4" x 5" x ½" Plain Pads, Grade 50 durometer hardness.

I. CASTING TOLERANCES:
1. Overall Height & Width: +/- ¼"
2. Thickness: +/- ¼"
3. Plane of side mold: +/- 1/16"
4. Openings: +/- ½"
5. Out of Square: ⅛" per 6 ft., but not more than ⅜" total along any side
6. Warping: 1/16" per foot distance to nearest corner
7. Bowing: 1/240 panel dimension
8. Surface Smoothness for Type "A" (Smooth) Surface Texture Option: +/- 1/16" along a 10 ft. straightedge.

J. SOUND BARRIER NOTES:
1. Post spacing is measured from centerline to centerline of auger cast piles. For this Index, posts and piles have been designed for a spacing between a minimum of 10 ft and a maximum of 20 ft. If pile spacing is greater than 10 ft, use post design based on a 20 ft spacing.
2. Total height of wall ranges from a minimum of 12 ft to a maximum of 22 ft. The height of individual panels must be a maximum of 12 ft and a minimum of 6 ft, except for the following. For total wall heights less than 14 ft high, the minimum bottom panel height is 4 ft when graphics must be accommodated in the upper panel. If a fire hose access hole is required, the bottom panels must be a minimum of 6 feet.
3. Where special graphics are required, locate horizontal panel joints outside of graphics. Where possible, hold horizontal panel joints at a constant elevation.

C:\d\projects\standards\structures\2013book\05200-01of16.dgn 6/28/2012 11:40:24 AM rd960rh

LAST REVISION	REVISION	DESCRIPTION:		FDOT DESIGN STANDARDS 2013	PRECAST SOUND BARRIERS	INDEX NO.	SHEET NO.
07/01/12						5200	1

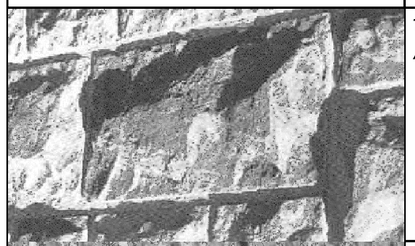

Type "A"
SMOOTH

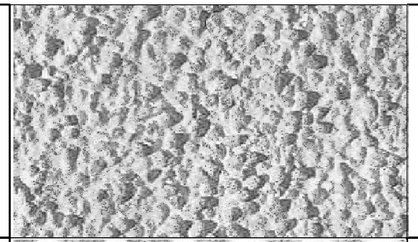

Type "F"
PEA GRAVEL



Type "B"
ASHLAR STONE



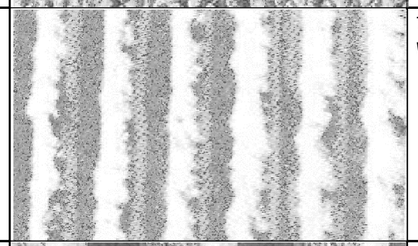

Type "G"
VERTICAL FRACTURED FIN



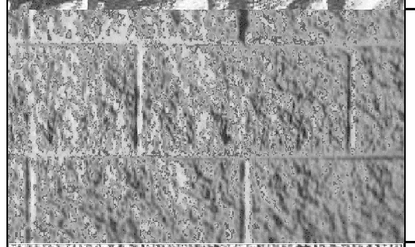

Type "C"
SPLIT FACE RUNNING BOND BLOCK



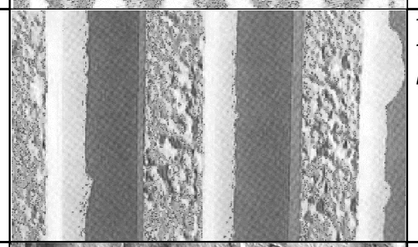

Type "H"
TRAPEZOID VERTICAL FINS W/ FRACTURED FACE (COLORADO DRAG AGGREGATE)



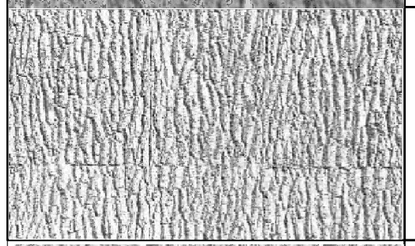

Type "D"
FRACTURED GRANITE



Type "I"
CUT CORAL BLOCK (RUNNING BOND)

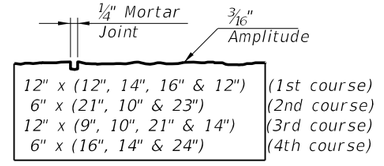

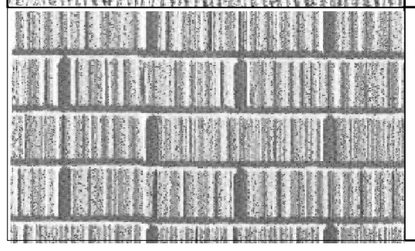

Type "E"
WIRE-CUT BRICK



NOTES:

1. Surfaces shall be formed, rolled, or pressed using form liners in accordance with the Plans and Specifications for Class 3 Surface Finish.
2. See Sound Barrier Data Tables for project aesthetic requirements.

TEXTURE OPTIONS

LAST REVISION	REVISION	DESCRIPTION:			INDEX NO.	SHEET NO.
07/01/12			FDOT DESIGN STANDARDS 2013	PRECAST SOUND BARRIERS	5200	2

6/28/2012 11:40:27 AM rd960rh C:\d\projects\standards\structures\2013book\05200-02of16.dgn

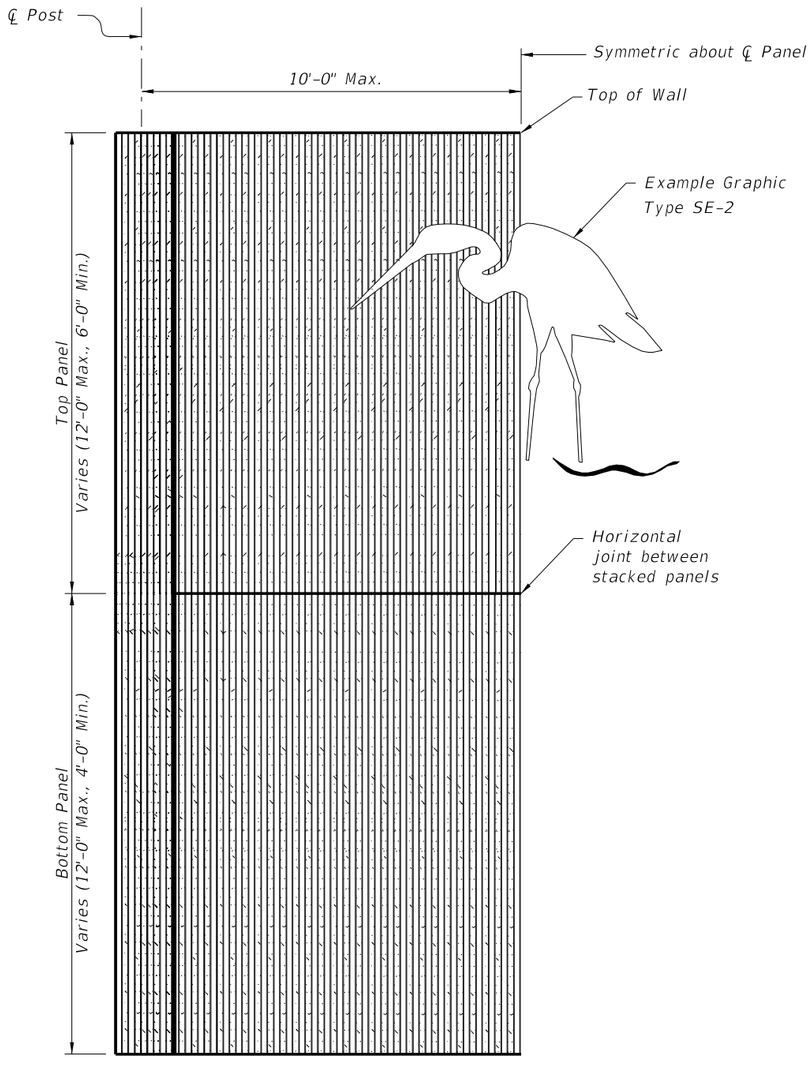

HALF ELEVATION
(Front Face Post and Panel Texture Type "H" shown)
(Graphic Type SE-2 shown)
(Two stacked panels shown, three stacked panels similar)

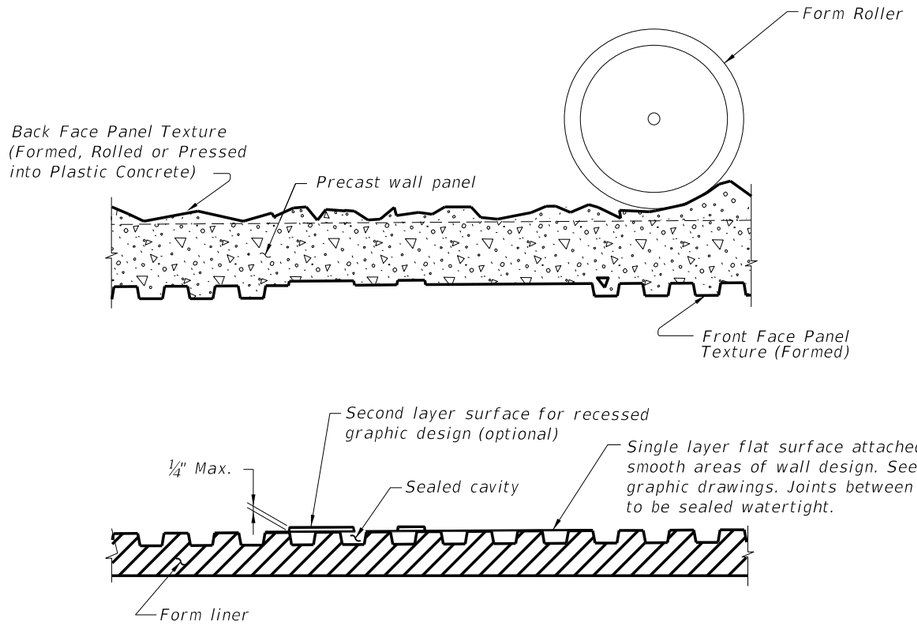

TYPICAL FORMING DETAIL
(Front Face Panel Texture Type "H" shown)
(Back Face Panel Texture Type "D" shown)
(Post Forming Details Similar)

NOTES:

1. *Submit specific form liner samples for approval by the Engineer.*
2. *Textures and graphics shown are for demonstration purposes only. See Sound Barrier Data Tables in the plans for project specific texture and graphic requirements.*

GRAPHICS & TEXTURE DETAILS

LAST REVISION	REVISION	DESCRIPTION:		FDOT DESIGN STANDARDS 2013	PRECAST SOUND BARRIERS	INDEX NO.	SHEET NO.
07/01/12						5200	3

6/28/2012 11:40:37 AM rd960rh C:\d\projects\standards\structures\2013book\05200-03of16.dgn

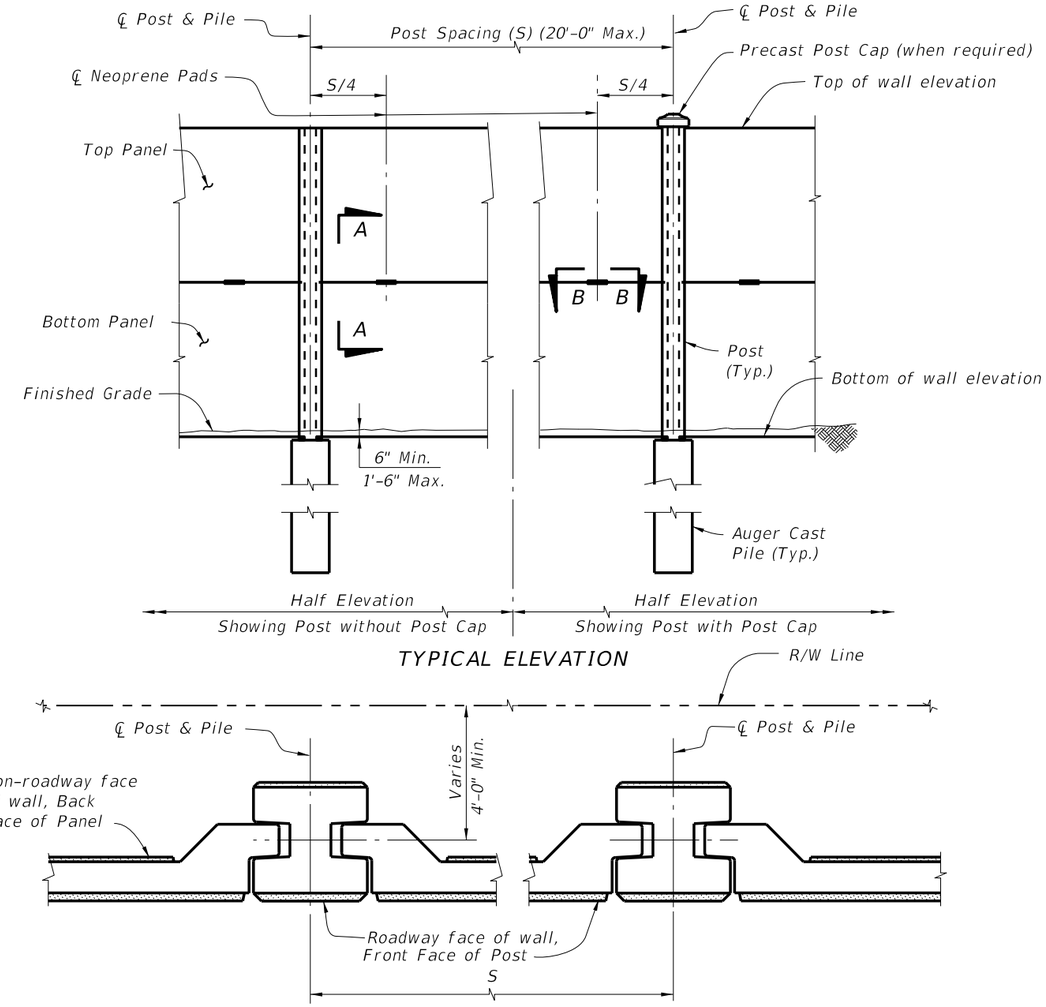

TYPICAL ELEVATION

PLAN
(Showing Flush Panel)

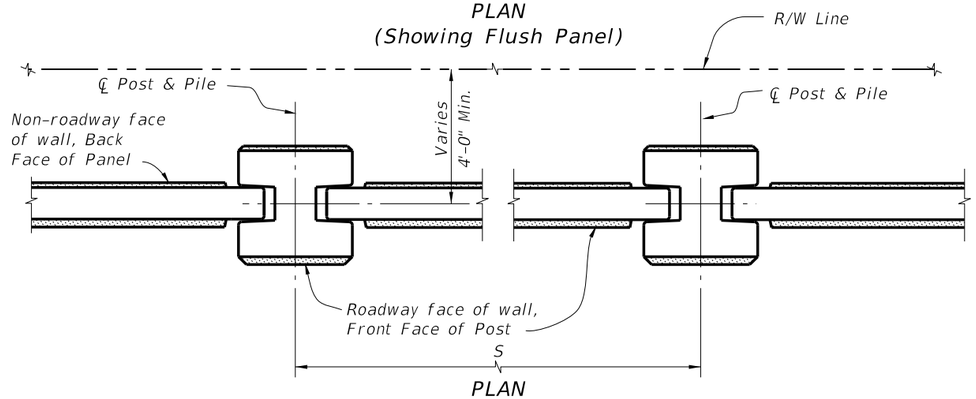

PLAN
(Showing Recessed Panel)

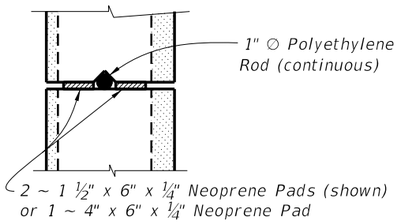

SECTION A-A

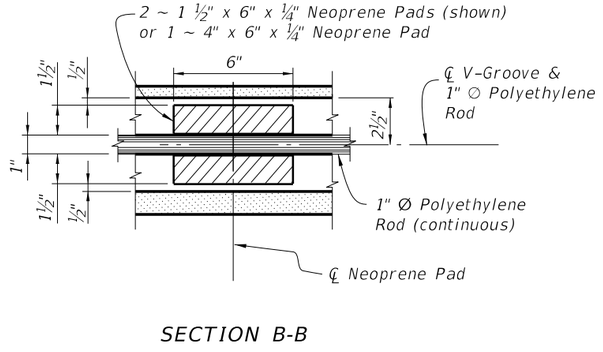

SECTION B-B

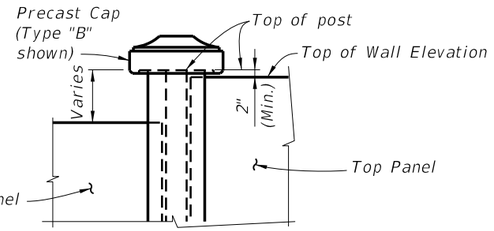

WITH POST CAP

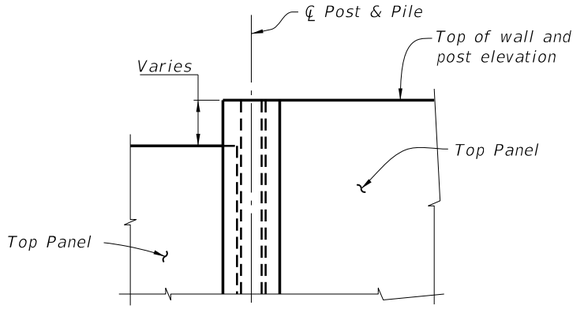

WITHOUT POST CAP

ELEVATION STEP AT TOP OF WALL

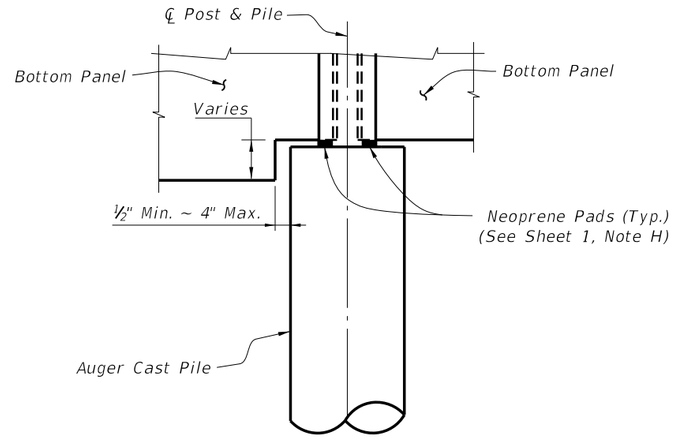

ELEVATION STEP AT BOTTOM OF WALL

TYPICAL DETAILS

C:\d*projects\standards\structures\2013book\05200-04of16.dgn
rd960rh
11:40:40 AM
6/28/2012

LAST REVISION	REVISION	DESCRIPTION:				
07/01/12			FDOT DESIGN STANDARDS 2013	PRECAST SOUND BARRIERS	INDEX NO. 5200	SHEET NO. 4

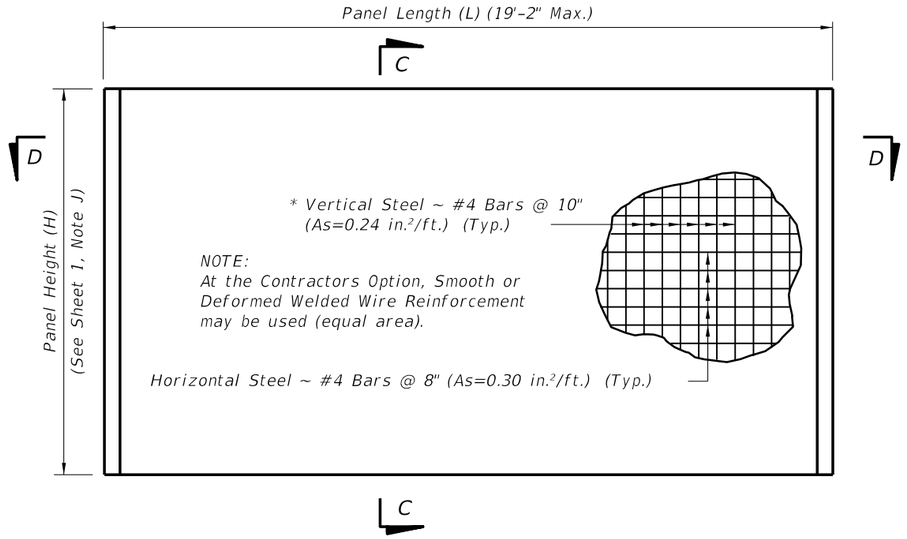

TYPICAL PANEL ELEVATION

* In lieu of utilizing the standard pick up points below, panels may be cast vertically or cast horizontally then tilted upright using tilt-tables prior to lifting from form. In this case, pick points must be placed in the top of panels only and transported maintaining the vertical orientation. If these criteria are met, the vertical steel may be reduced to #4 Bars @ 1'-3" (As=0.15 in.²/ft.).

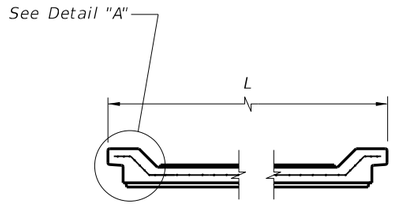

SECTION D-D
(Showing Flush Panel)

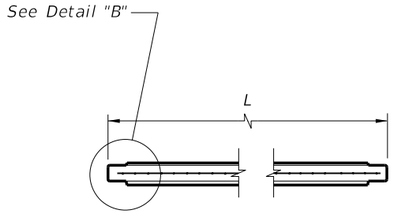

SECTION D-D
(Showing Recessed Panel)

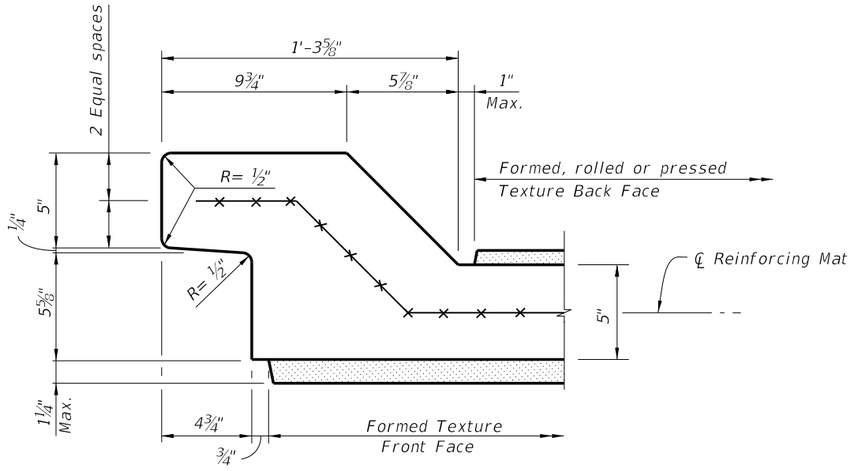

DETAIL "A"
(Typical both ends)

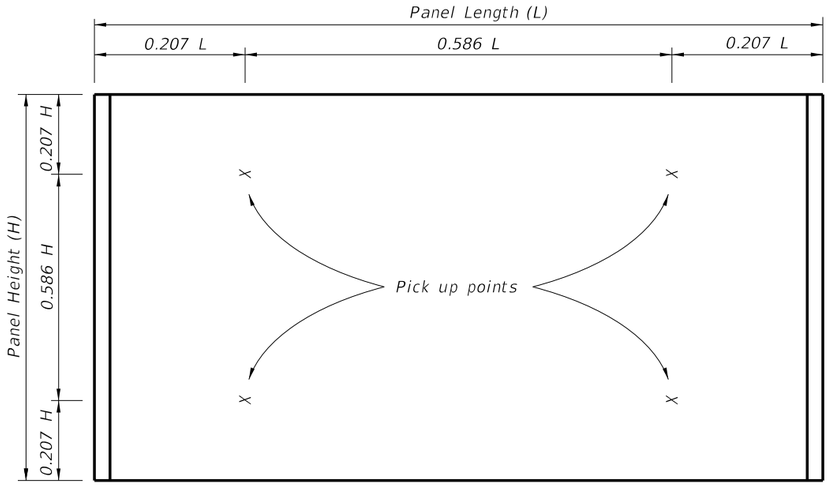

STANDARD PICK UP POINTS FOR PANELS
(Panels shall be rotated about long axis only)

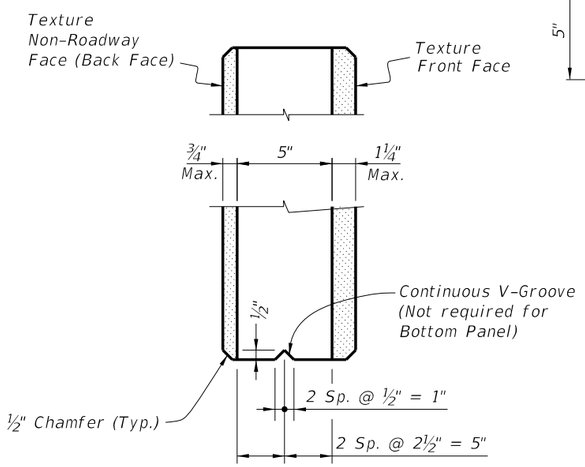

SECTION C-C

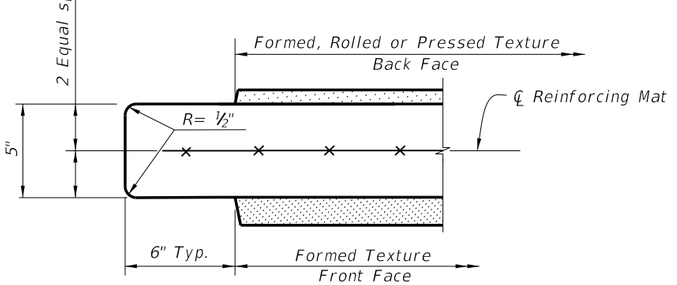

DETAIL "B"
(Typical both ends)

Notes:
1. See Sheet 3 for allowable methods of applying textures.
2. See plans for panel type and aesthetic requirements.

TYPICAL PANEL DETAILS

LAST REVISION	REVISION	DESCRIPTION:		FDOT DESIGN STANDARDS 2013	PRECAST SOUND BARRIERS	INDEX NO.	SHEET NO.
07/01/12						5200	5

6/28/2012 11:40:42 AM rd960rh C:\d\projects\standards\structures\2013book\05200-05of16.dgn

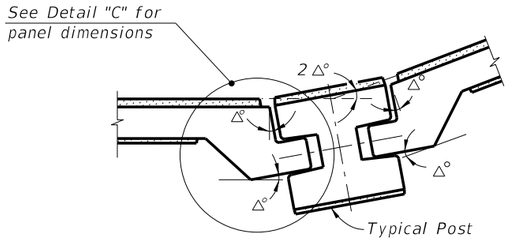

CASE 1
(Interior Angle)

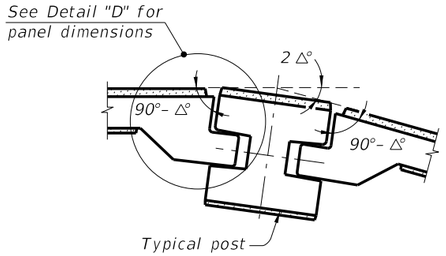

CASE 2
(Exterior Angle)

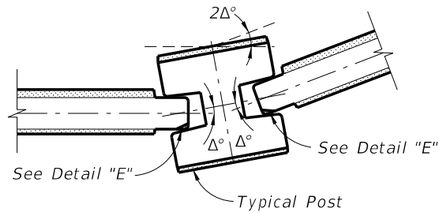

CASE 1
(Interior Angle)

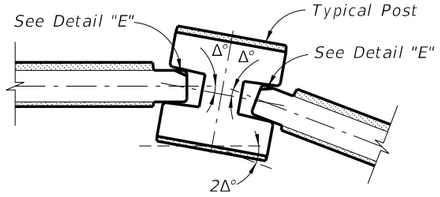

CASE 2
(Exterior Angle)

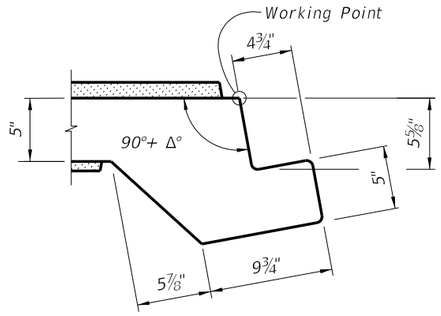

DETAIL "C"

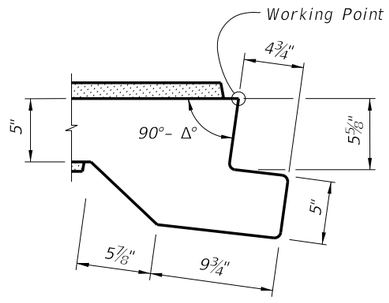

DETAIL "D"



DETAIL "E"
(Back Face Chamfer Shown
Front Face Chamfer Similar)

NOTE:
The shop drawings shall include specific pivoting details of panel ends at locations where the deflection angle (2Δ°) between panels exceeds 7°.

PIVOTING DETAILS
(Flush Panel)

NOTE:
The shop drawings shall include specific pivoting details of panel ends at locations where the deflection angle (2Δ°) between panels exceeds 20°.

PIVOTING DETAILS
(Recessed Panel)

TYPICAL PANEL DETAILS

6/28/2012 11:40:45 AM rd960rh C:\d\projects\standards\structures\2013book\05200-06of16.dgn

LAST REVISION	REVISION	DESCRIPTION:			INDEX NO.	SHEET NO.
07/01/12			FDOT DESIGN STANDARDS 2013	PRECAST SOUND BARRIERS	5200	6

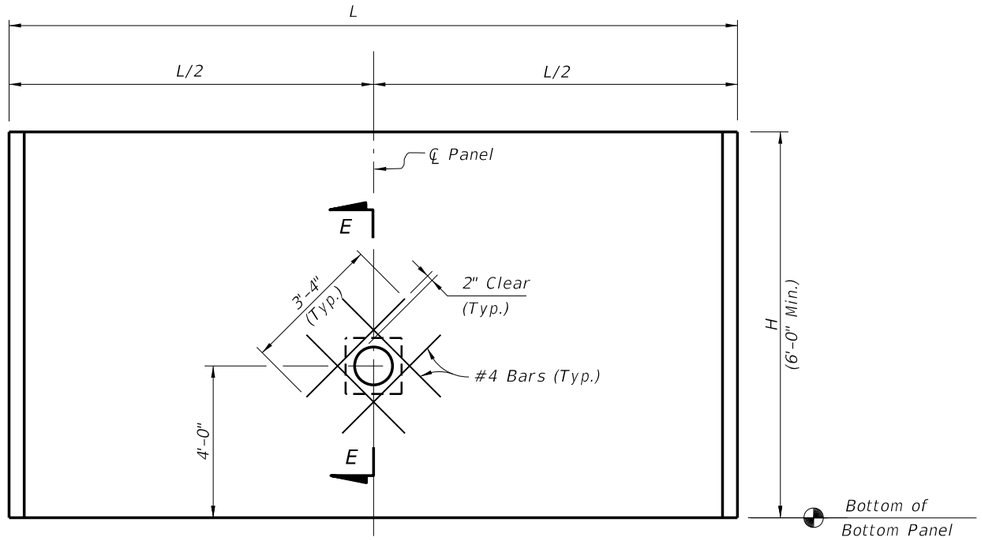

NOTE: Fire Hose Access Hole only to be located at or near fire hydrants

FIRE HOSE ACCESS HOLE TYPICAL DETAIL
(Front Face of Wall Shown)

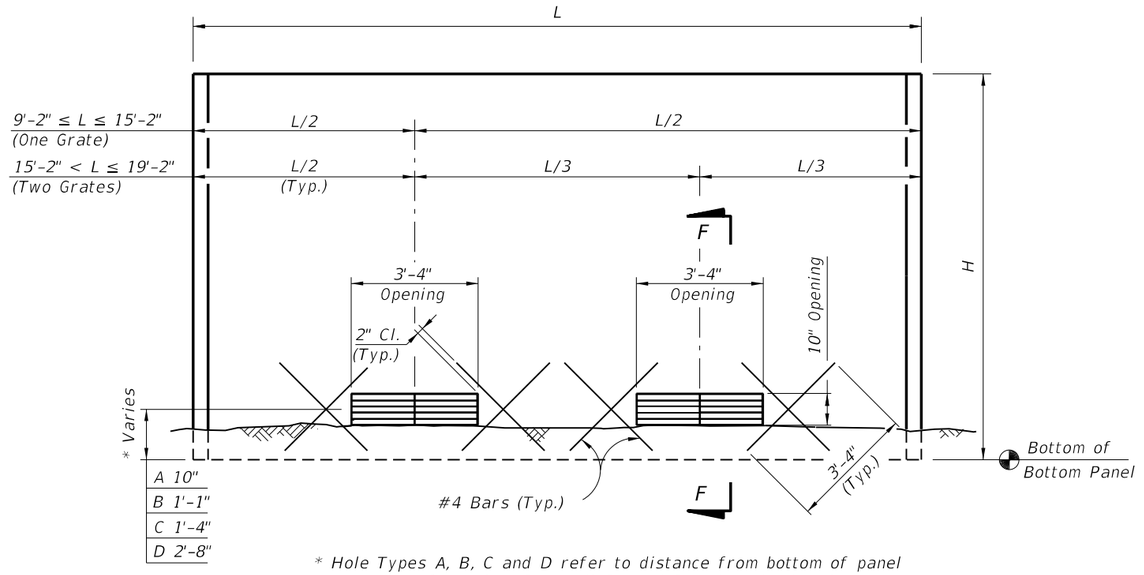

* Hole Types A, B, C and D refer to distance from bottom of panel to center of opening. See Wall Control Drawings in the plans.

DRAINAGE HOLES TYPES A, B, C & D
(Front Face of Wall Shown)
(Two Holes Shown, One Hole Similar)

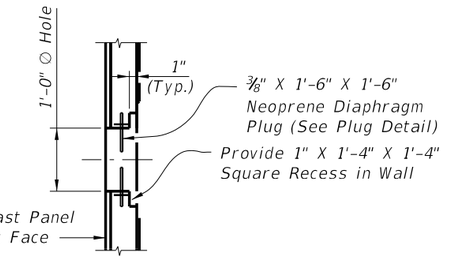

SECTION E-E

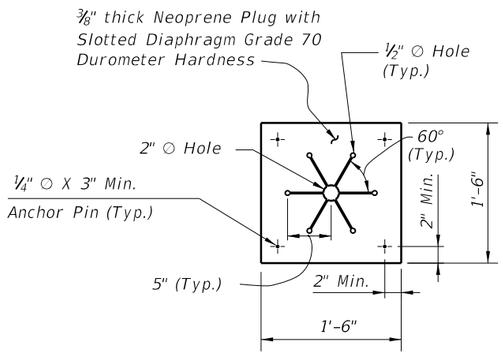

PLUG DETAIL

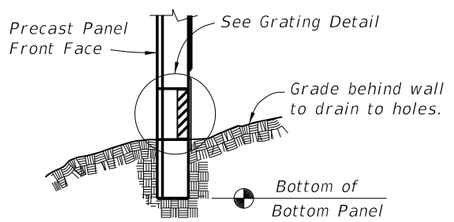

SECTION F-F



SECTION G-G

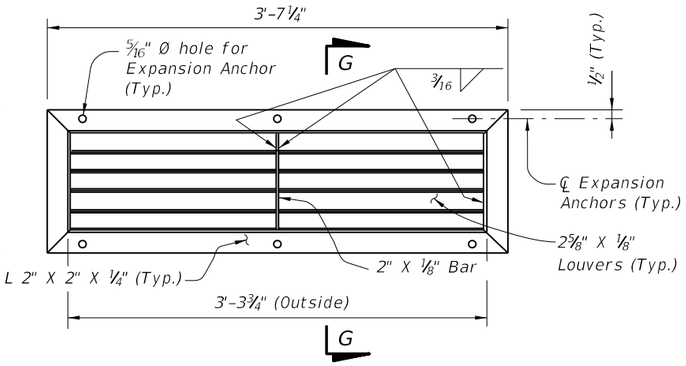

GRATING DETAIL

GRATING NOTES:
1. Grating shall be ASTM A36 steel welded in accordance with the current edition of ANSI/AWS D1.1 Steel Welding Code. Hot-dip galvanize grate after fabrication in accordance with Specification Section 962-9.
2. Expansion Anchors: Use ¼" Ø x 3" ASTM A307, vandal resistant, hot-dip galvanized expansion anchors to connect grates to panels.
3. Grating recessed with back face of wall.

FIRE HOSE ACCESS & DRAINAGE HOLE DETAILS

C:\d\projects\standards\structures\2013book\05200-07of16.dgn rd960rh 11:40:47 AM 6/28/2012

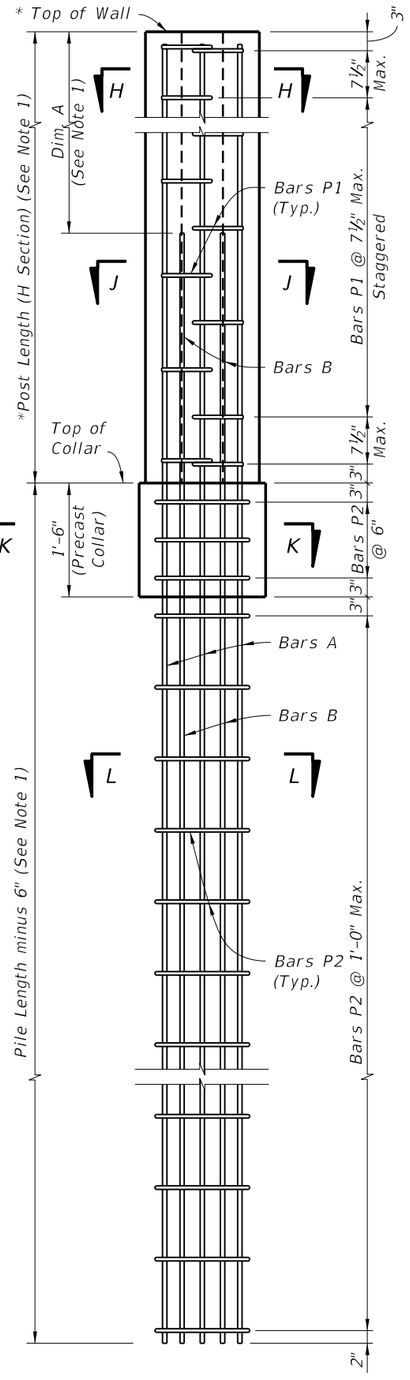

TYPICAL POST

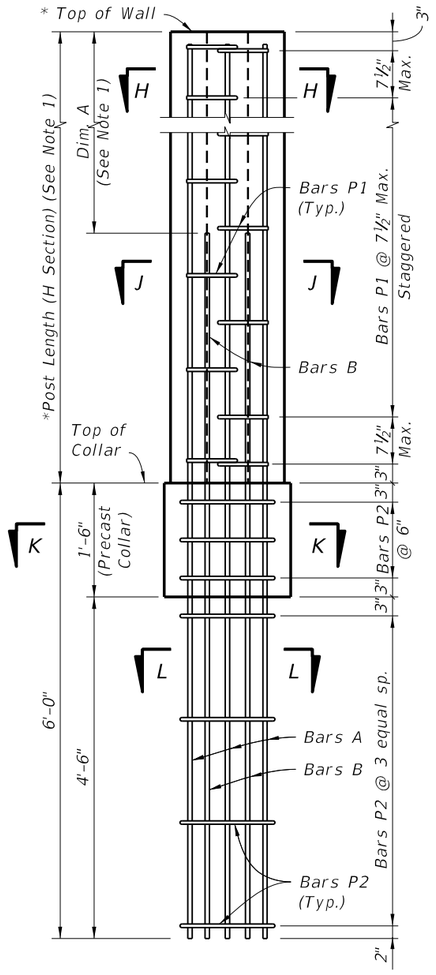

LOW CLEARANCE OPTION

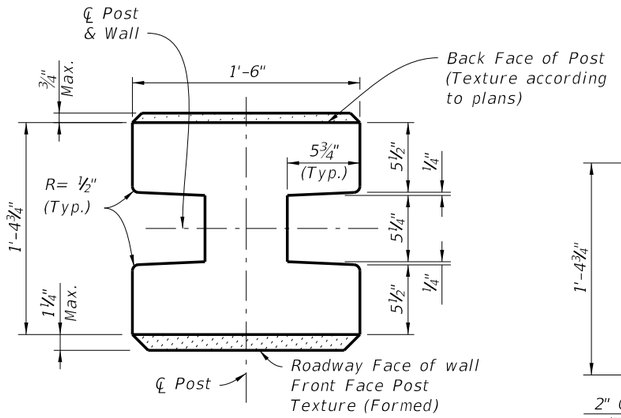

TYPICAL POST SECTION
(H Section)

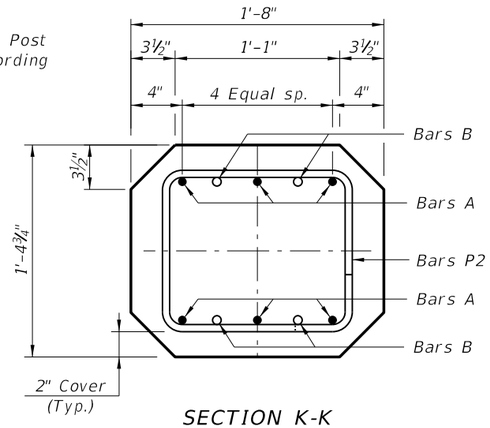

SECTION K-K
(Collar Section)

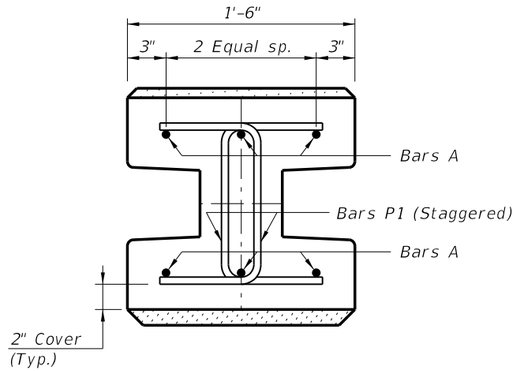

SECTION H-H

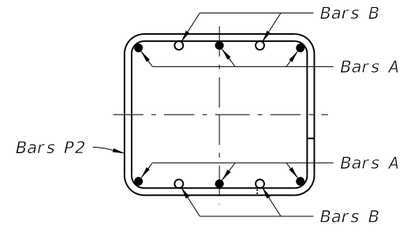

SECTION L-L

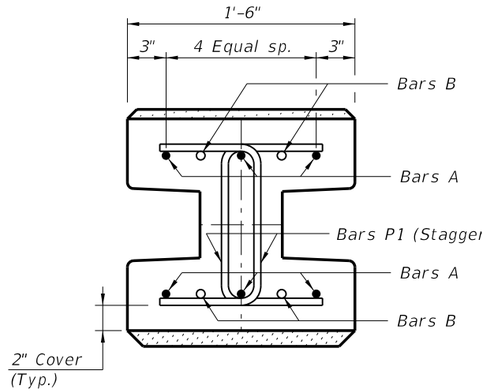

SECTION J-J

NOTES:
1. For Table of Dimensions and Reinforcing Steel, see Sheets 15 and 16.

* Extend Post 2" above top of high side wall panel when post caps are shown in plans. See Sheet 4, "ELEVATION STEP AT TOP OF WALL".

STANDARD POST REINFORCEMENT
(Standard Post Shown, 45° Corner Posts Similar)

STANDARD POST DETAILS

C:\d\projects\standards\structures\2013book\05200-08of16.dgn
rd960rh
11:40:50 AM
6/28/2012

LAST REVISION	REVISION	DESCRIPTION:				
07/01/12			FDOT DESIGN STANDARDS 2013	PRECAST SOUND BARRIERS	INDEX NO. 5200	SHEET NO. 8

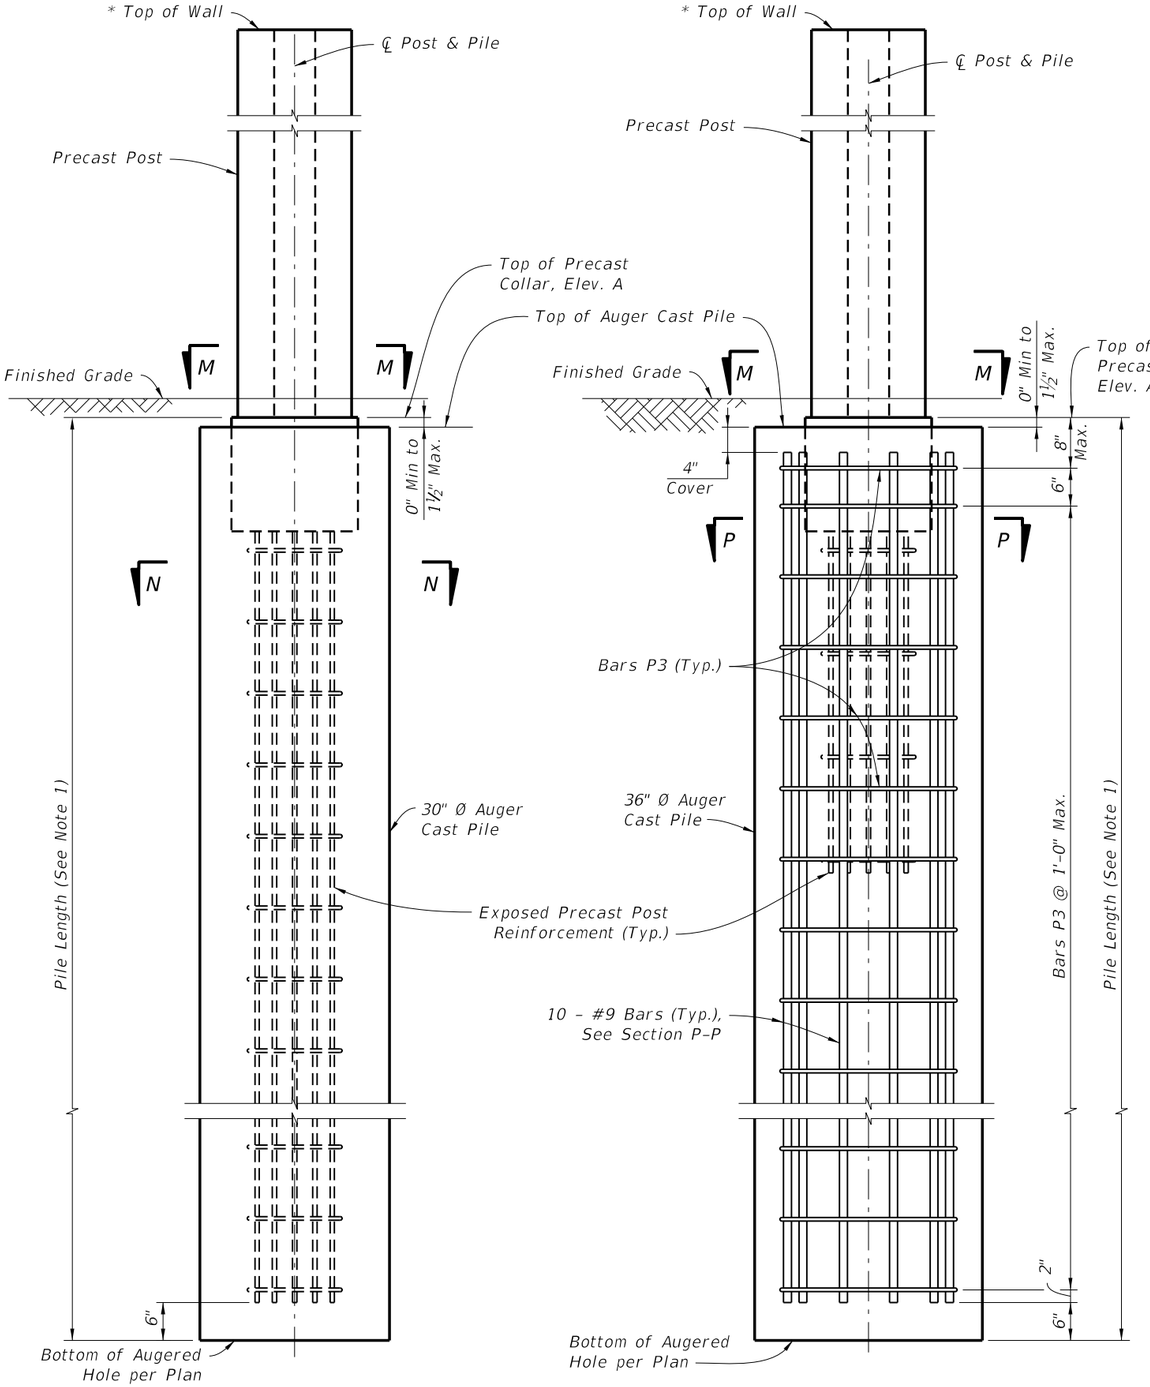

TYPICAL POST

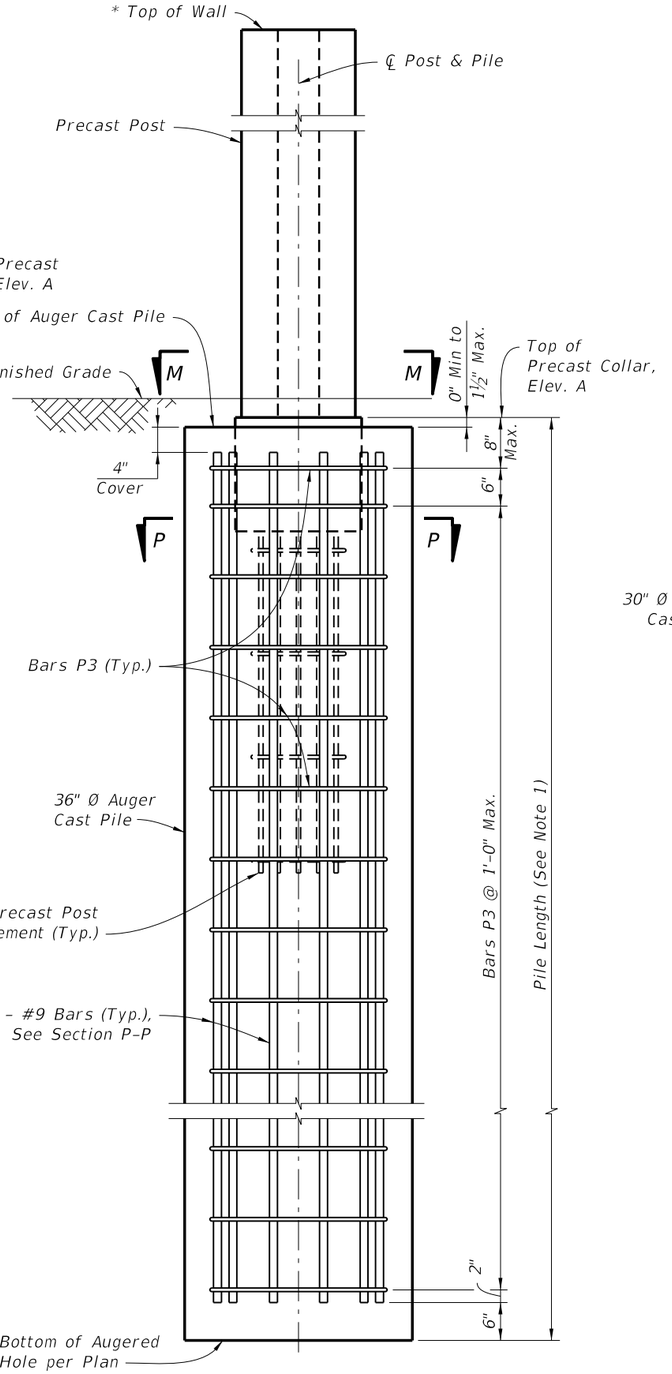

LOW CLEARANCE OPTION

STANDARD POST PLACEMENT IN AUGER CAST PILE
(Standard Post Shown, 45° Corner Posts Similar)

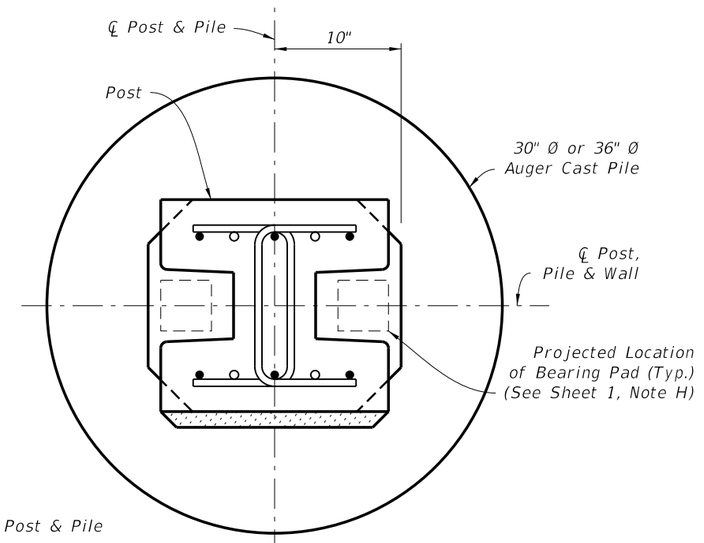

SECTION M-M
(Standard Post)

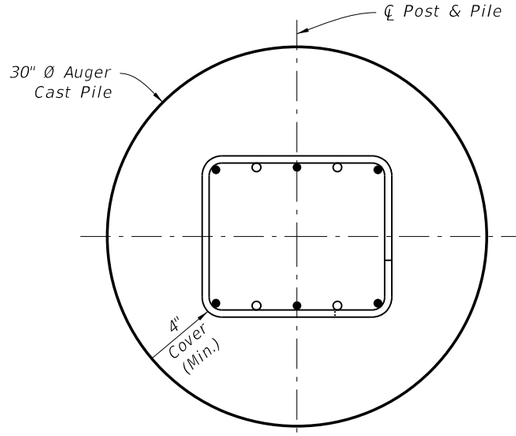

SECTION N-N
(Standard Post)

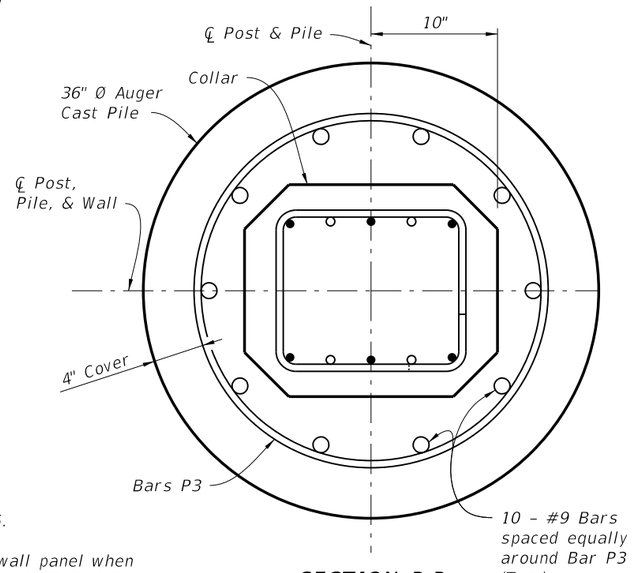

SECTION P-P
(Standard Post)

NOTES:
1. For Pile Lengths, see Sheets 15 and 16.

* Extend Post 2" above top of high side wall panel when post caps are shown in plans. See Sheet 4, "ELEVATION STEP AT TOP OF WALL".

POST PLACEMENT & PILE REINFORCING STEEL DETAILS

LAST REVISION	REVISION	DESCRIPTION:		FDOT DESIGN STANDARDS 2013		INDEX NO.	SHEET NO.
07/01/12						5200	9

6/28/2012 11:40:52 AM rd960rh C:\d\projects\standards\structures\2013book\05200-09of16.dgn

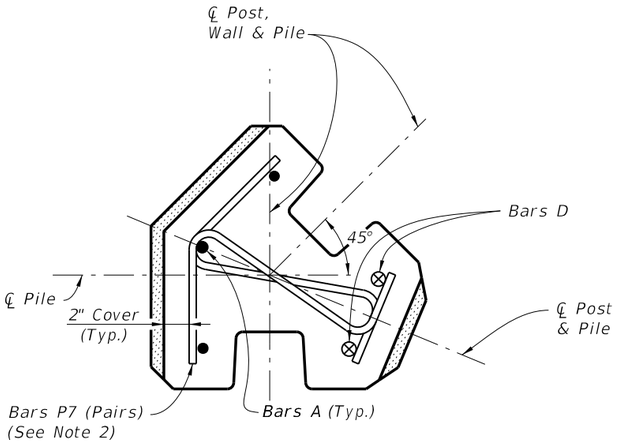

SECTION H-H
(45° Corner Post)

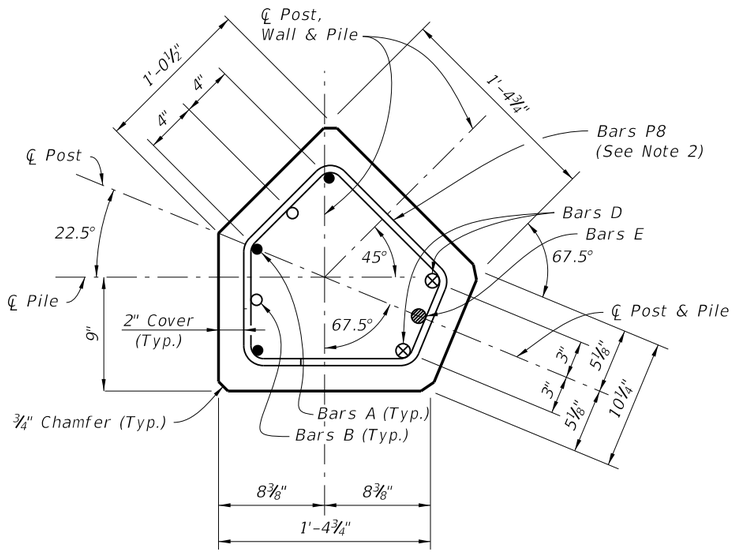

SECTION K-K
(Collar Section, 45° Corner Post)

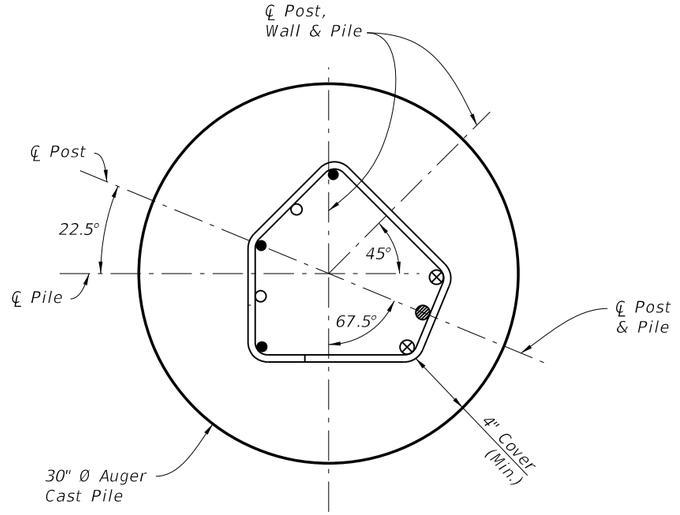

SECTION N-N
(45° Corner Post)

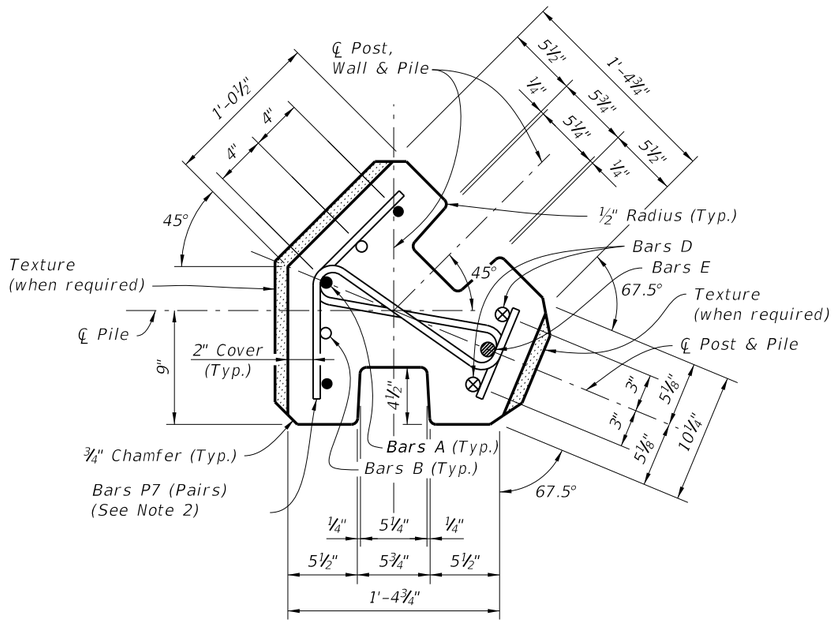

SECTION J-J
(45° Corner Post)



SECTION L-L
(45° Corner Post)

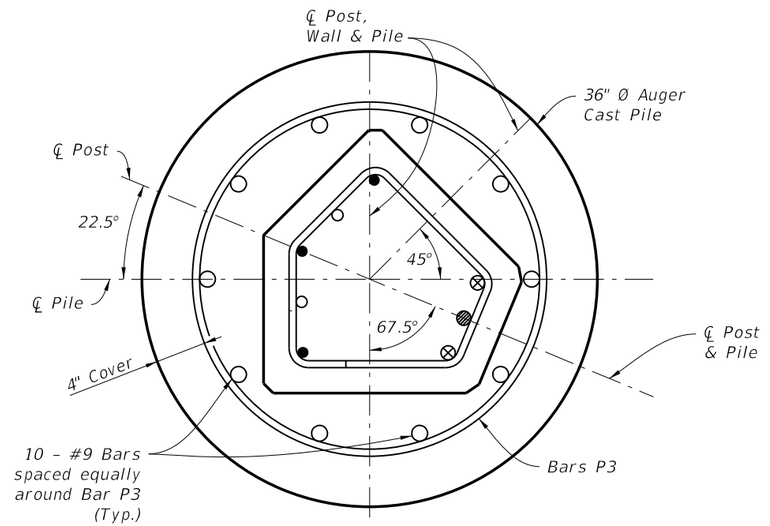

SECTION P-P
(45° Corner Post)

45° POST NOTES:
1. For Post & Pile Lengths and Table of Reinforcing Steel, see Sheets 15 & 16.
2. Reference Sheets 8 & 9 for location of Sections.
   Space Bars P7 as shown for Bars P1.
   Space Bars P8 as shown for Bars P2.
3. For texture thickness, match with appropriate Panel face.

45° POST DETAILS

45° POST PLACEMENT IN AUGER CAST PILE

45° CORNER POST DETAILS

C:\d\projects\standards\structures\2013book\05200-10of16.dgn rd960rh 11:40:58 AM 6/28/2012

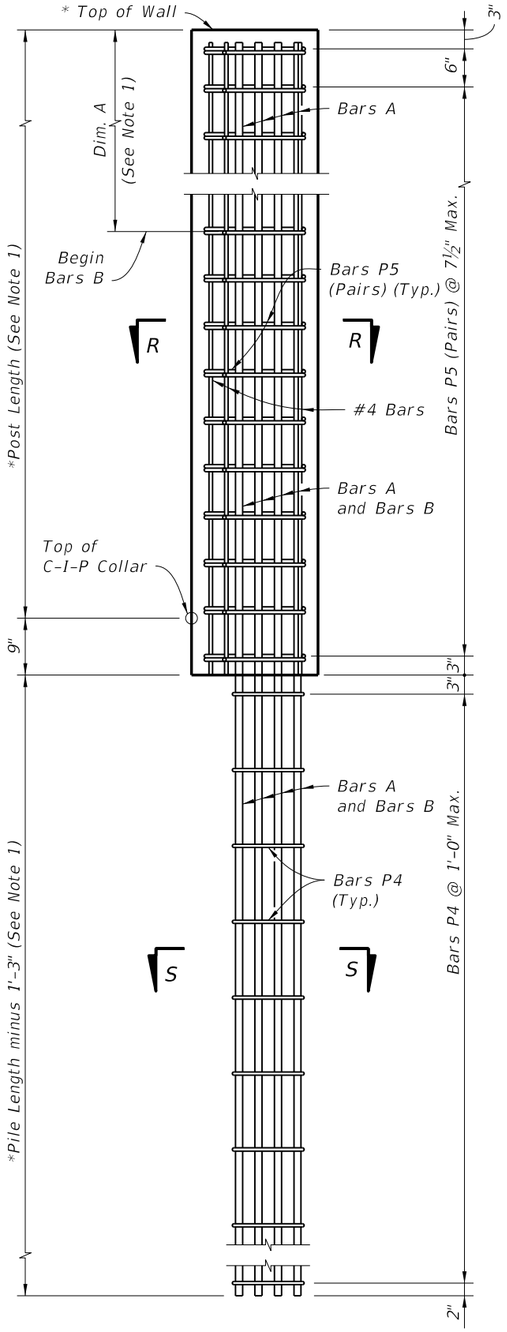

TYPICAL POST

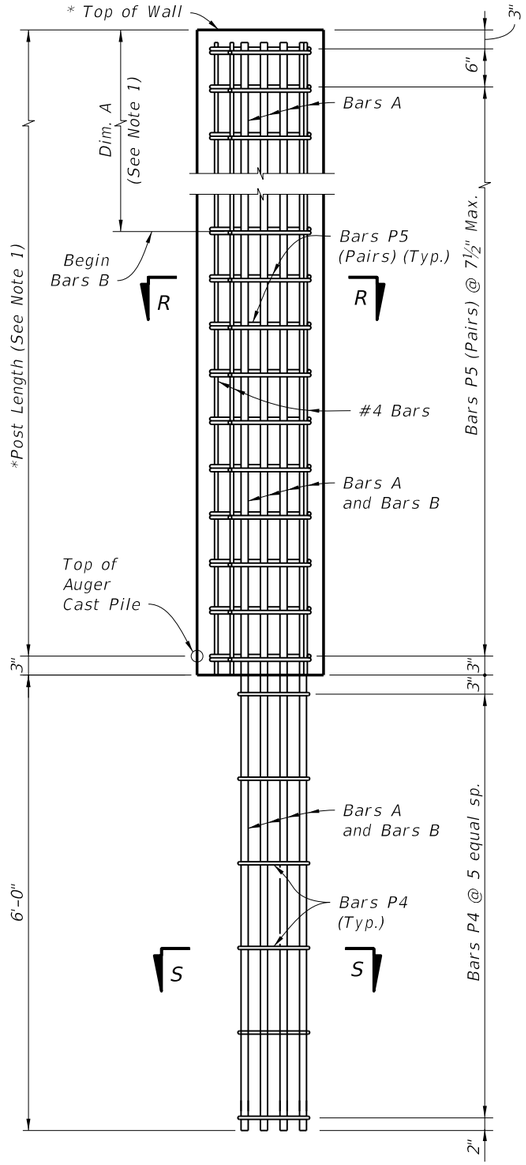

LOW CLEARANCE OPTION

90° CORNER POST REINFORCMENT

(Post Surface Features Not Shown For Clarity)

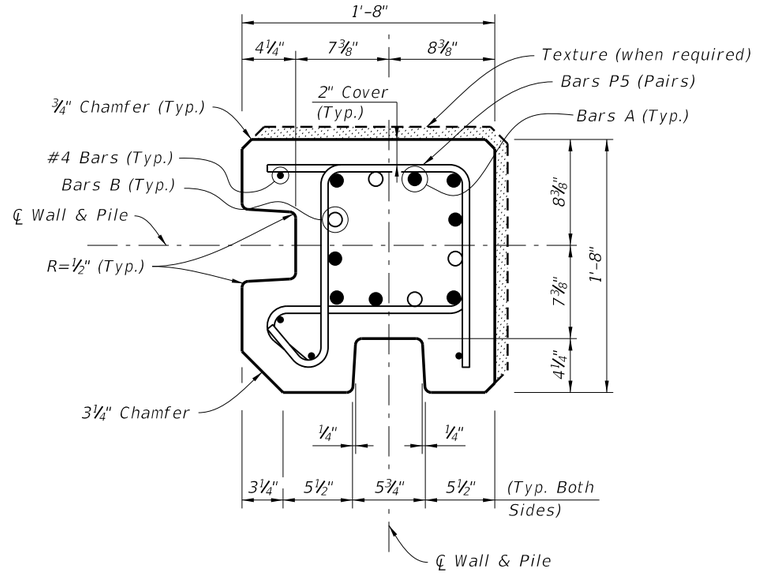

SECTION R-R



SECTION S-S

90° CORNER POST NOTES:

1. *For Table of Dimensions and Reinforcing Steel, see Sheet 15 & 16.*
2. *Reduce typical panel length by 3½" at each 90° Corner Post.*
3. *For texture thickness, match appropriate Panel face.*

* *Extend Post 2" above top of high side wall panel when post caps are shown in plans. See Sheet 4, "ELEVATION STEP AT TOP OF WALL".*

90° CORNER POST DETAILS

LAST REVISION	REVISION	DESCRIPTION:				
07/01/12			FDOT DESIGN STANDARDS 2013	PRECAST SOUND BARRIERS	INDEX NO. 5200	SHEET NO. 11

6/28/2012 11:41:00 AM rd960rh C:\d\projects\standards\structures\2013book\05200-11of16.dgn

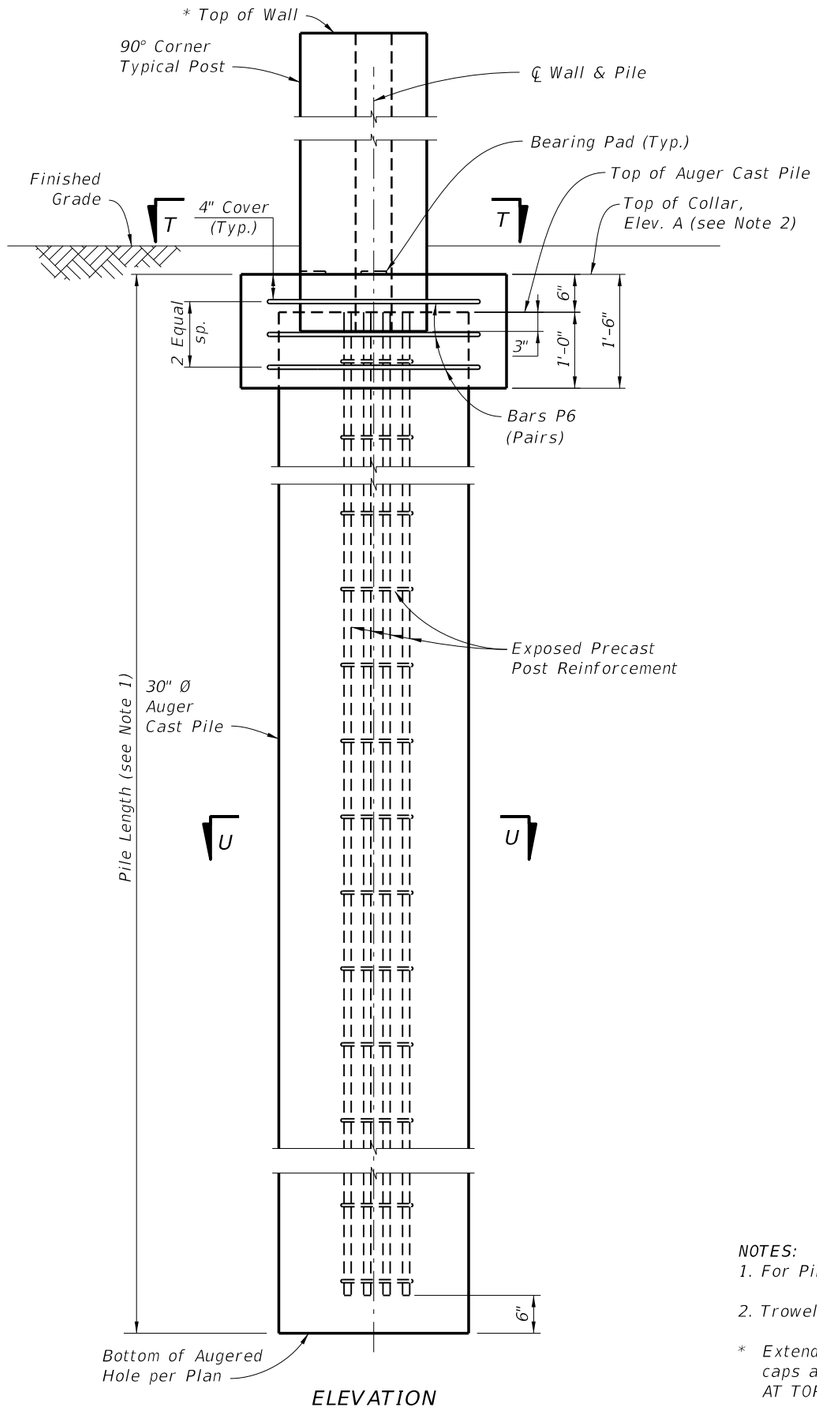

ELEVATION

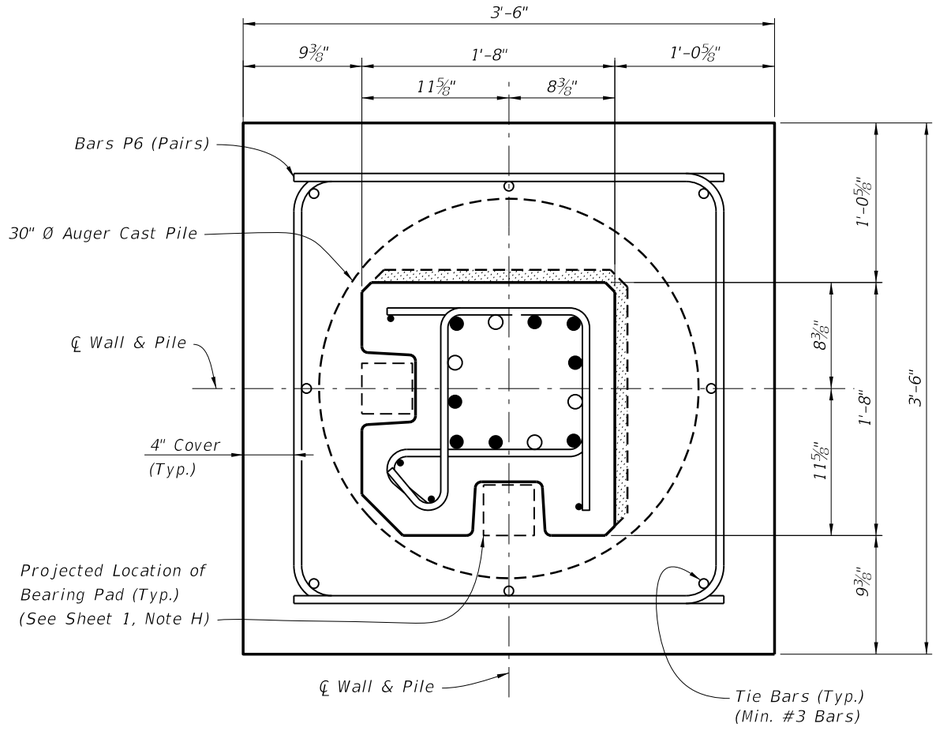

SECTION T-T

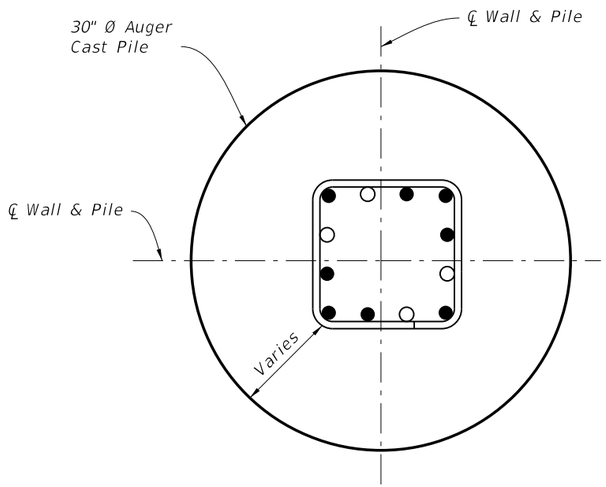

SECTION U-U

NOTES:
1. For Pile Lengths, see Sheets 15 and 16.

2. Trowel Finish top of Collar to allow placement of Bearing Pads.

* Extend Post 2" above top of high side wall panel when post caps are shown in plans. See Sheet 4, "ELEVATION STEP AT TOP OF WALL".

90° CORNER TYPICAL POST PLACEMENT DETAILS

LAST REVISION	REVISION	DESCRIPTION:		FDOT DESIGN STANDARDS 2013	PRECAST SOUND BARRIERS	INDEX NO.	SHEET NO.
07/01/12						5200	12

6/28/2012 11:41:03 AM rd960rh C:\d\projects\standards\structures\2013book\05200-12of16.dgn

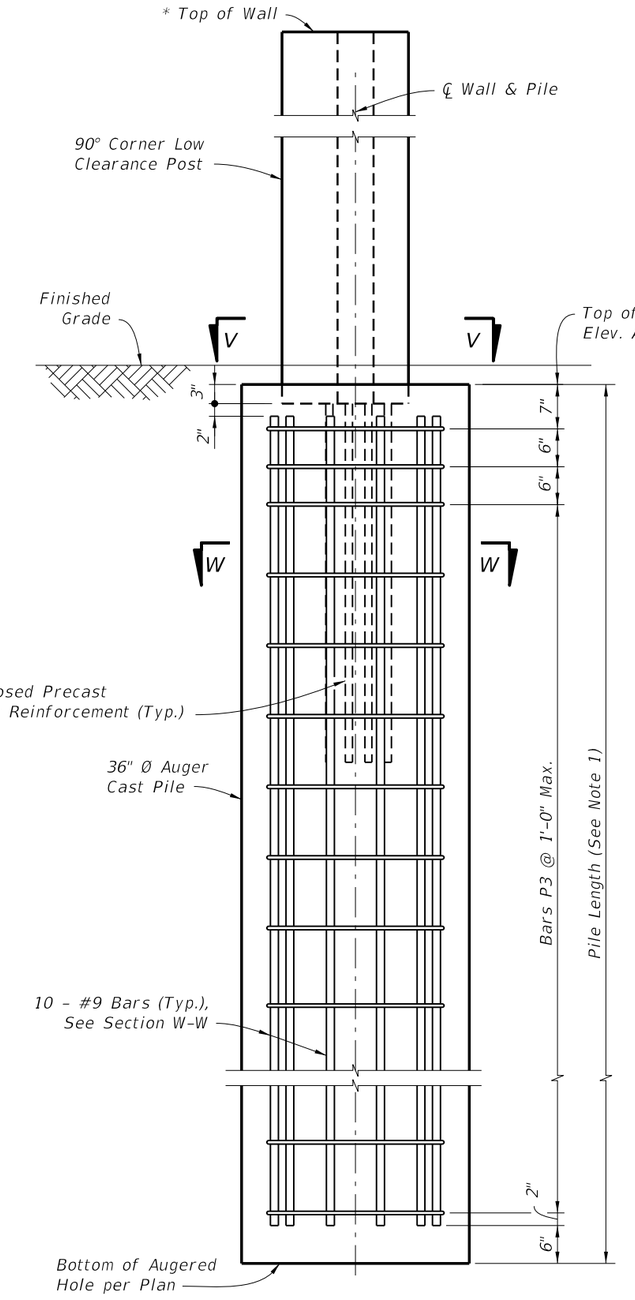

ELEVATION

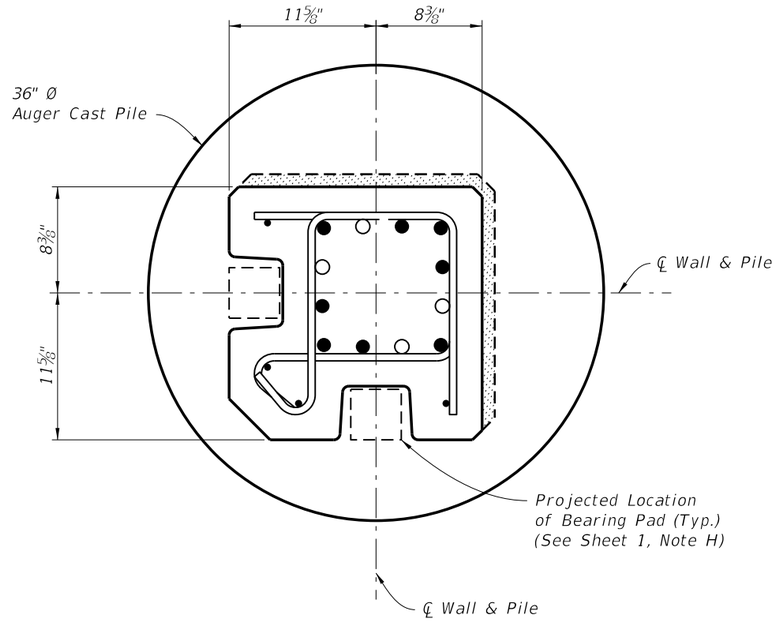

SECTION V-V

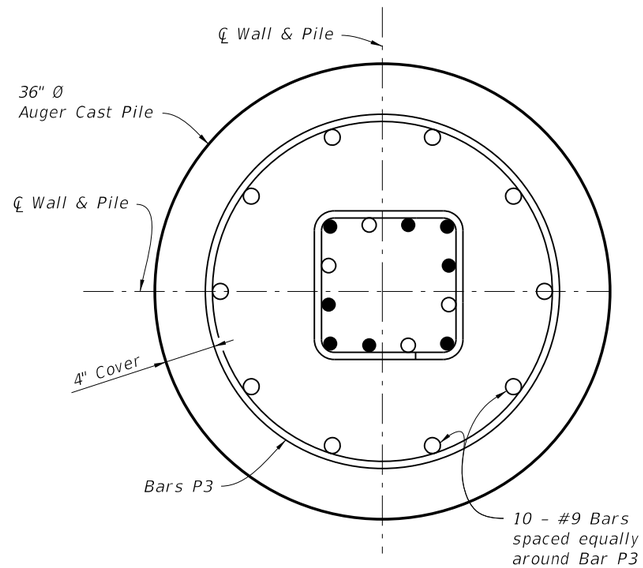

SECTION W-W

NOTES:
1. For Pile Lengths, see Sheets 15 and 16.

2. Trowel Finish top of Pile to allow placement of Bearing Pads.

* Extend Post 2" above top of high side wall panel when post caps are shown in plans. See Sheet 4, "ELEVATION STEP AT TOP OF WALL".

90° CORNER LOW CLEARANCE POST PLACEMENT & PILE REINFORCING STEEL DETAILS

LAST REVISION	REVISION	DESCRIPTION:		FDOT DESIGN STANDARDS 2013	PRECAST SOUND BARRIERS	INDEX NO.	SHEET NO.
07/01/12						5200	13

6/28/2012 11:41:05 AM rd960rh C:\d\projects\standards\structures\2013book\05200-13of16.dgn

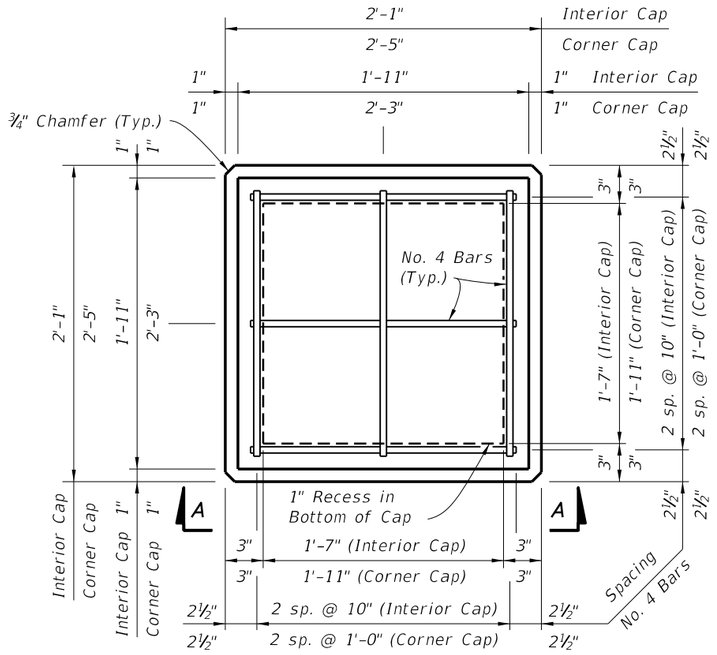

PLAN VIEW
(Type "A" Cap Shown, Type "B" & "C" Caps Similar)

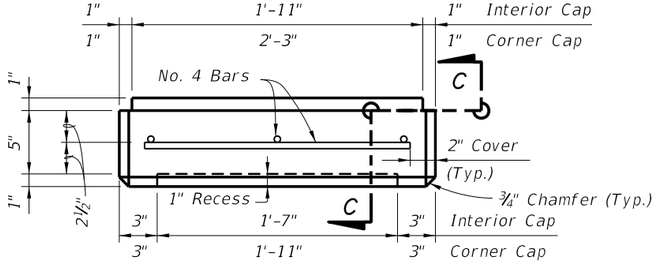

VIEW A-A SHOWN, VIEW B-B SIMILAR
(Type "A" Cap Shown, Type "B" & "C" Caps Similar)

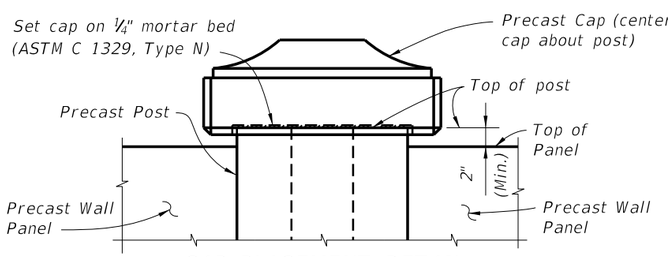

CAP PLACEMENT DETAIL
(Type "B" Cap Shown, Type "A" & "C" Caps Similar)

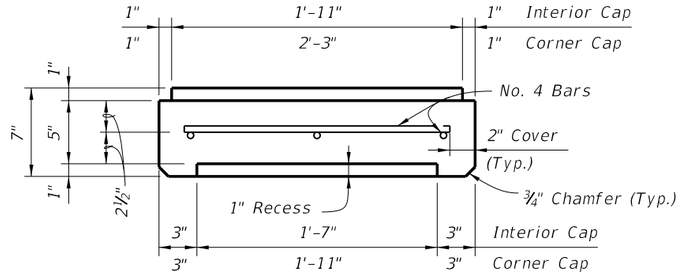

SECTION C-C

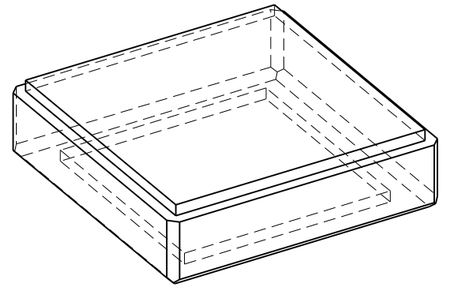

PICTORIAL VIEW

TYPE "A" CAP DETAILS

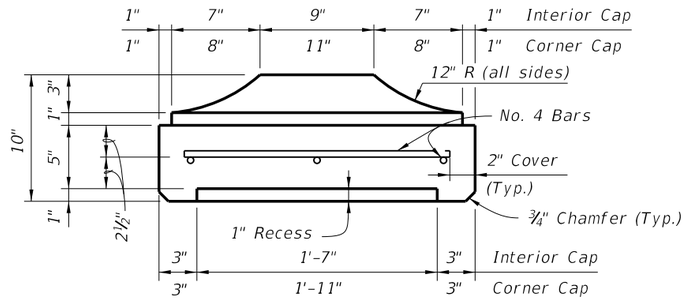

SECTION C-C

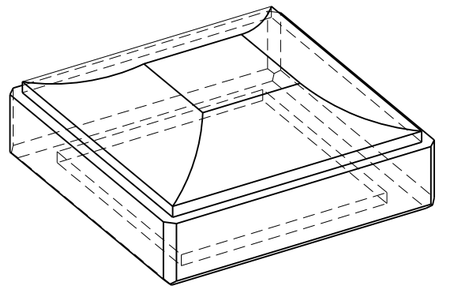

PICTORIAL VIEW

TYPE "B" CAP DETAILS

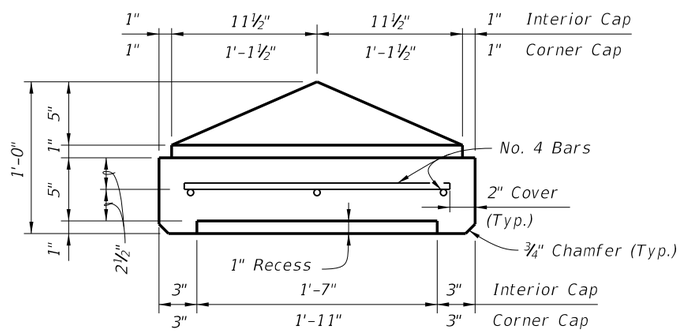

SECTION C-C

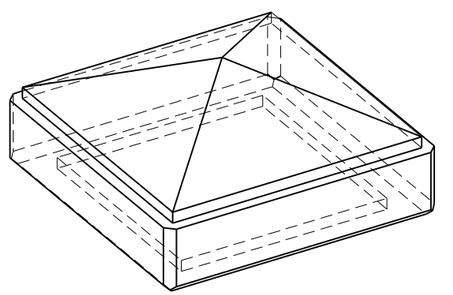

PICTORIAL VIEW

TYPE "C" CAP DETAILS

PRECAST POST CAPITAL

LAST REVISION	REVISION	DESCRIPTION:		FDOT DESIGN STANDARDS 2013	PRECAST SOUND BARRIERS	INDEX NO.	SHEET NO.
01/01/11						5200	14

C:\d\projects\standards\structures\2013book\05200-14of16.dgn rd960rh 11:41:08 AM 6/28/2012

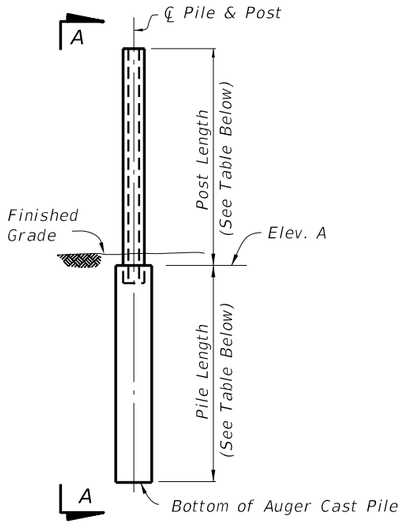

PILE/POST ELEVATION

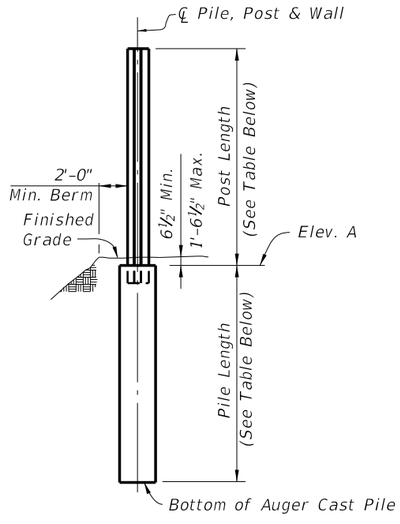

VIEW A-A

BAR BENDING DETAILS

All bar dimensions in bending diagrams are out-to-out. All bars not shown in the bending diagrams are straight.

STANDARD POST (#4 Bars)



BAR P1
Bar Length = 2'-5"



BAR P2
Bar Length = 5'-5"

PILE (Low Clearance) (#4 Bars)



BAR P3
Bar Length = 8'-7"

90° CORNER POST (#4 Bars)



BAR P4
Bar Length = 4'-8"



BAR P5
Bar Length = 4'-0"

CAST-IN-PLACE COLLAR (#5 Bars)



BAR P6
(Pairs)

45° CORNER POST (#4 Bars)



BAR P7
Bar Length = 3'-0"



BAR P8
Bar Length = 5'-3"

TABLE 1 - WIND SPEED = 110 MPH

POST AND PILE DIMENSIONS / TABLE OF REINFORCING STEEL

WALL TYPE	POST LENGTH WITHOUT CAP	POST LENGTH WITH CAP	PILE LENGTH								POST REINFORCING											
			N = 10 to 40 Med. Dense Granular Soil				N = 4 to 9 Loose Granular Soil				10'-0" POST SPACING						20'-0" POST SPACING					
			10'-0" POST SPACING		20'-0" POST SPACING		10'-0" POST SPACING		20'-0" POST SPACING		BARS A	BARS B		BARS D	BARS E		BARS A	BARS B		BARS D	BARS E	
			30" ∅	36" ∅	30" ∅	36" ∅	30" ∅	36" ∅	30" ∅	36" ∅	SIZE	SIZE	DIM 'A'	SIZE	SIZE	DIM 'A'	SIZE	SIZE	DIM 'A'	SIZE	SIZE	DIM 'A'
A1	12'-0½"	12'-2½"	10	10	14	13	11	10	14	13	#4	#4	11'-5"	#4	#4	11'-5"	#4	#4	8'-5"	#5	#5	9'-2"
B1	13'-0½"	13'-2½"	11	10	14	13	11	10	15	14	#4	#4	12'-5"	#4	#4	11'-5"	#5	#5	11'-2"	#5	#5	9'-2"
C1	14'-0½"	14'-2½"	11	10	15	14	12	11	15	14	#4	#4	13'-5"	#4	#4	11'-5"	#5	#5	11'-2"	#6	#6	10'-9"
D1	15'-0½"	15'-2½"	12	11	16	14	12	11	16	15	#4	#4	13'-5"	#4	#4	11'-5"	#5	#5	11'-2"	#6	#6	10'-9"
E1	16'-0½"	16'-2½"	12	11	16	15	13	12	17	15	#4	#4	13'-5"	#5	#5	14'-2"	#6	#6	12'-9"	#7	#7	12'-4"
F1	17'-0½"	17'-2½"	13	12	17	15	13	12	17	16	#4	#4	13'-5"	#5	#5	14'-2"	#6	#6	12'-9"	#7	#7	12'-4"
G1	18'-0½"	18'-2½"	13	12	17	16	13	13	18	17	#5	#5	16'-2"	#5	#5	14'-2"	#6	#6	12'-9"	#8	#8	13'-10"
H1	19'-0½"	19'-2½"	13	13	18	17	14	13	18	17	#5	#5	16'-2"	#6	#6	15'-9"	#7	#7	14'-4"	#8	#8	13'-10"
I1	20'-0½"	20'-2½"	14	13	18	17	14	13	19	18	#5	#5	16'-2"	#6	#6	15'-9"	#7	#7	14'-4"	#8	#8	13'-10"
J1	21'-0½"	21'-2½"	14	13	19	17	15	14	19	18	#5	#5	16'-2"	#6	#6	15'-9"	#7	#7	14'-4"	#9	#9	15'-4"
K1	22'-0½"	22'-2½"	15	14	19	18	15	14	20	19	#6	#6	18'-9"	#7	#7	18'-4"	#8	#8	15'-10"	#9	#9	15'-4"

TABLE NOTE:

1. Bars D and Bars E are for 45° Corner Posts only.

PILE DEPTH & REINFORCING SUMMARY

C:\d\projects\standards\structures\2013book\05200-15of16.dgn rd960rh 11:41:10 AM 6/28/2012

TABLE 2 - WIND SPEED = 130 MPH

POST AND PILE DIMENSIONS											TABLE OF REINFORCING STEEL											
WALL TYPE	POST LENGTH WITHOUT CAP	POST LENGTH WITH CAP	PILE LENGTH								POST REINFORCING											
			N = 10 to 40 Med. Dense Granular Soil				N = 4 to 9 Loose Granular Soil				10'-0" POST SPACING						20'-0" POST SPACING					
			10'-0" POST SPACING		20'-0" POST SPACING		10'-0" POST SPACING		20'-0" POST SPACING		BARS A	BARS B		BARS D	BARS E		BARS A	BARS B		BARS D	BARS E	
			30" ∅	36" ∅	30" ∅	36" ∅	30" ∅	36" ∅	30" ∅	36" ∅	SIZE	SIZE	DIM 'A'	SIZE	SIZE	DIM 'A'	SIZE	SIZE	DIM 'A'	SIZE	SIZE	DIM 'A'
A2	12'-0½"	12'-2½"	12	11	16	15	12	11	16	15	#4	#4	11'-5"	#4	#4	9'-5"	#5	#5	9'-2"	#6	#6	8'-9"
B2	13'-0½"	13'-2½"	12	12	16	15	13	12	17	16	#4	#4	11'-5"	#5	#5	12'-2"	#5	#5	9'-2"	#6	#6	8'-9"
C2	14'-0½"	14'-2½"	13	12	17	16	13	12	18	16	#4	#4	11'-5"	#5	#5	12'-2"	#6	#6	10'-9"	#7	#7	10'-4"
D2	15'-0½"	15'-2½"	13	13	18	16	14	13	18	17	#4	#4	11'-5"	#5	#5	12'-2"	#6	#6	10'-9"	#7	#7	10'-4"
E2	16'-0½"	16'-2½"	14	13	19	17	14	13	19	18	#5	#5	13'-2"	#6	#6	13'-9"	#7	#7	12'-4"	#8	#8	11'-10"
F2	17'-0½"	17'-2½"	14	13	19	18	15	14	20	18	#5	#5	13'-2"	#6	#6	13'-9"	#7	#7	12'-4"	#8	#8	11'-10"
G2	18'-0½"	18'-2½"	15	14	20	18	15	14	20	19	#5	#5	13'-2"	#6	#6	13'-9"	#8	#8	13'-10"	#9	#9	12'-4"
H2	19'-0½"	19'-2½"	15	14	20	19	16	15	21	20	#6	#6	15'-9"	#7	#7	15'-4"	#8	#8	13'-10"	#9	#10	11'-7"
I2	20'-0½"	20'-2½"	16	15	21	19	16	15	22	20	#6	#6	15'-9"	#7	#7	15'-4"	#8	#8	12'-10"	#10	#10	13'-7"
J2	21'-0½"	21'-2½"	16	15	22	20	17	16	22	21	#6	#6	15'-9"	#7	#7	15'-4"	#9	#9	14'-4"	#10	#11	12'-10"
K2	22'-0½"	22'-2½"	17	16	22	21	17	16	23	21	#7	#7	17'-4"	#8	#8	16'-10"	#9	#9	14'-4"	#11	#11	13'-10"

TABLE 3 - WIND SPEED = 150 MPH

POST AND PILE DIMENSIONS											TABLE OF REINFORCING STEEL											
WALL TYPE	POST LENGTH WITHOUT CAP	POST LENGTH WITH CAP	PILE LENGTH								POST REINFORCING											
			N = 10 to 40 Med. Dense Granular Soil				N = 4 to 9 Loose Granular Soil				10'-0" POST SPACING						20'-0" POST SPACING					
			10'-0" POST SPACING		20'-0" POST SPACING		10'-0" POST SPACING		20'-0" POST SPACING		BARS A	BARS B		BARS D	BARS E		BARS A	BARS B		BARS D	BARS E	
			30" ○	36" ○	30" ○	36" ○	30" ○	36" ○	30" ○	36" ○	SIZE	SIZE	DIM 'A'	SIZE	SIZE	DIM 'A'	SIZE	SIZE	DIM 'A'	SIZE	SIZE	DIM 'A'
A3	12'-0½"	12'-2½"	13	12	18	16	14	13	18	17	#4	#4	9'-5"	#5	#5	10'-2"	#6	#6	8'-9"	#6	#7	7'-4"
B3	13'-0½"	13'-2½"	14	13	19	17	14	13	19	18	#4	#4	9'-5"	#5	#5	10'-2"	#6	#6	8'-9"	#7	#7	8'-4"
C3	14'-0½"	14'-2½"	14	13	19	18	15	14	20	19	#5	#5	11'-2"	#6	#6	11'-9"	#7	#7	10'-4"	#8	#8	9'-10"
D3	15'-0½"	15'-2½"	15	14	20	19	16	14	21	19	#5	#5	11'-2"	#6	#6	11'-9"	#7	#7	10'-4"	#8	#9	9'-4"
E3	16'-0½"	16'-2½"	16	14	21	19	16	15	22	20	#5	#5	11'-2"	#6	#6	11'-9"	#8	#8	10'-10"	#9	#9	10'-4"
F3	17'-0½"	17'-2½"	16	15	22	20	17	16	22	21	#6	#6	13'-9"	#7	#7	13'-4"	#8	#8	10'-10"	#9	#10	9'-7"
G3	18'-0½"	18'-2½"	17	16	22	21	17	16	23	21	#6	#6	12'-9"	#7	#7	13'-4"	#9	#9	12'-4"	#10	#10	11'-7"
H3	19'-0½"	19'-2½"	17	16	23	21	18	17	24	22	#6	#6	12'-9"	#8	#8	14'-10"	#9	#9	12'-4"	#11	#11	11'-9"
I3	20'-0½"	20'-2½"	18	17	24	22	18	17	25	23	#7	#7	15'-4"	#8	#8	14'-10"	#9	#10	11'-7"	#11	#14	10'-0"
J3	21'-0½"	21'-2½"	18	17	24	23	19	18	25	23	#7	#7	15'-4"	#9	#9	16'-4"	–	–	–	–	–	–
K3	22'-0½"	22'-2½"	19	17	25	23	19	18	26	24	#8	#8	16'-10"	#9	#9	16'-4"	–	–	–	–	–	–

TABLE NOTE:

1. Bars D and Bars E are for 45° Corner Posts only.

PILE DEPTH & REINFORCING SUMMARY

6/28/2012 11:41:13 AM rd960rh C:\d\projects\standards\structures\2013book\05200-16of16.dgn