




C:\projects\standards\roadway\17300-s\17345-01.dgn  
rd960rh  
12:10:25 PM  
6/28/2012

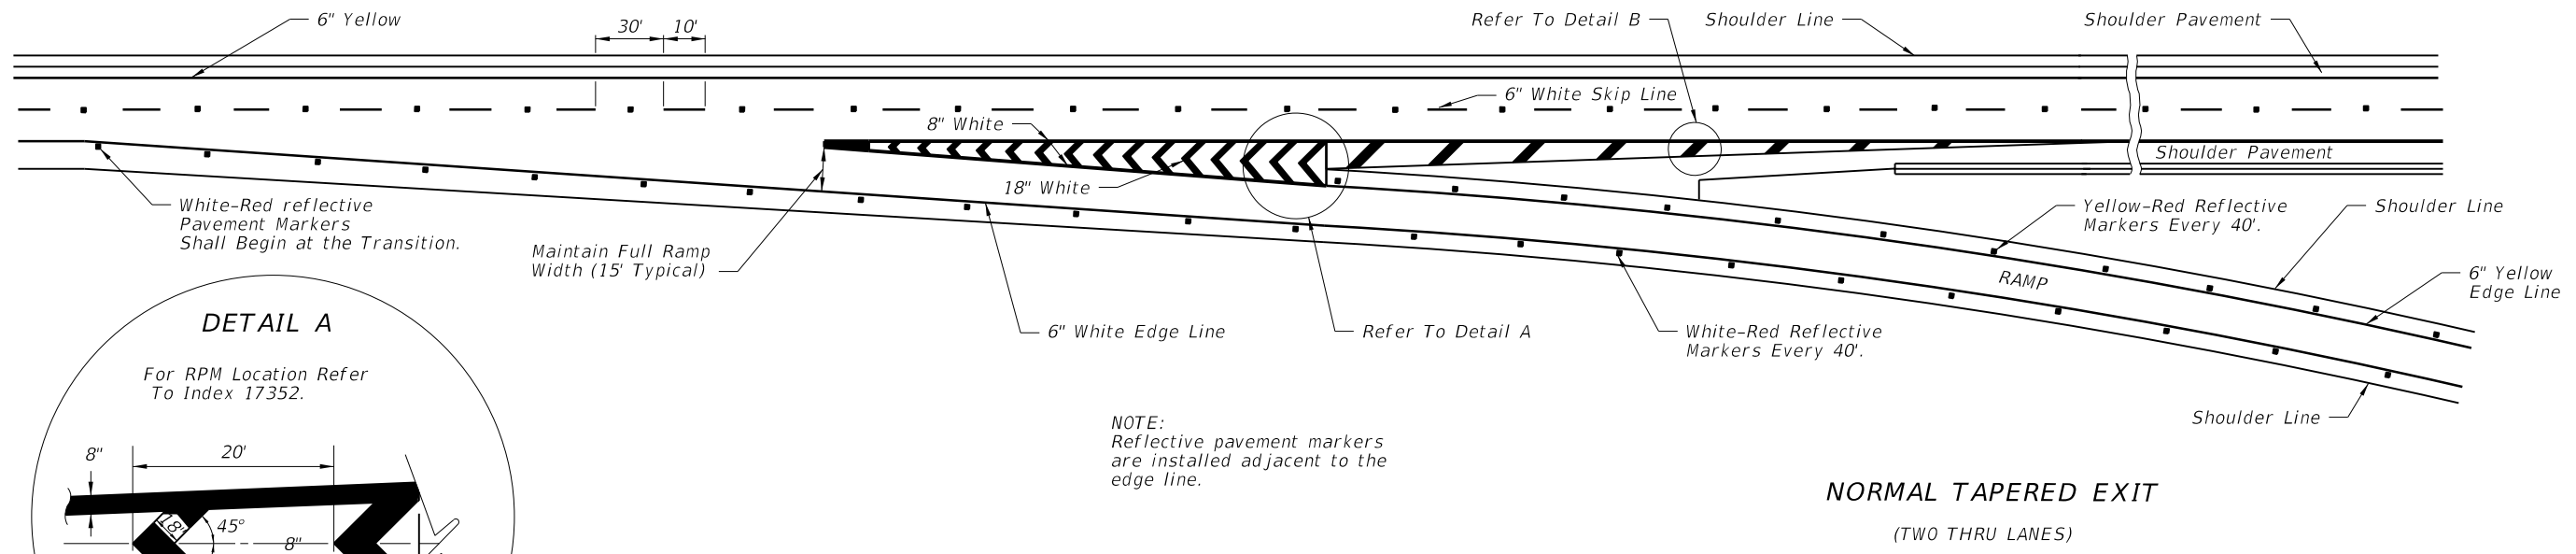

**NORMAL TAPERED EXIT**  
(TWO THRU LANES)

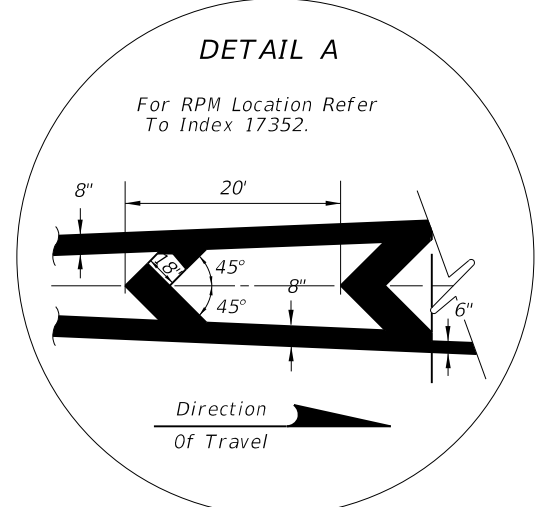



NOTE:  
Reflective pavement markers  
are installed adjacent to the  
edge line.

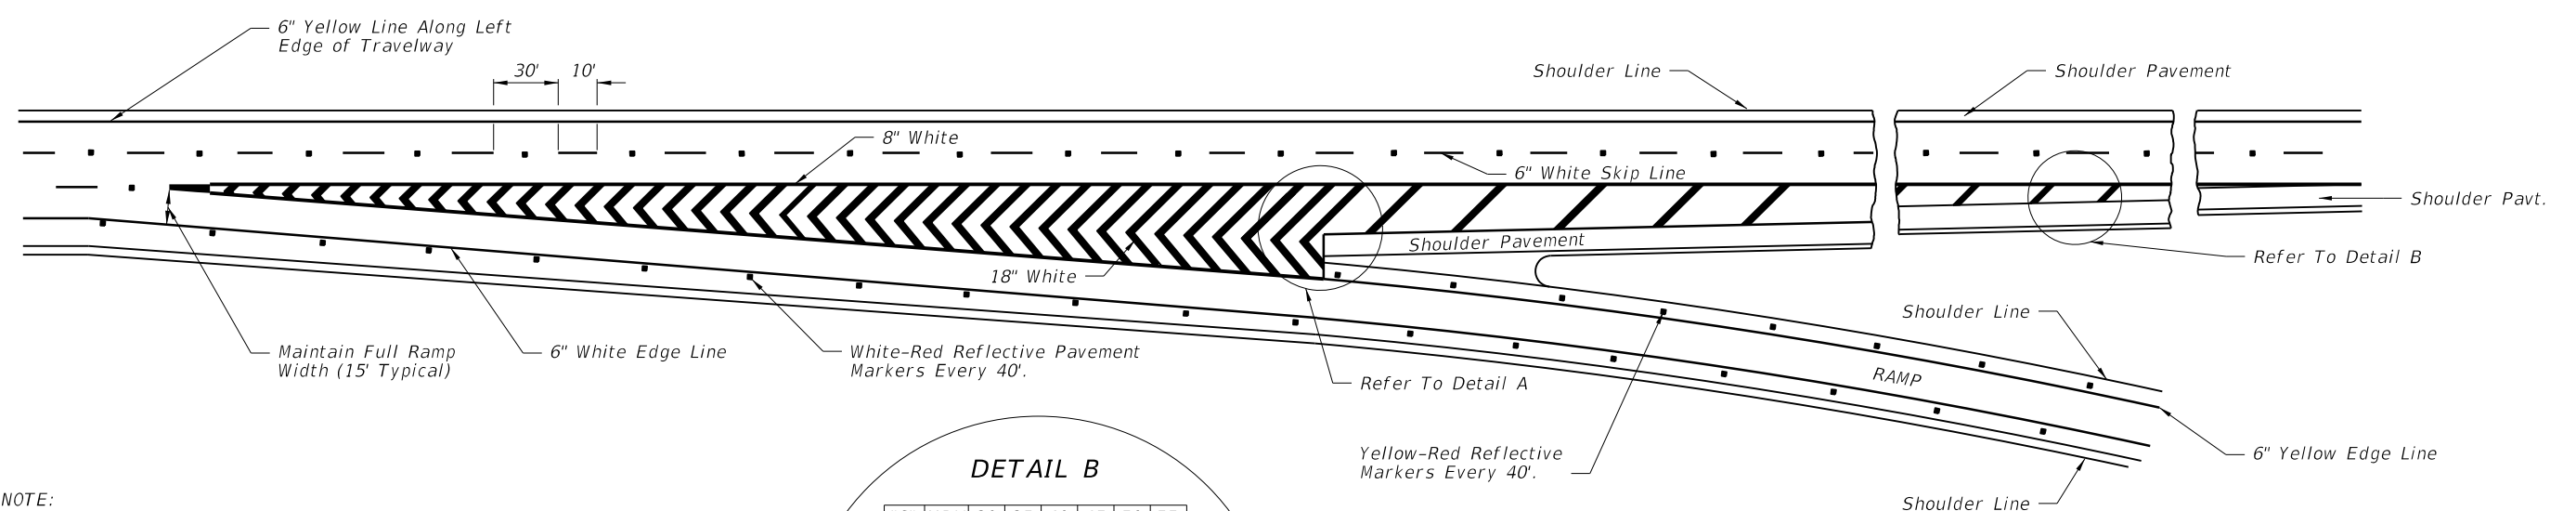


**NORMAL TAPERED EXIT ONLY**  
(TWO THRU LANES - THREE APPROACH LANES)

NOTE:  
In advance of lane drops at exit ramps a special marking pattern  
may be used to distinguish the lane drop situation from a normal  
exiting ramp or auxiliary lane.  
A typical special marking for lane drops consist of 8" wide by 3'  
long white stripes separated by 9' gaps. If used, this special  
marking should begin 1/2 mile in advance of the theoretical gore  
point. Where lane changes may cause conflicts, an 8" wide  
solid white channelizing line may be extended 300' upstream  
from the theoretical gore. (MUTCD Section 3B.05).

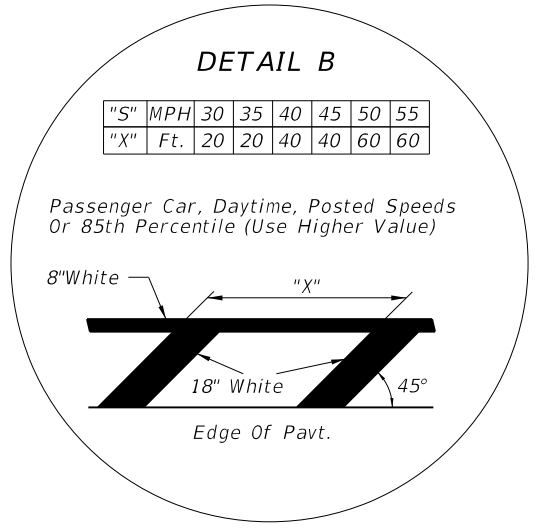

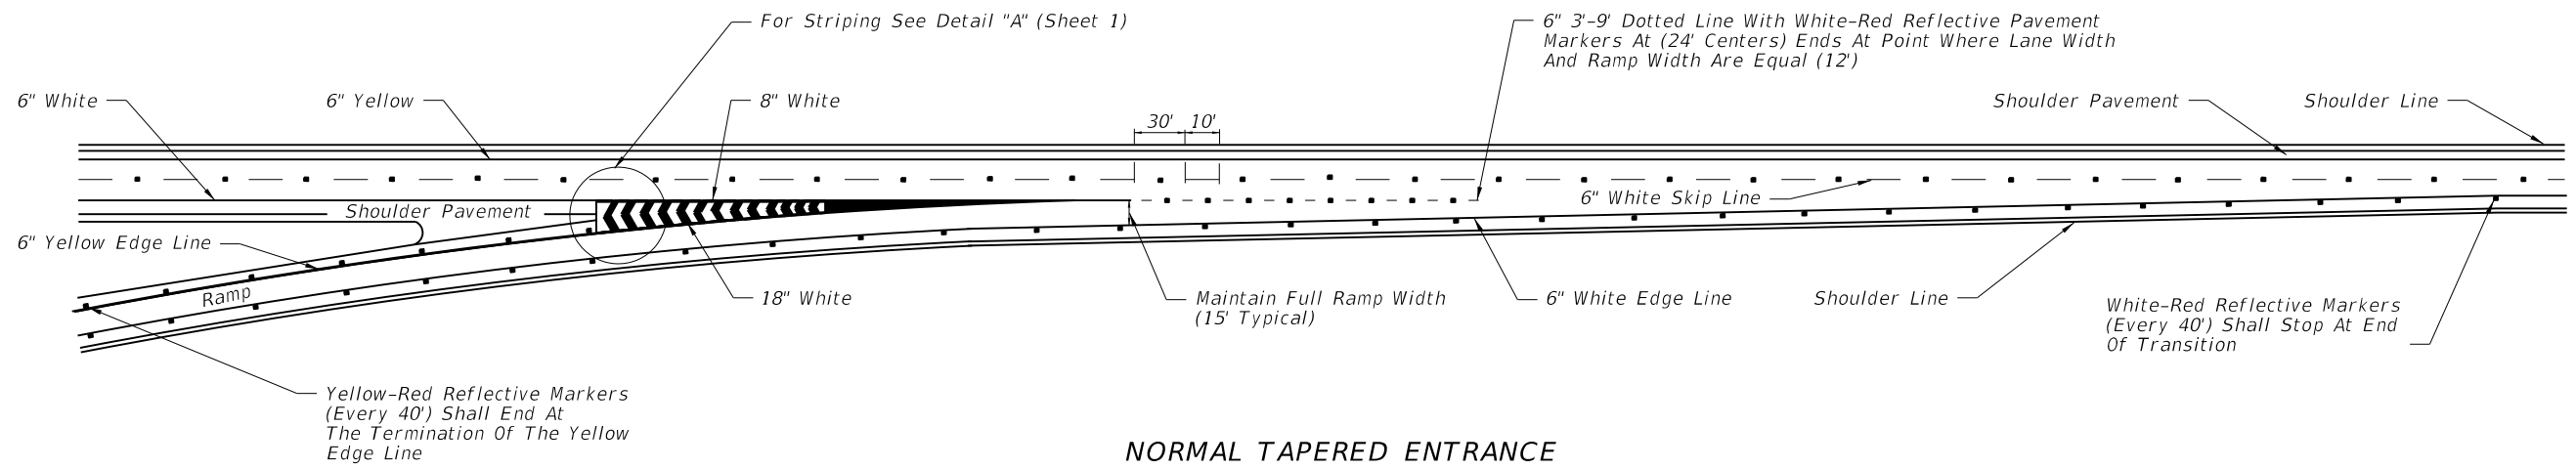


NORMAL TAPERED ENTRANCE

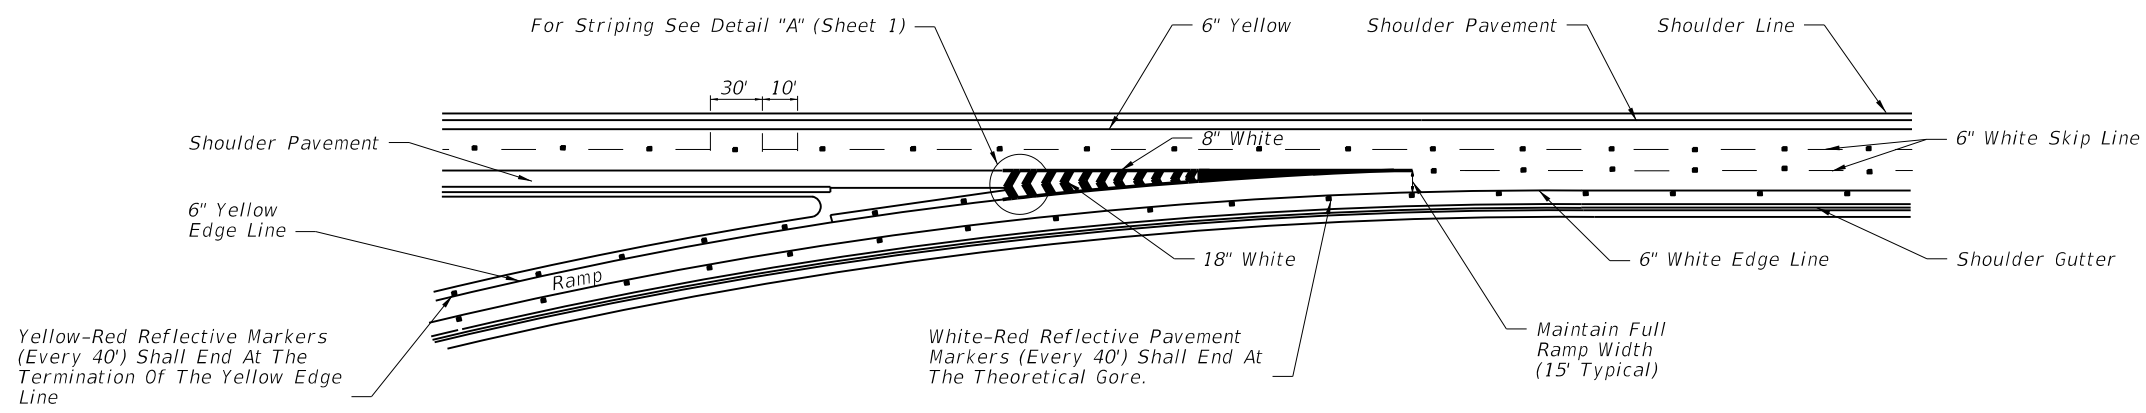


NORMAL TAPERED ENTRANCE WITH ADDED LANE


C:\projects\standards\roadway\17300-s\17345-02.dgn rd960rh 12:10:27 PM 6/29/2012

LAST REVISION	DESCRIPTION:	 <b>FDOT DESIGN STANDARDS</b> 2013	<b>INTERCHANGE MARKINGS</b>	INDEX NO.	SHEET NO.
07/01/10				17345	2


C:\projects\standards\roadway\17300-s\17345-03.dgn  
 rd960rh  
 12:10:29 PM  
 6/29/2012

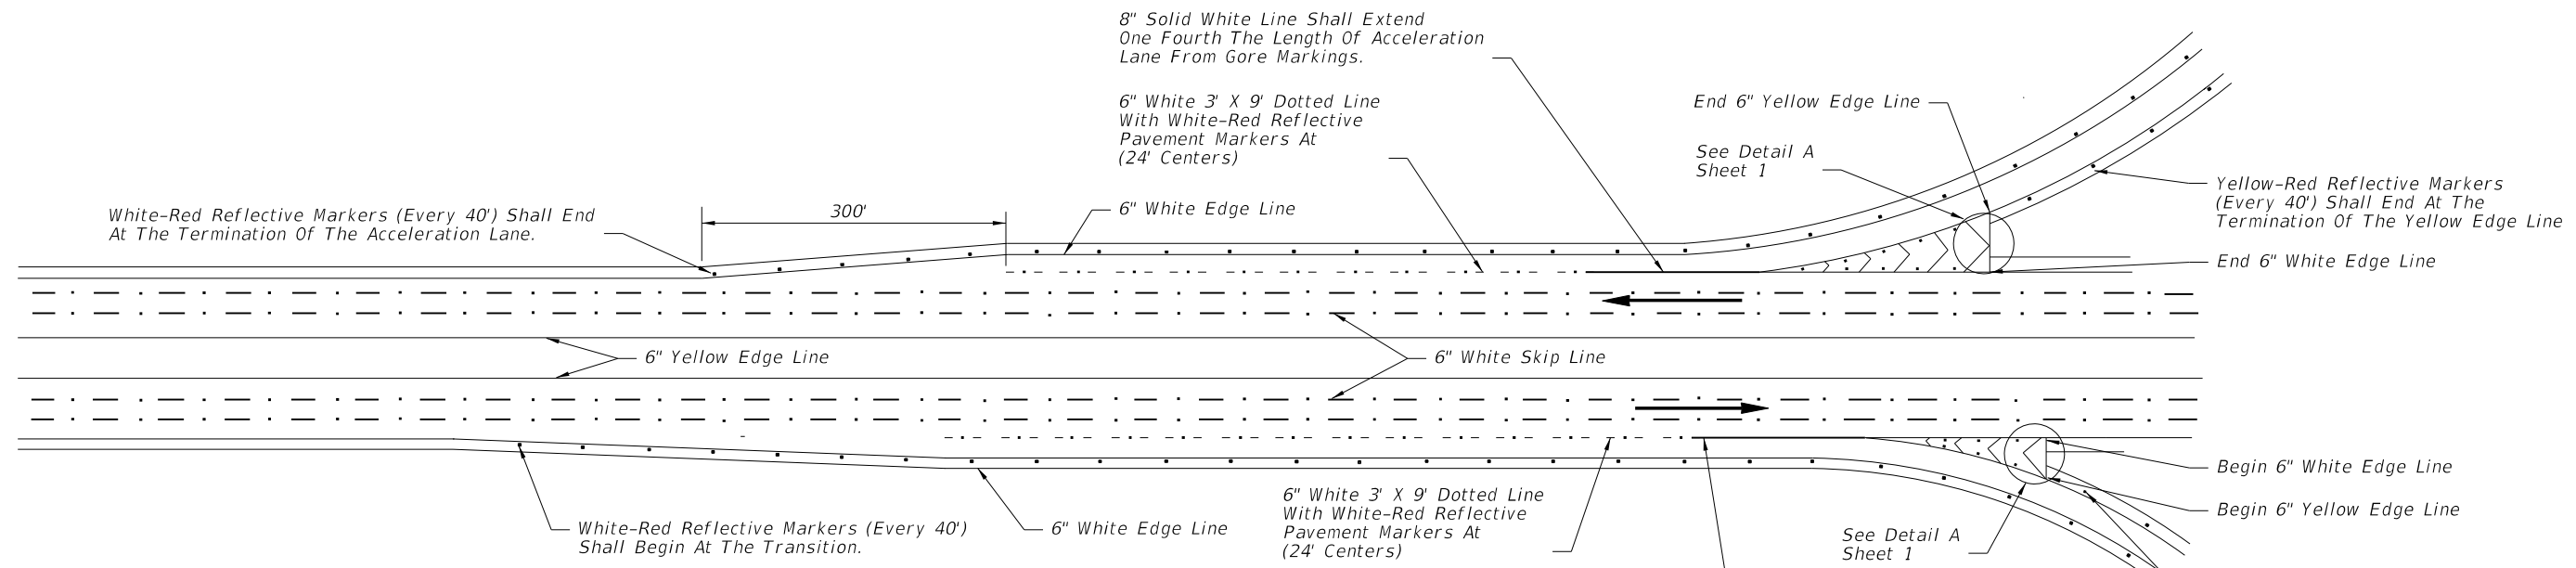

**PARALLEL ACCELERATION AND DECELERATION LANE**

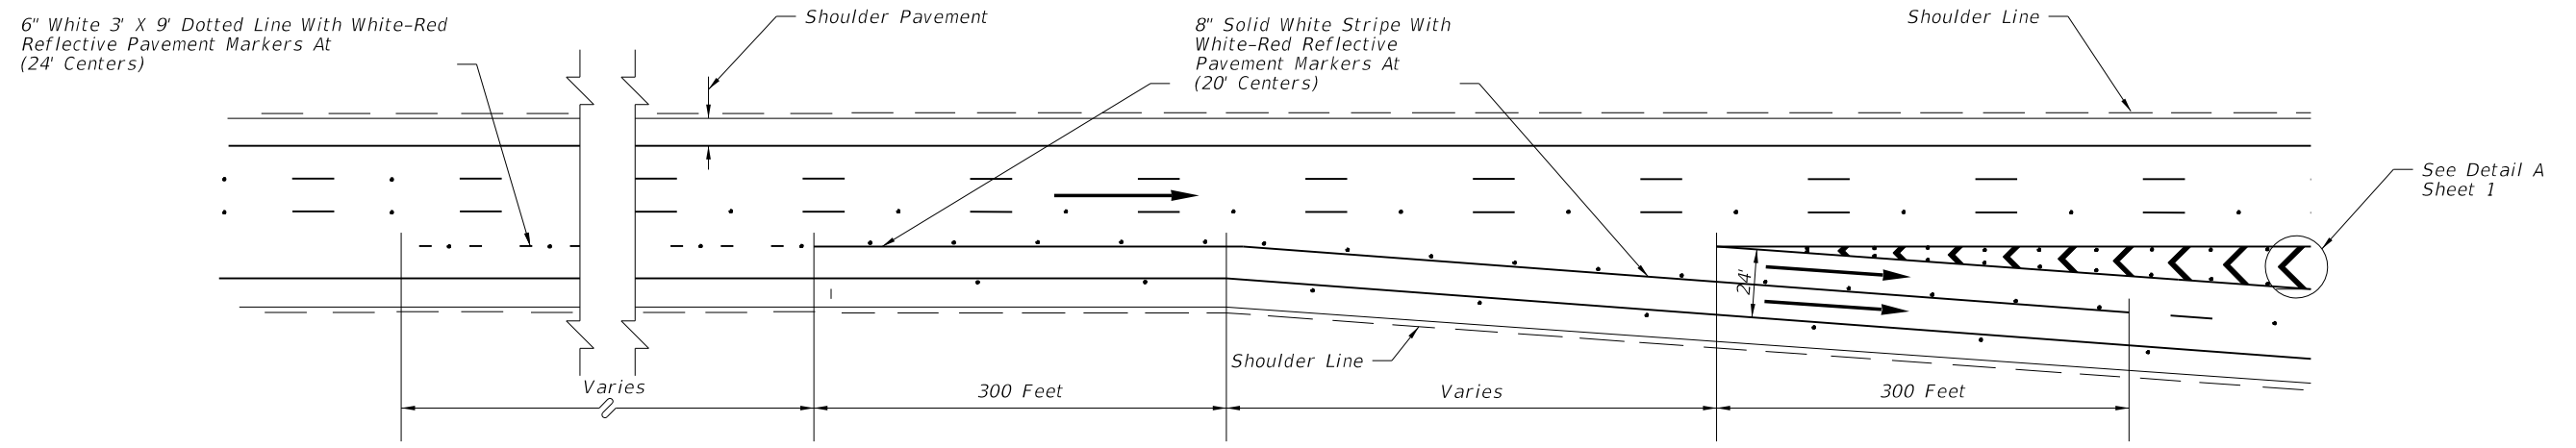

**TYPICAL MARKINGS AT DUAL LANE EXITS**

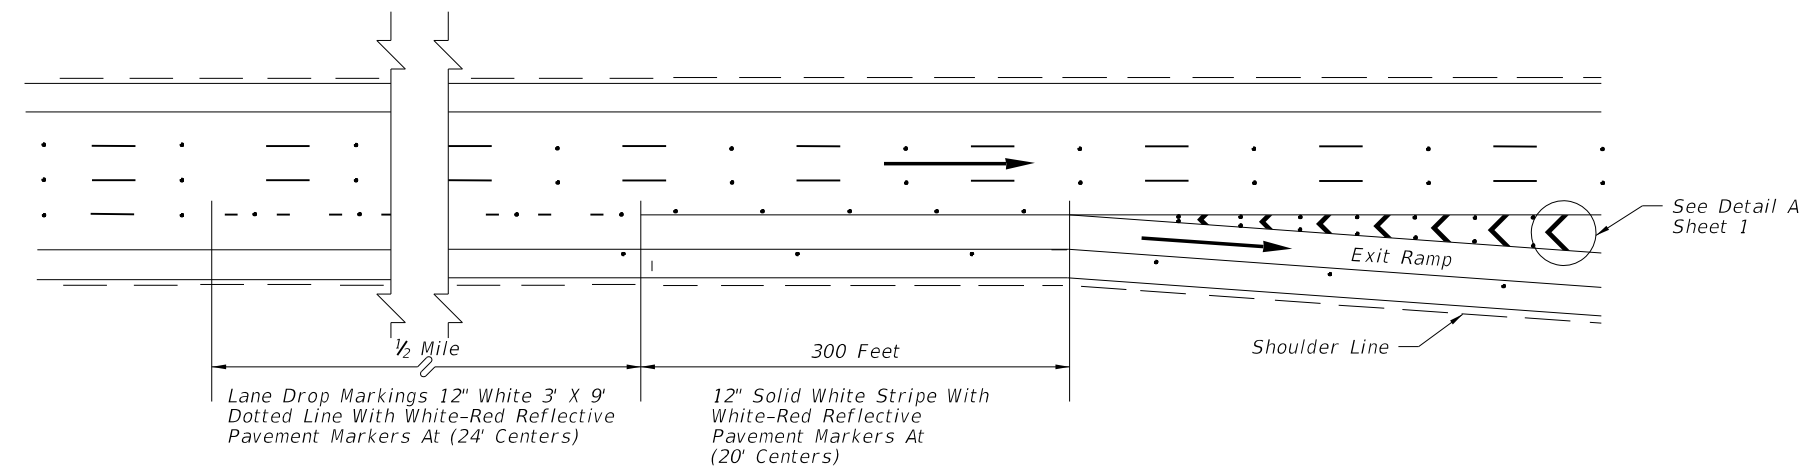




**TYPICAL LANE DROP MARKINGS AT EXIT RAMP**

→ Note: Arrows indicate direction of travel and are not shown for pavement marking.

LAST REVISION	REVISION	DESCRIPTION:		<b>FDOT DESIGN STANDARDS</b> <b>2013</b>	<b>INTERCHANGE MARKINGS</b>	INDEX NO. <b>17345</b>	SHEET NO. <b>3</b>
07/01/10							

Notes:

1. Post delineators spaced at 40' on curves of the entrance and exit of ramps. The spacing on the tangent portion of the ramp section shall be 300'. All delineators are to be setback 4' from shoulder break. Post delineators should not be discontinued in sections with guardrail.

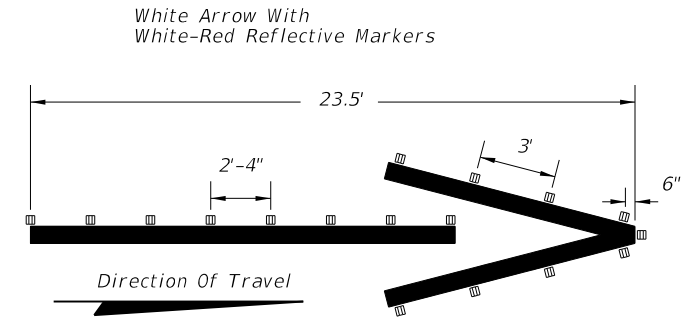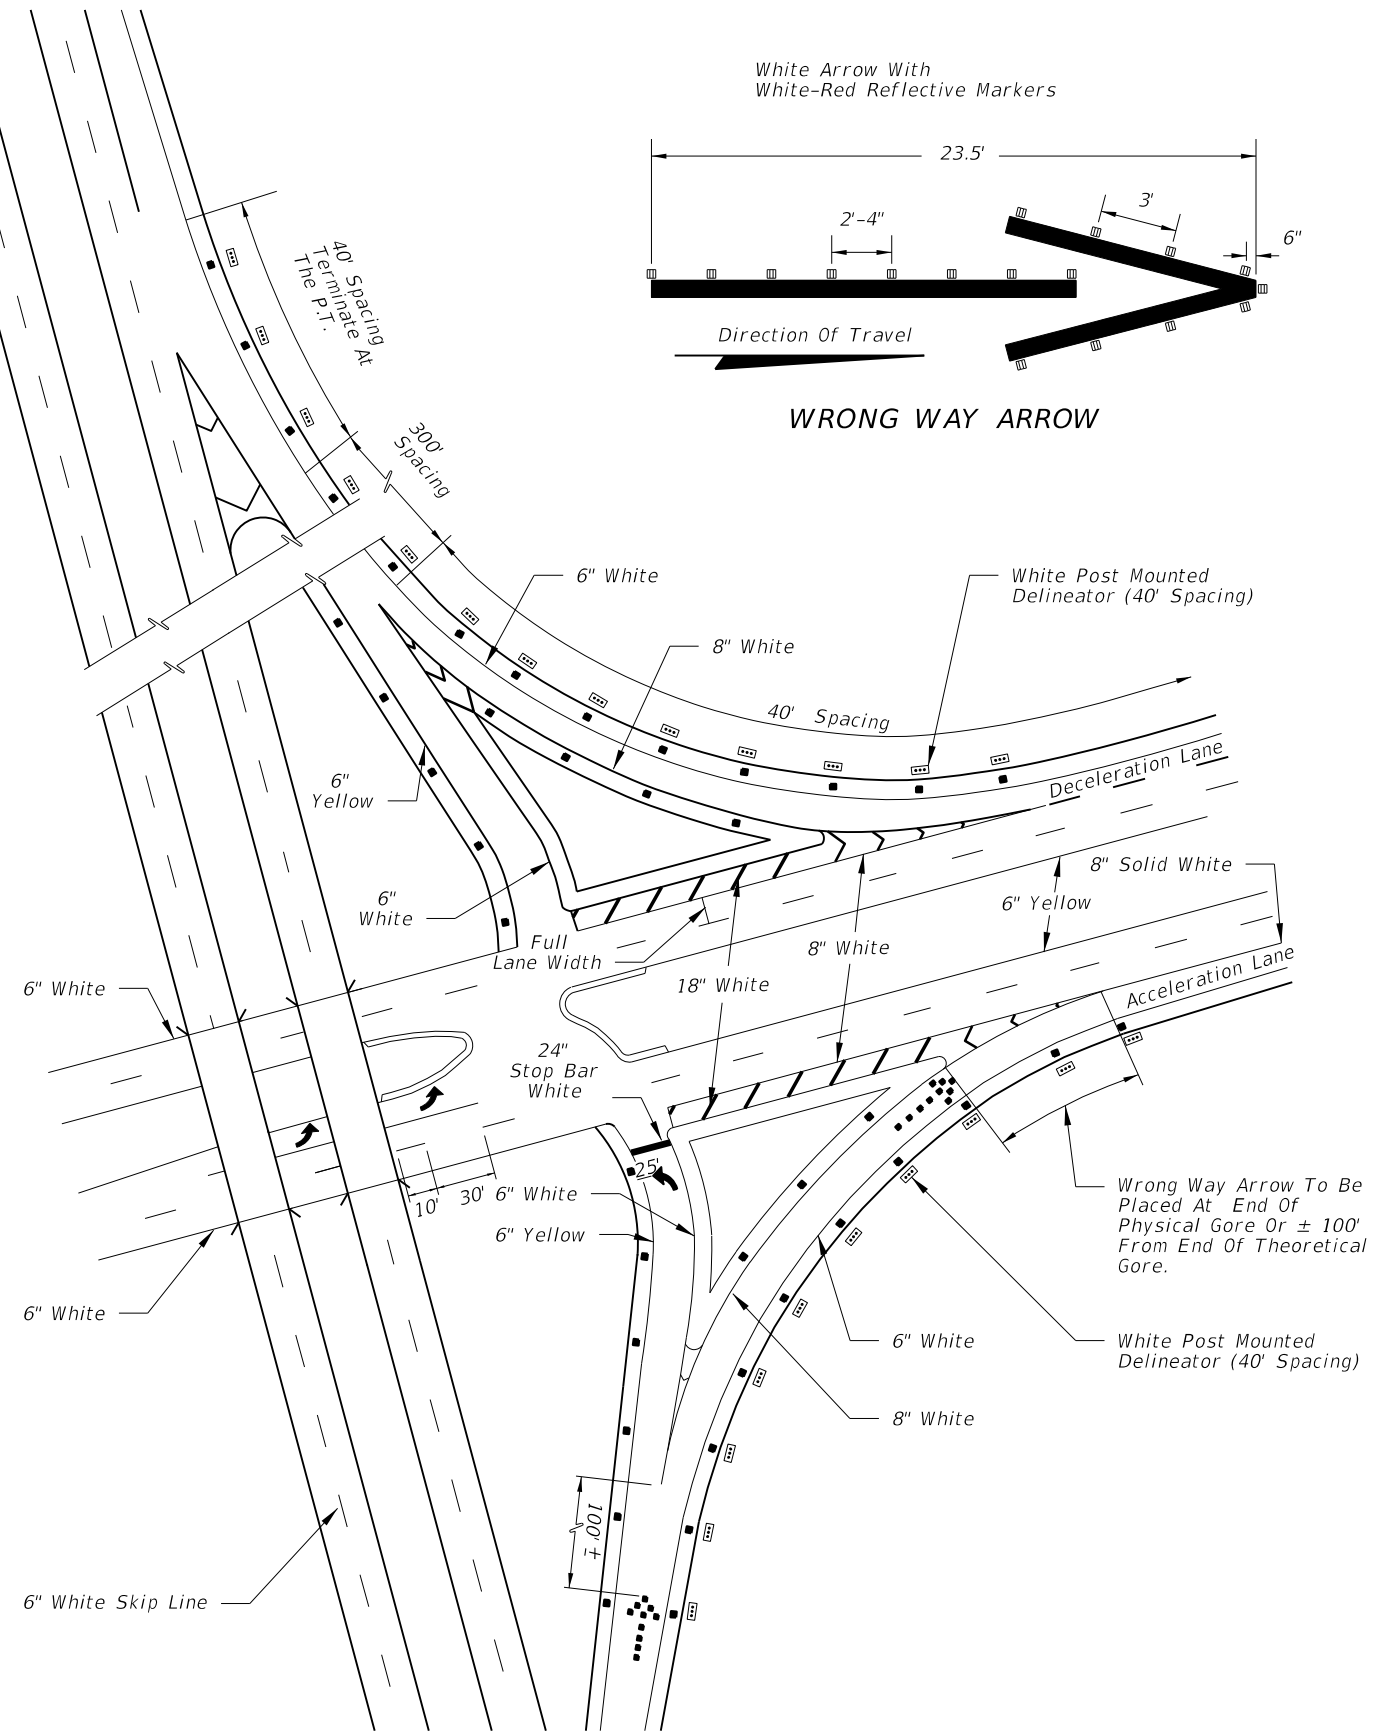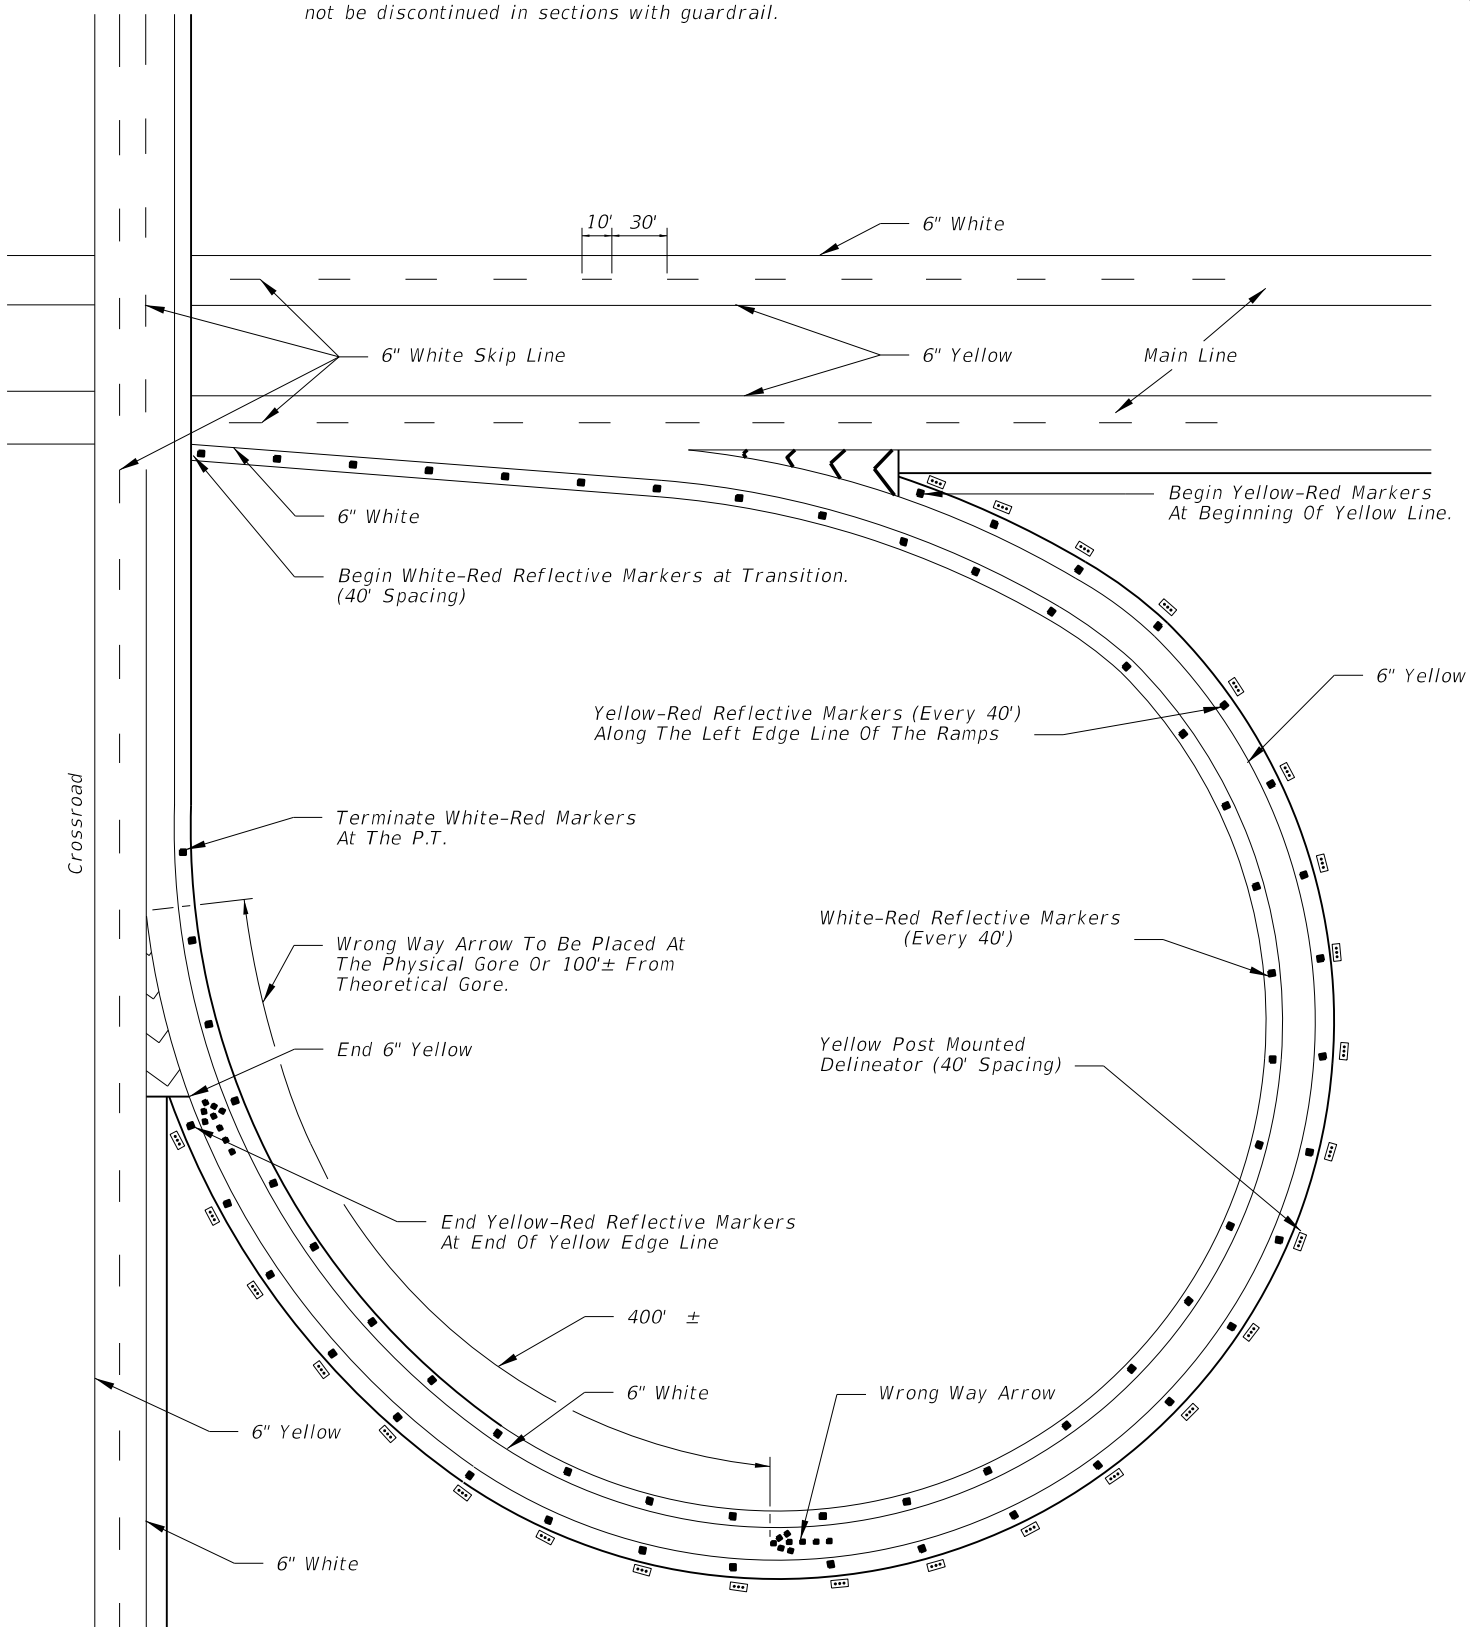

C:\projects\standards\roadway\17300-s\17345-04.dgn  
r0960rh  
12:10:31 PM  
6/29/2012

LAST REVISION	DESCRIPTION:	 <b>FDOT DESIGN STANDARDS</b> 2013	<b>INTERCHANGE MARKINGS</b>	INDEX NO.	SHEET NO.
01/01/12				17345	4