

6/28/2012 12:34:58 PM rd960/h C:\projects\standards\roadway\17700-s\17764-01.dgn

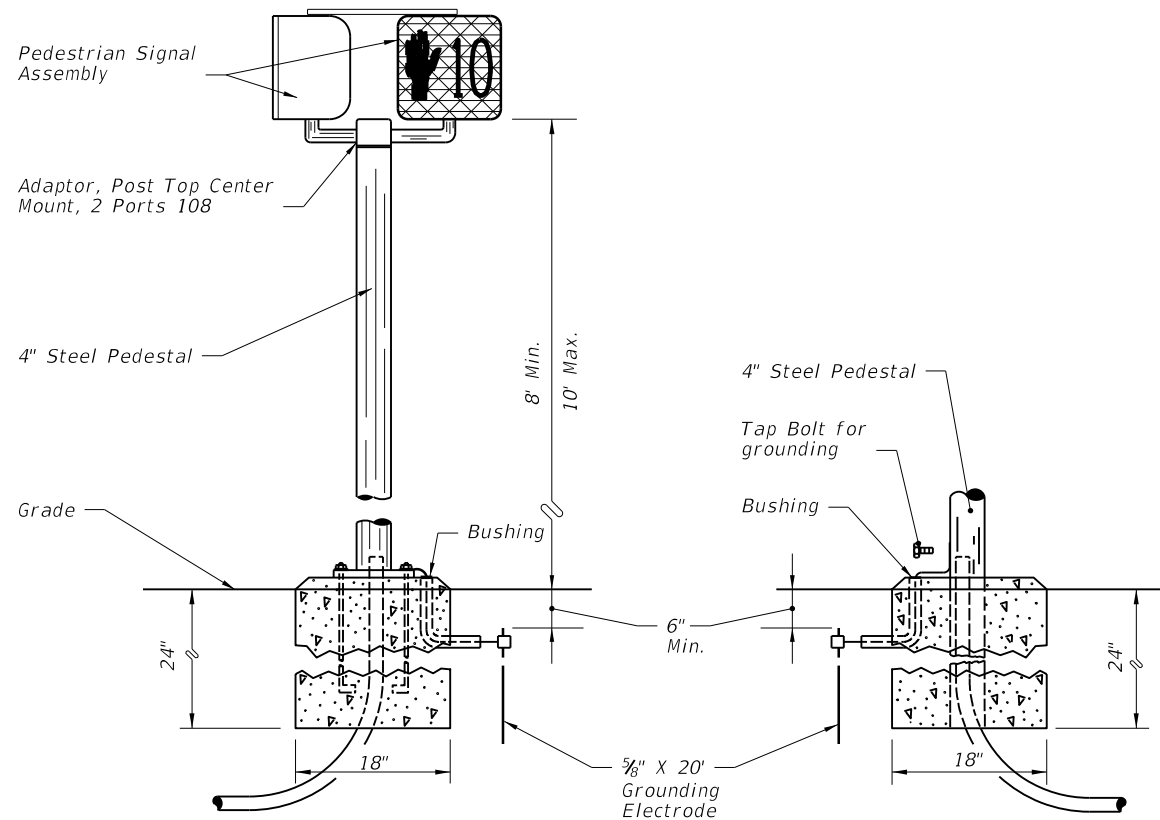


FIGURE A

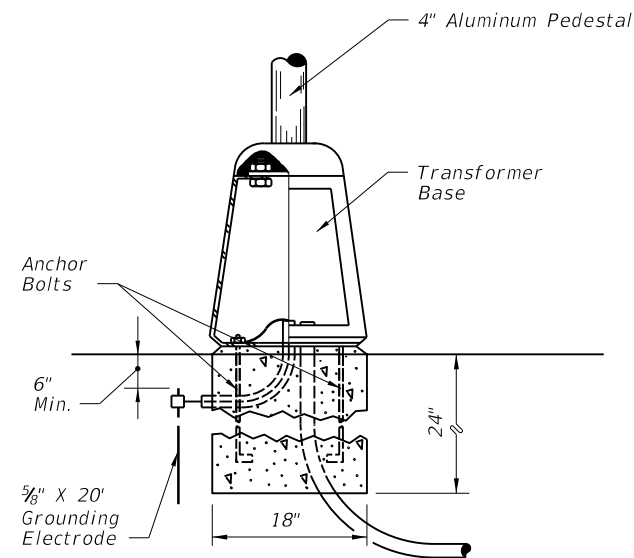


FIGURE B

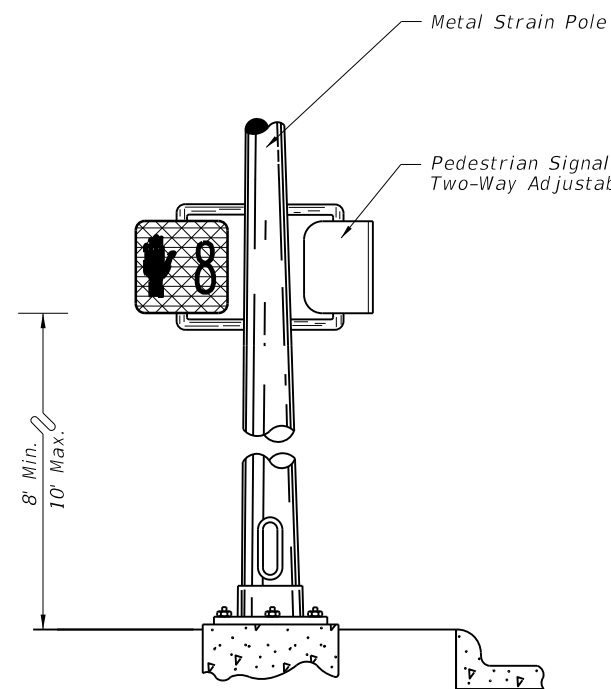


FIGURE C

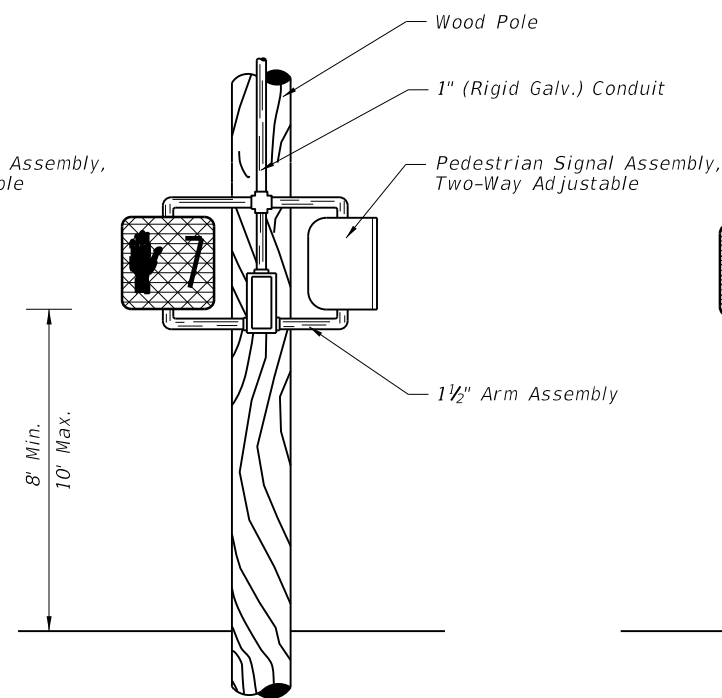


FIGURE D

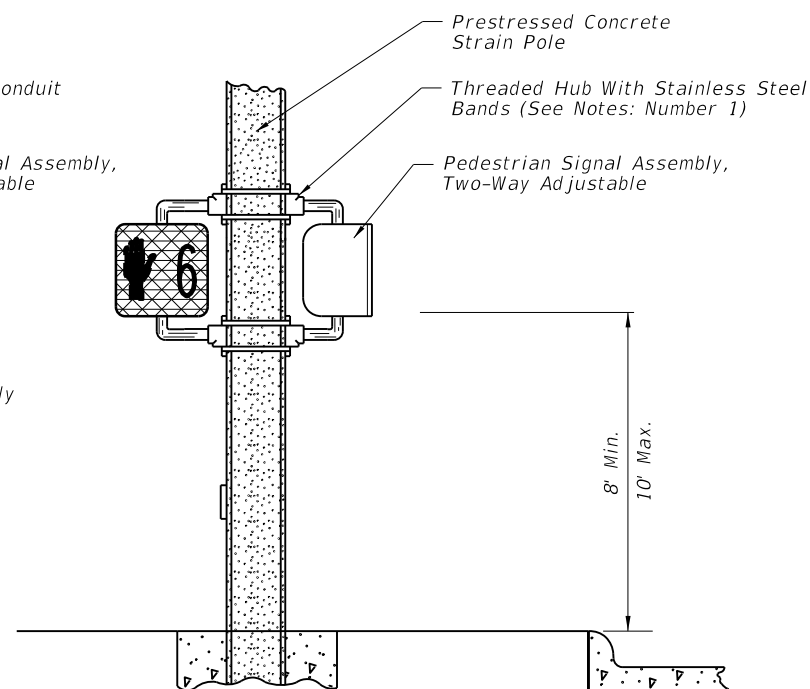


FIGURE E

**Notes:**

1. As an option, the contractor will be allowed to install pedestrian signals on concrete poles and pedestals with the use of lead anchors (two bolts same size per hub) in lieu of the stranded steel bands.
2. Holes drilled or punched in metal poles or pedestals shall be thoroughly reamed, cleaned of all burrs and covered with two (2) coats of zinc rich paint as specified in the standard specifications for road and bridge construction. Grommets or bushings shall be installed in holes.
3. Meet all grounding requirements of Section 620 of the Standard Specifications.

LAST REVISION	DESCRIPTION:
01/01/12	REVISION



FDOT DESIGN STANDARDS  
2013

PEDESTRIAN CONTROL SIGNAL  
INSTALLATION DETAILS

INDEX NO.	SHEET NO.
17764	1