

**NOTES**

**A. DESIGN SPECIFICATIONS:**

1. AASHTO LRFD Specifications for Highway Bridges.
2. FDOT Structures Manual (Current Edition).
3. Florida Department of Transportation's Plans Preparation Manual, Volume I (Current Edition).

**B. DESIGN CRITERIA:**

The Precast Sound Barriers are pre-designed based on criteria in the Structures Manual, Volume I.

**C. CONCRETE AND GROUT:**

1. Concrete Class and Compressive Strength:
  - a. Cast-In-Place Collars: Class IV ( $f'c = 5500$  psi)
  - b. Precast Panels, Collars and Post Caps: Class IV ( $f'c = 5500$  psi)
  - c. Posts: Class IV ( $f'c = 5500$  psi)
2. Grout for Auger Cast Piles:
  - a. Maximum Working Compressive Strength = 2200 psi
  - b. Minimum 28 Day Strength = 5500 psi
3. Minimum Compressive Strength for Form Removal and Handling of Posts and Panels:
  - a. 2,500 psi for horizontally cast post and panels.
  - b. 2,000 psi for vertically cast panels or when tilt-up form tables are used for horizontally cast panels.

**D. REINFORCING STEEL:**

1. In addition to the requirements of Specification Section 415, tie post and pile stirrups at the following locations as a minimum:
  - a. Post Stirrups - Tie at all four corner bars and at every third interior bar intersection.
  - b. Pile Stirrups - Tie to the main vertical reinforcing at alternate intersections for circular configurations and for rectangular configurations at the four corners and at every third interior bar intersection.

**E. SURFACE FINISHES AND AESTHETIC REQUIREMENTS:**

1. See Sound Barrier Data Tables in the Plans for project requirements.

**F. PILING:**

Construct Auger Cast Piling in accordance with the Plans and Specification Section 455.

**G. UTILITIES:**

Field verify the locations of all overhead and underground utilities shown in the Wall Control Drawings.

**H. NEOPRENE PADS AND RESILIENT PADS:**

1. Neoprene Pads for Panel Bearing Points Between the Stacked Panels:
 

The Neoprene pads for the panel bearing points shall be Plain Pads, Grade 50 durometer hardness in accordance with Specifications Sections 932-2.
2. Neoprene Pads for Collar Bearing Points:
 

Neoprene Pads shall be Fiber Reinforced Pads, with a durometer hardness between Grade 50 and Grade 80, in accordance with Specification Section 932-2. Plain Pads may be substituted for Fiber Reinforced Pads when sufficient bearing area is available on the concrete collar, as follows:

  - a. 10' post spacing: 4" x 4" x 1/2" Plain Pads, Grade 50 durometer hardness.
  - b. 20' post spacing and < 18' wall height: 4" x 4" x 1/2" Plain Pads, Grade 50 durometer hardness.
  - c. 20' post spacing and ≥ 18' wall height: 4" x 5" x 1/2" Plain Pads, Grade 50 durometer hardness.

**I. CASTING TOLERANCES:**

1. Overall Height & Width: +/- 1/4"
2. Thickness: +/- 1/4"
3. Plane of side mold: +/- 1/16"
4. Openings: +/- 1/2"
5. Out of Square: 1/8" per 6 ft., but not more than 3/8" total along any side
6. Warping: 1/16" per foot distance to nearest corner
7. Bowing: 1/240 panel dimension
8. Surface Smoothness for Type "A" (Smooth) Surface Texture Option: +/- 1/16" along a 10 ft. straightedge.

**J. SOUND BARRIER NOTES:**




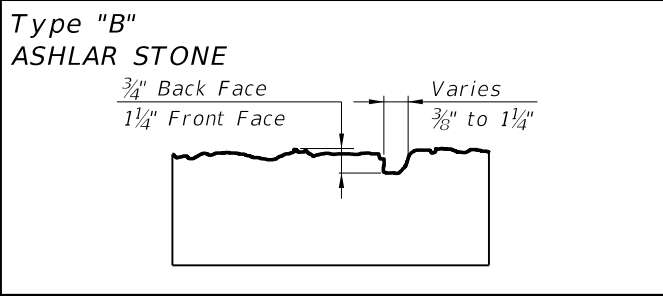
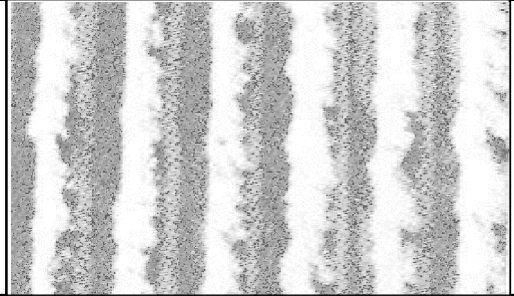
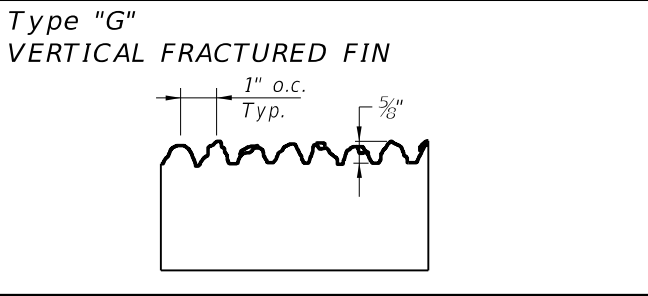
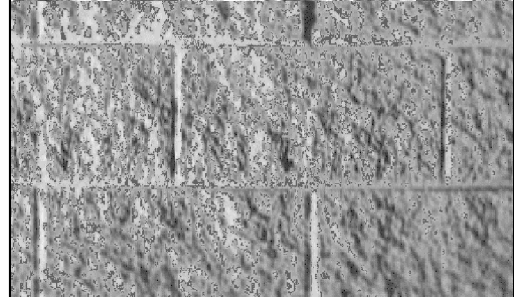
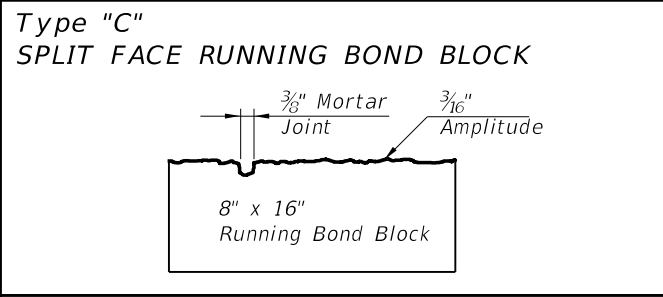
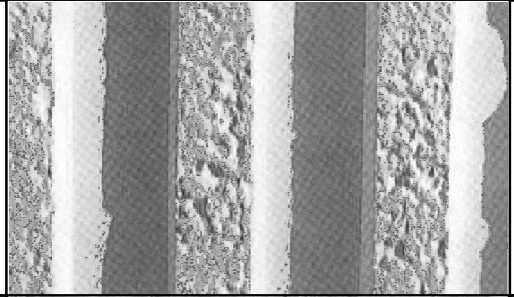
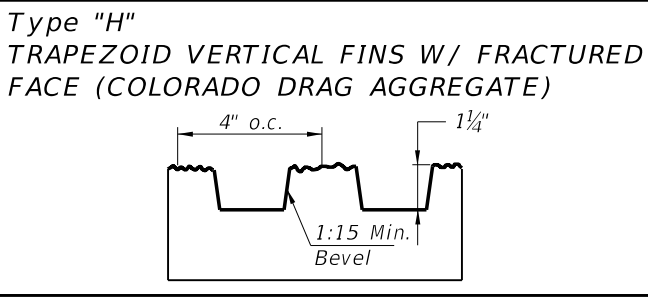
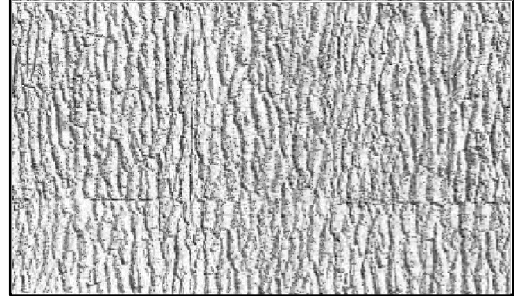
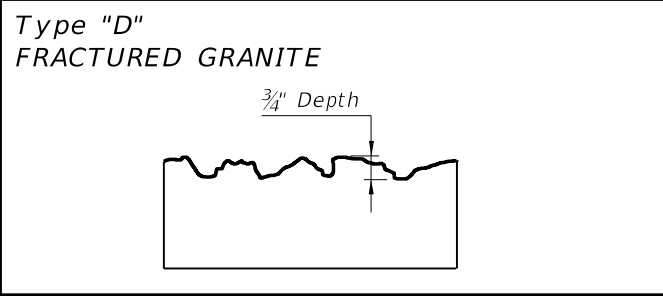
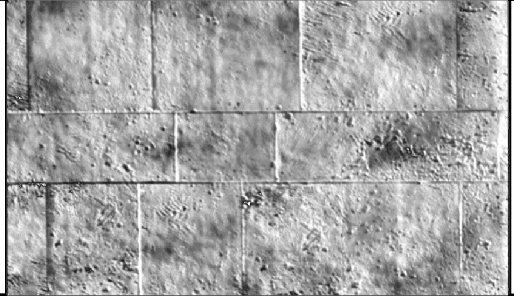
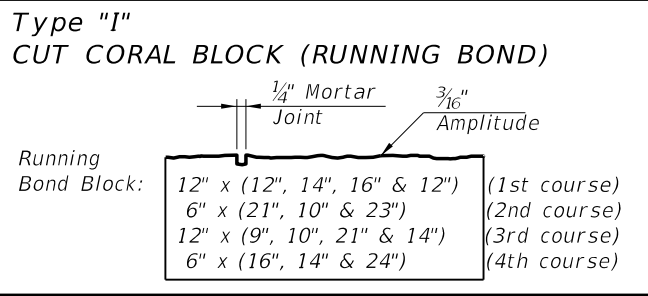
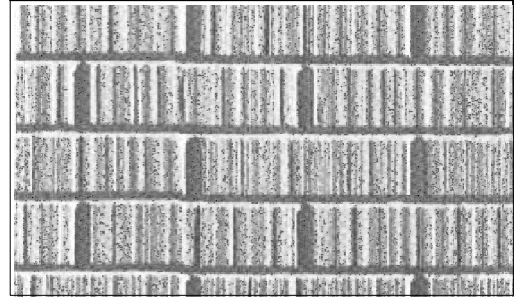
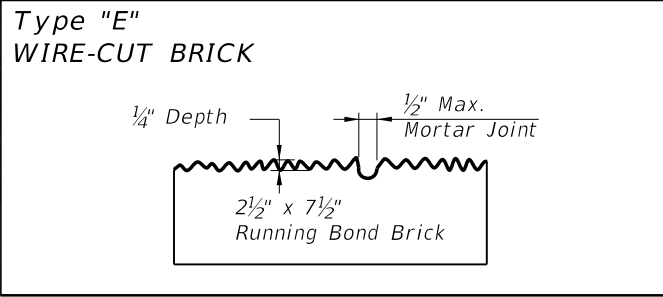
1. Post spacing is measured from centerline to centerline of auger cast piles. For this Index, posts and piles have been designed for a spacing between a minimum of 10 ft and a maximum of 20 ft. If pile spacing is greater than 10 ft, use post design based on a 20 ft spacing.
2. Total height of wall ranges from a minimum of 12 ft to a maximum of 22 ft. The height of individual panels must be a maximum of 12 ft and a minimum of 6 ft, except for the following. For total wall heights less than 14 ft high, the minimum bottom panel height is 4 ft when graphics must be accommodated in the upper panel. If a fire hose access hole is required, the bottom panels must be a minimum of 6 feet.
3. Where special graphics are required, locate horizontal panel joints outside of graphics. Where possible, hold horizontal panel joints at a constant elevation.

C:\projects\standards\structures\2013book\05200-01of16.dgn 6/28/2012 3:00:47 PM rd960rh

**GENERAL NOTES**


|               |          |              |   |   |                               |           |           |
|---------------|----------|--------------|---|---|-------------------------------|-----------|-----------|
| LAST REVISION | REVISION | DESCRIPTION: |  | <b>FDOT DESIGN STANDARDS</b><br><b>2013</b> | <b>PRECAST SOUND BARRIERS</b> | INDEX NO. | SHEET NO. |
| 07/01/12      |          |              |   |   |                               | 5200      | 1         |

6/28/2012 3:00:50 PM r0960rh C:\projects\standards\structures\2013book\05200-02of16.dgn

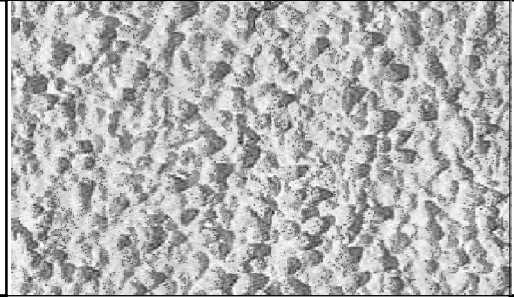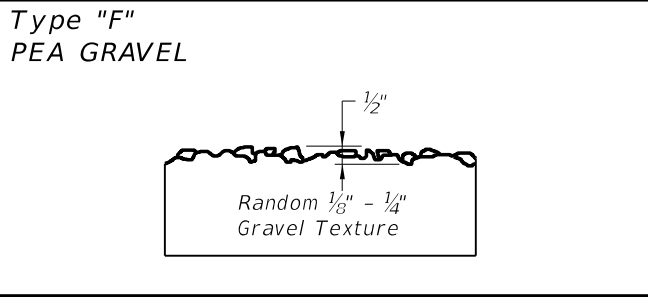
|   |   |   |  |                             |              |                       |              |                            |              |                       |              |
|---|---|---|--|-----------------------------|--------------|-----------------------|--------------|----------------------------|--------------|-----------------------|--------------|
|   | <p>Type "A"<br/>SMOOTH</p>  |    | <p>Type "F"<br/>PEA GRAVEL</p>    |                             |              |                       |              |                            |              |                       |              |
|    | <p>Type "B"<br/>ASHLAR STONE</p>                    |    | <p>Type "G"<br/>VERTICAL FRACTURED FIN</p>    |                             |              |                       |              |                            |              |                       |              |
|   | <p>Type "C"<br/>SPLIT FACE RUNNING BOND BLOCK</p>  |   | <p>Type "H"<br/>TRAPEZOID VERTICAL FINNS W/ FRACTURED FACE (COLORADO DRAG AGGREGATE)</p>   |                             |              |                       |              |                            |              |                       |              |
|  | <p>Type "D"<br/>FRACTURED GRANITE</p>             |    | <p>Type "I"<br/>CUT CORAL BLOCK (RUNNING BOND)</p>  <p>Running Bond Block:</p> <table border="1" data-bbox="2175 1249 2641 1370"> <tr> <td>12" x (12", 14", 16" &amp; 12")</td> <td>(1st course)</td> </tr> <tr> <td>6" x (21", 10" &amp; 23")</td> <td>(2nd course)</td> </tr> <tr> <td>12" x (9", 10", 21" &amp; 14")</td> <td>(3rd course)</td> </tr> <tr> <td>6" x (16", 14" &amp; 24")</td> <td>(4th course)</td> </tr> </table> | 12" x (12", 14", 16" & 12") | (1st course) | 6" x (21", 10" & 23") | (2nd course) | 12" x (9", 10", 21" & 14") | (3rd course) | 6" x (16", 14" & 24") | (4th course) |
| 12" x (12", 14", 16" & 12")   | (1st course)  |   |  |                             |              |                       |              |                            |              |                       |              |
| 6" x (21", 10" & 23")   | (2nd course)  |   |  |                             |              |                       |              |                            |              |                       |              |
| 12" x (9", 10", 21" & 14")  | (3rd course)  |   |  |                             |              |                       |              |                            |              |                       |              |
| 6" x (16", 14" & 24")   | (4th course)  |   |  |                             |              |                       |              |                            |              |                       |              |
|  | <p>Type "E"<br/>WIRE-CUT BRICK</p>                | <p>NOTES:</p> <ol style="list-style-type: none"> <li>Surfaces shall be formed, rolled, or pressed using form liners in accordance with the Plans and Specifications for Class 3 Surface Finish.</li> <li>See Sound Barrier Data Tables for project aesthetic requirements.</li> </ol> |  |                             |              |                       |              |                            |              |                       |              |

TEXTURE OPTIONS

|                                   |                     |   |                               |                           |                        |
|-----------------------------------|---------------------|---|-------------------------------|---------------------------|------------------------|
| <p>LAST REVISION<br/>07/01/12</p> | <p>DESCRIPTION:</p> |  <p>FDOT DESIGN STANDARDS<br/>2013</p> | <p>PRECAST SOUND BARRIERS</p> | <p>INDEX NO.<br/>5200</p> | <p>SHEET NO.<br/>2</p> |
|-----------------------------------|---------------------|---|-------------------------------|---------------------------|------------------------|

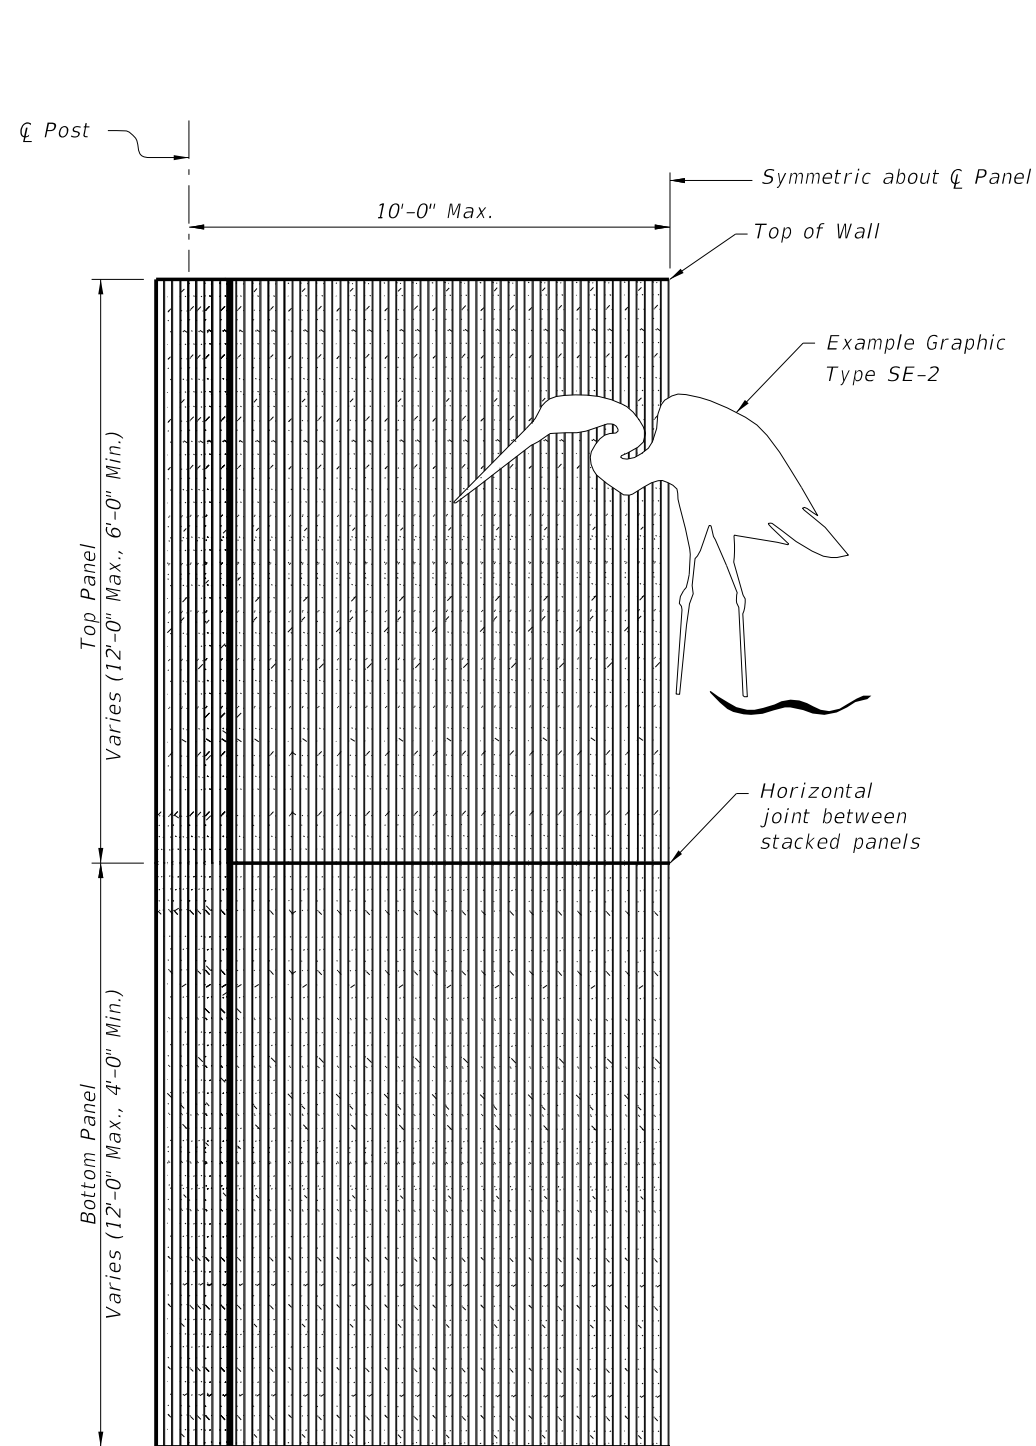

HALF ELEVATION  
 (Front Face Post and Panel Texture Type "H" shown)  
 (Graphic Type SE-2 shown)  
 (Two stacked panels shown, three stacked panels similar)

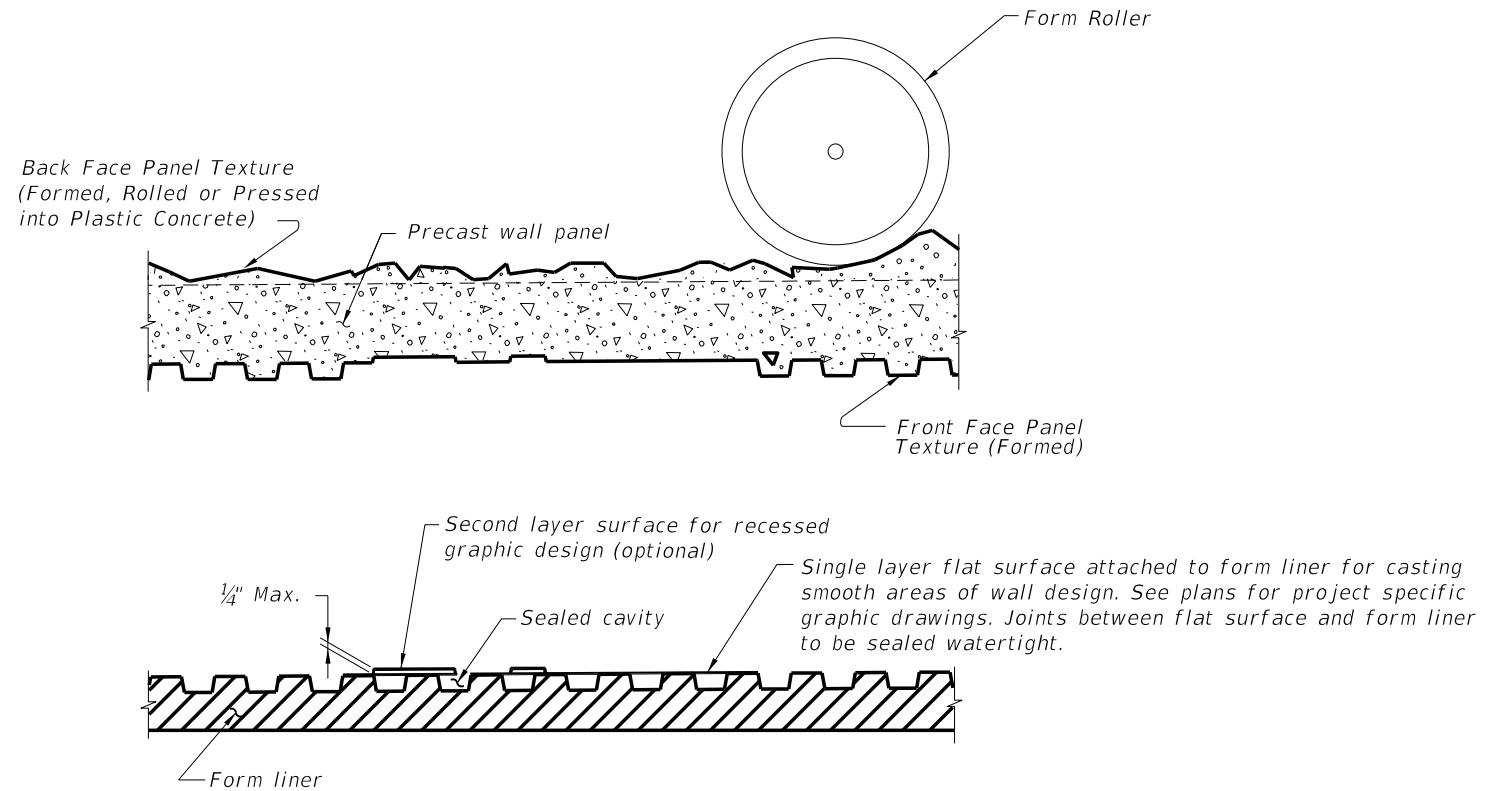


TYPICAL FORMING DETAIL  
 (Front Face Panel Texture Type "H" shown)  
 (Back Face Panel Texture Type "D" shown)  
 (Post Forming Details Similar)


- NOTES:
1. Submit specific form liner samples for approval by the Engineer.
  2. Textures and graphics shown are for demonstration purposes only. See Sound Barrier Data Tables in the plans for project specific texture and graphic requirements.

6/28/2012 3:01:00 PM rd9607h C:\projects\standards\structures\2013book\05200-03of16.dgn


GRAPHICS & TEXTURE DETAILS

|               |          |              |   |                               |           |           |
|---------------|----------|--------------|---|-------------------------------|-----------|-----------|
| LAST REVISION | REVISION | DESCRIPTION: | <br><b>FDOT DESIGN STANDARDS</b><br>2013 | <b>PRECAST SOUND BARRIERS</b> | INDEX NO. | SHEET NO. |
| 07/01/12      |          |              |   |                               | 5200      | 3         |


C:\projects\standards\structures\2013book\05200-04of16.dgn  
 rd960rh  
 3:01:02 PM  
 6/28/2012

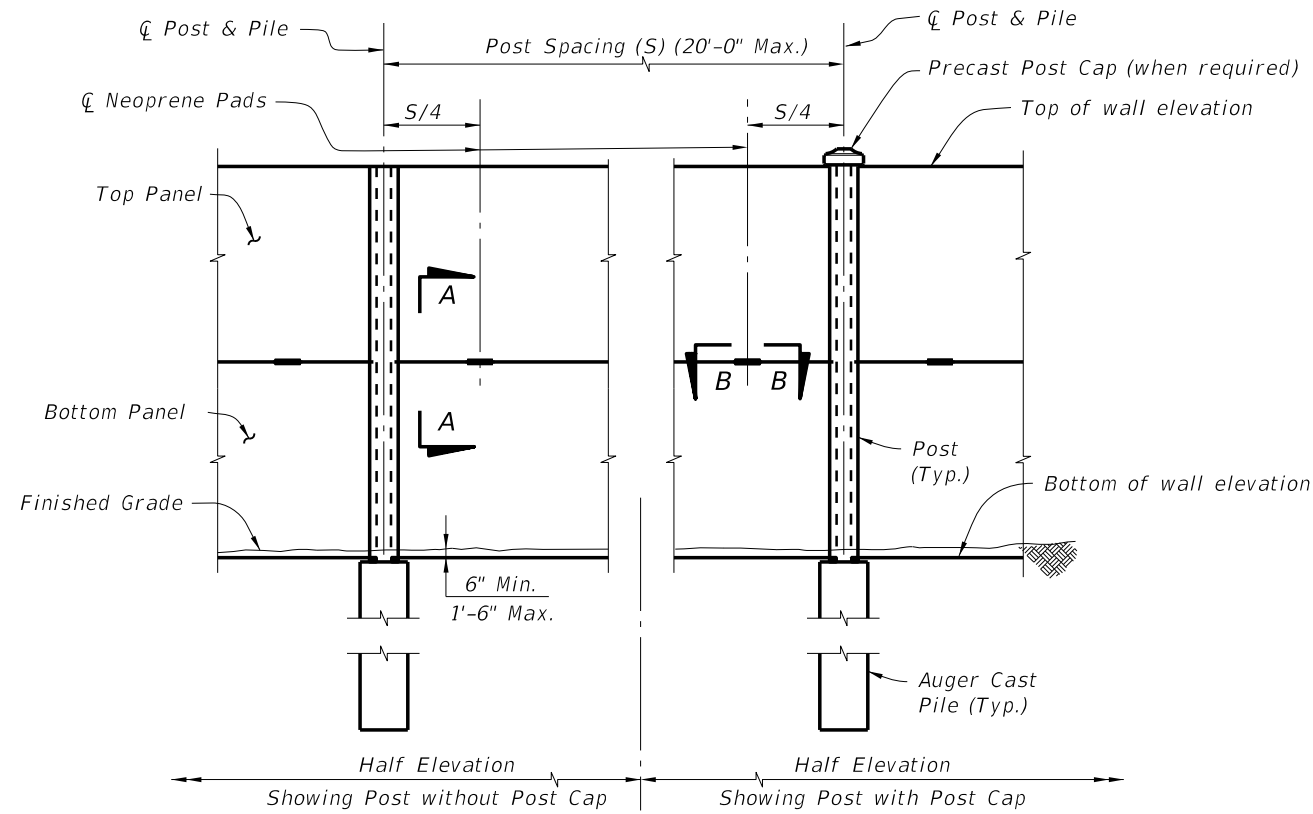


TYPICAL ELEVATION

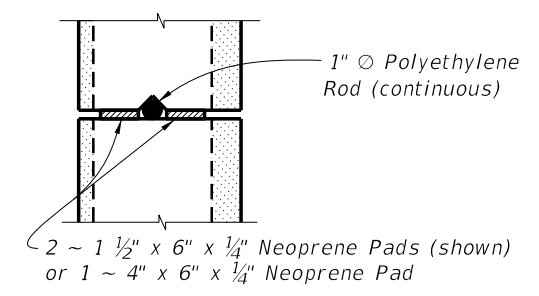


SECTION A-A

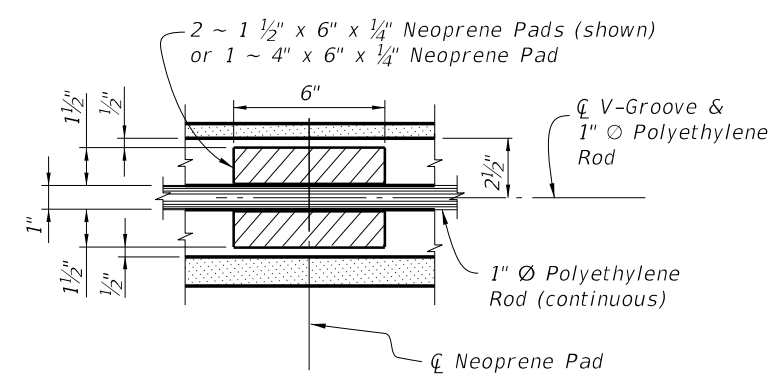

SECTION B-B

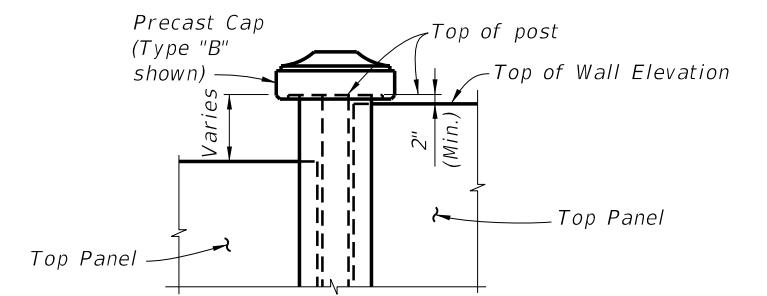


WITH POST CAP

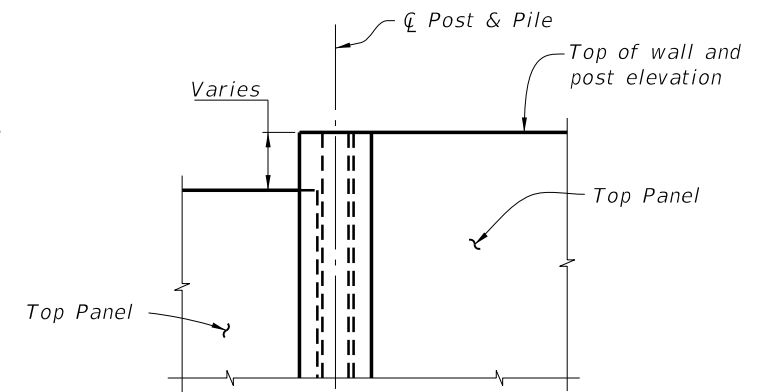


WITHOUT POST CAP


ELEVATION STEP AT TOP OF WALL

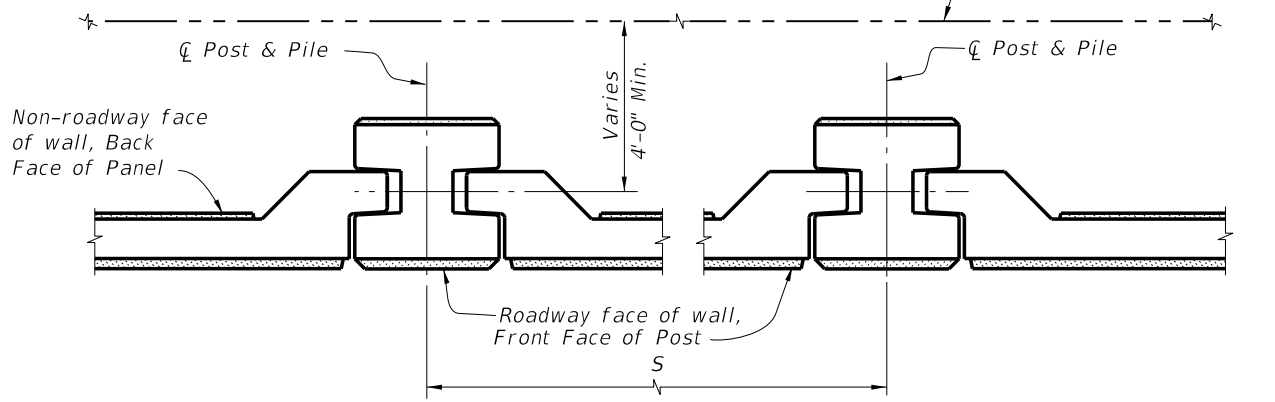

PLAN (Showing Flush Panel)

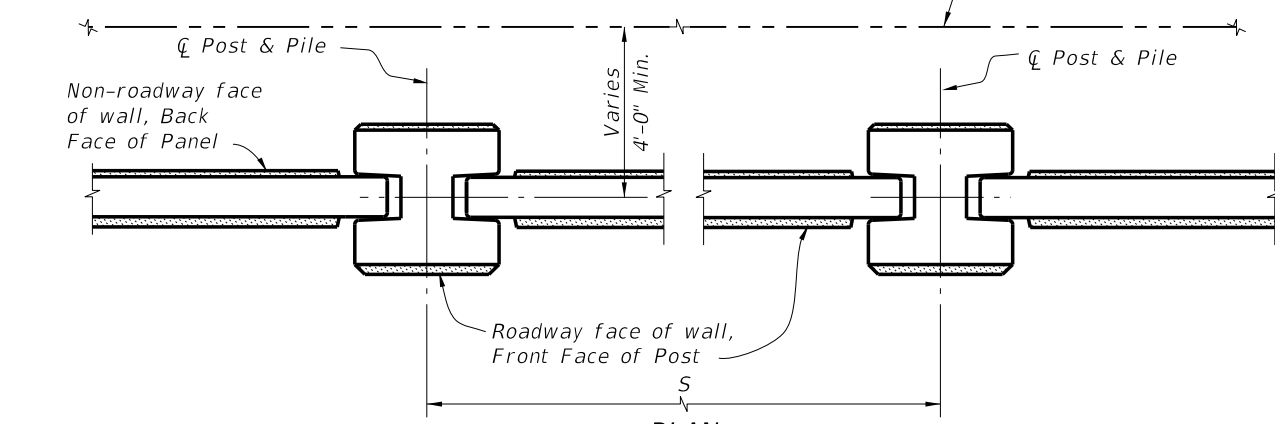

PLAN (Showing Recessed Panel)

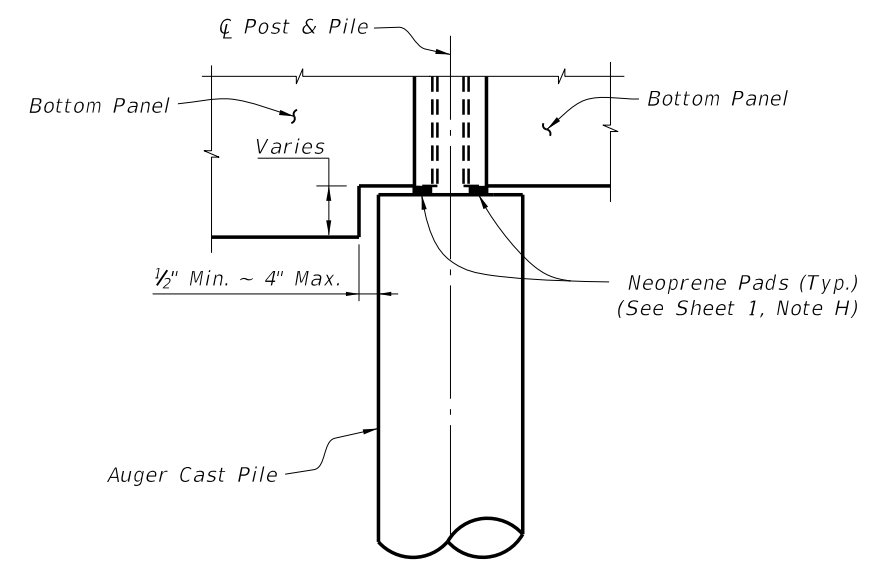


ELEVATION STEP AT BOTTOM OF WALL

TYPICAL DETAILS

|               |              |  |                               |           |           |
|---------------|--------------|--|-------------------------------|-----------|-----------|
| LAST REVISION | DESCRIPTION: |  <b>FDOT DESIGN STANDARDS</b><br>2013 | <b>PRECAST SOUND BARRIERS</b> | INDEX NO. | SHEET NO. |
| 07/01/12      |              |  |                               | 5200      | 4         |




6/28/2012 3:01:04 PM rd960rh C:\projects\standards\structures\2013book\05200-05of16.dgn

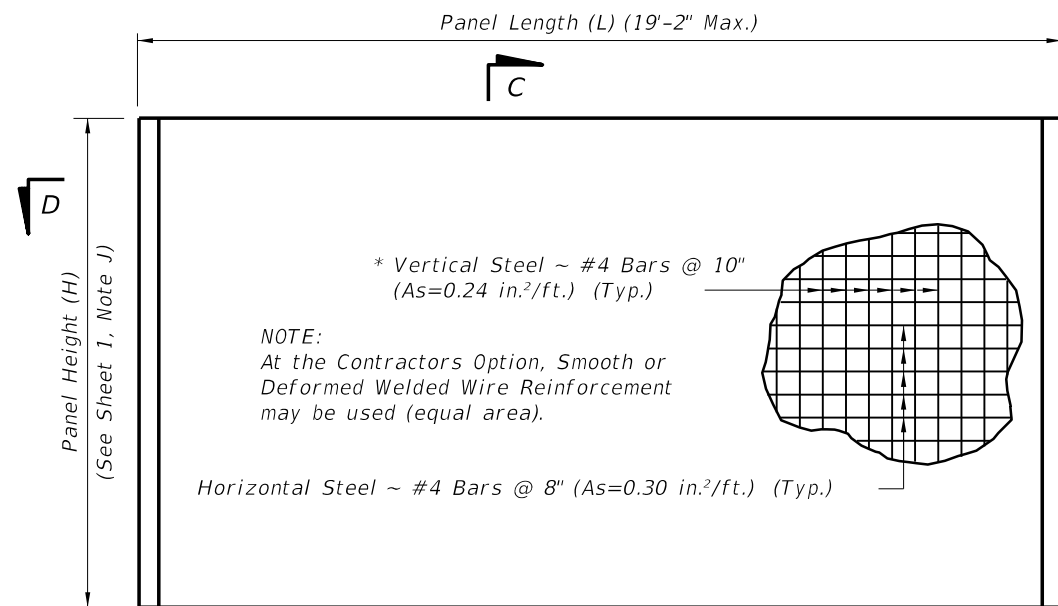


TYPICAL PANEL ELEVATION


\* In lieu of utilizing the standard pick up points below, panels may be cast vertically or cast horizontally then tilted upright using tilt-tables prior to lifting from form. In this case, pick points must be placed in the top of panels only and transported maintaining the vertical orientation. If these criteria are met, the vertical steel may be reduced to #4 Bars @ 1'-3" (As=0.15 in.²/ft.).

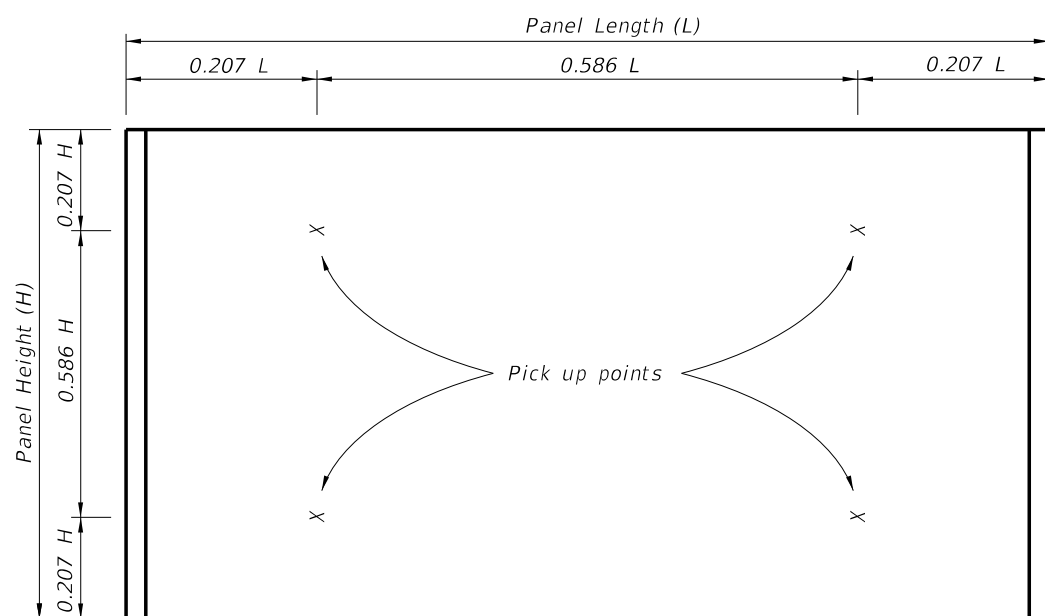


STANDARD PICK UP POINTS FOR PANELS  
(Panels shall be rotated about long axis only)

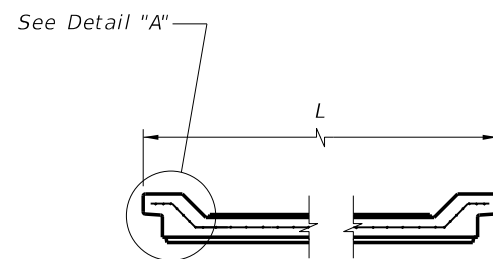


SECTION D-D  
(Showing Flush Panel)

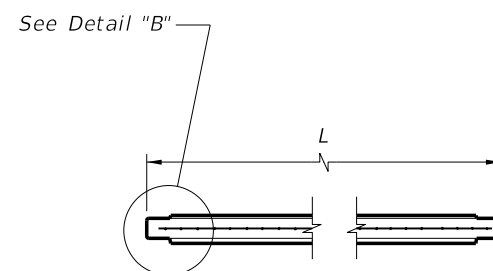


SECTION D-D  
(Showing Recessed Panel)

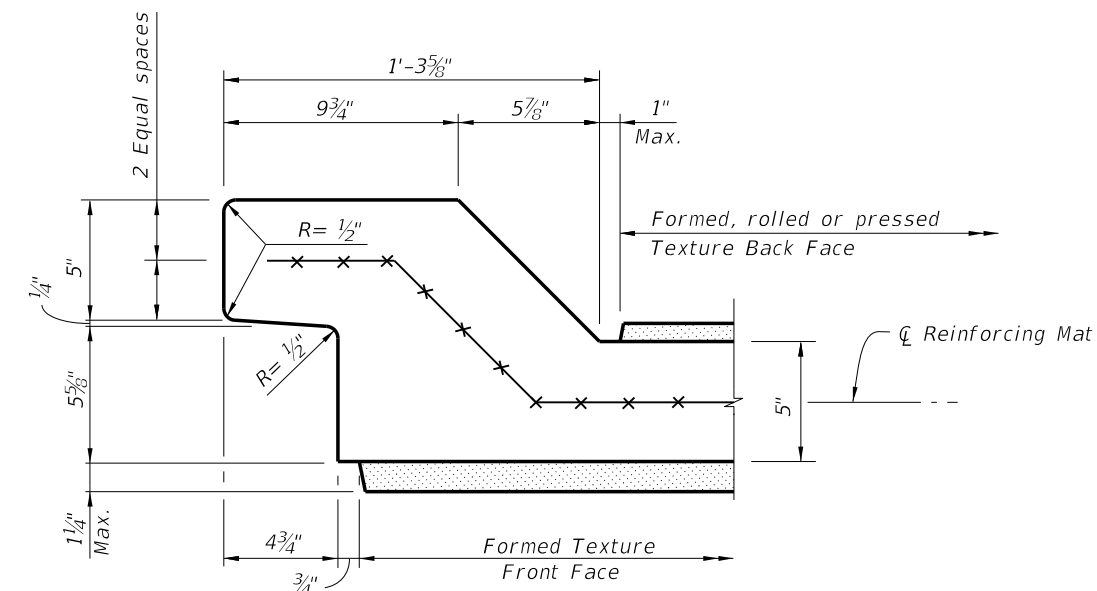

DETAIL "A"  
(Typical both ends)

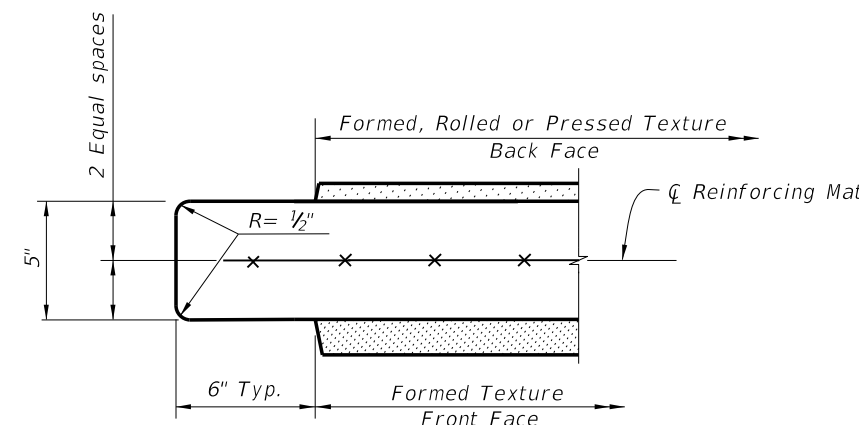

DETAIL "B"  
(Typical both ends)

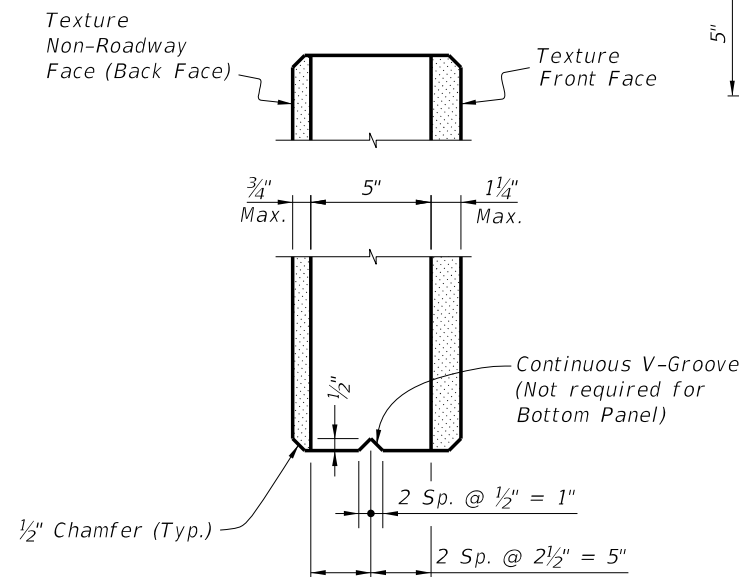

SECTION C-C


- Notes:
1. See Sheet 3 for allowable methods of applying textures.
  2. See plans for panel type and aesthetic requirements.

TYPICAL PANEL DETAILS

|               |              |  |                               |           |           |
|---------------|--------------|--|-------------------------------|-----------|-----------|
| LAST REVISION | DESCRIPTION: |  <b>FDOT DESIGN STANDARDS</b><br>2013 | <b>PRECAST SOUND BARRIERS</b> | INDEX NO. | SHEET NO. |
| 07/01/12      |              |  |                               | 5200      | 5         |


6/29/2012 3:01:07 PM rd960rh C:\projects\standards\structures\2013book\05200-06of16.dgn

See Detail "C" for panel dimensions

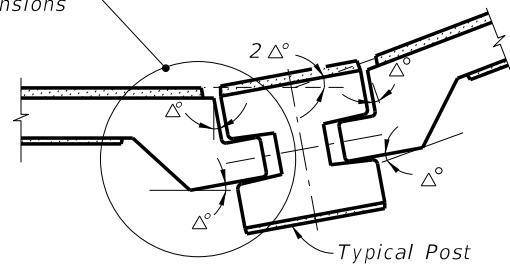


**CASE 1**  
(Interior Angle)


See Detail "D" for panel dimensions

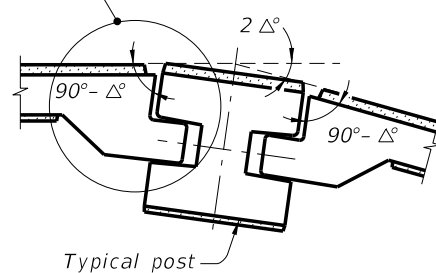


**CASE 2**  
(Exterior Angle)

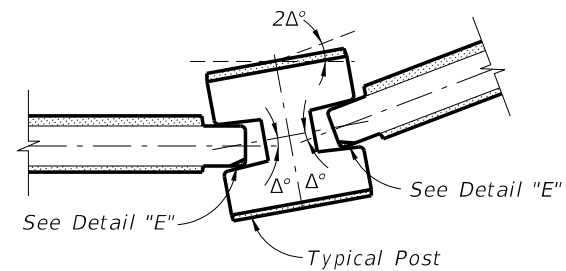


**CASE 1**  
(Interior Angle)

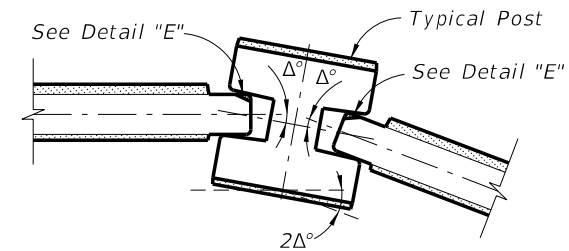


**CASE 2**  
(Exterior Angle)

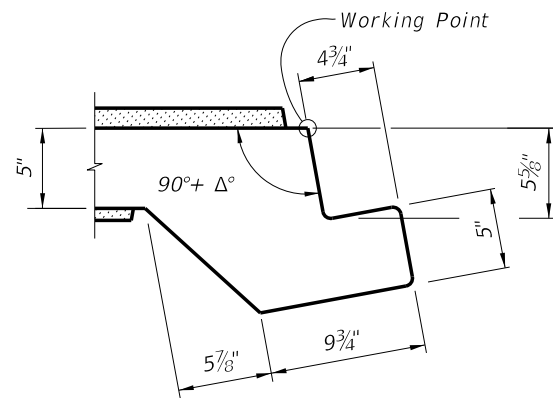

**DETAIL "C"**

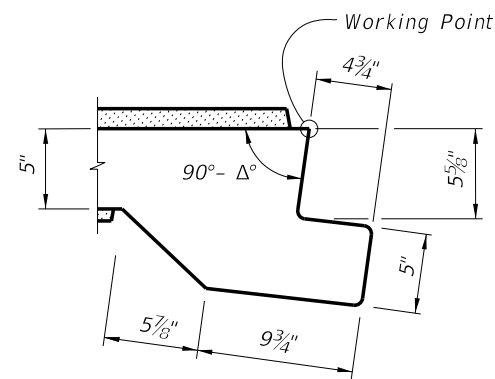

**DETAIL "D"**



**DETAIL "E"**  
(Back Face Chamfer Shown  
Front Face Chamfer Similar)

**NOTE:**  
The shop drawings shall include specific pivoting details of panel ends at locations where the deflection angle ( $2\Delta^\circ$ ) between panels exceeds  $7^\circ$ .


PIVOTING DETAILS  
(Flush Panel)

**NOTE:**  
The shop drawings shall include specific pivoting details of panel ends at locations where the deflection angle ( $2\Delta^\circ$ ) between panels exceeds  $20^\circ$ .

PIVOTING DETAILS  
(Recessed Panel)

TYPICAL PANEL DETAILS


| LAST REVISION | DESCRIPTION: |
|---------------|--------------|
| 07/01/12      |              |



**FDOT DESIGN STANDARDS**  
2013


**PRECAST SOUND BARRIERS**

| INDEX NO. | SHEET NO. |
|-----------|-----------|
| 5200      | 6         |

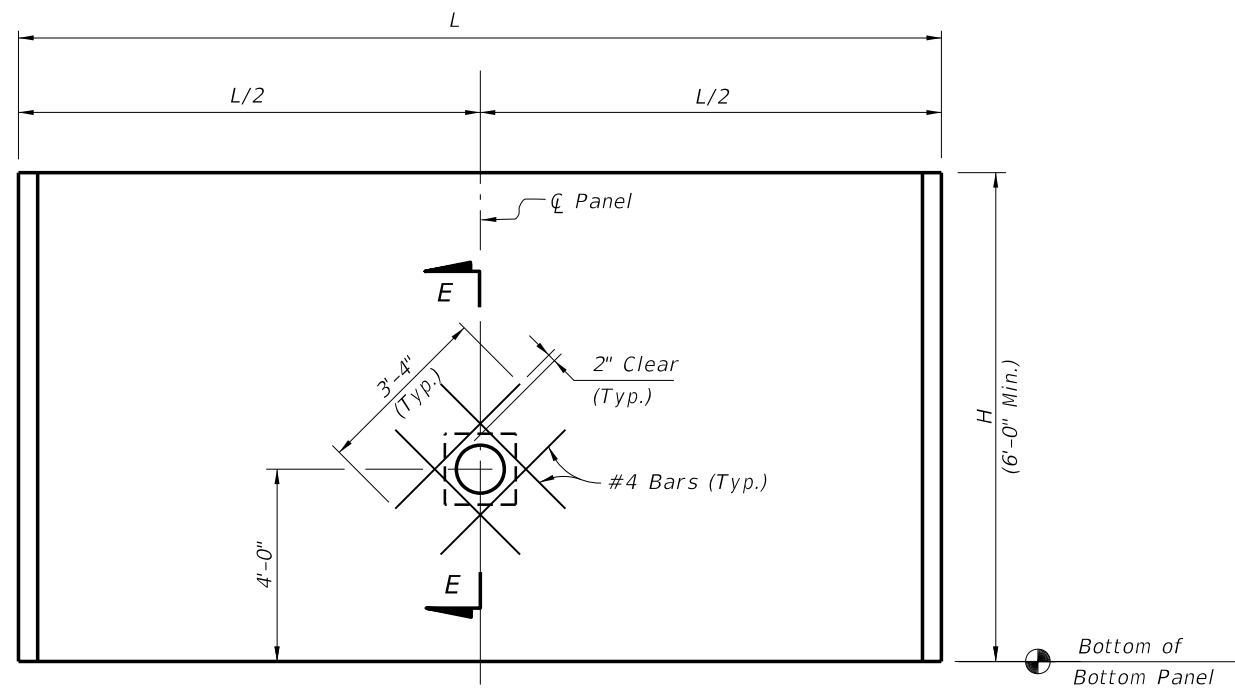


NOTE: Fire Hose Access Hole only to be located at or near fire hydrants


**FIRE HOSE ACCESS HOLE TYPICAL DETAIL**  
(Front Face of Wall Shown)

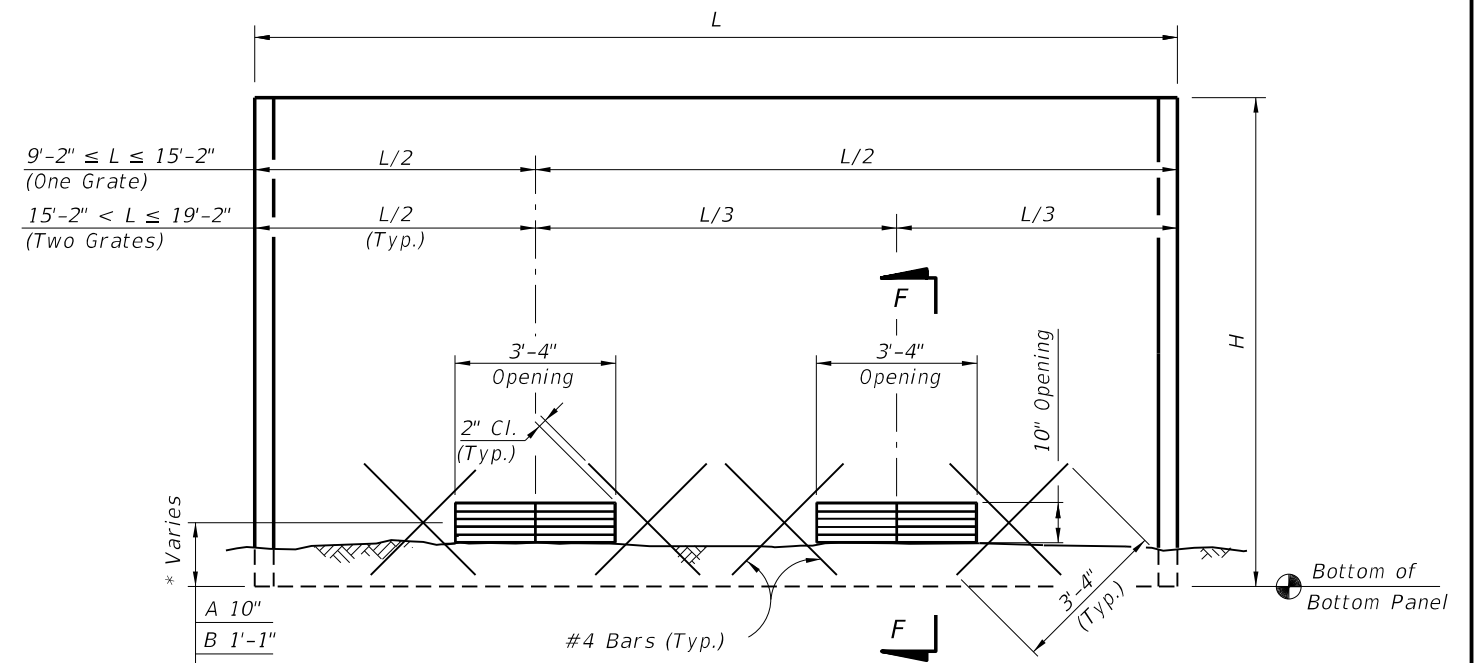


**DRAINAGE HOLES TYPES A, B, C & D**  
(Front Face of Wall Shown)  
(Two Holes Shown,  
One Hole Similar)

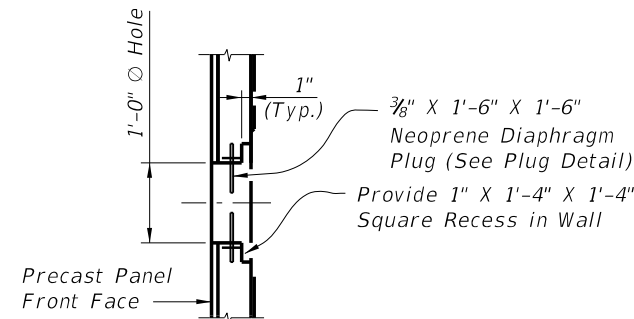


**SECTION E-E**

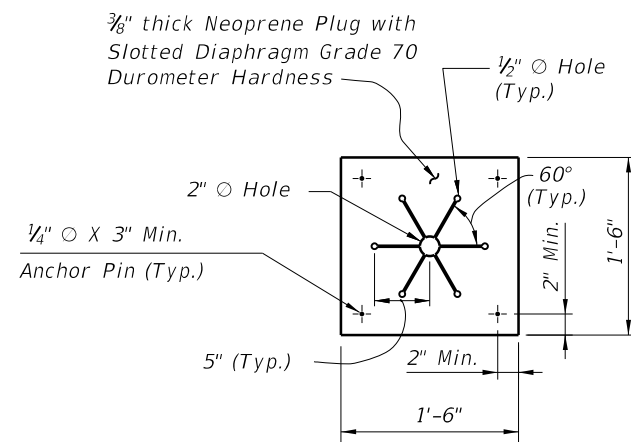

**PLUG DETAIL**

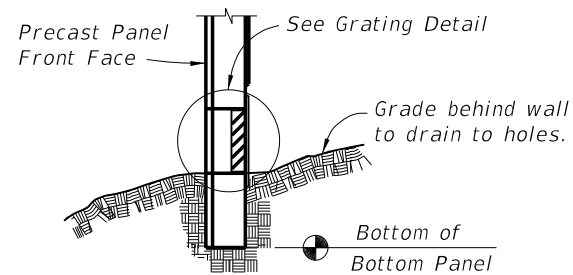

**SECTION F-F**

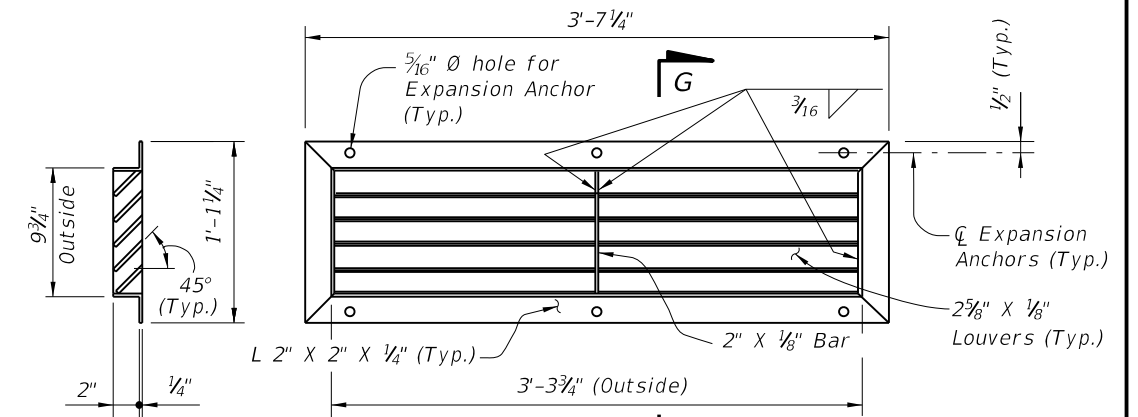

**SECTION G-G**

**GRATING DETAIL**

**GRATING NOTES:**








1. Grating shall be ASTM A36 steel welded in accordance with the current edition of ANSI/AWS D1.1 Steel Welding Code. Hot-dip galvanize grate after fabrication in accordance with Specification Section 962-9.
2. Expansion Anchors: Use 1/4" diameter x 3" ASTM A307, vandal resistant, hot-dip galvanized expansion anchors to connect grates to panels.
3. Grating recessed with back face of wall.

**FIRE HOSE ACCESS & DRAINAGE HOLE DETAILS**

C:\projects\standards\structures\2013book\05200-07of16.dgn 6/29/2012 3:01:09 PM rd960rh

|                           |              |  |                               |                   |                |
|---------------------------|--------------|--|-------------------------------|-------------------|----------------|
| LAST REVISION<br>07/01/12 | DESCRIPTION: |  <b>FDOT DESIGN STANDARDS</b><br>2013 | <b>PRECAST SOUND BARRIERS</b> | INDEX NO.<br>5200 | SHEET NO.<br>7 |
| REVISION                  |              |  |                               |                   |                |

6/28/2012 3:01:11 PM rd960rh C:\projects\standards\structures\2013book\05200-08of16.dgn

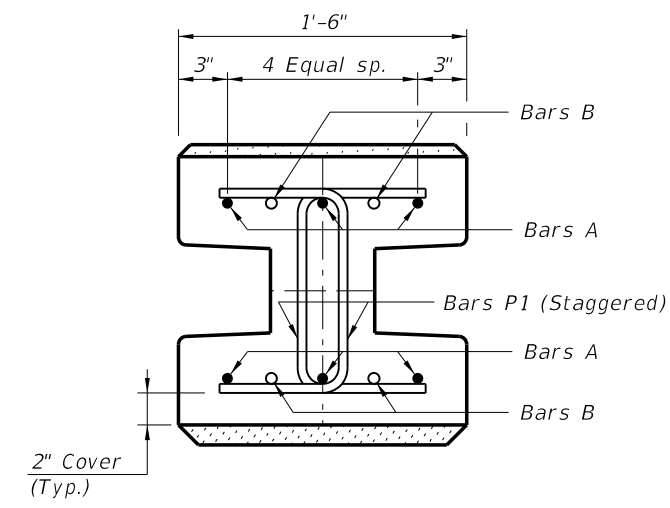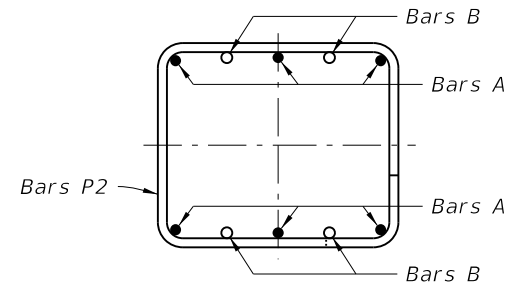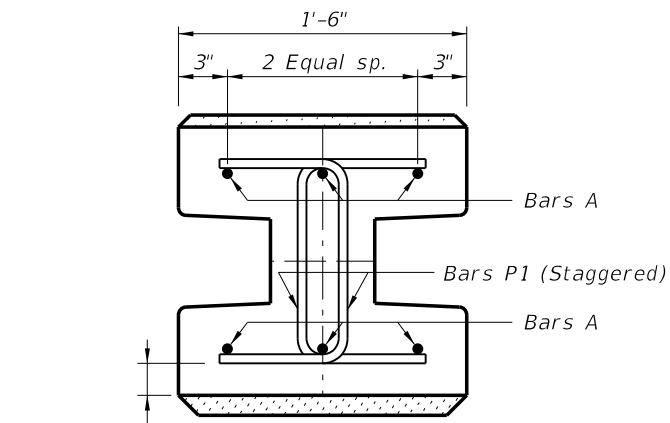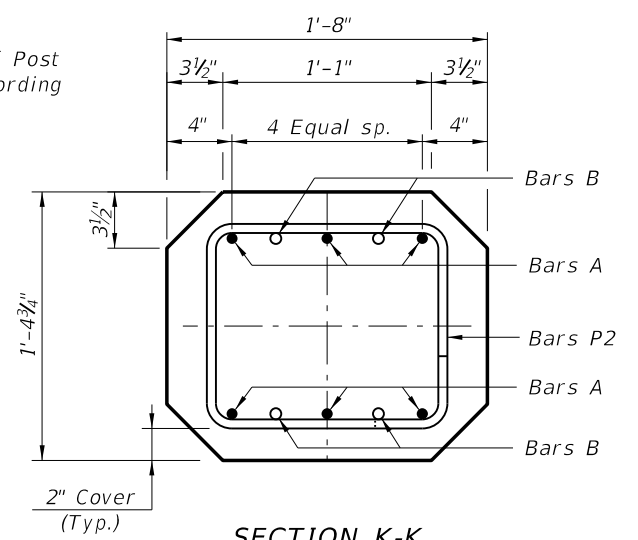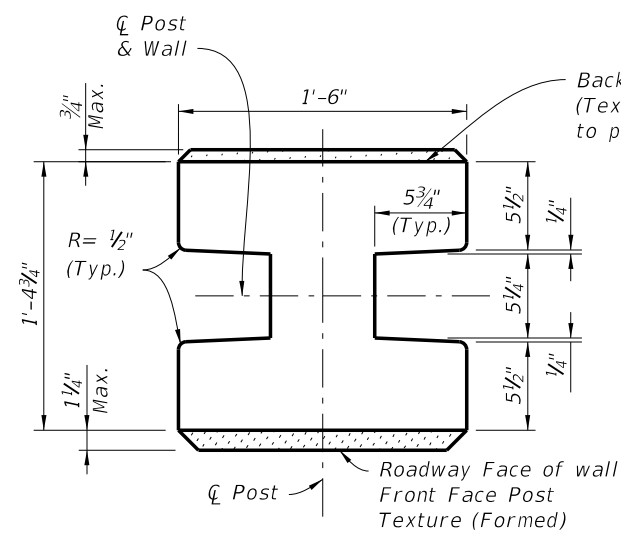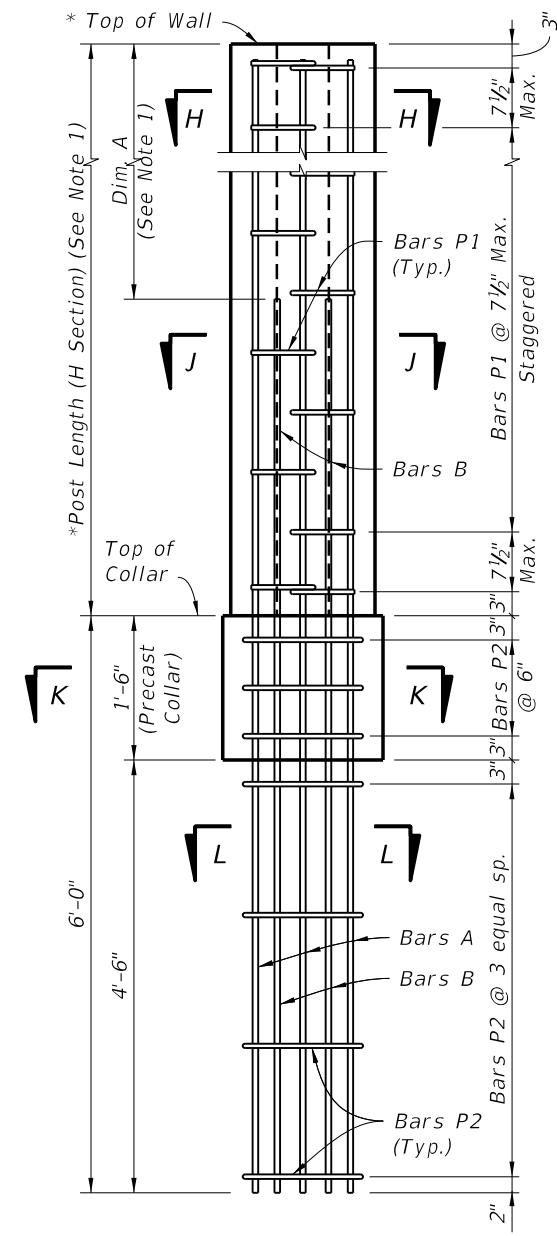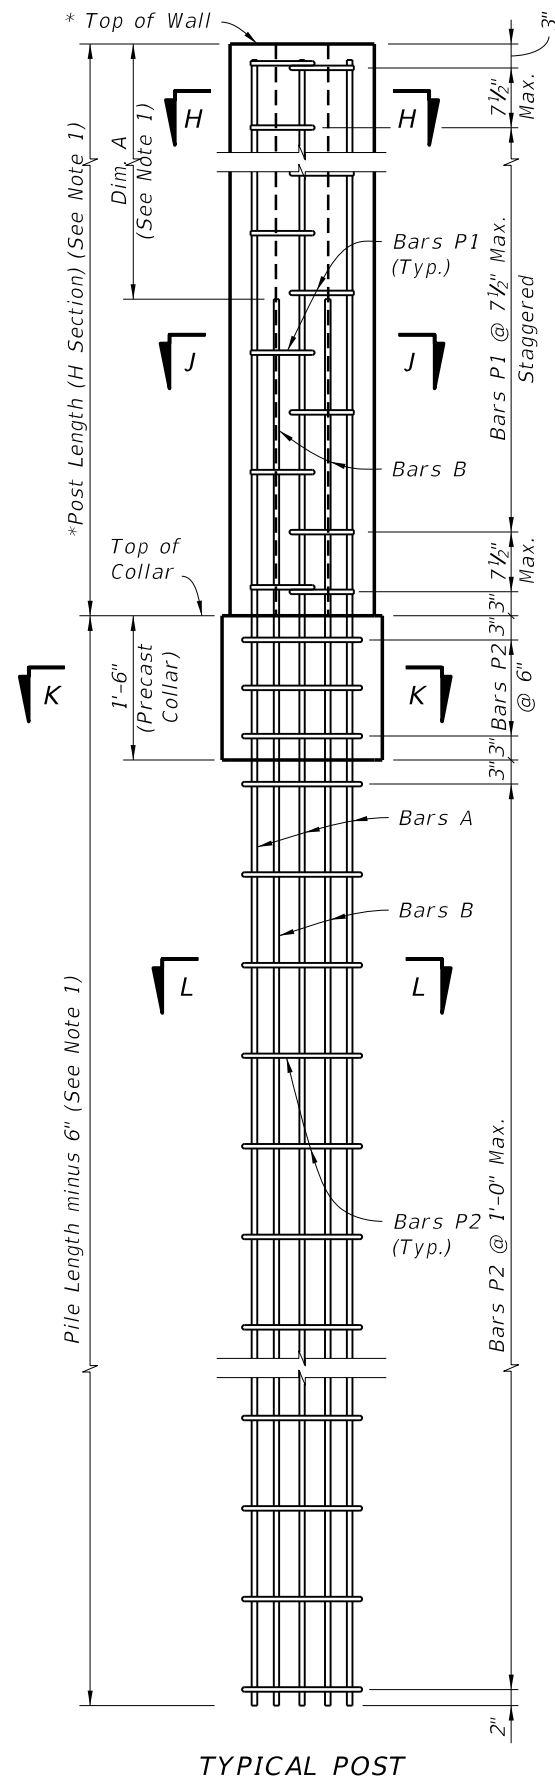

**NOTES:**

1. For Table of Dimensions and Reinforcing Steel, see Sheets 15 and 16.



\* Extend Post 2" above top of high side wall panel when post caps are shown in plans. See Sheet 4, "ELEVATION STEP AT TOP OF WALL".

**STANDARD POST REINFORCEMENT**  
(Standard Post Shown, 45° Corner Posts Similar)

**STANDARD POST DETAILS**

|               |          |              |   |                                      |                               |           |      |           |   |
|---------------|----------|--------------|---|--------------------------------------|-------------------------------|-----------|------|-----------|---|
| LAST REVISION | 07/01/12 | DESCRIPTION: |  | <b>FDOT DESIGN STANDARDS</b><br>2013 | <b>PRECAST SOUND BARRIERS</b> | INDEX NO. | 5200 | SHEET NO. | 8 |
|---------------|----------|--------------|---|--------------------------------------|-------------------------------|-----------|------|-----------|---|

C:\projects\standards\structures\2013book\05200-09of16.dgn  
 rd960rh  
 3:01:13 PM  
 6/28/2012

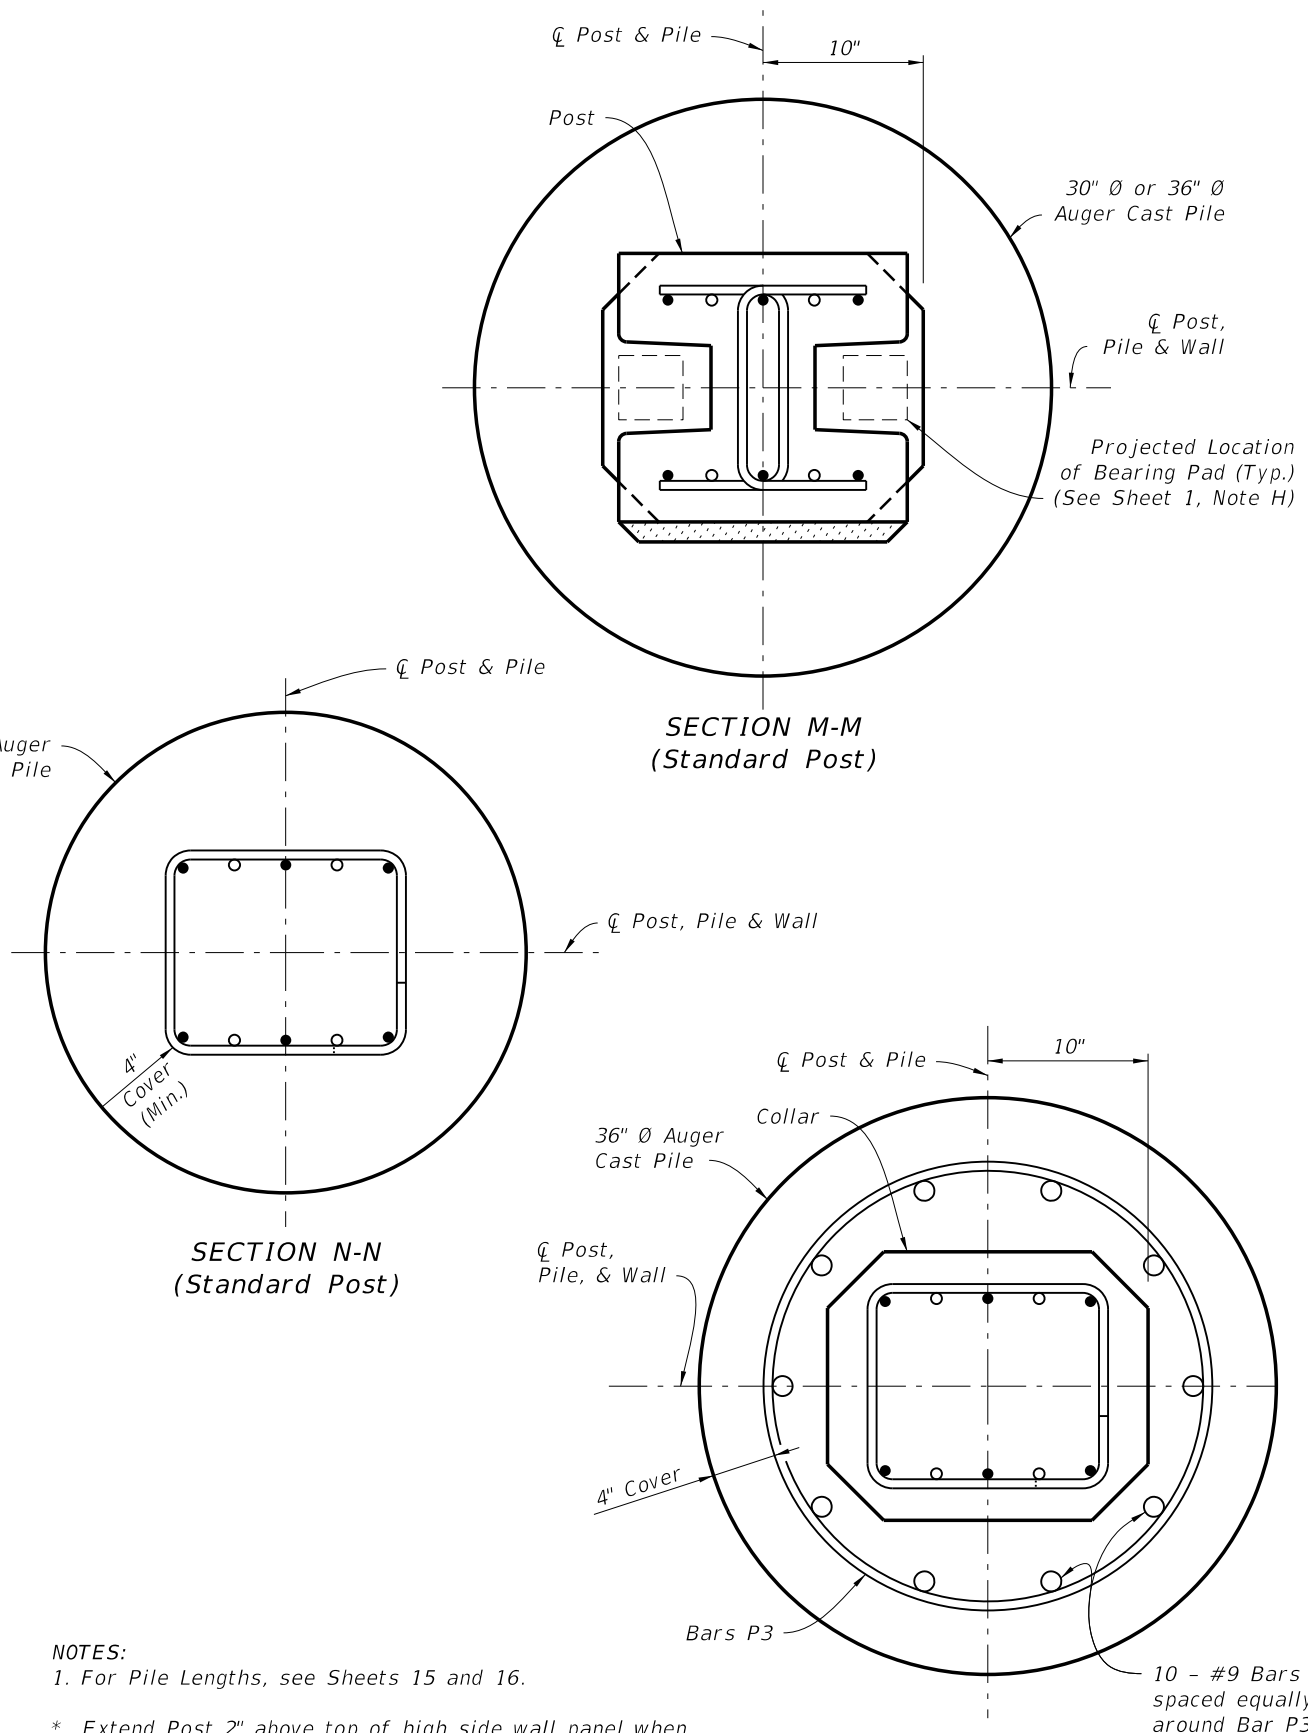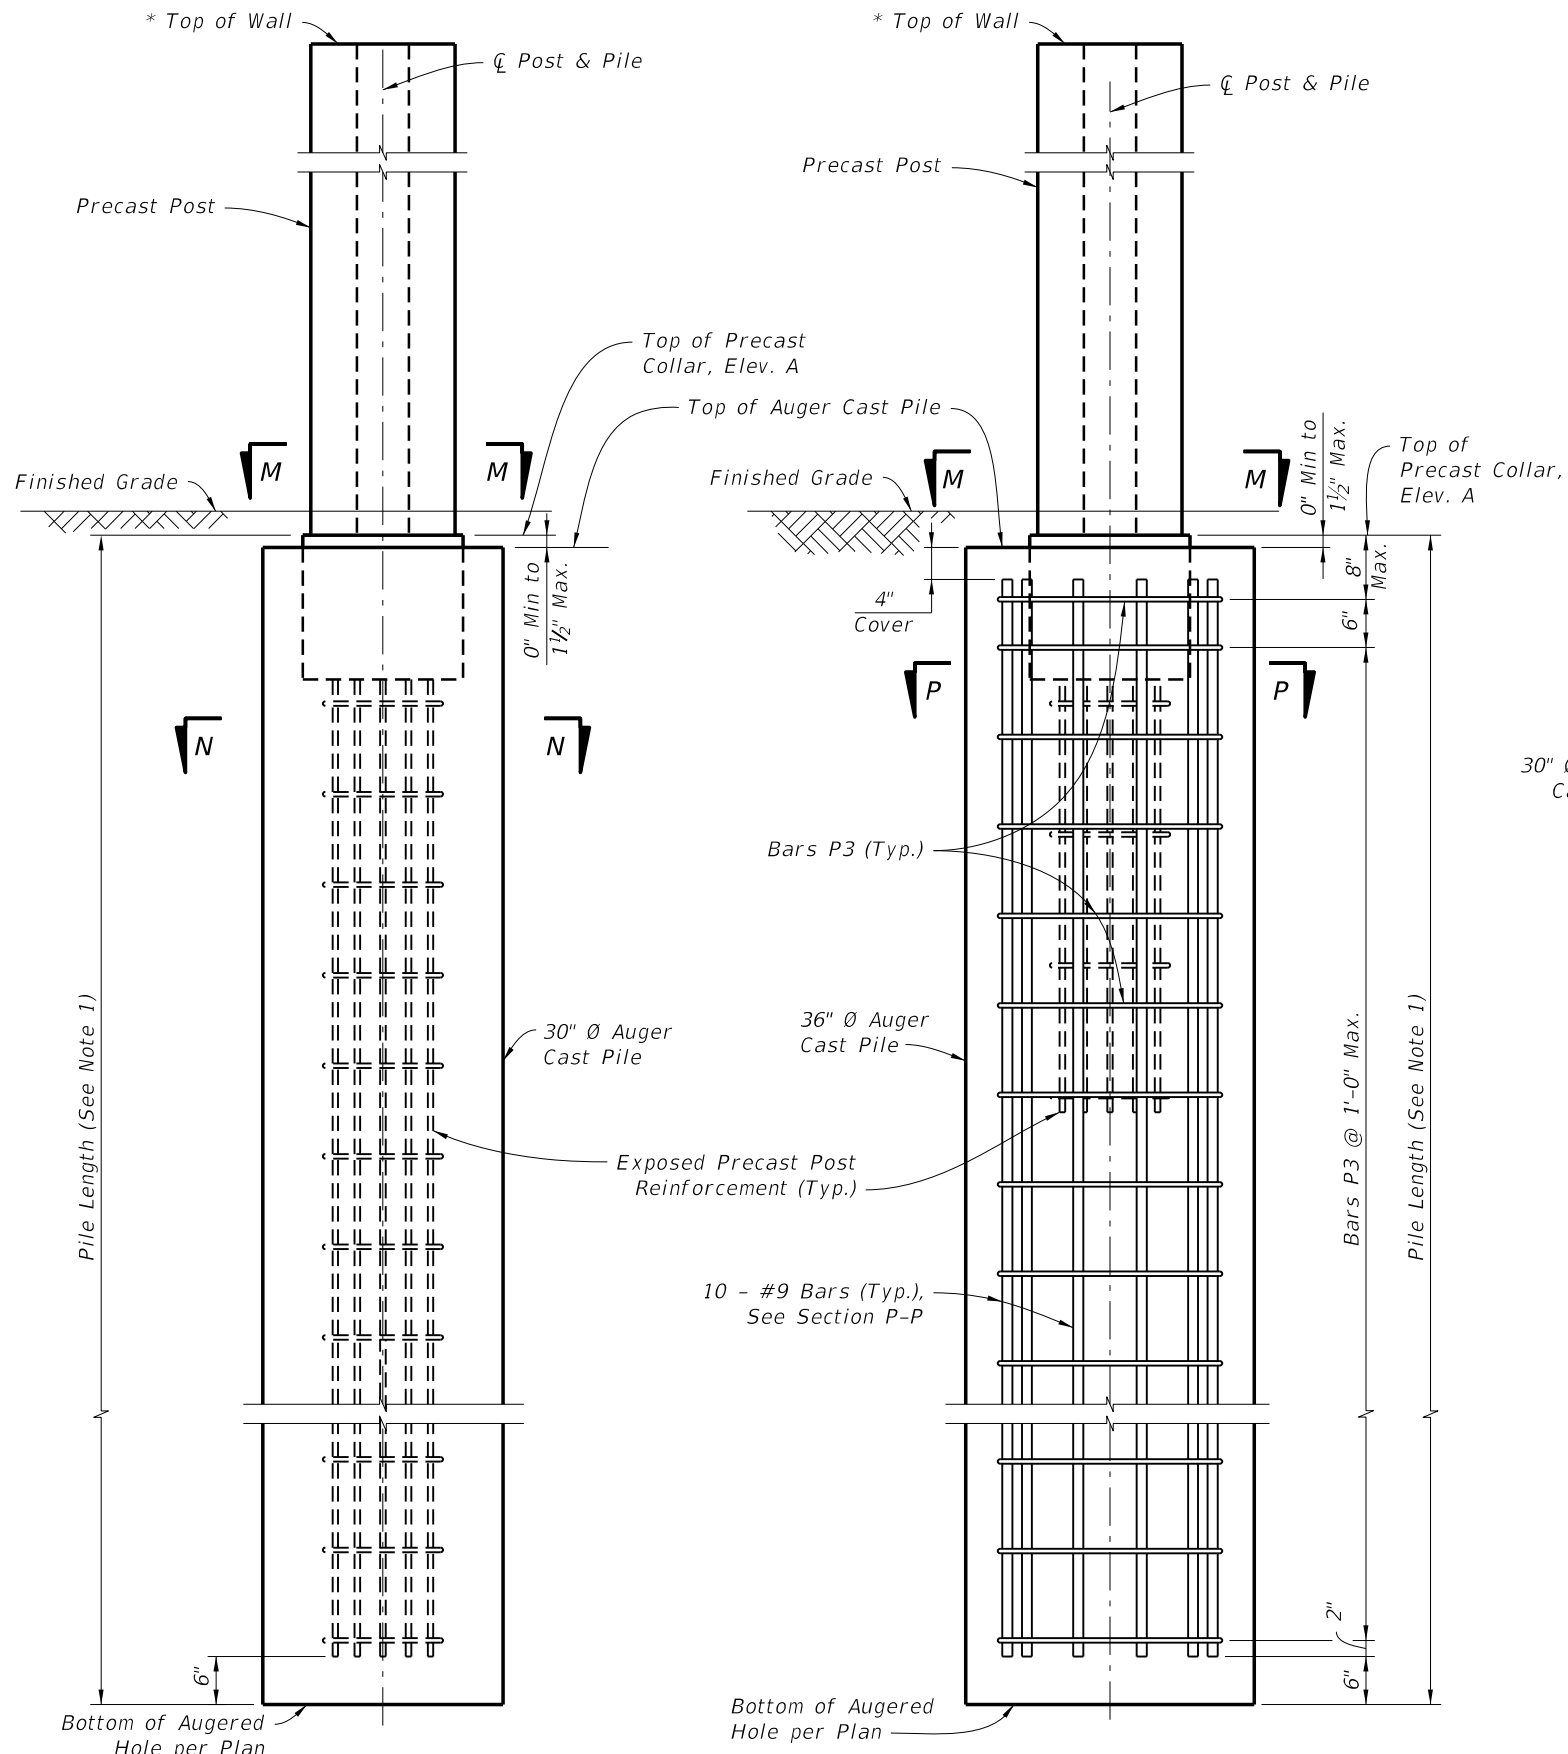


**NOTES:**  
 1. For Pile Lengths, see Sheets 15 and 16.  
 \* Extend Post 2" above top of high side wall panel when post caps are shown in plans. See Sheet 4, "ELEVATION STEP AT TOP OF WALL".


**TYPICAL POST**  
**LOW CLEARANCE OPTION**  
**STANDARD POST PLACEMENT IN AUGER CAST PILE**  
 (Standard Post Shown, 45° Corner Posts Similar)

**POST PLACEMENT & PILE REINFORCING STEEL DETAILS**


|               |          |              |   |           |           |
|---------------|----------|--------------|---|-----------|-----------|
| LAST REVISION | REVISION | DESCRIPTION: |  <b>FDOT DESIGN STANDARDS</b><br><b>2013</b> | INDEX NO. | SHEET NO. |
| 07/01/12      |          |              |   | 5200      | 9         |

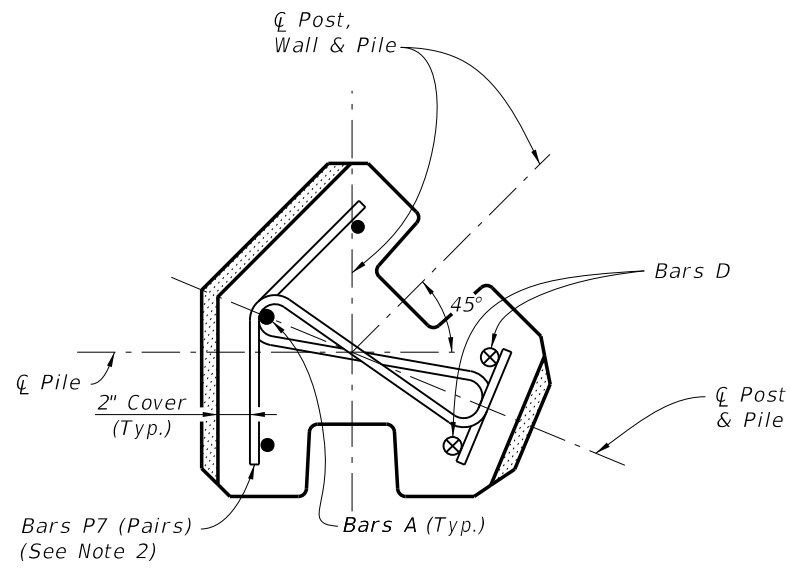


SECTION H-H  
(45° Corner Post)

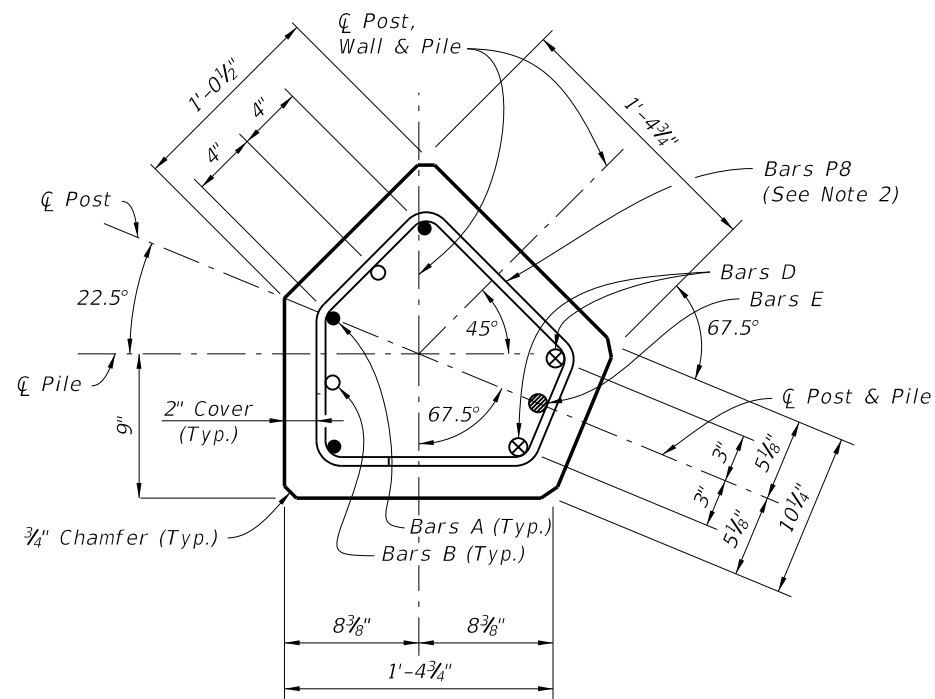


SECTION K-K  
(Collar Section, 45° Corner Post)

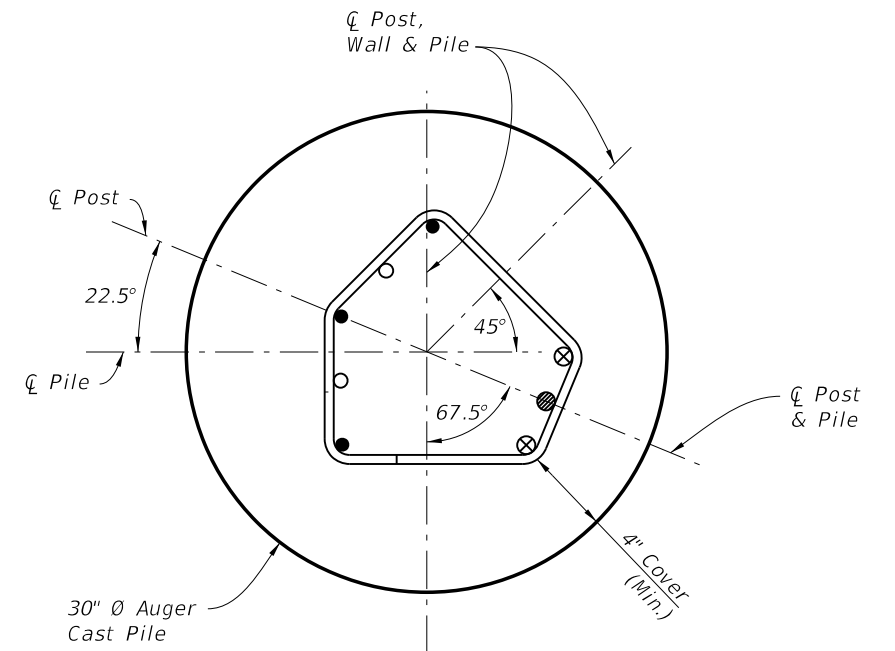


SECTION N-N  
(45° Corner Post)

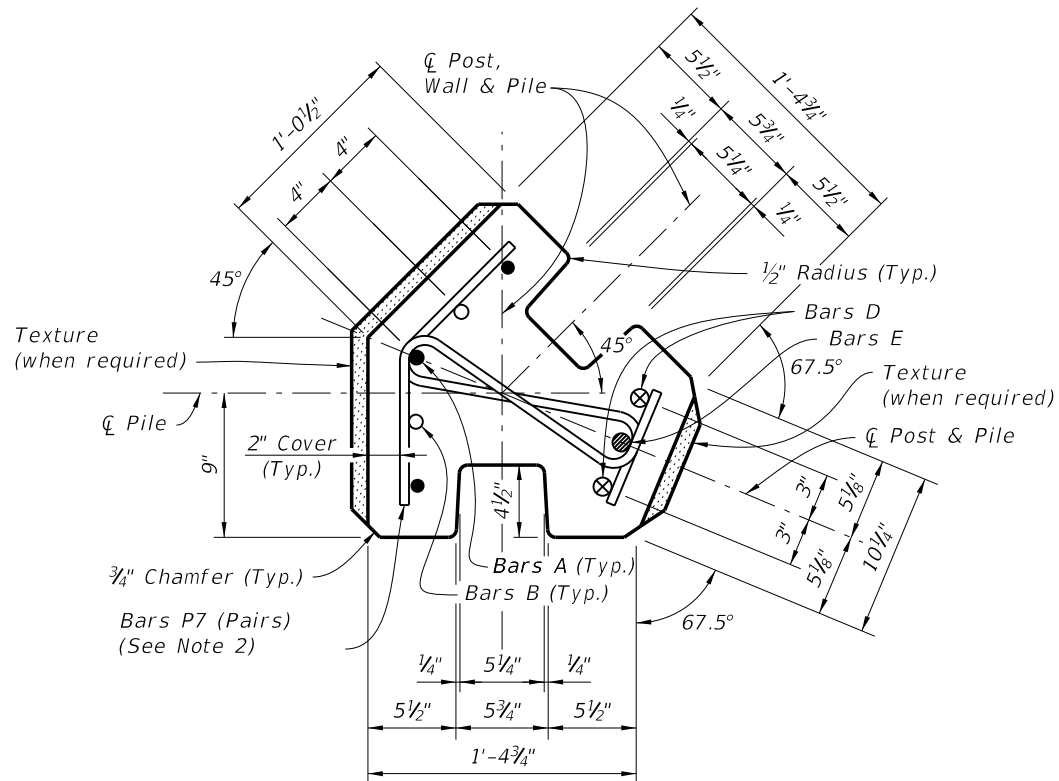

SECTION J-J  
(45° Corner Post)

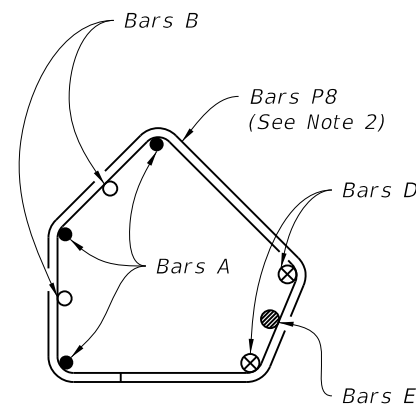

SECTION L-L  
(45° Corner Post)

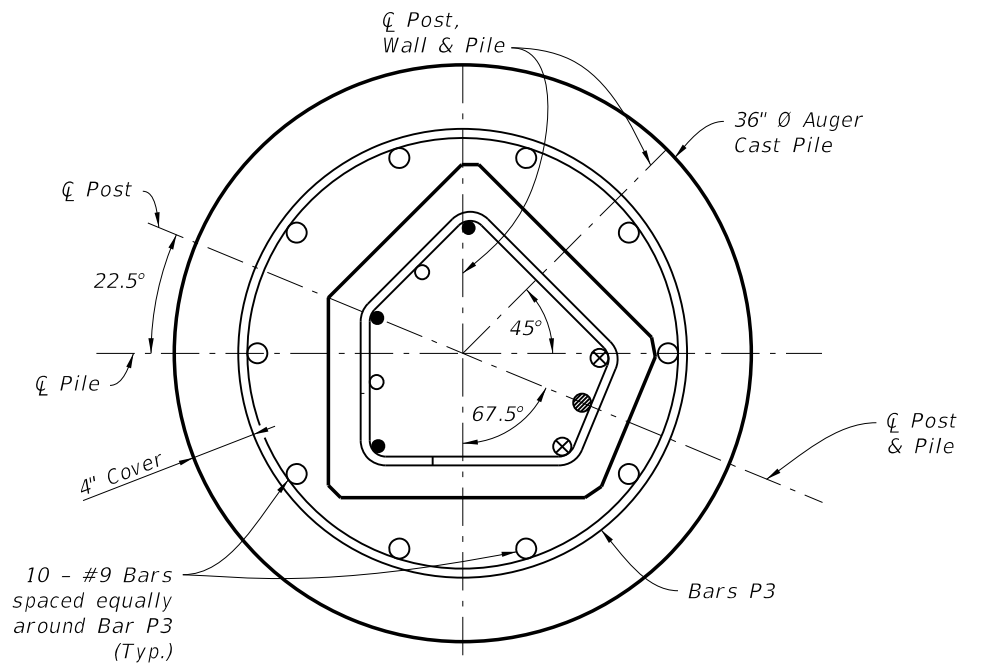

SECTION P-P  
(45° Corner Post)

45° POST NOTES:

1. For Post & Pile Lengths and Table of Reinforcing Steel, see Sheets 15 & 16.
2. Reference Sheets 8 & 9 for location of Sections.  
Space Bars P7 as shown for Bars P1.  
Space Bars P8 as shown for Bars P2.
3. For texture thickness, match with appropriate Panel face.

45° POST DETAILS


45° POST PLACEMENT IN AUGER CAST PILE

45° CORNER POST DETAILS


C:\p\projects\standards\structures\2013book\05200-10of16.dgn 3:01:16 PM 6/29/2012 rd960rh

|               |              |  |                               |           |           |
|---------------|--------------|--|-------------------------------|-----------|-----------|
| LAST REVISION | DESCRIPTION: |  <b>FDOT DESIGN STANDARDS</b><br>2013 | <b>PRECAST SOUND BARRIERS</b> | INDEX NO. | SHEET NO. |
| 07/01/12      | REVISION     |  |                               | 5200      | 10        |


6/29/2012 3:01:18 PM rd960rh C:\projects\standards\structures\2013book\05200-11of16.dgn

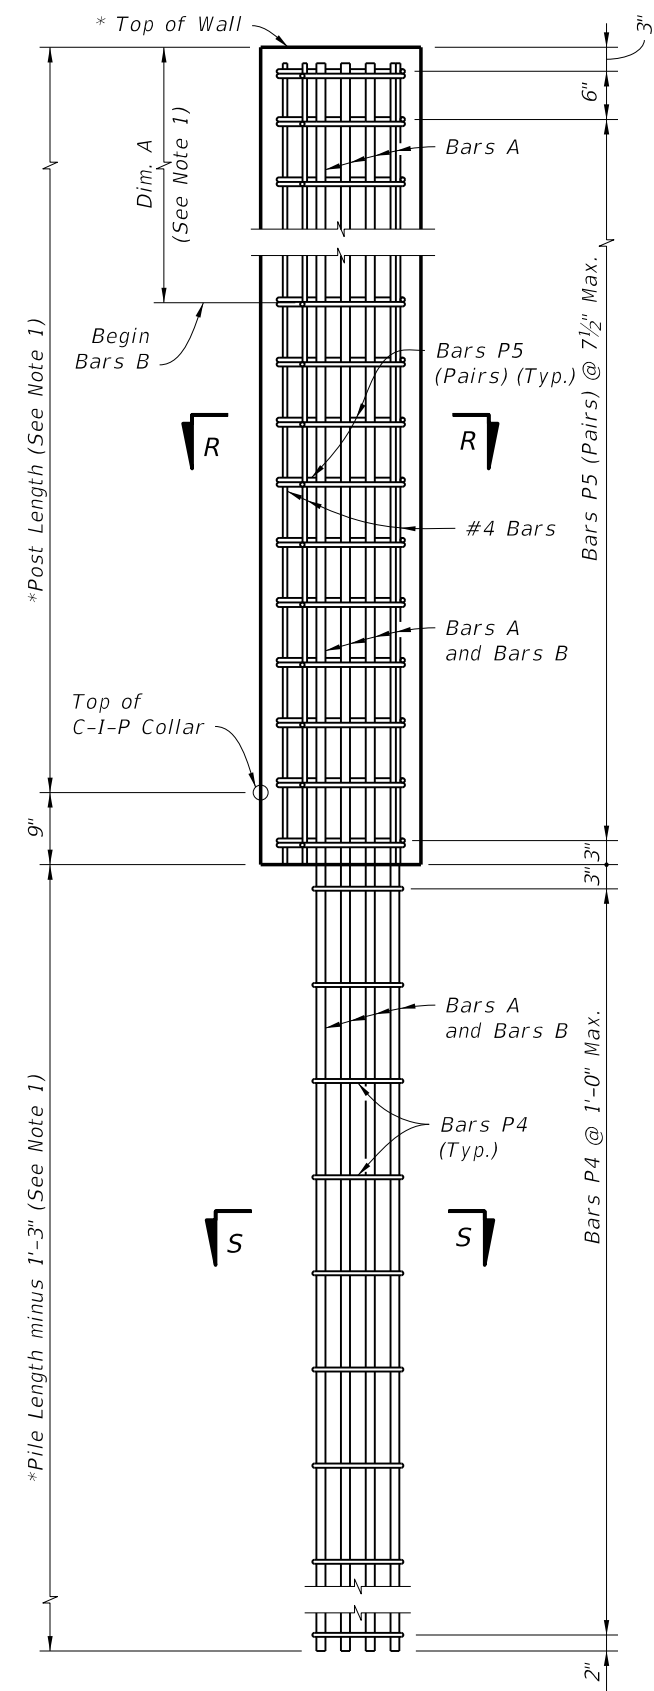


TYPICAL POST

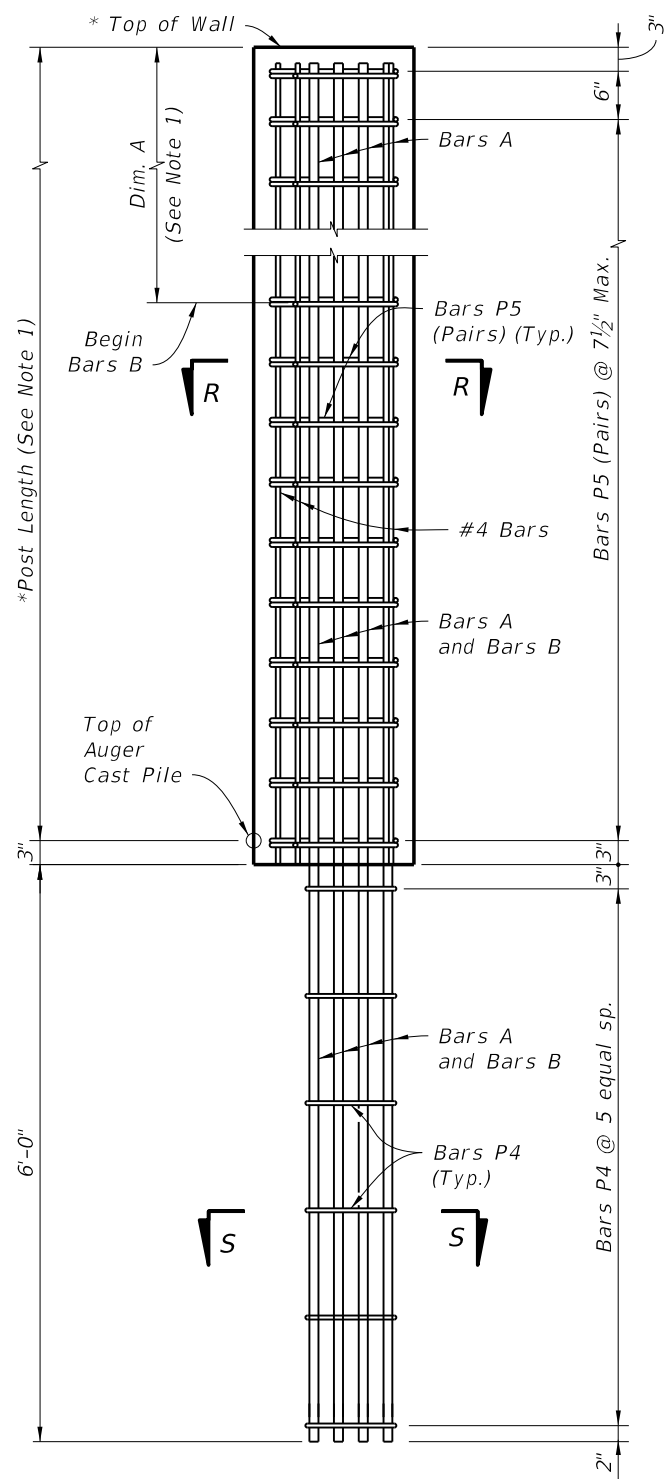

LOW CLEARANCE OPTION

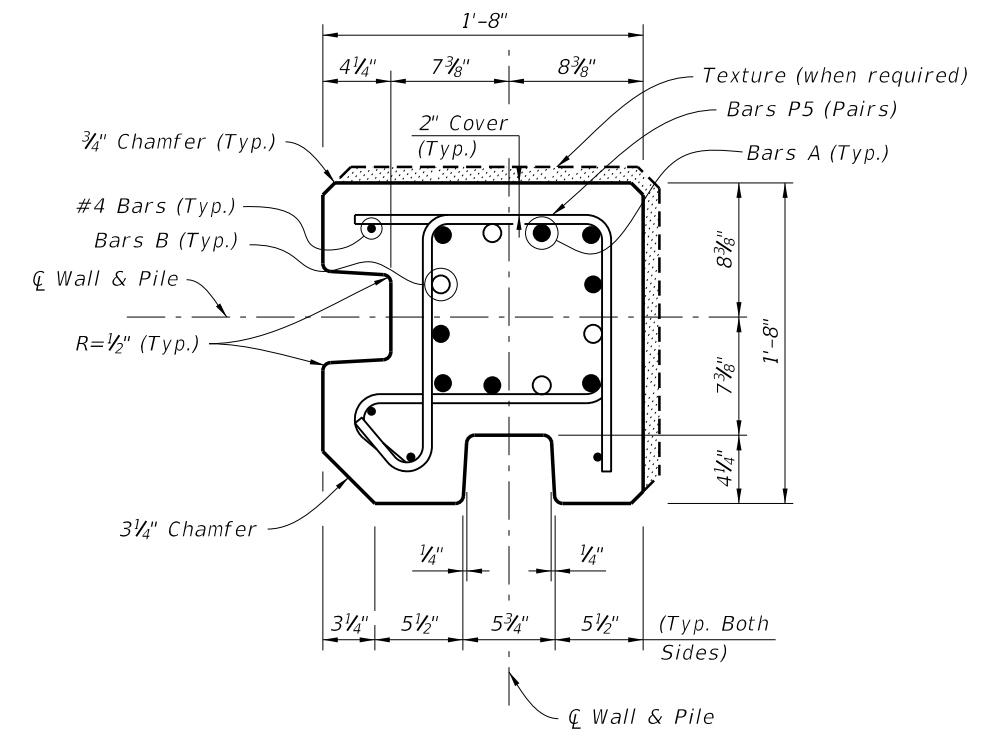

SECTION R-R

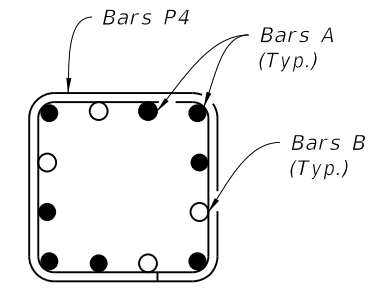

SECTION S-S

**90° CORNER POST REINFORCEMENT**  
(Post Surface Features Not Shown For Clarity)




- 90° CORNER POST NOTES:**
1. For Table of Dimensions and Reinforcing Steel, see Sheet 15 & 16.
  2. Reduce typical panel length by 3 1/2" at each 90° Corner Post.
  3. For texture thickness, match appropriate Panel face.

\* Extend Post 2" above top of high side wall panel when post caps are shown in plans. See Sheet 4, "ELEVATION STEP AT TOP OF WALL".

90° CORNER POST DETAILS


|               |          |              |                                      |                               |           |           |
|---------------|----------|--------------|--------------------------------------|-------------------------------|-----------|-----------|
| LAST REVISION | 07/01/12 | DESCRIPTION: | <b>FDOT DESIGN STANDARDS</b><br>2013 | <b>PRECAST SOUND BARRIERS</b> | INDEX NO. | SHEET NO. |
|               |          |              |                                      |                               | 5200      | 11        |

6/28/2012 3:01:23 PM rd960rh C:\projects\standards\structures\2013book\05200-12of16.dgn

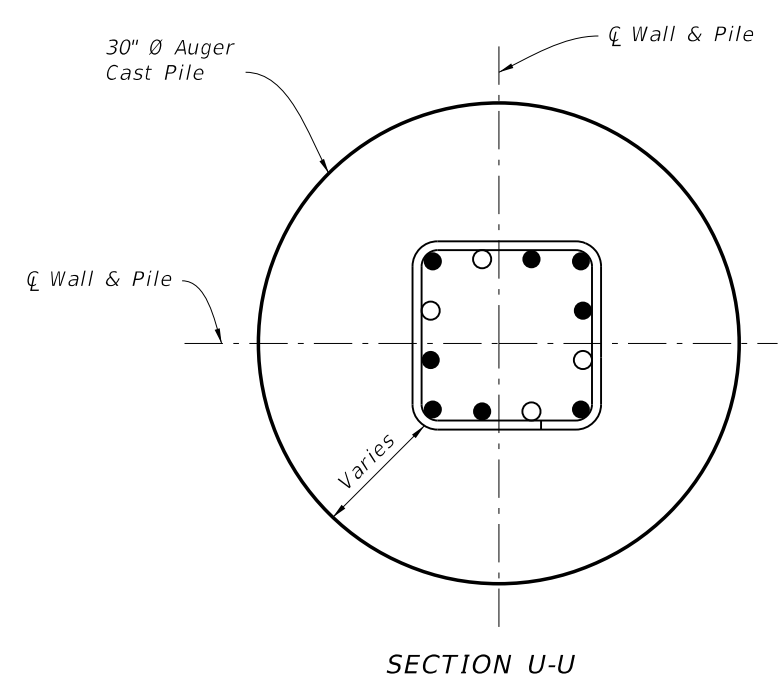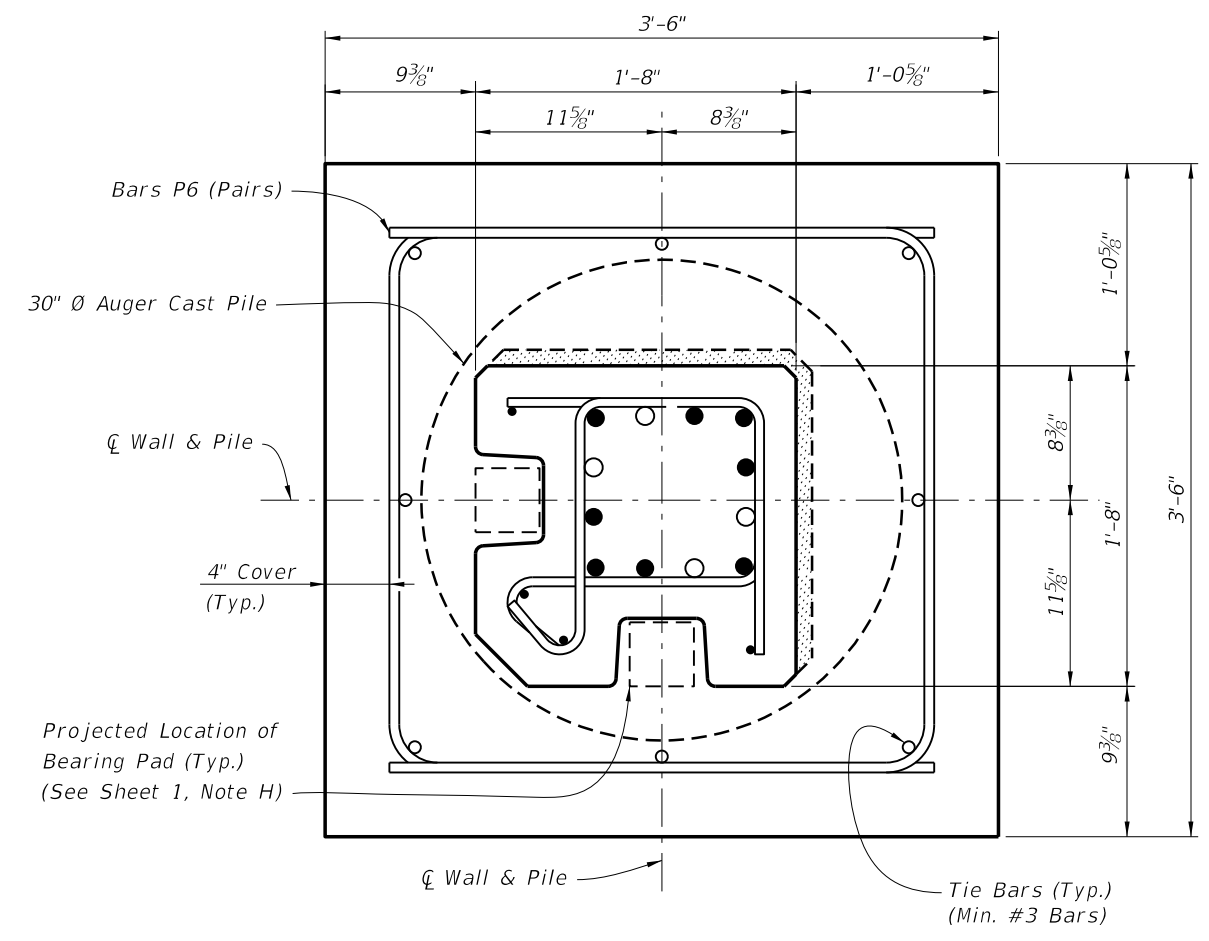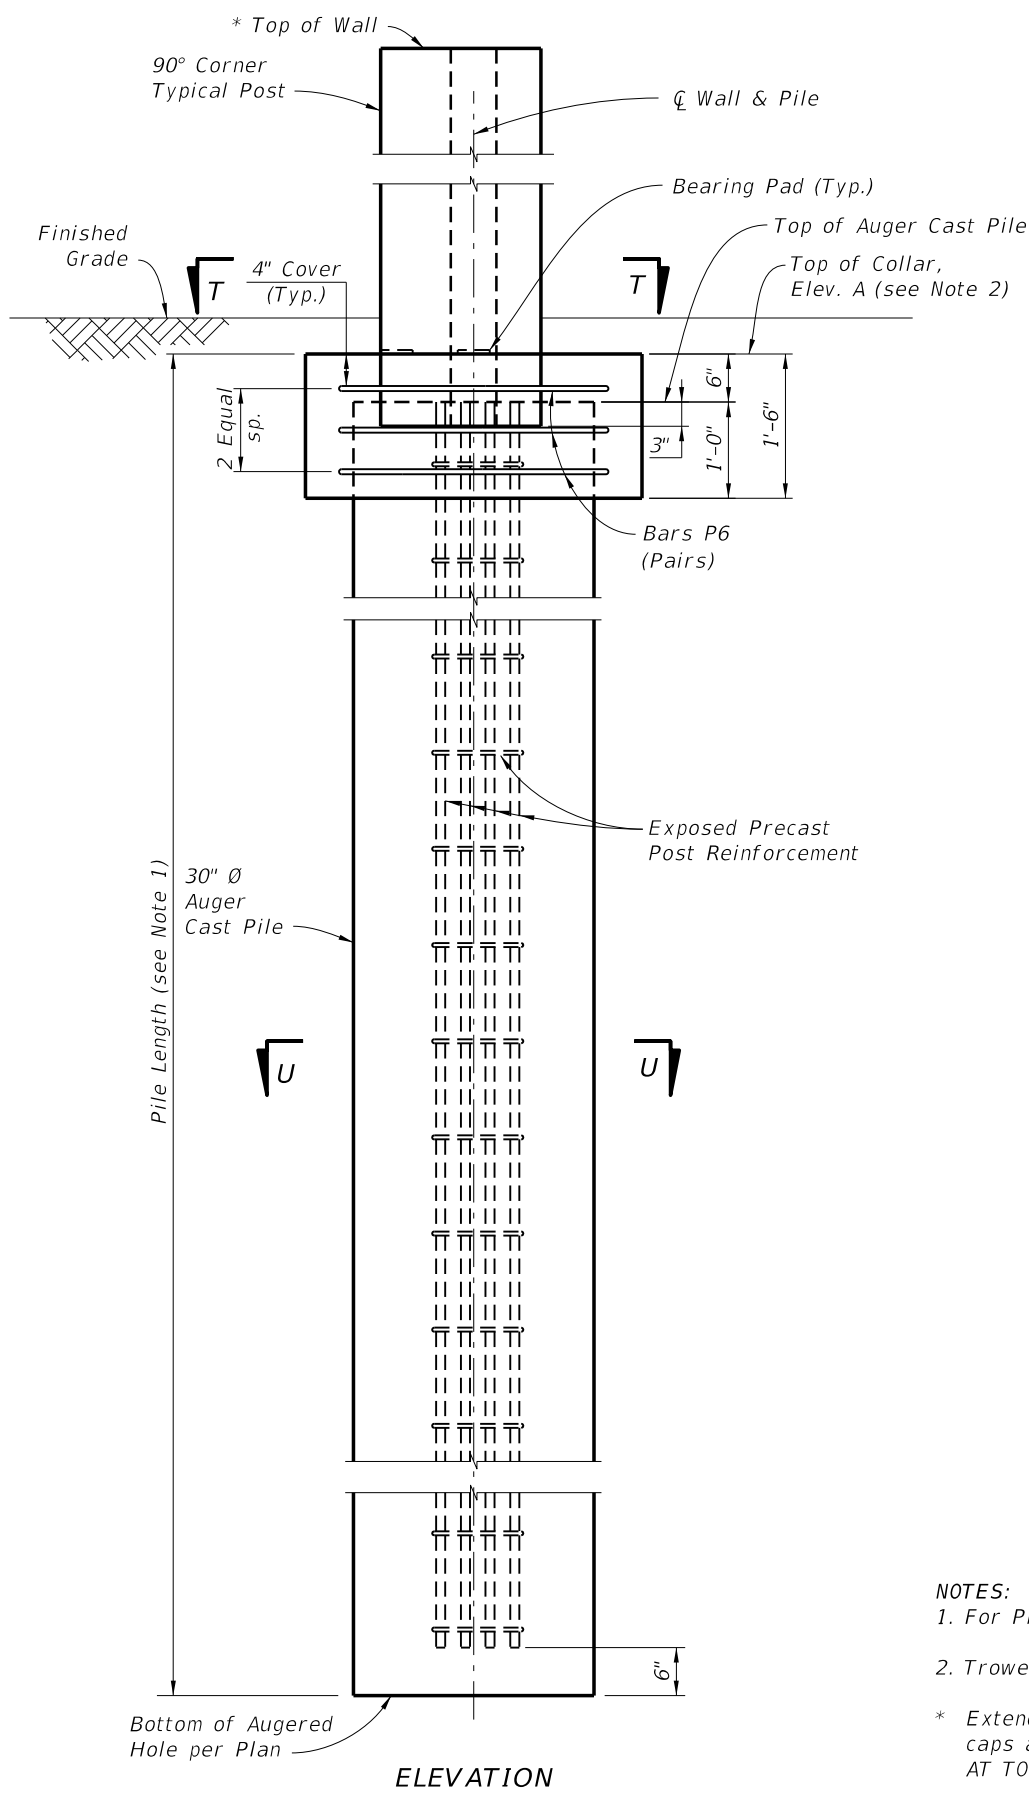


**NOTES:**  
 1. For Pile Lengths, see Sheets 15 and 16.  
 2. Trowel Finish top of Collar to allow placement of Bearing Pads.  
 \* Extend Post 2" above top of high side wall panel when post caps are shown in plans. See Sheet 4, "ELEVATION STEP AT TOP OF WALL".

90° CORNER TYPICAL POST PLACEMENT DETAILS


|               |          |              |   |                               |           |           |
|---------------|----------|--------------|---|-------------------------------|-----------|-----------|
| LAST REVISION | REVISION | DESCRIPTION: |  <b>FDOT DESIGN STANDARDS</b><br><b>2013</b> | <b>PRECAST SOUND BARRIERS</b> | INDEX NO. | SHEET NO. |
| 07/01/12      |          |              |   |                               | 5200      | 12        |




C:\projects\standards\structures\2013book\05200-13of16.dgn  
rd960rh  
3:01:25 PM  
6/28/2012

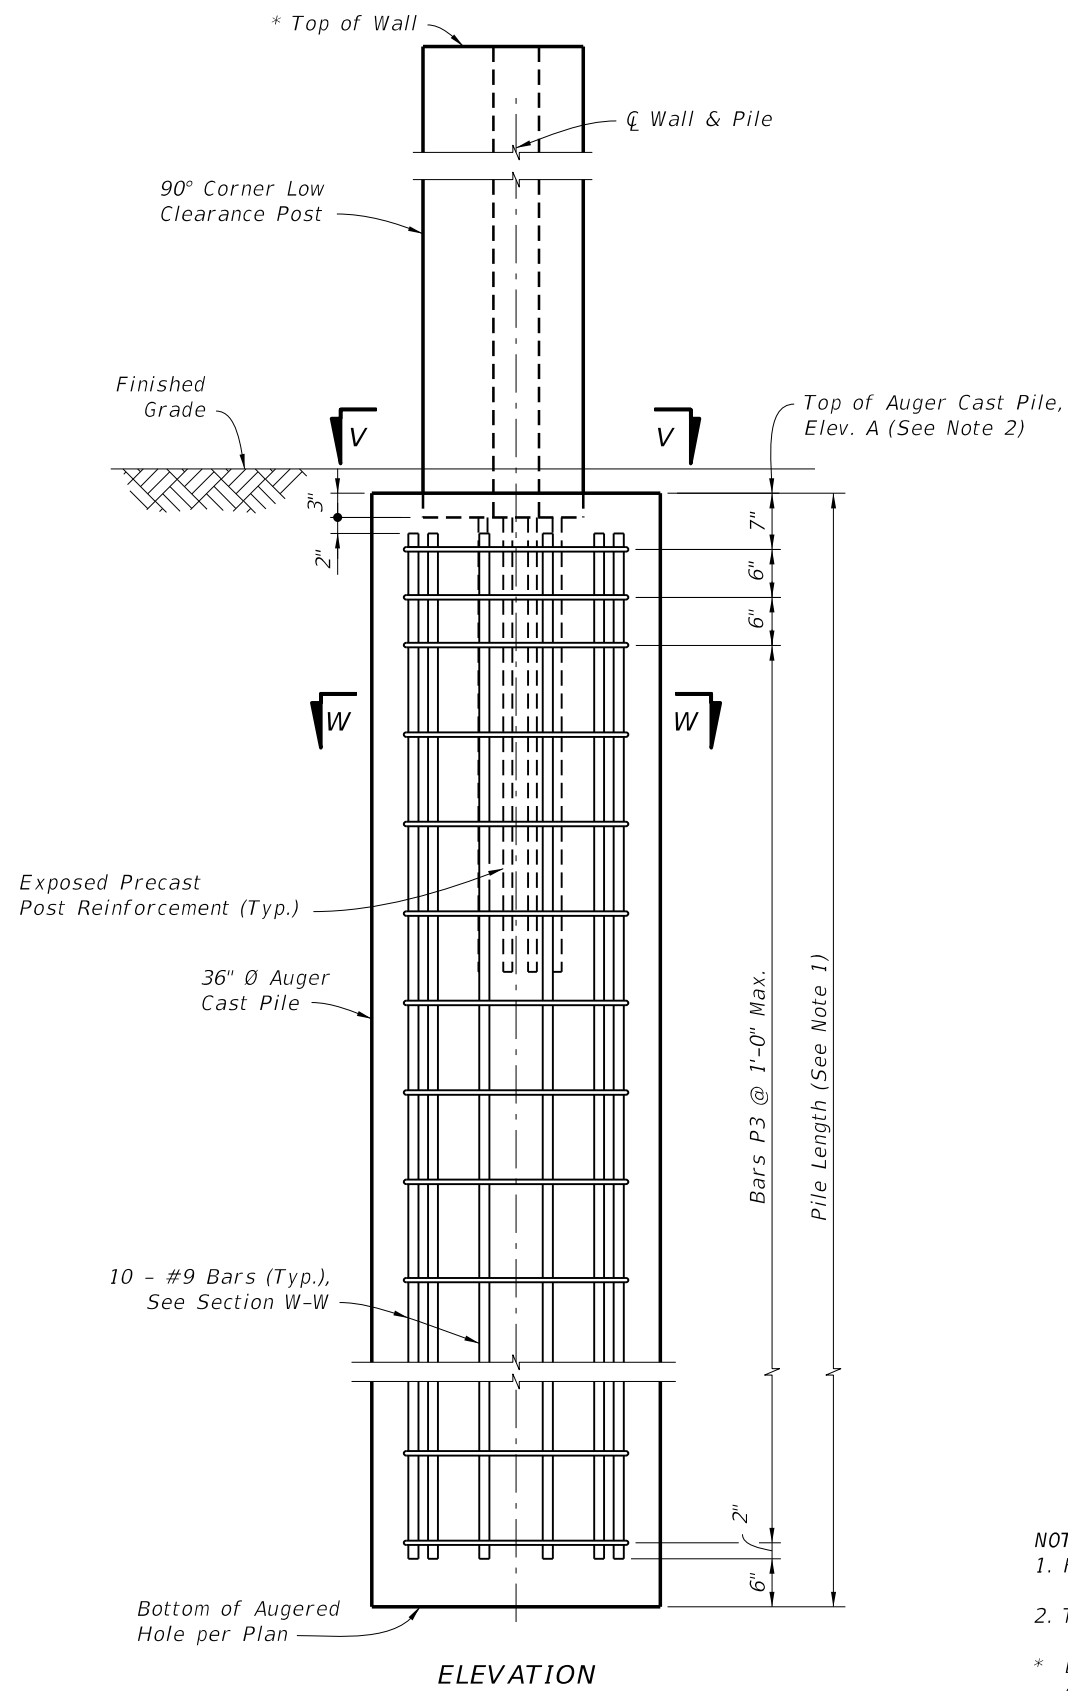

ELEVATION

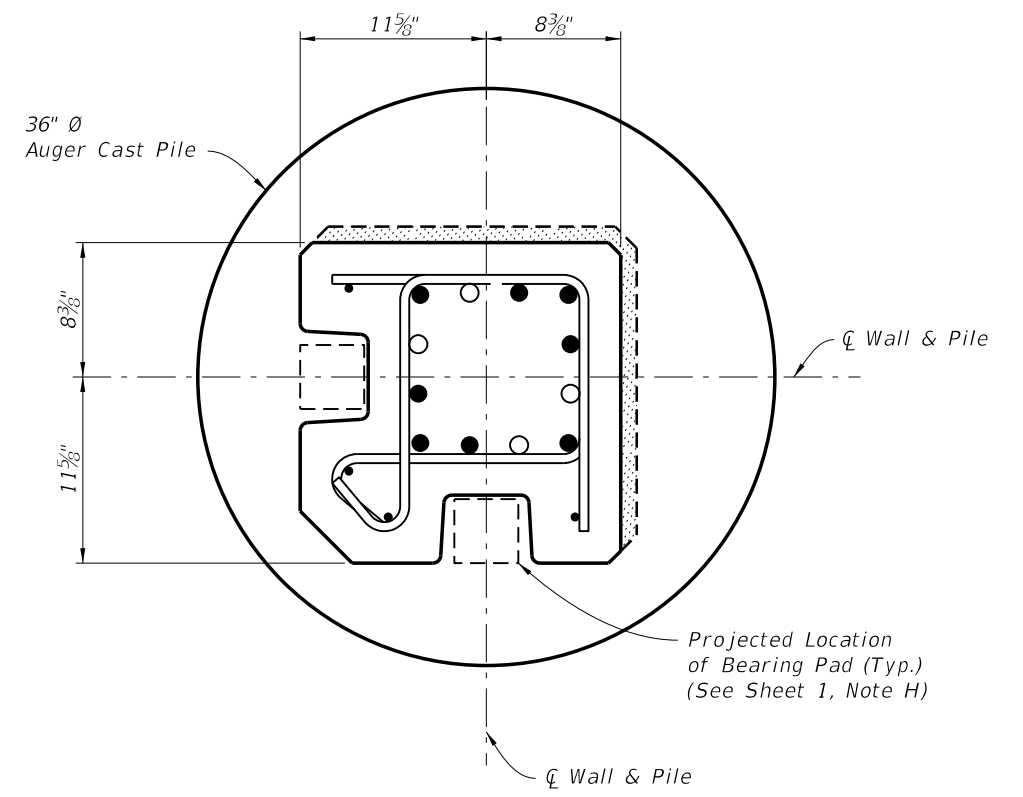

SECTION V-V

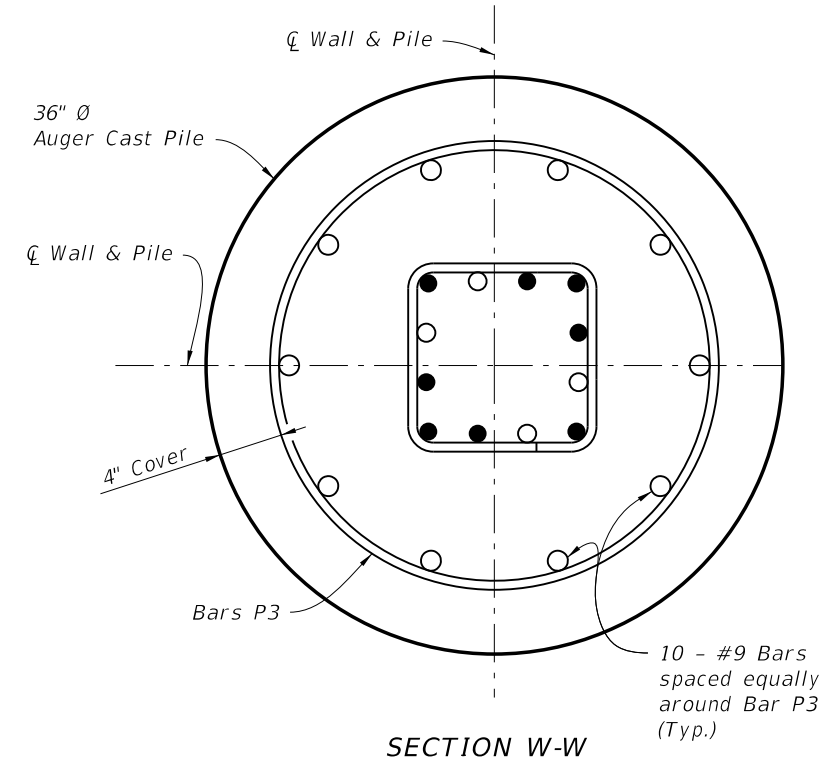


SECTION W-W

- NOTES:**
1. For Pile Lengths, see Sheets 15 and 16.
  2. Trowel Finish top of Pile to allow placement of Bearing Pads.
- \* Extend Post 2" above top of high side wall panel when post caps are shown in plans. See Sheet 4, "ELEVATION STEP AT TOP OF WALL".


90° CORNER LOW CLEARANCE POST PLACEMENT & PILE REINFORCING STEEL DETAILS

|               |          |              |  |                               |                   |                 |
|---------------|----------|--------------|--|-------------------------------|-------------------|-----------------|
| LAST REVISION | 07/01/12 | DESCRIPTION: |  <b>FDOT DESIGN STANDARDS</b><br>2013 | <b>PRECAST SOUND BARRIERS</b> | INDEX NO.<br>5200 | SHEET NO.<br>13 |
|---------------|----------|--------------|--|-------------------------------|-------------------|-----------------|


C:\projects\standards\structures\2013book\05200-14of16.dgn  
 rd960rh  
 3:01:28 PM  
 6/29/2012

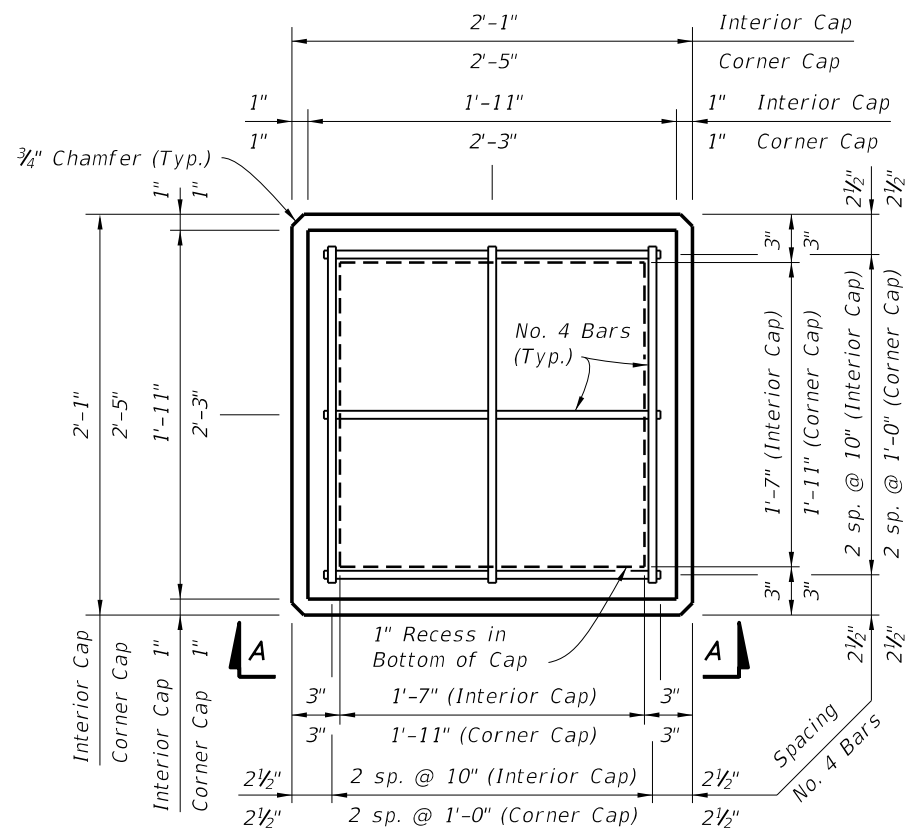


**PLAN VIEW**  
 (Type "A" Cap Shown, Type "B" & "C" Caps Similar)

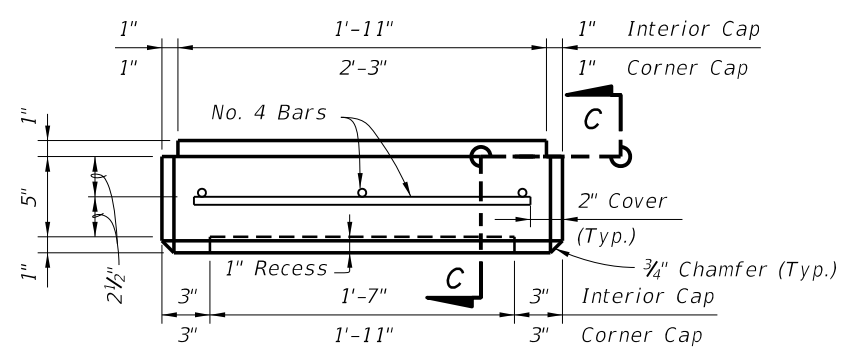

**VIEW A-A SHOWN, VIEW B-B SIMILAR**  
 (Type "A" Cap Shown, Type "B" & "C" Caps Similar)

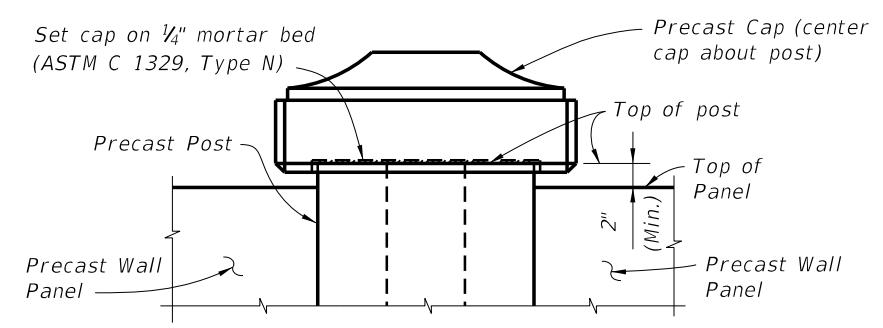


**CAP PLACEMENT DETAIL**  
 (Type "B" Cap Shown, Type "A" & "C" Caps Similar)

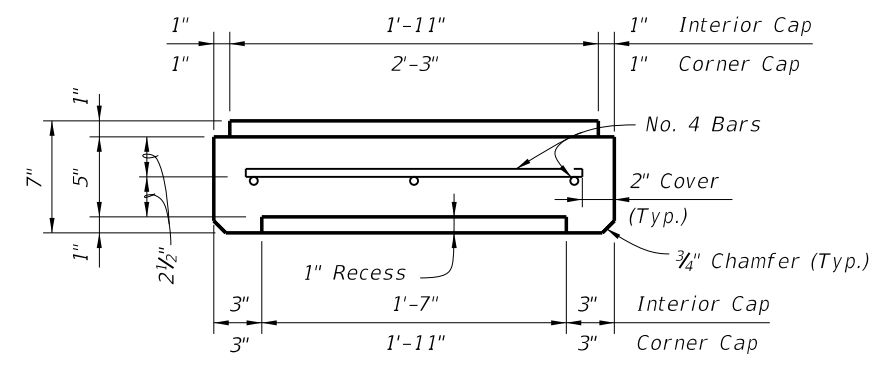


**SECTION C-C**

**TYPE "A" CAP DETAILS**

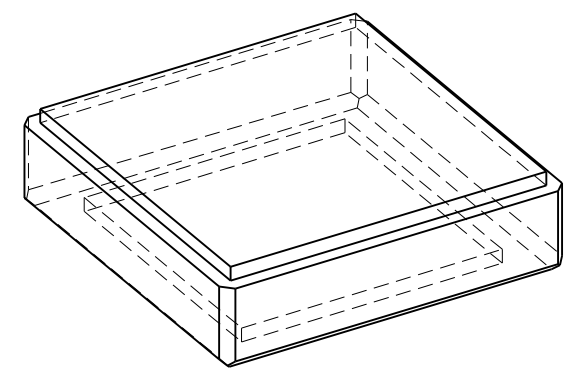


**PICTORIAL VIEW**

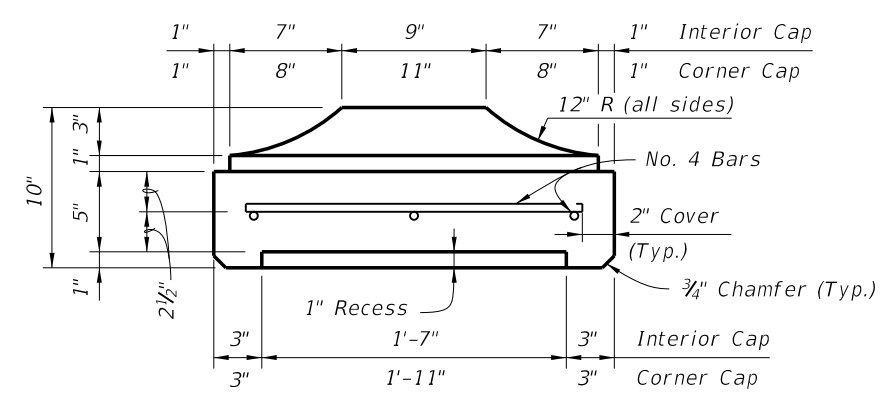


**SECTION C-C**

**TYPE "B" CAP DETAILS**

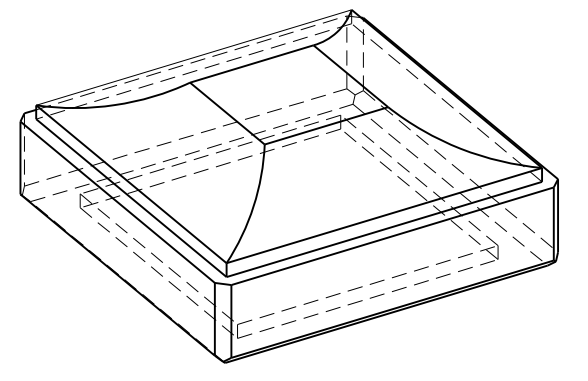


**PICTORIAL VIEW**

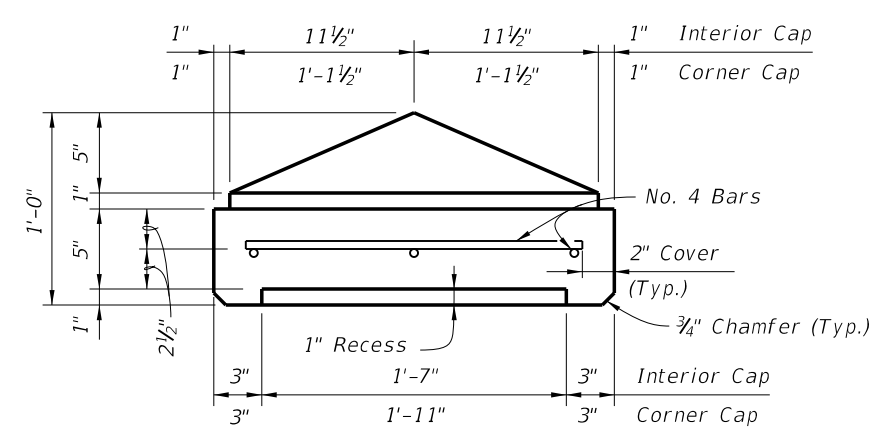

**SECTION C-C**


**TYPE "C" CAP DETAILS**

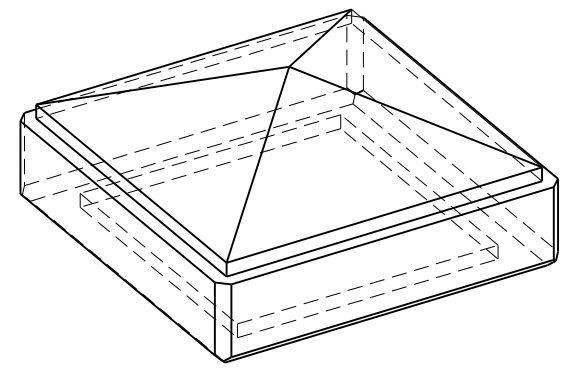


**PICTORIAL VIEW**

PRECAST POST CAPITAL

|               |              |                                      |                               |           |           |
|---------------|--------------|--------------------------------------|-------------------------------|-----------|-----------|
| LAST REVISION | DESCRIPTION: | <b>FDOT DESIGN STANDARDS</b><br>2013 | <b>PRECAST SOUND BARRIERS</b> | INDEX NO. | SHEET NO. |
| 01/01/11      |              |                                      |                               | 5200      | 14        |

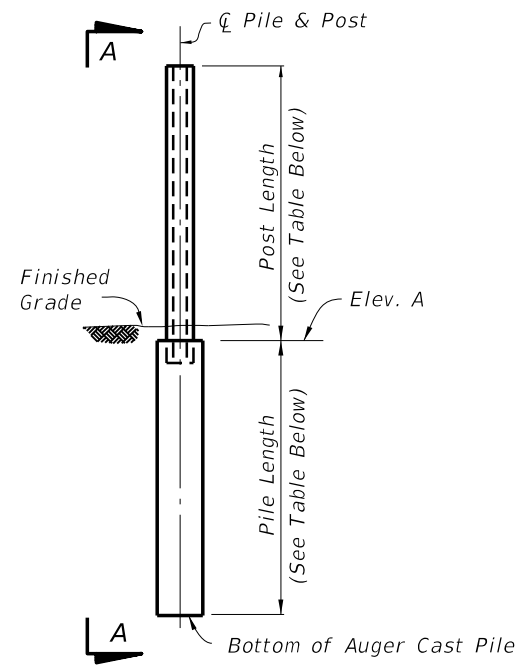

PILE/POST ELEVATION

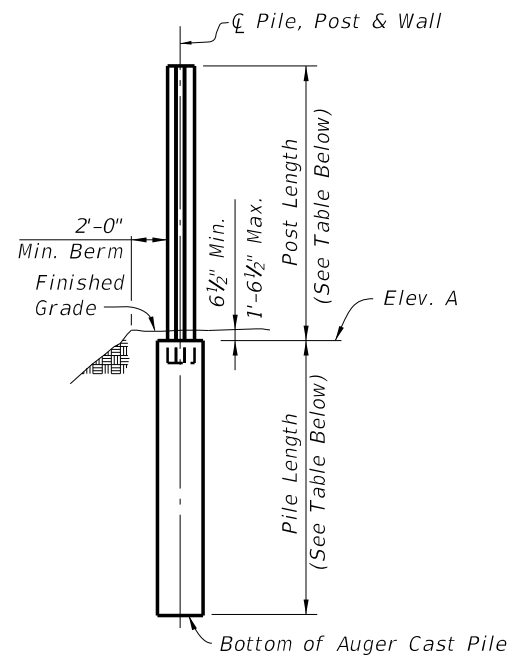

VIEW A-A

BAR BENDING DETAILS

All bar dimensions in bending diagrams are out-to-out. All bars not shown in the bending diagrams are straight.

|   |   |   |
|---|---|---|
| STANDARD POST (#4 Bars)                     |   | PILE (Low Clearance) (#4 Bars)              |
| <p><b>BAR P1</b><br/>Bar Length = 2'-5"</p> | <p><b>BAR P2</b><br/>Bar Length = 5'-5"</p> | <p><b>BAR P3</b><br/>Bar Length = 8'-7"</p> |
| 90° CORNER POST (#4 Bars)                   |   | CAST-IN-PLACE COLLAR (#5 Bars)              |
| <p><b>BAR P4</b><br/>Bar Length = 4'-8"</p> | <p><b>BAR P5</b><br/>Bar Length = 4'-0"</p> | <p><b>BAR P6</b><br/>(Pairs)</p>            |
| 45° CORNER POST (#4 Bars)                   |   |   |
| <p><b>BAR P7</b><br/>Bar Length = 3'-0"</p> | <p><b>BAR P8</b><br/>Bar Length = 5'-3"</p> |   |

TABLE 1 - WIND SPEED = 110 MPH

| WALL TYPE | POST LENGTH WITHOUT CAP | POST LENGTH WITH CAP | PILE LENGTH                              |       |                     |       |                                   |       |                     |       | POST REINFORCING    |        |         |        |        |                     |        |        |         |      |      |         |
|-----------|-------------------------|----------------------|--|-------|---------------------|-------|-----------------------------------|-------|---------------------|-------|---------------------|--------|---------|--------|--------|---------------------|--------|--------|---------|------|------|---------|
|           |                         |                      | N = 10 to 40<br>Med. Dense Granular Soil |       |                     |       | N = 4 to 9<br>Loose Granular Soil |       |                     |       | 10'-0" POST SPACING |        |         |        |        | 20'-0" POST SPACING |        |        |         |      |      |         |
|           |                         |                      | 10'-0" POST SPACING                      |       | 20'-0" POST SPACING |       | 10'-0" POST SPACING               |       | 20'-0" POST SPACING |       | BARS A              | BARS B | BARS D  | BARS E | BARS A | BARS B              | BARS D | BARS E |         |      |      |         |
|           |                         |                      | 30" O                                    | 36" O | 30" O               | 36" O | 30" O                             | 36" O | 30" O               | 36" O | SIZE                | SIZE   | DIM 'A' | SIZE   | SIZE   | DIM 'A'             | SIZE   | SIZE   | DIM 'A' | SIZE | SIZE | DIM 'A' |
| A1        | 12'-0 1/2"              | 12'-2 1/2"           | 10                                       | 10    | 14                  | 13    | 11                                | 10    | 14                  | 13    | #4                  | #4     | 11'-5"  | #4     | #4     | 11'-5"              | #4     | #4     | 8'-5"   | #5   | #5   | 9'-2"   |
| B1        | 13'-0 1/2"              | 13'-2 1/2"           | 11                                       | 10    | 14                  | 13    | 11                                | 10    | 15                  | 14    | #4                  | #4     | 12'-5"  | #4     | #4     | 11'-5"              | #5     | #5     | 11'-2"  | #5   | #5   | 9'-2"   |
| C1        | 14'-0 1/2"              | 14'-2 1/2"           | 11                                       | 10    | 15                  | 14    | 12                                | 11    | 15                  | 14    | #4                  | #4     | 13'-5"  | #4     | #4     | 11'-5"              | #5     | #5     | 11'-2"  | #6   | #6   | 10'-9"  |
| D1        | 15'-0 1/2"              | 15'-2 1/2"           | 12                                       | 11    | 16                  | 14    | 12                                | 11    | 16                  | 15    | #4                  | #4     | 13'-5"  | #4     | #4     | 11'-5"              | #5     | #5     | 11'-2"  | #6   | #6   | 10'-9"  |
| E1        | 16'-0 1/2"              | 16'-2 1/2"           | 12                                       | 11    | 16                  | 15    | 13                                | 12    | 17                  | 15    | #4                  | #4     | 13'-5"  | #5     | #5     | 14'-2"              | #6     | #6     | 12'-9"  | #7   | #7   | 12'-4"  |
| F1        | 17'-0 1/2"              | 17'-2 1/2"           | 13                                       | 12    | 17                  | 15    | 13                                | 12    | 17                  | 16    | #4                  | #4     | 13'-5"  | #5     | #5     | 14'-2"              | #6     | #6     | 12'-9"  | #7   | #7   | 12'-4"  |
| G1        | 18'-0 1/2"              | 18'-2 1/2"           | 13                                       | 12    | 17                  | 16    | 13                                | 13    | 18                  | 17    | #5                  | #5     | 16'-2"  | #5     | #5     | 14'-2"              | #6     | #6     | 12'-9"  | #8   | #8   | 13'-10" |
| H1        | 19'-0 1/2"              | 19'-2 1/2"           | 13                                       | 13    | 18                  | 17    | 14                                | 13    | 18                  | 17    | #5                  | #5     | 16'-2"  | #6     | #6     | 15'-9"              | #7     | #7     | 14'-4"  | #8   | #8   | 13'-10" |
| I1        | 20'-0 1/2"              | 20'-2 1/2"           | 14                                       | 13    | 18                  | 17    | 14                                | 13    | 19                  | 18    | #5                  | #5     | 16'-2"  | #6     | #6     | 15'-9"              | #7     | #7     | 14'-4"  | #8   | #8   | 13'-10" |
| J1        | 21'-0 1/2"              | 21'-2 1/2"           | 14                                       | 13    | 19                  | 17    | 15                                | 14    | 19                  | 18    | #5                  | #5     | 16'-2"  | #6     | #6     | 15'-9"              | #7     | #7     | 14'-4"  | #9   | #9   | 15'-4"  |
| K1        | 22'-0 1/2"              | 22'-2 1/2"           | 15                                       | 14    | 19                  | 18    | 15                                | 14    | 20                  | 19    | #6                  | #6     | 18'-9"  | #7     | #7     | 18'-4"              | #8     | #8     | 15'-10" | #9   | #9   | 15'-4"  |

TABLE NOTE:

1. Bars D and Bars E are for 45° Corner Posts only.

PILE DEPTH & REINFORCING SUMMARY

|                           |              |  |                                      |                               |                   |                 |
|---------------------------|--------------|--|--------------------------------------|-------------------------------|-------------------|-----------------|
| LAST REVISION<br>07/01/12 | DESCRIPTION: |  | <b>FDOT DESIGN STANDARDS</b><br>2013 | <b>PRECAST SOUND BARRIERS</b> | INDEX NO.<br>5200 | SHEET NO.<br>15 |
|---------------------------|--------------|--|--------------------------------------|-------------------------------|-------------------|-----------------|

C:\projects\standards\structures\2013book\05200-15of16.dgn r0960rh 3:01:30 PM 6/29/2012

TABLE 2 - WIND SPEED = 130 MPH

| POST AND PILE DIMENSIONS |                         |                      |  |          |                        |          |                                   |          |                        |          | TABLE OF REINFORCING STEEL |          |        |        |         |                        |        |         |         |        |         |         |
|--------------------------|-------------------------|----------------------|--|----------|------------------------|----------|-----------------------------------|----------|------------------------|----------|----------------------------|----------|--------|--------|---------|------------------------|--------|---------|---------|--------|---------|---------|
| WALL TYPE                | POST LENGTH WITHOUT CAP | POST LENGTH WITH CAP | PILE LENGTH                              |          |                        |          |                                   |          |                        |          | POST REINFORCING           |          |        |        |         |                        |        |         |         |        |         |         |
|                          |                         |                      | N = 10 to 40<br>Med. Dense Granular Soil |          |                        |          | N = 4 to 9<br>Loose Granular Soil |          |                        |          | 10'-0"<br>POST SPACING     |          |        |        |         | 20'-0"<br>POST SPACING |        |         |         |        |         |         |
|                          |                         |                      | 10'-0"<br>POST SPACING                   |          | 20'-0"<br>POST SPACING |          | 10'-0"<br>POST SPACING            |          | 20'-0"<br>POST SPACING |          | BARS A                     | BARS B   |        | BARS D | BARS E  |                        | BARS A | BARS B  |         | BARS D | BARS E  |         |
|                          |                         |                      | 30"<br>○                                 | 36"<br>○ | 30"<br>○               | 36"<br>○ | 30"<br>○                          | 36"<br>○ | 30"<br>○               | 36"<br>○ | 30"<br>○                   | 36"<br>○ | SIZE   | SIZE   | DIM 'A' | SIZE                   | SIZE   | DIM 'A' | SIZE    | SIZE   | DIM 'A' | SIZE    |
| A2                       | 12'-0 1/2"              | 12'-2 1/2"           | 12                                       | 11       | 16                     | 15       | 12                                | 11       | 16                     | 15       | #4                         | #4       | 11'-5" | #4     | #4      | 9'-5"                  | #5     | #5      | 9'-2"   | #6     | #6      | 8'-9"   |
| B2                       | 13'-0 1/2"              | 13'-2 1/2"           | 12                                       | 12       | 16                     | 15       | 13                                | 12       | 17                     | 16       | #4                         | #4       | 11'-5" | #5     | #5      | 12'-2"                 | #5     | #5      | 9'-2"   | #6     | #6      | 8'-9"   |
| C2                       | 14'-0 1/2"              | 14'-2 1/2"           | 13                                       | 12       | 17                     | 16       | 13                                | 12       | 18                     | 16       | #4                         | #4       | 11'-5" | #5     | #5      | 12'-2"                 | #6     | #6      | 10'-9"  | #7     | #7      | 10'-4"  |
| D2                       | 15'-0 1/2"              | 15'-2 1/2"           | 13                                       | 13       | 18                     | 16       | 14                                | 13       | 18                     | 17       | #4                         | #4       | 11'-5" | #5     | #5      | 12'-2"                 | #6     | #6      | 10'-9"  | #7     | #7      | 10'-4"  |
| E2                       | 16'-0 1/2"              | 16'-2 1/2"           | 14                                       | 13       | 19                     | 17       | 14                                | 13       | 19                     | 18       | #5                         | #5       | 13'-2" | #6     | #6      | 13'-9"                 | #7     | #7      | 12'-4"  | #8     | #8      | 11'-10" |
| F2                       | 17'-0 1/2"              | 17'-2 1/2"           | 14                                       | 13       | 19                     | 18       | 15                                | 14       | 20                     | 18       | #5                         | #5       | 13'-2" | #6     | #6      | 13'-9"                 | #7     | #7      | 12'-4"  | #8     | #8      | 11'-10" |
| G2                       | 18'-0 1/2"              | 18'-2 1/2"           | 15                                       | 14       | 20                     | 18       | 15                                | 14       | 20                     | 19       | #5                         | #5       | 13'-2" | #6     | #6      | 13'-9"                 | #8     | #8      | 13'-10" | #9     | #9      | 12'-4"  |
| H2                       | 19'-0 1/2"              | 19'-2 1/2"           | 15                                       | 14       | 20                     | 19       | 16                                | 15       | 21                     | 20       | #6                         | #6       | 15'-9" | #7     | #7      | 15'-4"                 | #8     | #8      | 13'-10" | #9     | #10     | 11'-7"  |
| I2                       | 20'-0 1/2"              | 20'-2 1/2"           | 16                                       | 15       | 21                     | 19       | 16                                | 15       | 22                     | 20       | #6                         | #6       | 15'-9" | #7     | #7      | 15'-4"                 | #8     | #8      | 12'-10" | #10    | #10     | 13'-7"  |
| J2                       | 21'-0 1/2"              | 21'-2 1/2"           | 16                                       | 15       | 22                     | 20       | 17                                | 16       | 22                     | 21       | #6                         | #6       | 15'-9" | #7     | #7      | 15'-4"                 | #9     | #9      | 14'-4"  | #10    | #11     | 12'-10" |
| K2                       | 22'-0 1/2"              | 22'-2 1/2"           | 17                                       | 16       | 22                     | 21       | 17                                | 16       | 23                     | 21       | #7                         | #7       | 17'-4" | #8     | #8      | 16'-10"                | #9     | #9      | 14'-4"  | #11    | #11     | 13'-10" |


TABLE 3 - WIND SPEED = 150 MPH

| POST AND PILE DIMENSIONS |                         |                      |  |          |                        |          |                                   |          |                        |          | TABLE OF REINFORCING STEEL |          |         |        |         |                        |        |         |         |        |         |        |
|--------------------------|-------------------------|----------------------|--|----------|------------------------|----------|-----------------------------------|----------|------------------------|----------|----------------------------|----------|---------|--------|---------|------------------------|--------|---------|---------|--------|---------|--------|
| WALL TYPE                | POST LENGTH WITHOUT CAP | POST LENGTH WITH CAP | PILE LENGTH                              |          |                        |          |                                   |          |                        |          | POST REINFORCING           |          |         |        |         |                        |        |         |         |        |         |        |
|                          |                         |                      | N = 10 to 40<br>Med. Dense Granular Soil |          |                        |          | N = 4 to 9<br>Loose Granular Soil |          |                        |          | 10'-0"<br>POST SPACING     |          |         |        |         | 20'-0"<br>POST SPACING |        |         |         |        |         |        |
|                          |                         |                      | 10'-0"<br>POST SPACING                   |          | 20'-0"<br>POST SPACING |          | 10'-0"<br>POST SPACING            |          | 20'-0"<br>POST SPACING |          | BARS A                     | BARS B   |         | BARS D | BARS E  |                        | BARS A | BARS B  |         | BARS D | BARS E  |        |
|                          |                         |                      | 30"<br>○                                 | 36"<br>○ | 30"<br>○               | 36"<br>○ | 30"<br>○                          | 36"<br>○ | 30"<br>○               | 36"<br>○ | 30"<br>○                   | 36"<br>○ | SIZE    | SIZE   | DIM 'A' | SIZE                   | SIZE   | DIM 'A' | SIZE    | SIZE   | DIM 'A' | SIZE   |
| A3                       | 12'-0 1/2"              | 12'-2 1/2"           | 13                                       | 12       | 18                     | 16       | 14                                | 13       | 18                     | 17       | #4                         | #4       | 9'-5"   | #5     | #5      | 10'-2"                 | #6     | #6      | 8'-9"   | #6     | #7      | 7'-4"  |
| B3                       | 13'-0 1/2"              | 13'-2 1/2"           | 14                                       | 13       | 19                     | 17       | 14                                | 13       | 19                     | 18       | #4                         | #4       | 9'-5"   | #5     | #5      | 10'-2"                 | #6     | #6      | 8'-9"   | #7     | #7      | 8'-4"  |
| C3                       | 14'-0 1/2"              | 14'-2 1/2"           | 14                                       | 13       | 19                     | 18       | 15                                | 14       | 20                     | 19       | #5                         | #5       | 11'-2"  | #6     | #6      | 11'-9"                 | #7     | #7      | 10'-4"  | #8     | #8      | 9'-10" |
| D3                       | 15'-0 1/2"              | 15'-2 1/2"           | 15                                       | 14       | 20                     | 19       | 16                                | 14       | 21                     | 19       | #5                         | #5       | 11'-2"  | #6     | #6      | 11'-9"                 | #7     | #7      | 10'-4"  | #8     | #9      | 9'-4"  |
| E3                       | 16'-0 1/2"              | 16'-2 1/2"           | 16                                       | 14       | 21                     | 19       | 16                                | 15       | 22                     | 20       | #5                         | #5       | 11'-2"  | #6     | #6      | 11'-9"                 | #8     | #8      | 10'-10" | #9     | #9      | 10'-4" |
| F3                       | 17'-0 1/2"              | 17'-2 1/2"           | 16                                       | 15       | 22                     | 20       | 17                                | 16       | 22                     | 21       | #6                         | #6       | 13'-9"  | #7     | #7      | 13'-4"                 | #8     | #8      | 10'-10" | #9     | #10     | 9'-7"  |
| G3                       | 18'-0 1/2"              | 18'-2 1/2"           | 17                                       | 16       | 22                     | 21       | 17                                | 16       | 23                     | 21       | #6                         | #6       | 12'-9"  | #7     | #7      | 13'-4"                 | #9     | #9      | 12'-4"  | #10    | #10     | 11'-7" |
| H3                       | 19'-0 1/2"              | 19'-2 1/2"           | 17                                       | 16       | 23                     | 21       | 18                                | 17       | 24                     | 22       | #6                         | #6       | 12'-9"  | #8     | #8      | 14'-10"                | #9     | #9      | 12'-4"  | #11    | #11     | 11'-9" |
| I3                       | 20'-0 1/2"              | 20'-2 1/2"           | 18                                       | 17       | 24                     | 22       | 18                                | 17       | 25                     | 23       | #7                         | #7       | 15'-4"  | #8     | #8      | 14'-10"                | #9     | #10     | 11'-7"  | #11    | #14     | 10'-0" |
| J3                       | 21'-0 1/2"              | 21'-2 1/2"           | 18                                       | 17       | 24                     | 23       | 19                                | 18       | 25                     | 23       | #7                         | #7       | 15'-4"  | #9     | #9      | 16'-4"                 | -      | -       | -       | -      | -       | -      |
| K3                       | 22'-0 1/2"              | 22'-2 1/2"           | 19                                       | 17       | 25                     | 23       | 19                                | 18       | 26                     | 24       | #8                         | #8       | 16'-10" | #9     | #9      | 16'-4"                 | -      | -       | -       | -      | -       | -      |


TABLE NOTE:

1. Bars D and Bars E are for 45° Corner Posts only.

PILE DEPTH & REINFORCING SUMMARY


|                           |          |              |   |                               |                        |                   |                 |
|---------------------------|----------|--------------|---|-------------------------------|------------------------|-------------------|-----------------|
| LAST REVISION<br>07/01/12 | REVISION | DESCRIPTION: |  | FDOT DESIGN STANDARDS<br>2013 | PRECAST SOUND BARRIERS | INDEX NO.<br>5200 | SHEET NO.<br>16 |
|---------------------------|----------|--------------|---|-------------------------------|------------------------|-------------------|-----------------|

C:\projects\standards\structures\2013book\05200-16of16.dgn 6/28/2012 3:01:32 PM rd960rh

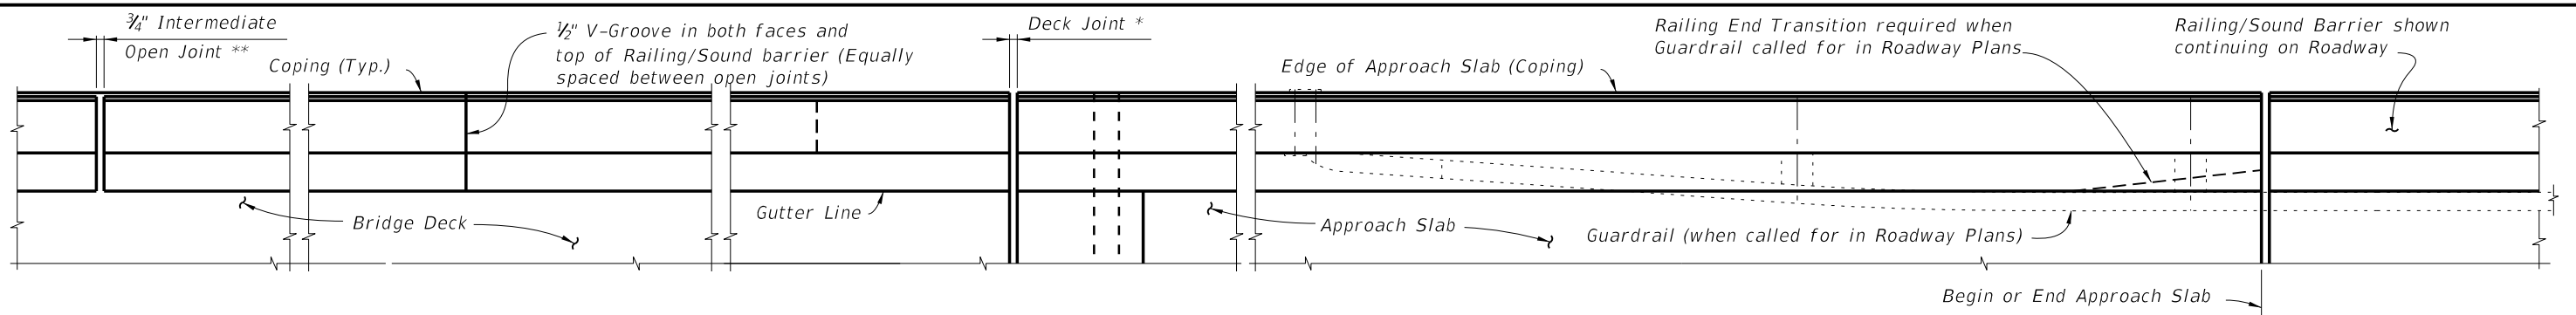

PLAN (BRIDGE MOUNTED RAILING/SOUND BARRIER SHOWN, WALL OR FOOTING MOUNTED RAILING/SOUND BARRIER SIMILAR) (Reinforcing Steel not shown for clarity)

CROSS REFERENCE:  
 For Detail "B" and V-Groove Lettering Detail see Sheet 2.  
 For Section A-A see Sheet 4.  
 For Section C-C and Detail "A" see Sheet 5.  
 For Wall mounted Railing/Sound Barrier Details see Index No. 5212.  
 For Footing mounted Railing/Sound Barrier Details see Index Nos. 5213 (T-Shaped), 5214 (L-Shaped) or 5215 (Trench).

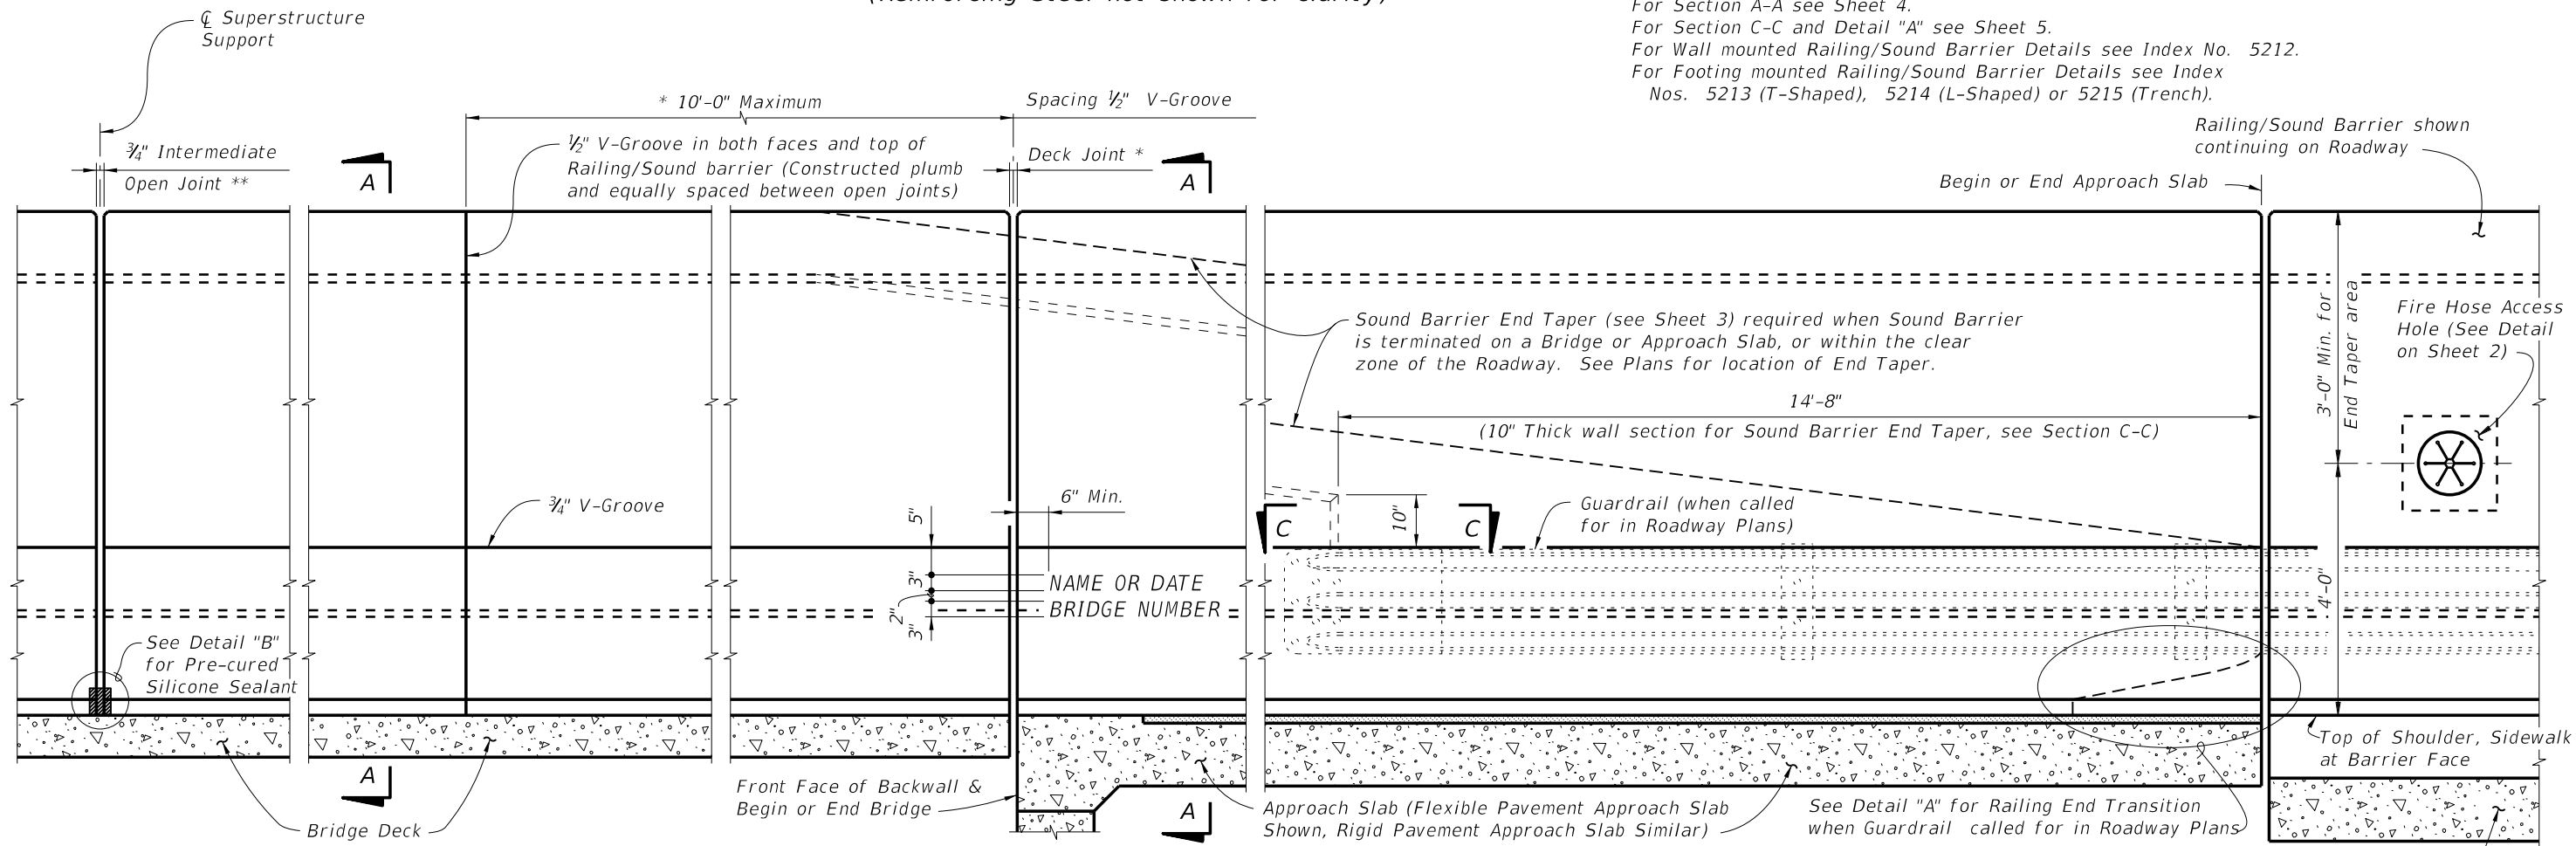

ELEVATION OF INSIDE FACE OF RAILING/SOUND BARRIER (BRIDGE MOUNTED RAILING/SOUND BARRIER SHOWN, WALL OR FOOTING MOUNTED RAILING/SOUND BARRIER SIMILAR) (Reinforcing Steel not shown for clarity)

T-Shaped Spread Footing Shown, L-Shaped Spread Footing, Trench Footing Similar and Junction Slab similar

\* On Bridges see Superstructure and Approach Slab Sheets for actual dimensions and joint orientation. Open Railing/Sound Barrier Joints at Deck Expansion Joint locations shall match the dimensions of the Deck Joint. For treatment of Railing/Sound Barrier walls on skewed bridges see Index No. 420. Deck Joint at Begin Bridge or End Bridge shown, Deck Joint at  $\phi$  Pier or Intermediate Bent, Junction Slab or Footing similar.

\*\*  $\frac{3}{4}$ " Intermediate Open Joints shall be constructed plumb and provided at :  
 (1) - Superstructure supports where slab is continuous.  
 (2) - Construction Joints for Junction Slabs and Footings.

C:\p\projects\standards\structures\2013book\05210-1of5.dgn  
 rd960rh  
 3:01:35 PM  
 6/29/2012

|               |              |  |  |           |           |
|---------------|--------------|--|--|-----------|-----------|
| LAST REVISION | DESCRIPTION: |  <b>FDOT DESIGN STANDARDS</b><br>2013 | <b>TRAFFIC RAILING/SOUND BARRIER (8'-0")</b> | INDEX NO. | SHEET NO. |
| 01/01/11      | REVISION     |  |  | 5210      | 1         |

**TRAFFIC RAILING/SOUND BARRIER NOTES**

This railing has been structurally evaluated to be equivalent or greater in strength to a safety shape/sound barrier combination railing which has been crash tested to NCHRP Report 350 TL-4 Criteria. The Transverse Design Force for the design of bridge deck overhang shall be 54 kips applied horizontally at 3'-6" height above the deck.

**CONSTRUCTION REQUIREMENTS :** The Traffic Railing/Sound Barrier and joints shall be constructed plumb, they shall not be constructed perpendicular to the roadway surface. Slip forming is not permitted.


**CONCRETE AND REINFORCING STEEL :** For Railing/Sound Barrier on bridges see General Notes. For Wall and Footing mounted Railing/Sound Barrier, concrete shall be Class II for slightly aggressive environments and Class IV for moderately or extremely aggressive environments. All reinforcing steel shall be Grade 60.

**NAME, DATE AND BRIDGE NUMBER :** For Railing/Sound Barrier on bridges, the Name and Bridge Number shall be placed on the Traffic Railing so as to be seen on the driver's right side when approaching the bridge. The Date shall be placed on the driver's left side when approaching the bridge. The Name shall be as shown in the General Notes in the Structures Plans. The Date shall be the year the bridge is completed. For a widening when the existing railing is removed, use both the existing date and the year of the widening. Black plastic letters and figures 3" in height may be used, as approved by the Engineer, in lieu of the letters and figures formed by 3/8" V-Grooves. V-Grooves shall be formed by preformed letters and figures.

**MARKERS :** For Railing/Sound Barrier on bridges, Elevation Markers shall be placed on top of the Traffic Railing/Sound Barrier or Bridge Deck at the end bents as directed by the Engineer. Markers are to be furnished by the Florida Department of Transportation and installed by the Contractor. The cost of installing the markers shall be included in the Contract Unit Price for the Railing/Sound Barrier.


**REFLECTIVE RAILING MARKERS :** Reflective Railing Markers shall meet Specification Section 993. Install markers 2'-4" above the riding surface at the spacing shown in the table below. Reflector color (white or yellow) shall match the color of the near edgeline. The cost of the reflective markers shall be included in the Contract Unit Price for the Traffic Railing/Sound Barrier.

| REFLECTIVE RAILING MARKER SPACING                 |               |
|---|---------------|
| Distance - Edge of Travel Lane to Face of Railing | Spacing (Ft.) |
| < 4'  | 40'           |
| 4' to 8'  | 80'           |
| > than 8'   | None Required |

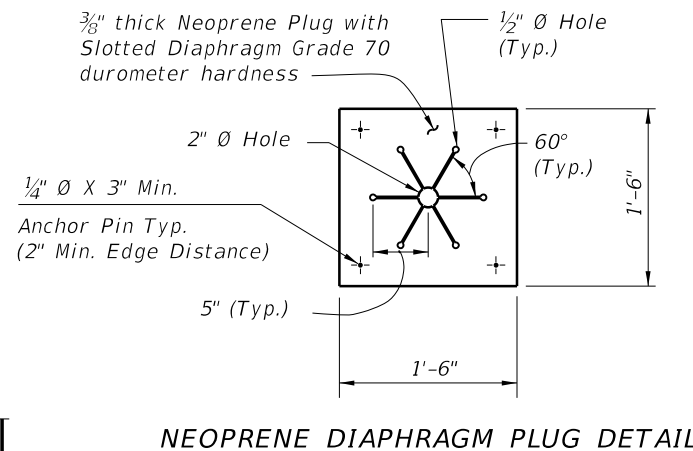

**INTERMEDIATE JOINT SEAL NOTES:**


- At Intermediate Open Joints, seal the lower 6" portion of the open joint with Pre-cured Silicone Sealant in accordance with Specification Section 932.
- Apply sealant prior to any Class V finish coating and remove all curing compound and loose material from the surface prior to application of bonding agent.
- The cost of the Pre-cured Silicone Sealant shall be included in the Contract Unit Price for the Traffic Railing.



**DETAIL "B" - SECTION AT INTERMEDIATE OPEN JOINT**

| ESTIMATED TRAFFIC RAILING/SOUND BARRIER QUANTITIES |       |          |
|--|-------|----------|
| ITEM   | UNIT  | QUANTITY |
| Concrete (Railing)                                 | CY/LF | 0.104    |
| Concrete (Sound Barrier)                           | CY/LF | 0.145    |
| Reinforcing Steel (Typical)                        | LB/LF | 78.57    |
| Additional Reinf. @ Open Joint                     | LB    | 430.24   |


(The above quantities are based on the bridge mounted typical section, 2% deck cross slope and railing on low side of deck.)

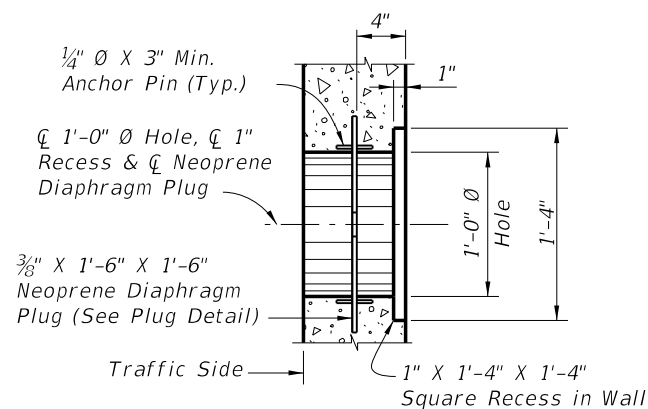


**NOTE:** Fire hose access holes are required at or near fire hydrant locations. Field cut reinforcement as required to maintain 2" minimum cover at access holes. Locate fire hose access holes a minimum of 10'-0" from 3/4" open joints when possible.

**REINFORCING STEEL BENDING DIAGRAMS**


| BILL OF REINFORCING STEEL |      |           | BRIDGE CROSS-SLOPE |     | LOW GUTTER |     | HIGH GUTTER |     |
|---------------------------|------|-----------|--------------------|-----|------------|-----|-------------|-----|
| MARK                      | SIZE | LENGTH    | ØA                 | ØB  | ØA         | ØB  | ØA          | ØB  |
| P                         | 5    | 5'-7"     | 90°                | 90° | 90°        | 90° | 90°         | 90° |
| R                         | 5    | 7'-9"     | 93°                | 87° | 87°        | 93° | 93°         | 93° |
| S1                        | 5    | As Req'd. | 96°                | 84° | 84°        | 96° | 96°         | 96° |
| S2                        | 5    | 7'-3"     | 90°                | 90° | 90°        | 90° | 90°         | 90° |
| V (Bridge and Wall)       | 5    | 5'-1"     |                    |     |            |     |             |     |
| V (Footing)               | 5    | 7'-7"     |                    |     |            |     |             |     |




**BARS 5S1 & 5S2**

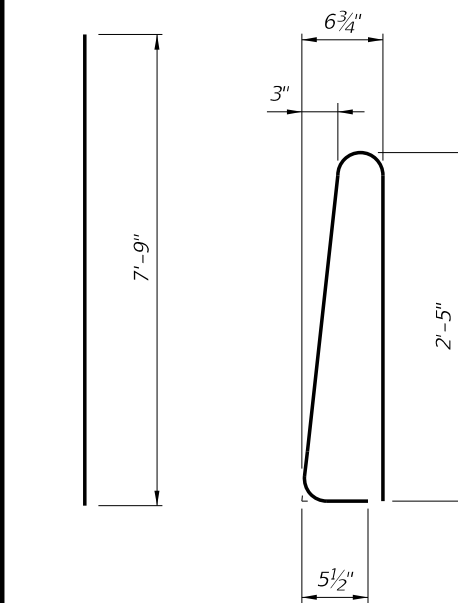

**BAR 5R**  
(Field Cut for End Taper)

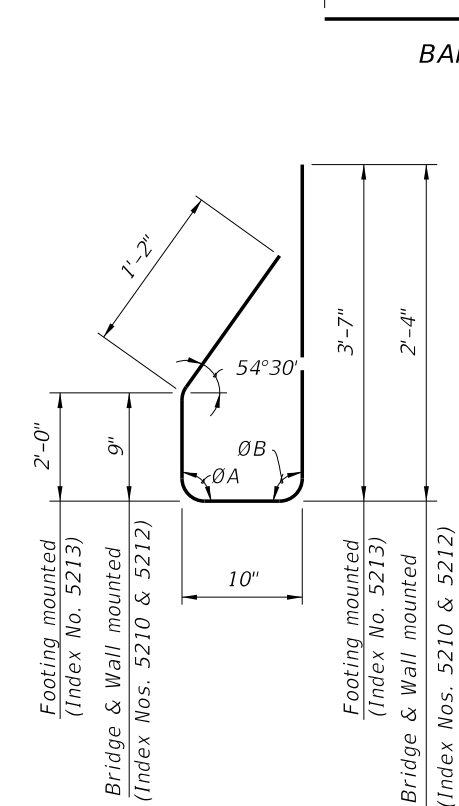


**STIRRUP BAR 5P**

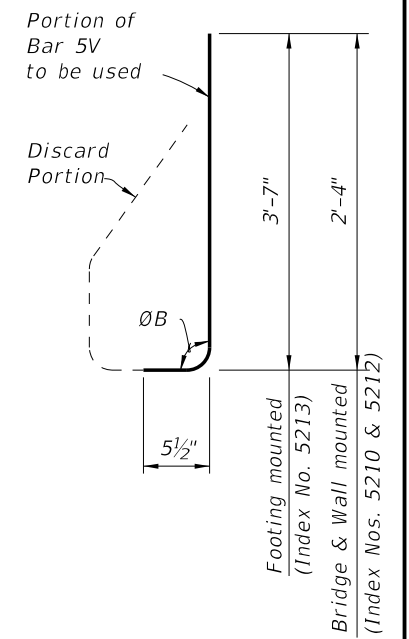

**END STIRRUP BAR 5V**  
To Be Field Cut (One Required per Railing End Transition)

**REINFORCING STEEL NOTES:**

- All bar dimensions in the bending diagrams are out to out.
- All reinforcing steel at the open joints shall have a 2" minimum cover.
- Bars 5S1 may be continuous or spliced at the construction joints. Lap splices for Bars 5S1 shall be a minimum of 2'-2".
- The Contractor may use Welded Wire Reinforcement when approved by the Engineer. Welded Wire Reinforcement shall conform to ASTM A 497.
- Bars 5R shall be one continuous bar. No mechanical couplers or lap splices are permitted.
- See Index Nos. 5214 and 5215 for Bars 5V and 5T in L-shaped and Trench footings.

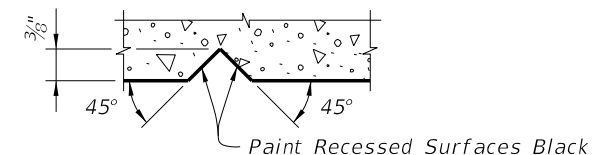


**SECTION THRU RECESSED "V" GROOVE TO FORM INSCRIBED LETTERS AND FIGURES**

**CROSS REFERENCE:** For locations of Detail "B", see Sheet 1.


C:\projects\standards\structures\2013book\05210-2of5.dgn 6/28/2012 3:01:37 PM rd960rh

|                                  |              |                                      |  |                          |                       |
|----------------------------------|--------------|--------------------------------------|--|--------------------------|-----------------------|
| LAST REVISION<br><b>01/01/11</b> | DESCRIPTION: | <b>FDOT DESIGN STANDARDS</b><br>2013 | <b>TRAFFIC RAILING/SOUND BARRIER (8'-0")</b> | INDEX NO.<br><b>5210</b> | SHEET NO.<br><b>2</b> |
|                                  |              |                                      |  |                          |                       |

C:\projects\standards\structures\2013book\05210-3of5.dgn  
rd960rh  
3:01:40 PM  
6/29/2012

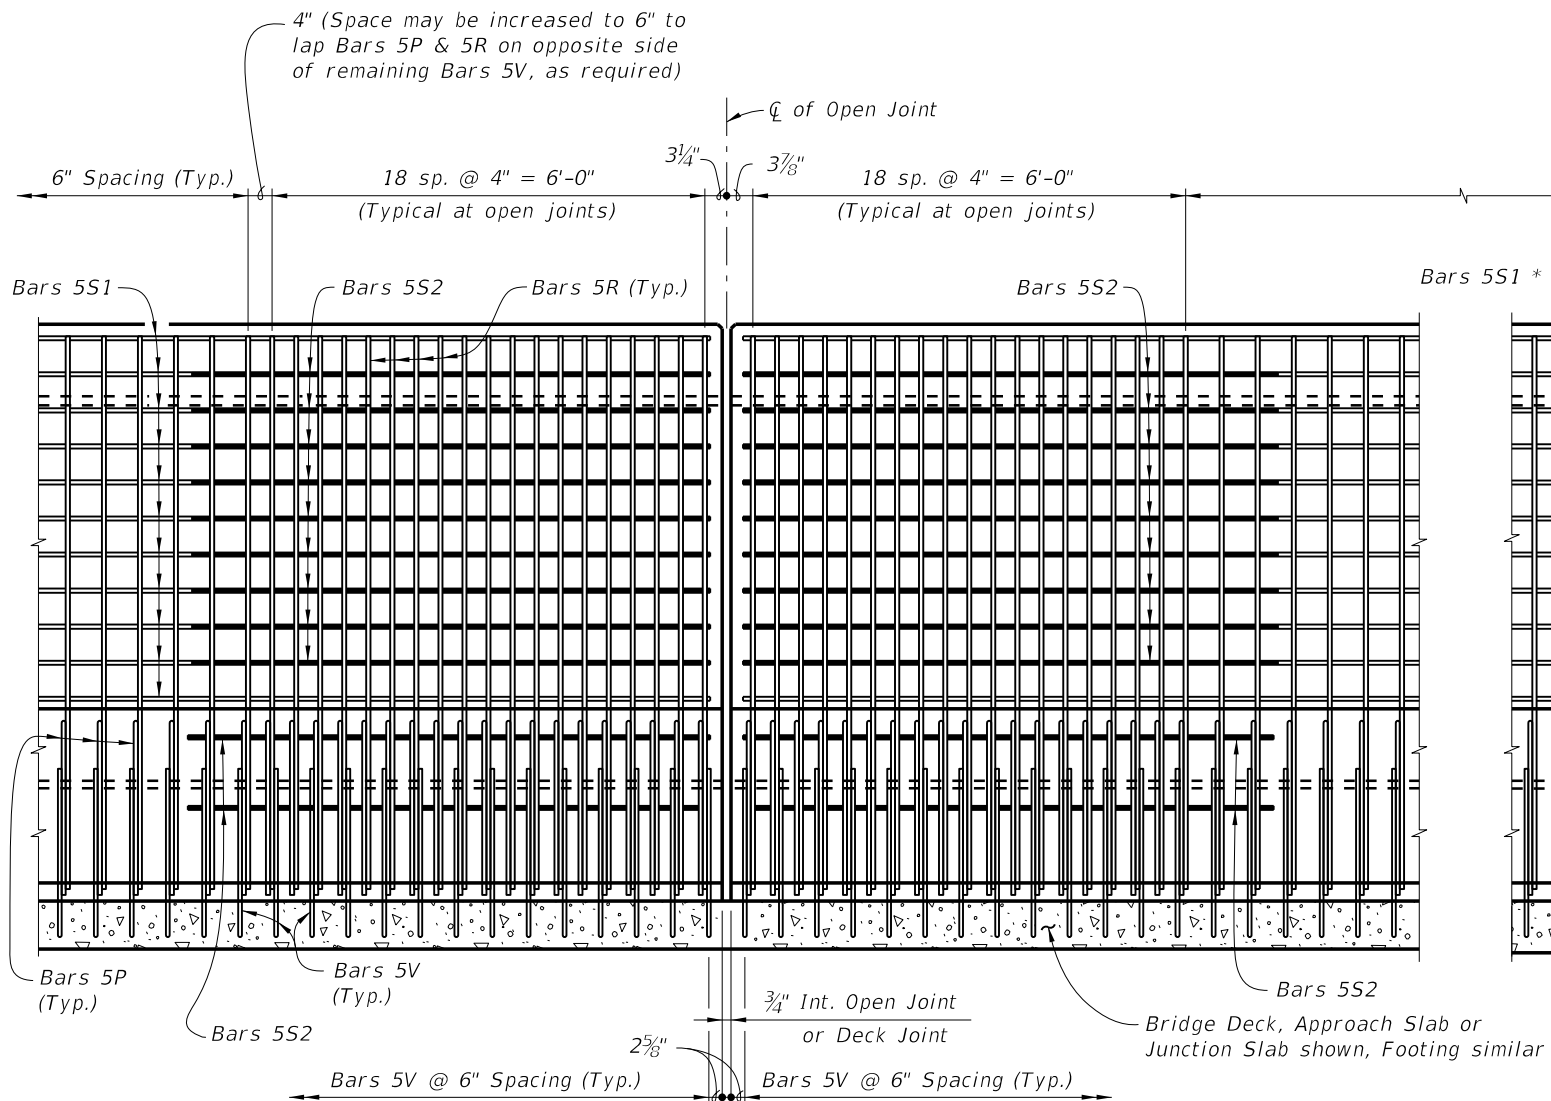

ELEVATION OF RAILING/SOUND BARRIER REINFORCING STEEL  
(INTERMEDIATE OPEN JOINT SHOWN, DECK JOINT SIMILAR)  
(Bars 5S1 in Barrier not shown for clarity)

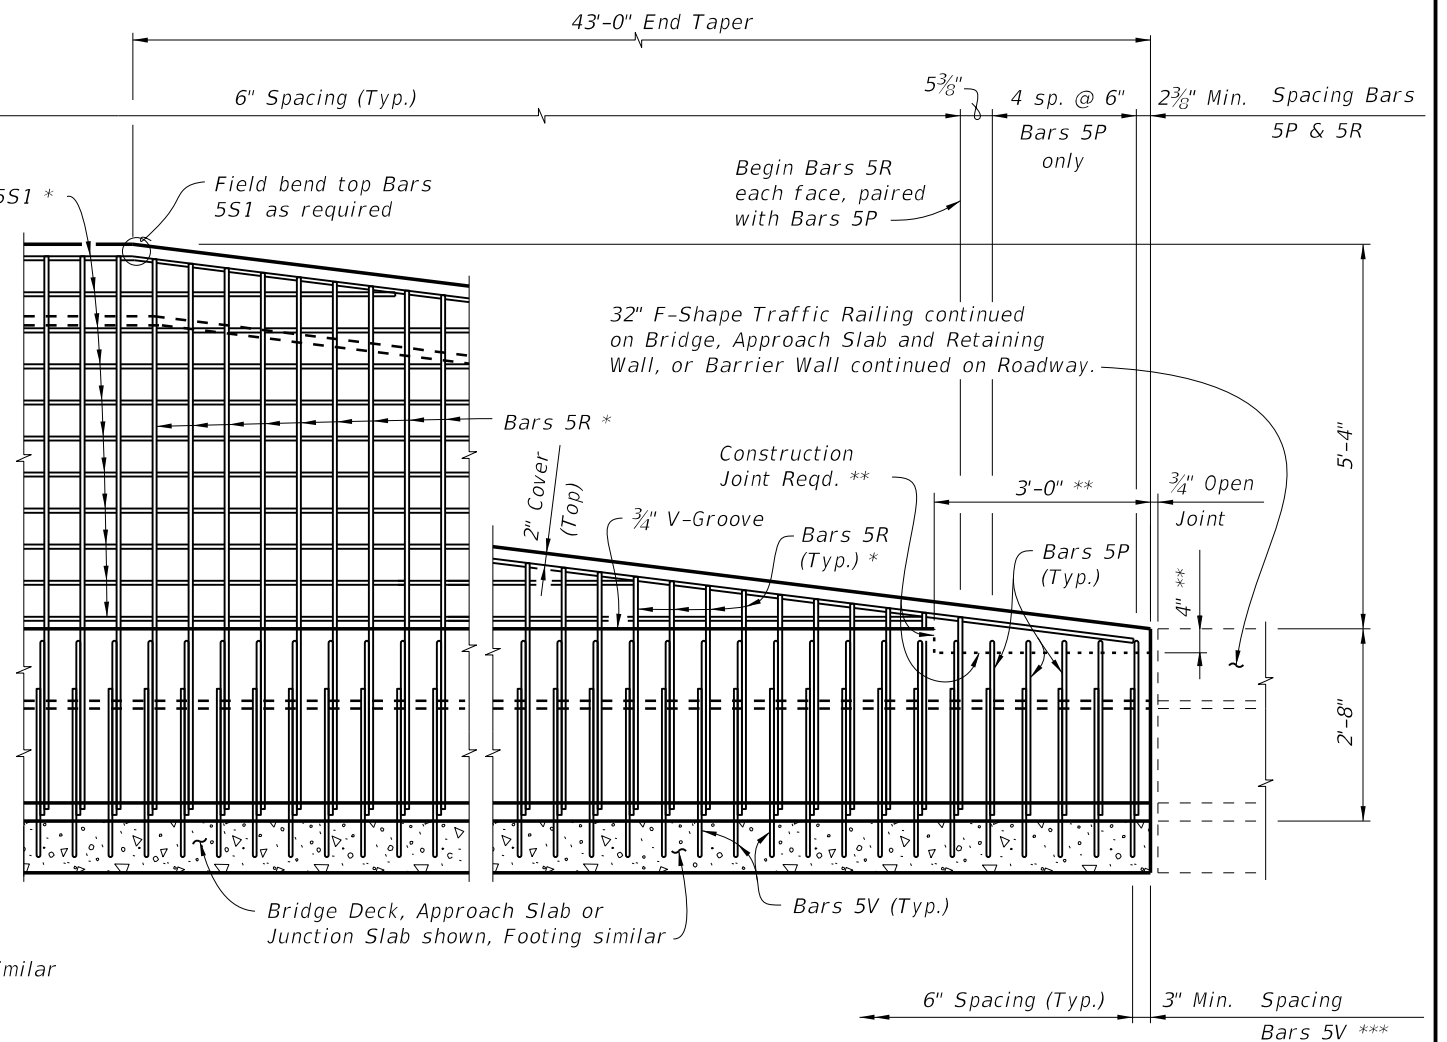


ELEVATION OF RAILING/SOUND BARRIER END TAPER (ADJACENT TO TRAFFIC RAILING  
SHOWN, GUARDRAIL ATTACHMENT SIMILAR SEE DETAIL "A", SHEET 5)  
(Bars 5S1 in Railing not shown for clarity)

NOTES:

- \* Field Cut Bars 5R & 5S1 to maintain clearance.
- \*\* Terminate  $\frac{3}{4}$ " V-groove at construction joint & cast top of railing with End Taper.
- \*\*\* Bar spacing shown for Bars 5V applies only to bridge mounted Railing/Sound Barrier. See Index No. 5212 for spacing of Bars 5V in junction slabs and Index Nos. 5213 (T-Shaped), 5214 (L-Shaped) or 5215 (Trench) for Bars 5V spacing in footings.

|               |          |              |  |  |           |           |
|---------------|----------|--------------|--|--|-----------|-----------|
| LAST REVISION | REVISION | DESCRIPTION: |  <b>FDOT DESIGN STANDARDS</b><br>2013 | <b>TRAFFIC RAILING/SOUND BARRIER (8'-0")</b> | INDEX NO. | SHEET NO. |
| 07/01/07      |          |              |  |  | 5210      | 3         |

C:\projects\standards\structures\2013book\05210-4of5.dgn  
 r0960rh  
 3:01:42 PM  
 6/28/2012

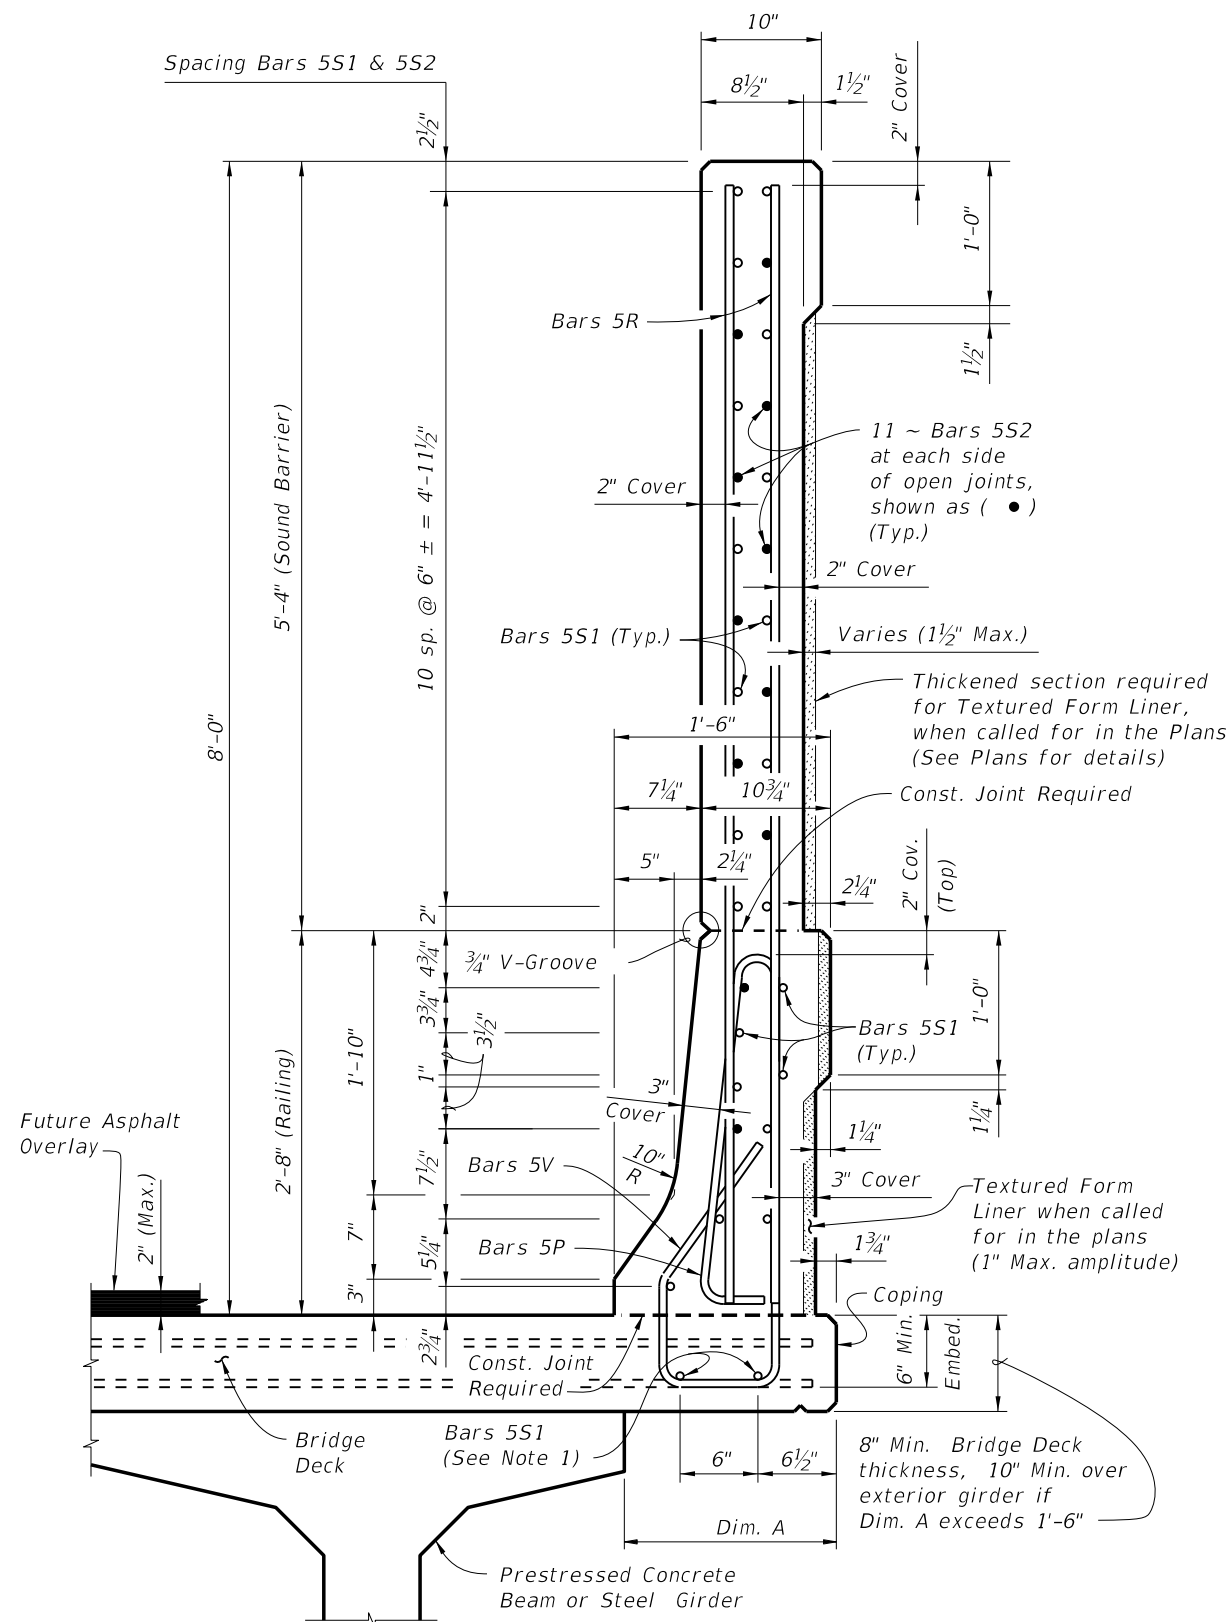


**SECTION A-A**  
**TYPICAL SECTION THRU TRAFFIC RAILING/SOUND BARRIER**  
 (Section Thru Bridge Deck Shown, Section Thru Approach Slab, Junction Slab or Footing Similar)

**NOTES:**

- Bottom Bars 5S1 and End Bar 5V are not present in L-Shaped (Index No. 5214) or Trench (Index No. 5215) Footings. For Bridge Mounted installations, see the Superstructure Sheets for Deck Steel. Omit Bars 5S1 if not specifically shown on the Superstructure Sheets.


**CROSS REFERENCE:**  
 For locations of Section A-A see Sheet 1.  
 For location of View B-B, see Sheet 5.

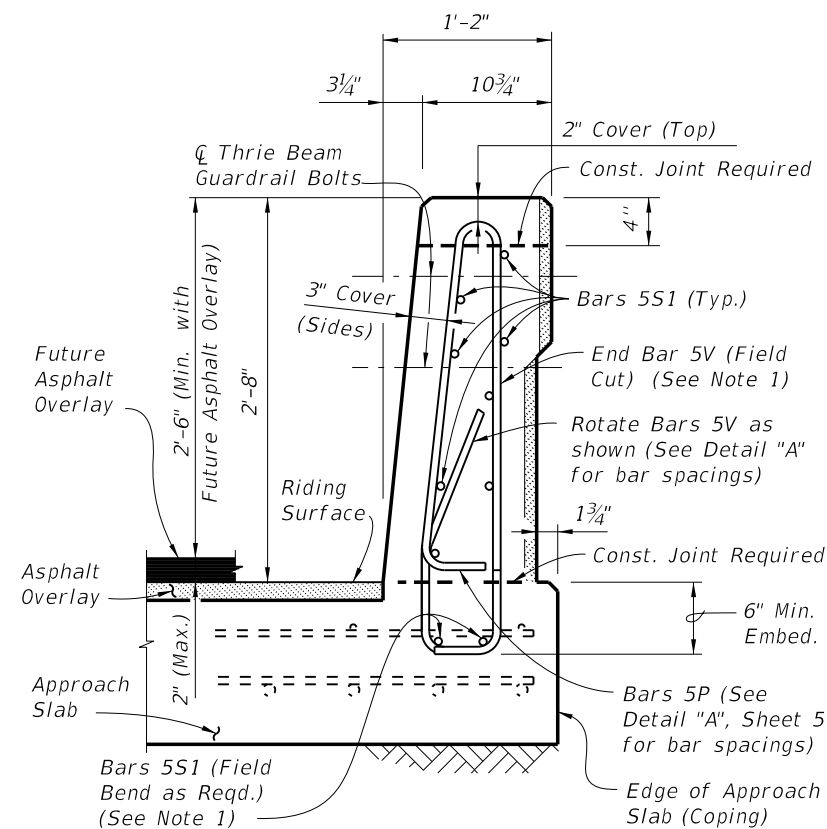


**VIEW B-B**  
**END VIEW OF RAILING END TRANSITION FOR GUARDRAIL ATTACHMENT AT END OF APPROACH SLAB**  
 (Flexible Pavement Approach Slab Shown, Rigid Pavement Approach Slab, Junction Slab or Footing Similar)

|                                  |                          |   |  |                          |                       |
|----------------------------------|--------------------------|---|--|--------------------------|-----------------------|
| LAST REVISION<br><b>01/01/11</b> | DESCRIPTION:<br>REVISION |  <b>FDOT DESIGN STANDARDS</b><br><b>2013</b> | <b>TRAFFIC RAILING/SOUND BARRIER (8'-0")</b> | INDEX NO.<br><b>5210</b> | SHEET NO.<br><b>4</b> |
|----------------------------------|--------------------------|---|--|--------------------------|-----------------------|



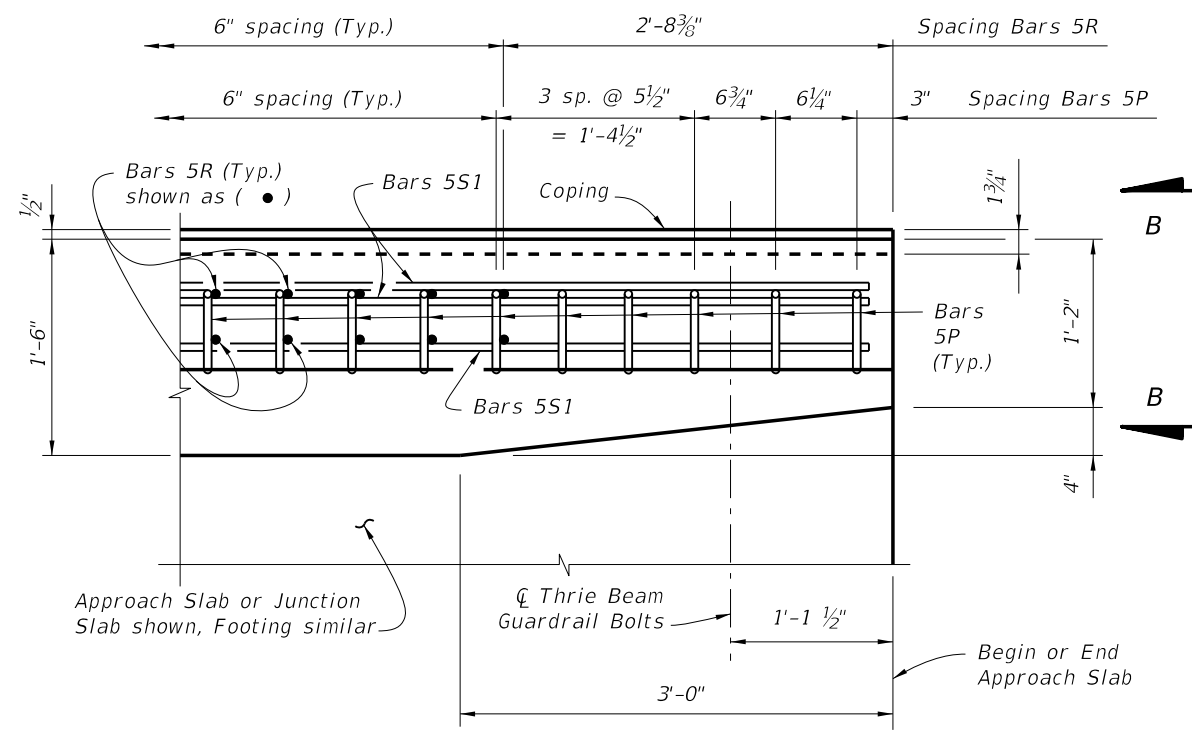

**PLAN - RAILING END TRANSITION**  
 (Showing Bars 5P, 5R, and Bars 5S1) (Bars 5V,  
 Soundwall & Reinforcement not shown for Clarity)

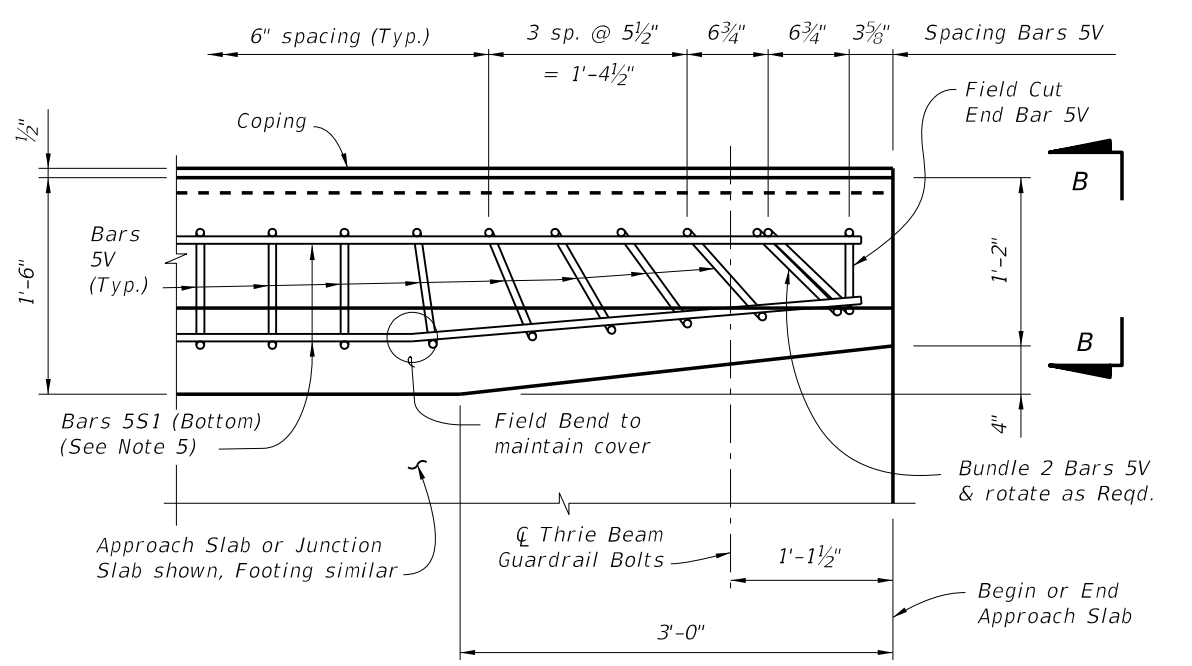


**PLAN - RAILING END TRANSITION**  
 (Showing Bars 5V and Bars 5S1) (Bars 5P, 5R,  
 Soundwall & Reinforcement not shown for Clarity)

**DETAIL "A"**

**DETAIL "A" NOTES:**

1. Rotate Bars 5P & 5V in Railing End Transition to maintain cover. Begin placing Railing Bars 5P and 5V at the railing end and proceed toward the guardrail (thrie beam) terminal connector to ensure placement of guardrail bolt holes. Pair Bars 5R with Bars 5P as shown. Clearance of Bars 5P, 5R & 5V to guardrail bolt holes shall be checked to prevent cutting of bars if holes are to be drilled. Shift bars locally where conflicts occur.
2. For Guardrail connection details see Design Standards Index No. 400.
3. Omit Railing End Transition if a 32" F-Shape Traffic Railing is used beyond the End Taper. See the Plan Sheets. If Railing End Transition is omitted, space Bars 5P, 5R & 5V at 6" as shown above (Typ.).
4. For L-Shaped (Index No. 5214) and Trench (Index No. 5215) footings, Bars 5V and 5T replace Bars 5P as shown at left. Details and bar spacing shown apply except that it is not necessary to rotate Bars 5V and 5T to maintain cover and there is no field cut End Bar 5V.
5. Bottom Bars 5S1 are not present in L-Shaped or Trench Footings.

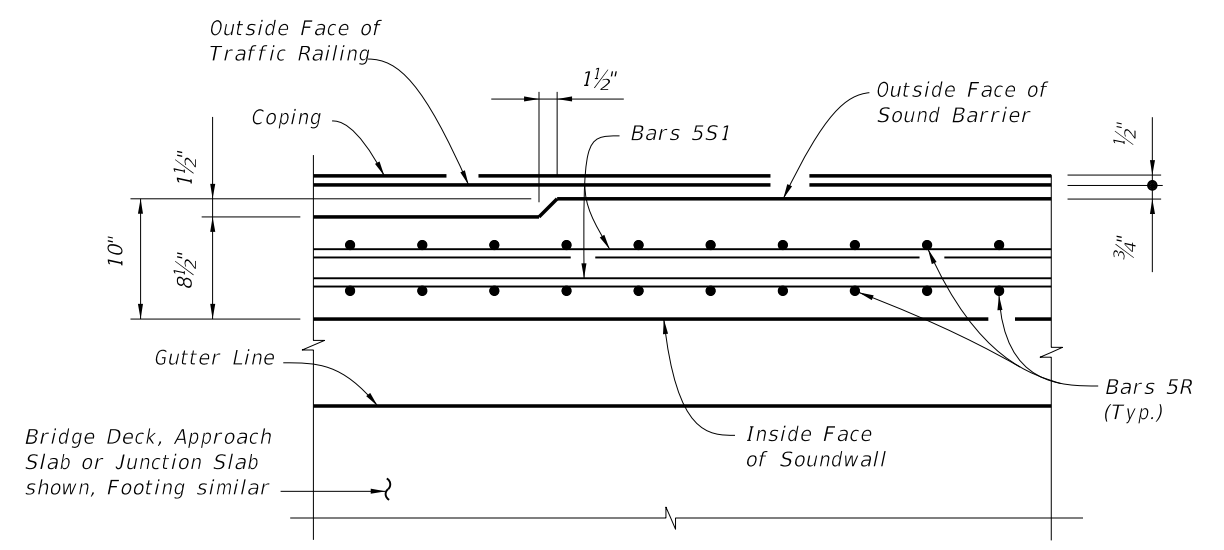


**SECTION C-C**  
**THRU SOUNDWALL END TAPER**

**CROSS REFERENCE:**  
 For location of Detail "A" see Sheet 1.  
 For location of Section C-C see Sheet 1.  
 For View B-B see Sheet 4.

C:\projects\standards\structures\2013book\05210-5of5.dgn  
 rd960rh  
 3:01:45 PM  
 6/28/2012

|               |          |              |   |   |  |           |           |
|---------------|----------|--------------|---|---|--|-----------|-----------|
| LAST REVISION | REVISION | DESCRIPTION: |  | <b>FDOT DESIGN STANDARDS</b><br><b>2013</b> | <b>TRAFFIC RAILING/SOUND BARRIER (8'-0")</b> | INDEX NO. | SHEET NO. |
| 07/01/07      |          |              |   |   |  | 5210      | 5         |

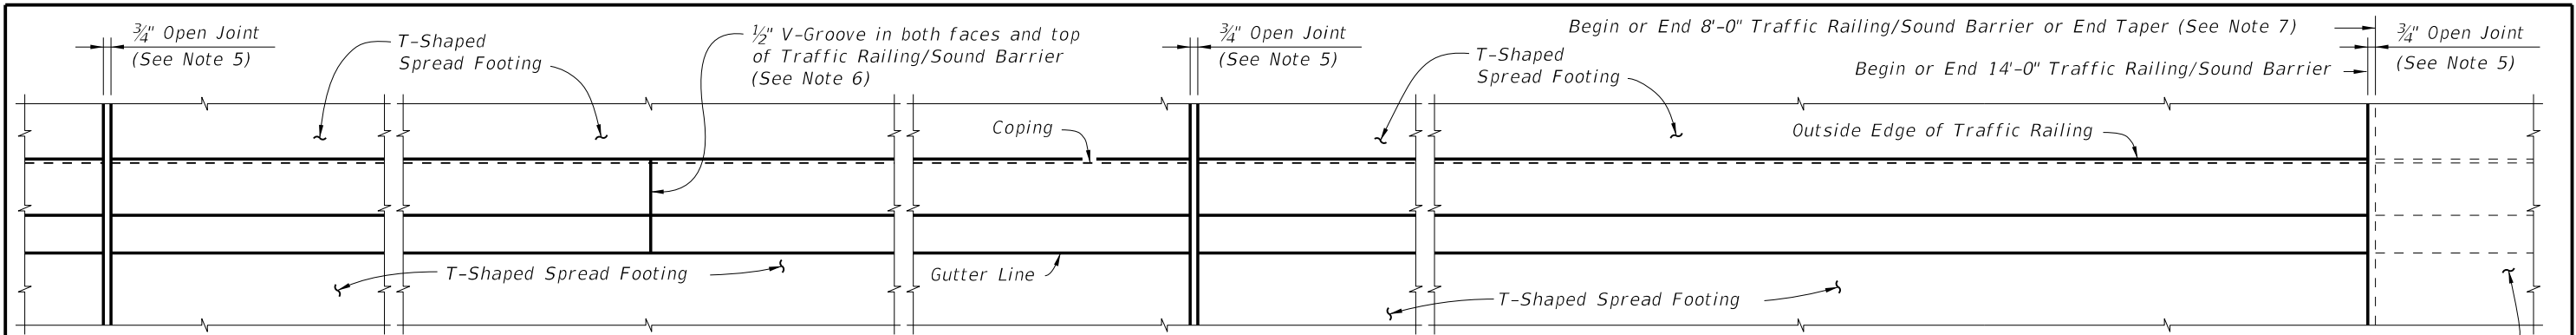


**CROSS REFERENCE:**  
 For Section A-A, Detail "A" and Estimated Quantities, see Sheet 3.  
 For Expansion Joint Detail in Footing, see Index No. 5213, 5214 or 5215.

**PLAN (Reinforcing Steel not shown for clarity)**  
 (T-Shaped Spread Footing Shown, L-Shaped Spread Footing and Trench Footing Similar)

**TRAFFIC RAILING/SOUND BARRIER NOTES**

8'-0" Traffic Railing/Sound Barrier continuing or End Taper on Approach Slab or Roadway (shown)

1. This railing has been structurally evaluated to be equivalent or greater in strength to a safety shape/sound barrier combination railing which has been crash tested to NCHRP Report 350 TL-4 Criteria.
2. **CONSTRUCTION REQUIREMENTS:** Construct the Traffic Railing/Sound Barrier and joints plumb; do not construct the Traffic Railing/Sound Barrier perpendicular to the roadway surface. Slip forming is not permitted.
3. **CONCRETE:** Use Class II concrete for slightly aggressive environments. Use Class IV concrete for moderately or extremely aggressive environments. Concrete will be in accordance with Specification Section 346.
4. **REINFORCING STEEL:** Provide Grade 60 reinforcing steel in accordance with Specification Section 931.
5. Construct  $\frac{3}{4}$ " Open Joints plumb and perpendicular or radial to Gutter Line. Provide at 90'-0" maximum intervals as shown.  $\frac{3}{4}$ " Open Joint locations are to coincide with  $\frac{3}{4}$ " Expansion Joints in footings.
6. Construct  $\frac{1}{2}$ " V-Grooves plumb and provide at 30'-0" maximum intervals as shown. Space V-Grooves equally between  $\frac{3}{4}$ " Open Joints and/or Begin or End Traffic Railing/Sound Barrier. V-Groove locations are to coincide with V-Groove locations in footings.
7. 14'-0" Sound Barrier End Taper is required when Railing/Sound Barrier is adjacent to an 8'-0" Traffic Railing/Sound Barrier and may be used when an 8'-0" Traffic Railing/Sound Barrier End Taper is provided (see Index No. 5210 for details). See Roadway Plans for Traffic Railing/Sound Barrier End Treatment.
8. Work this Standard Drawing with Index No. 5210 - Traffic Railing/Sound Barrier (8'-0") and one or more of the following:
  - a. Index No. 5213 - Traffic Railing/Sound Barrier T-Shaped Spread Footing.
  - b. Index No. 5214 - Traffic Railing/Sound Barrier L-Shaped Spread Footing or
  - c. Index No. 5215 - Traffic Railing/Sound Barrier Trench Footing.

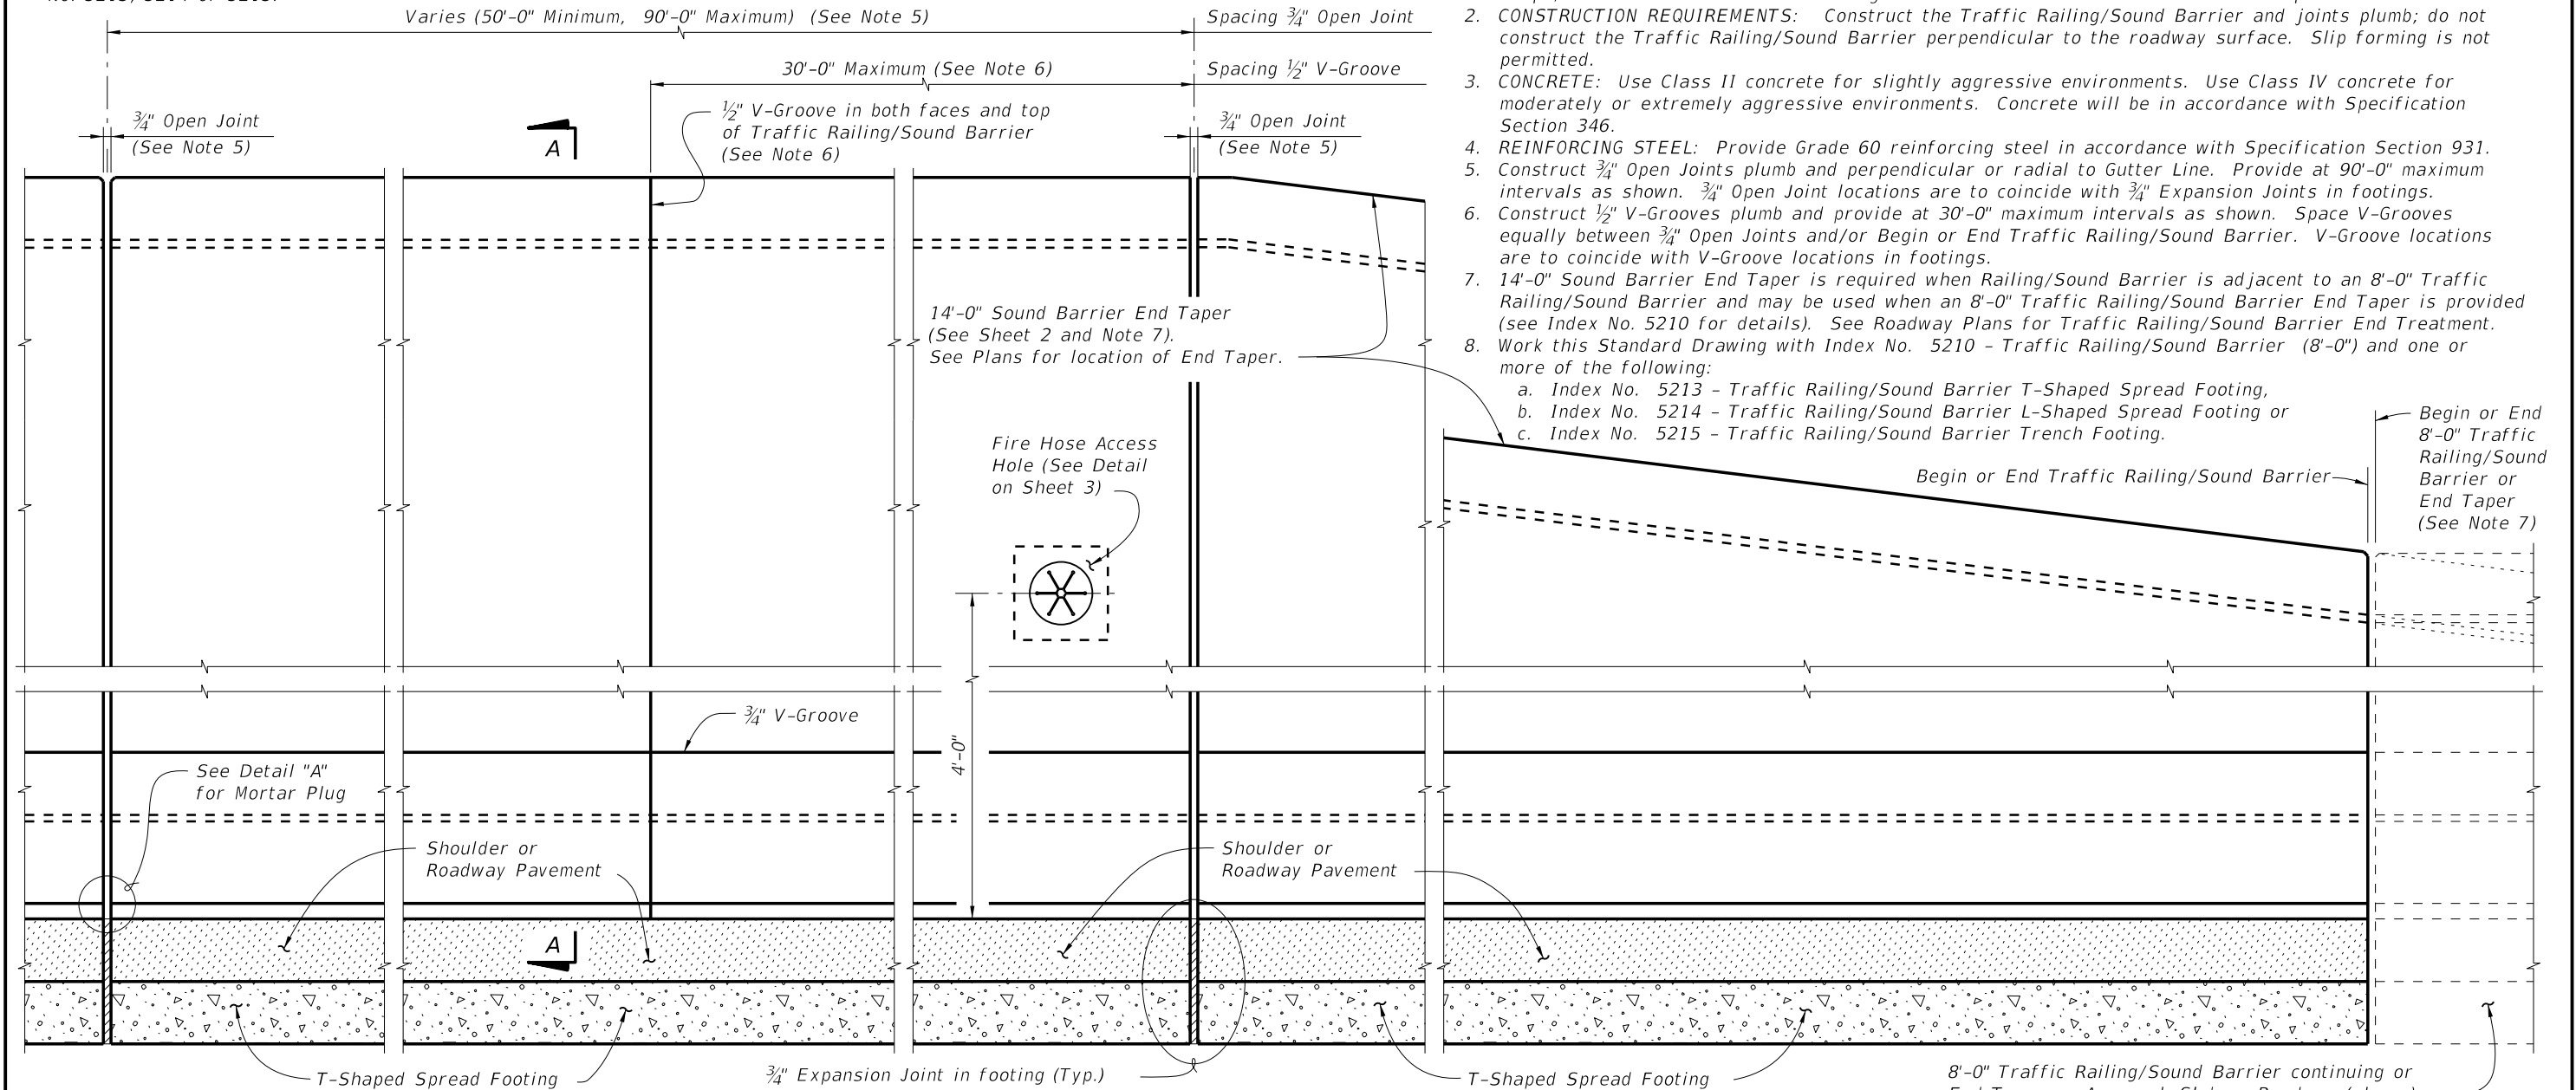


**ELEVATION OF INSIDE FACE OF TRAFFIC RAILING/SOUND BARRIER**  
 (Reinforcing Steel not shown for clarity)  
 (T-Shaped Spread Footing Shown, L-Shaped Spread Footing and Trench Footing Similar)

C:\projects\standards\structures\2013book\05211-1of3.dgn  
 rd960rh  
 3:01:48 PM  
 6/29/2012

|                      |                     |   |   |                  |                  |
|----------------------|---------------------|---|---|------------------|------------------|
| <b>LAST REVISION</b> | <b>DESCRIPTION:</b> | <b>FDOT DESIGN STANDARDS</b><br><b>2013</b> | <b>TRAFFIC RAILING/SOUND BARRIER (14'-0")</b> | <b>INDEX NO.</b> | <b>SHEET NO.</b> |
| 07/01/07             |                     |   |   | 5211             | 1                |


C:\projects\standards\structures\2013book\05211-2of3.dgn  
 r0960rh  
 3:01:50 PM  
 6/29/2012

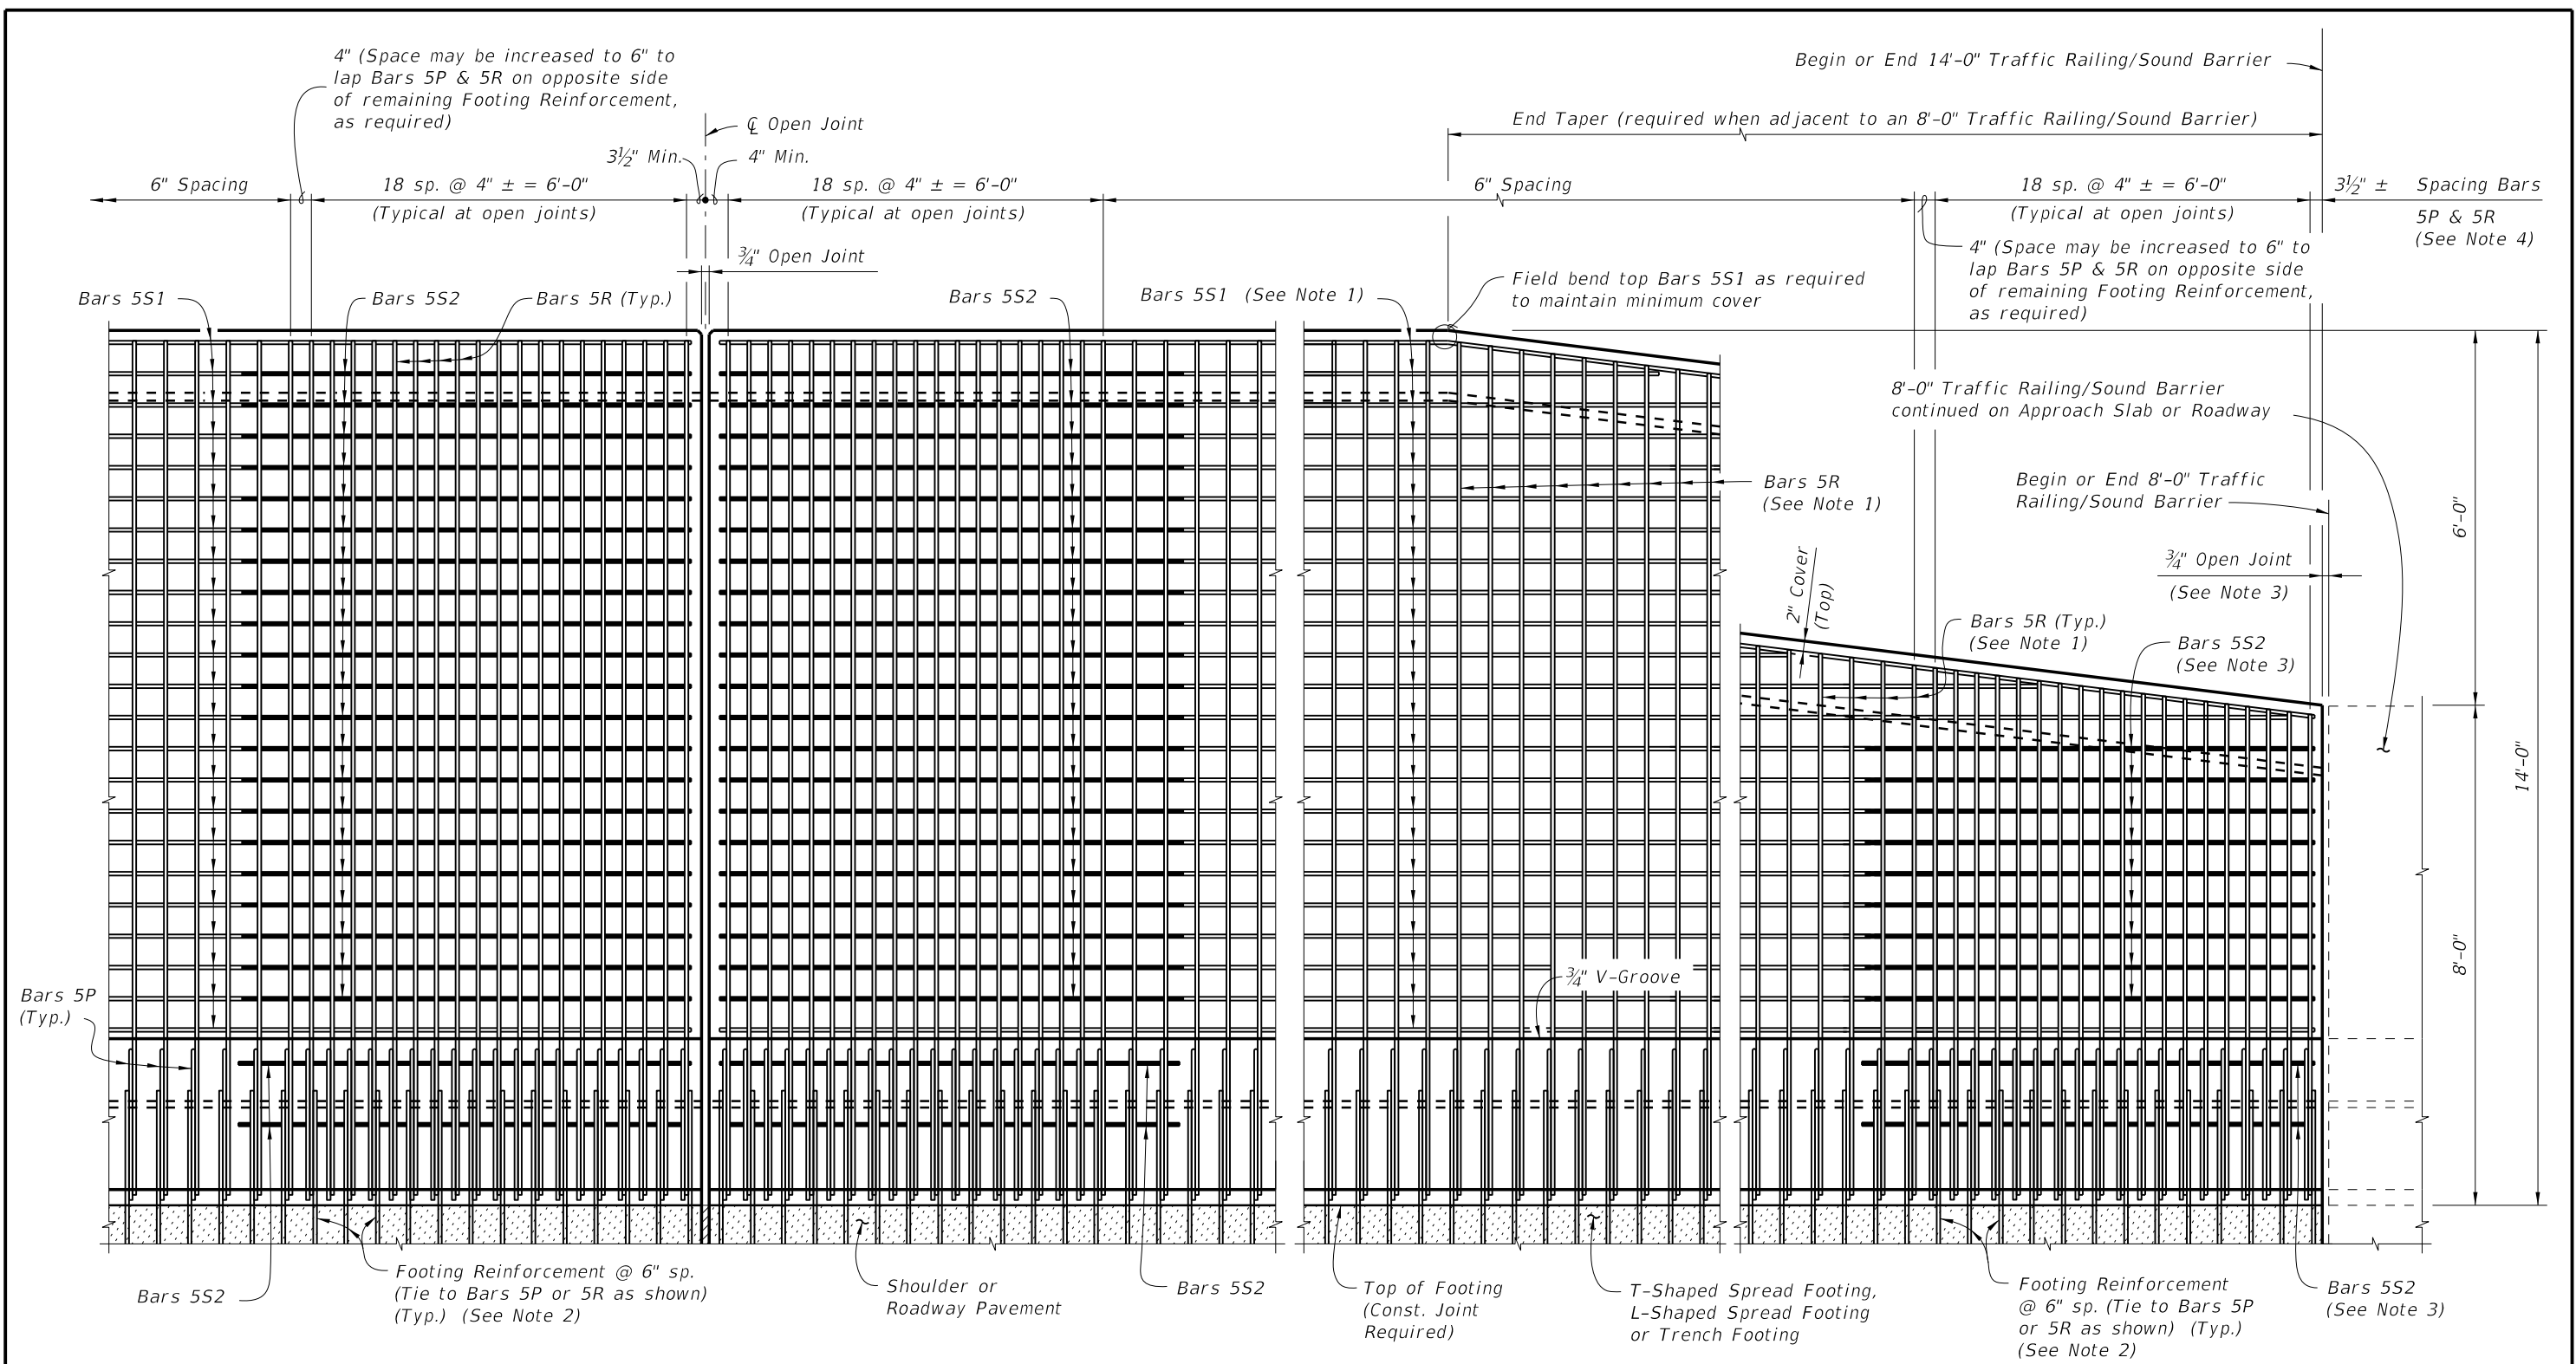


**ELEVATION OF TRAFFIC RAILING/SOUND BARRIER REINFORCING STEEL**  
(Bars 5S1 in Railing not shown for clarity)

**ELEVATION OF TRAFFIC RAILING/SOUND BARRIER END TAPER**  
(Bars 5S1 in Railing not shown for clarity)

- NOTES:**
1. Field Cut Bars 5R & 5S1 in Sound Barrier End Taper as required to maintain minimum cover.
  2. See Index Nos. 5213, 5214 and 5215 for footing reinforcement.
  3. 3/4" Open Joint may be omitted when 8'-0" Railing/Sound Barrier End Taper is adjacent to a 14'-0" Traffic Railing/Sound Barrier End Taper as shown on Sheet 1. See Index No. 5210 for reinforcement details and spacing. Bars 5S2 are not required when 3/4" Open Joint is omitted.
  4. Bar spacing shown is along the Gutter Line.


|               |          |              |  |   |           |           |
|---------------|----------|--------------|--|---|-----------|-----------|
| LAST REVISION | 07/01/05 | DESCRIPTION: |  <b>FDOT DESIGN STANDARDS</b><br>2013 | <b>TRAFFIC RAILING/SOUND BARRIER (14'-0")</b> | INDEX NO. | SHEET NO. |
|               |          |              |  |   | 5211      | 2         |

6/28/2012 3:01:53 PM r0960rh C:\projects\standards\structures\2013book\05211-3of3.dgn

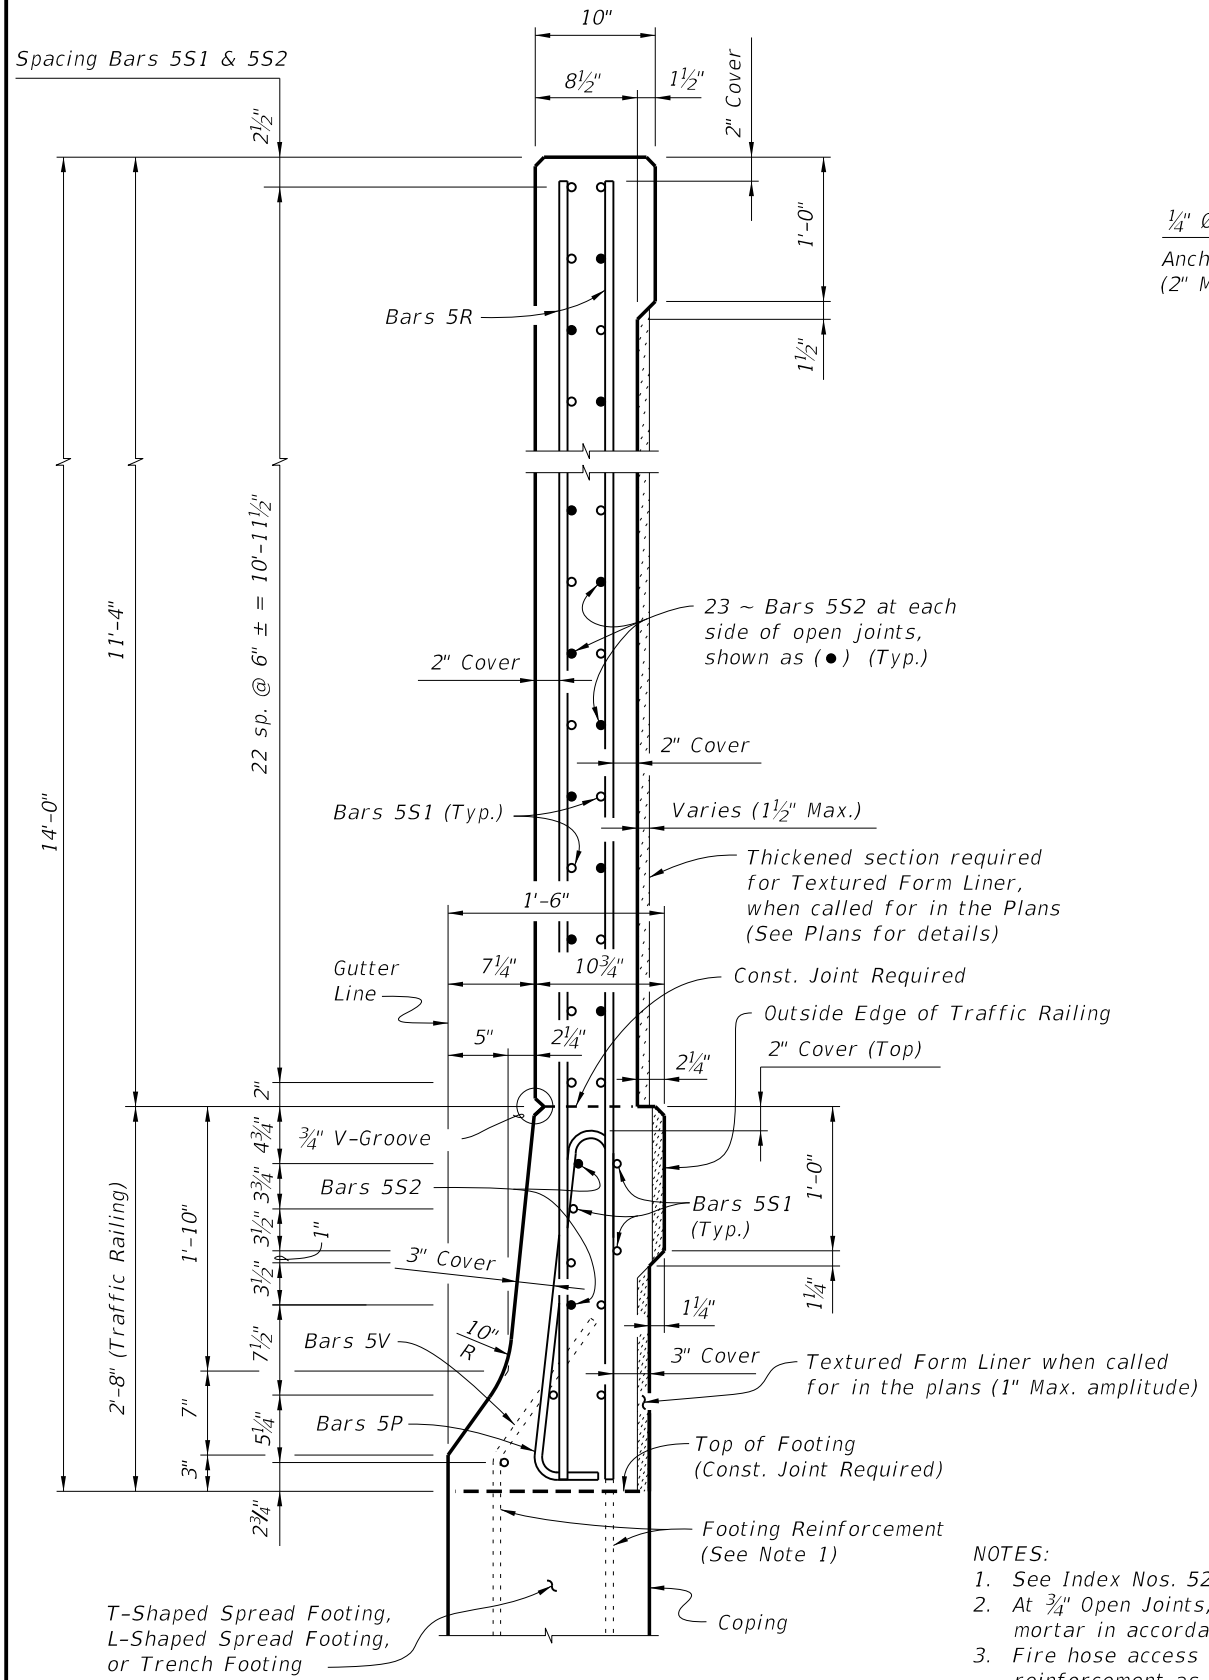


**SECTION A-A**  
TYPICAL SECTION THRU TRAFFIC RAILING/SOUND BARRIER


- NOTES:**
1. See Index Nos. 5213, 5214 and 5215 for footing reinforcement.
  2. At  $\frac{3}{4}$ " Open Joints, plug the lower 3" portion of the open joint by filling it with mortar in accordance with Specification Section 400.
  3. Fire hose access holes are required at or near fire hydrant locations. Field cut reinforcement as required to maintain 2" minimum cover at access holes. Locate fire hose access holes at least 10'-0" from  $\frac{3}{4}$ " open joints when possible.

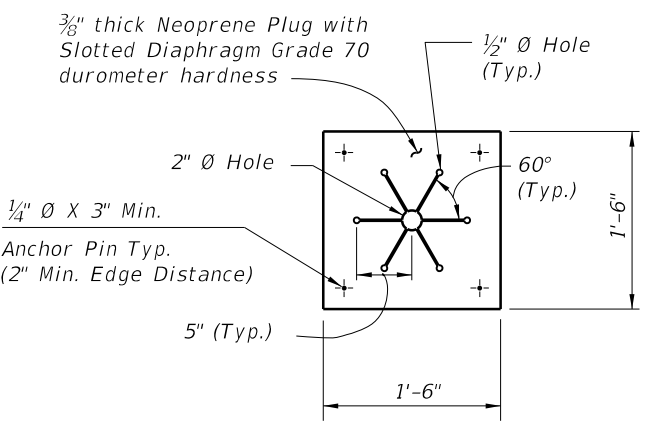

**NEOPRENE DIAPHRAGM PLUG DETAIL**

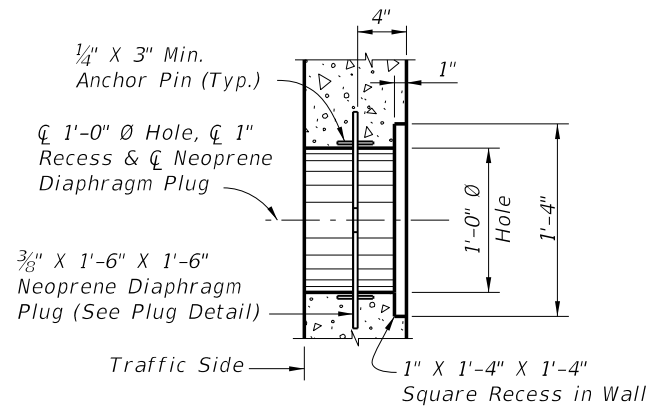


**TYPICAL SECTION FIRE HOSE ACCESS DETAIL**

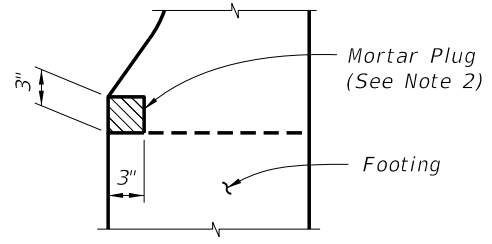


**DETAIL "A" - SECTION AT OPEN JOINT**

**REINFORCING STEEL BENDING DIAGRAMS**


| BILL OF REINFORCING STEEL |      |          |
|---------------------------|------|----------|
| MARK                      | SIZE | LENGTH   |
| P                         | 5    | 5'-7"    |
| R                         | 5    | 13'-9"   |
| S1                        | 5    | AS REQD. |
| S2                        | 5    | 7'-3"    |

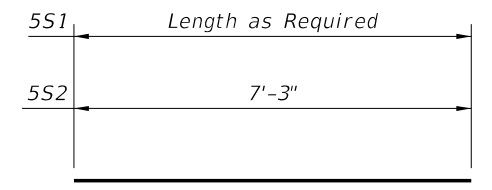

**BARS 5S1 & 5S2**

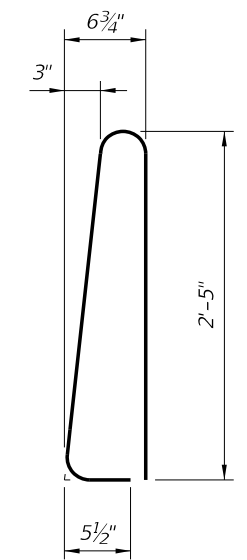

**STIRRUP BAR 5P**

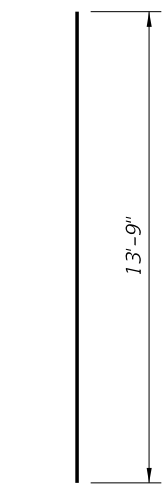

**BAR 5R (Field Cut for End Taper)**

**REINFORCING STEEL NOTES:**

1. All bar dimensions in the bending diagrams are out to out.
2. All reinforcing steel at the open joints will have a 2" minimum cover.
3. Bars 5R may be continuous or spliced at construction joints. Lap splices for Bars 5R and 5S1 will be a minimum of 2'-2".
4. The Contractor may use Welded Wire Reinforcement when approved by the Engineer. Welded Wire Reinforcement will conform to ASTM A 497.

**ESTIMATED TRAFFIC RAILING BARRIER/SOUNDWALL QUANTITIES**

| ITEM   | UNIT  | QUANTITY |
|--|-------|----------|
| Concrete (Traffic Railing)   | CY/FT | 0.104    |
| Concrete (Sound Barrier, excluding any thickening)                                   | CY/FT | 0.302    |
| Reinforcing Steel (Railing/Sound Barrier) (Typical, excluding Footing Reinforcement) | LB/FT | 103.43   |
| Additional Reinf. @ Open Joint (Railing/Sound Barrier)                               | LB    | 761.91   |

**CROSS REFERENCE:**  
For locations of Section A-A and Detail "A", see Sheet 1.

| LAST REVISION | DESCRIPTION: |
|---------------|--------------|
| 07/01/09      |              |


| REVISION | DESCRIPTION: |
|----------|--------------|
|          |              |



**FDOT DESIGN STANDARDS**  
2013

**TRAFFIC RAILING/SOUND BARRIER (14'-0")**

| INDEX NO. | SHEET NO. |
|-----------|-----------|
| 5211      | 3         |

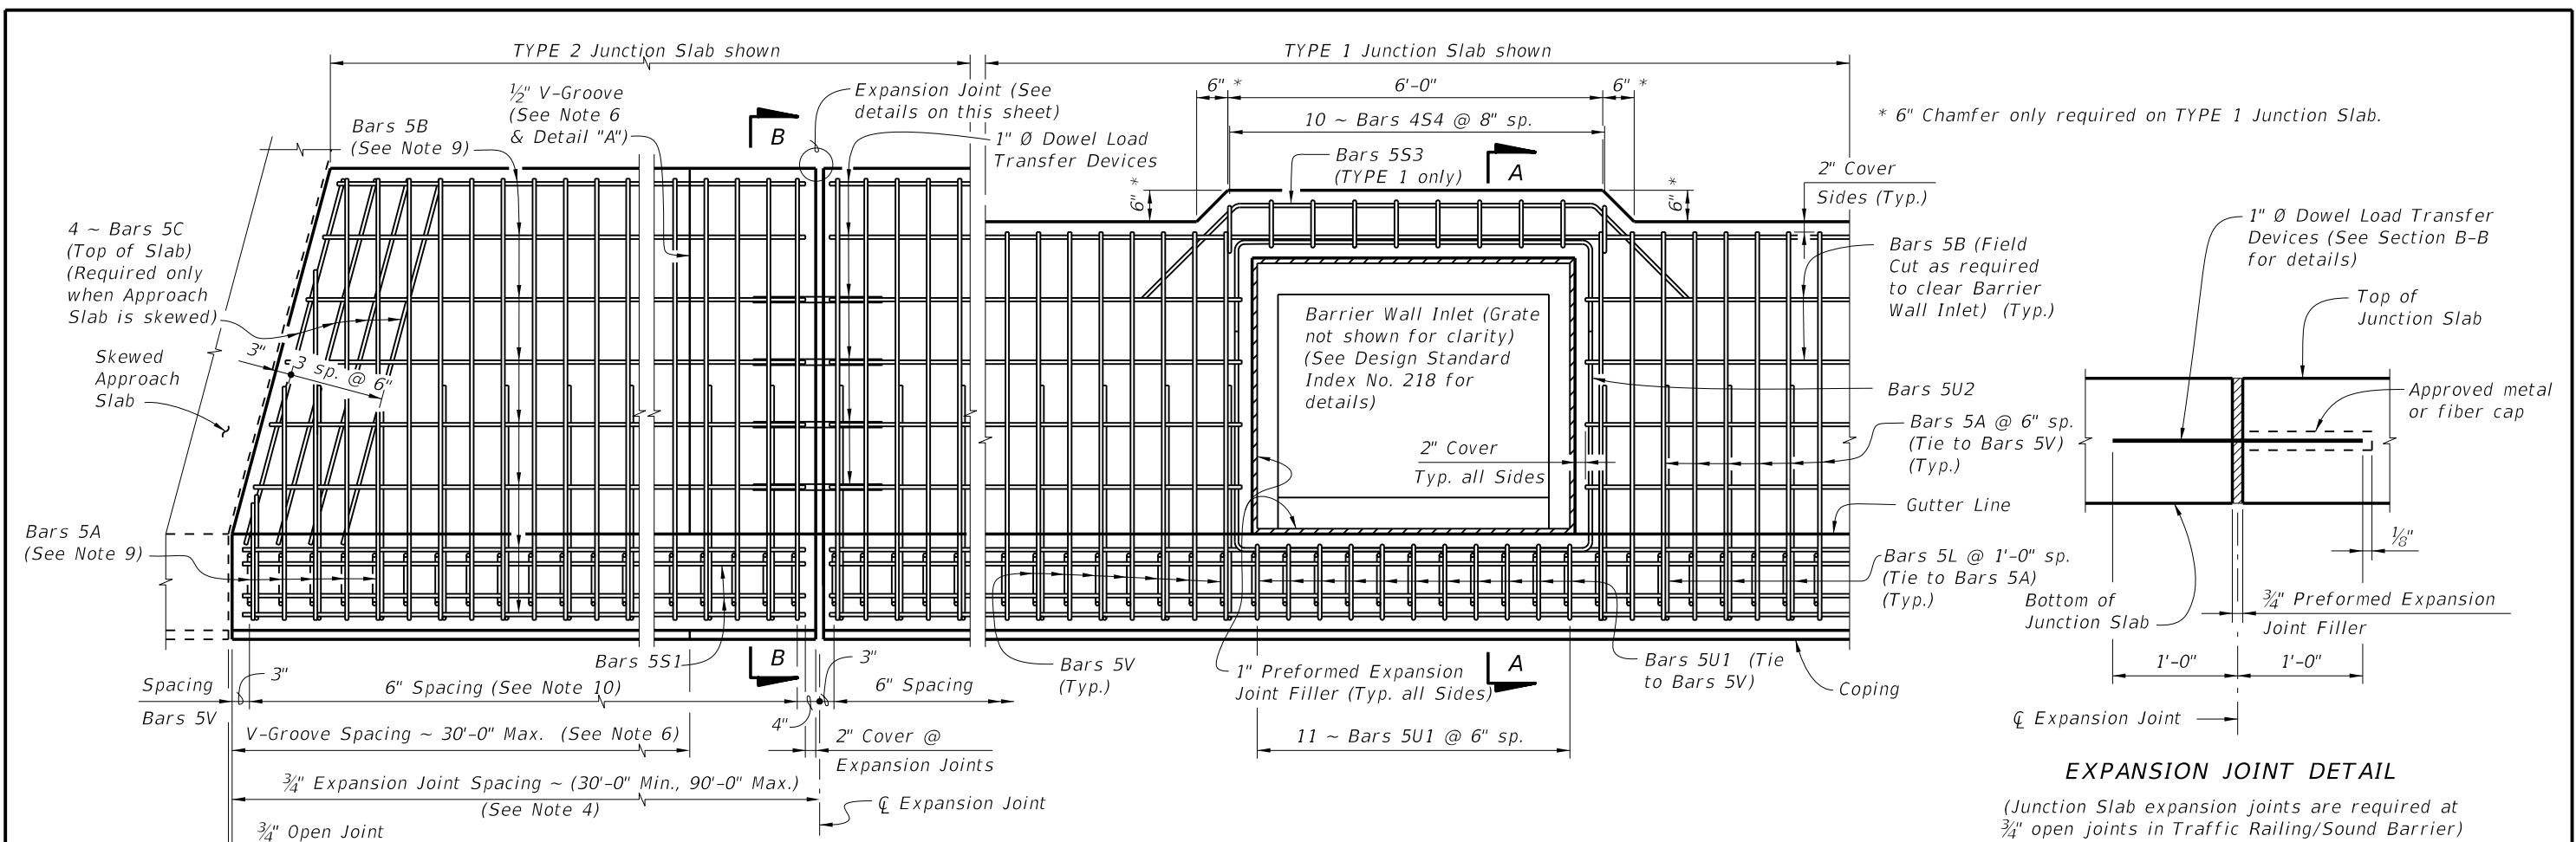


PLAN  
 JUNCTION SLAB ADJACENT TO SKEWED APPROACH SLAB AND WITH BARRIER WALL INLET

EXPANSION JOINT DETAIL  
 (Junction Slab expansion joints are required at 3/4" open joints in Traffic Railing/Sound Barrier)

NOTES

1. CONSTRUCTION REQUIREMENTS: Construct the Junction Slab level transversely and expansion joints plumb; do not construct the junction slab perpendicular to the roadway surface. Slip forming is not permitted.
2. CONCRETE: Use Class II concrete for slightly aggressive environments. Use Class IV concrete for moderately or extremely aggressive environments. Concrete will be in accordance with Specification Section 346.
3. REINFORCING STEEL: Provide Grade 60 reinforcing steel in accordance with Specification Section 931. Dowel Load Transfer Devices will be ASTM A 36 smooth round bar and hot-dip galvanized in accordance with Specification Section 962. Install Dowel Load Transfer Devices in accordance with Specification Section 350.
4. EXPANSION JOINTS: Construct 3/4" Expansion Joints plumb and perpendicular or radial to Gutter Line. Provide at 90'-0" maximum intervals as shown.
5. Provide two layers of 30 Lb. Roofing Felt on top and Expanded Polystyrene (1/2" thick) on sides.
6. V-GROOVES: Construct 1/2" V-Grooves plumb and provide at 30'-0" maximum intervals as shown. Space V-Grooves equally between 3/4" Expansion Joints and/or Begin or End Junction Slab. V-Groove locations are to coincide with V-Groove locations in the Railing/Sound Barrier.
7. FILL REQUIREMENTS: Shoulder or Roadway Pavement or Fill is required on top of the junction slab for its entire length on the traffic side of the Railing/Sound Barrier. See Section B-B for details.
8. Actual location & width vary depending on type of Retaining Wall used.
9. Field cut Bars 5A and 5B as required to maintain minimum cover for skewed Approach Slab.
10. Spacing shown is along the Gutter Line.
11. See Index No. 5210 for Bars 5V and 5S1. See Plans for Junction Slab width (TYPE).
12. Work this Index with the following:  
 Index No. 5210 - Traffic Railing/Sound Barrier (8'-0").

CROSS REFERENCE:  
 For Section B-B and Detail "A", see Sheet 2.

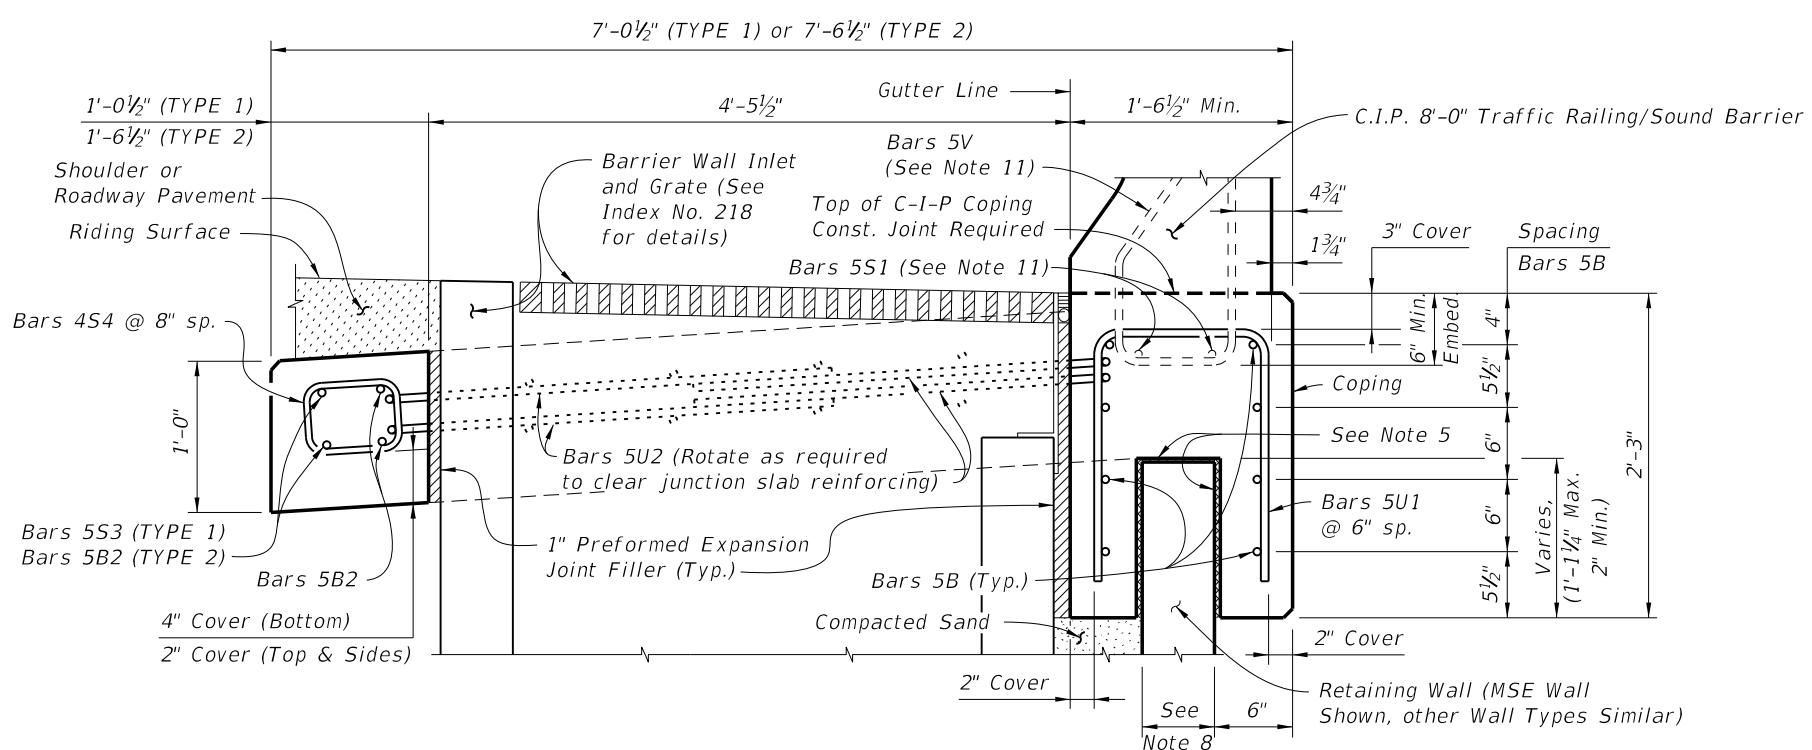

SECTION A-A  
 SECTION THRU JUNCTION SLAB, BARRIER WALL INLET AND RETAINING WALL  
 (TYPE 1 Junction Slab Shown, TYPE 2 Similar)

C:\projects\standards\structures\2013book\05212-1of2.dgn  
 rd960rh  
 3:01:58 PM  
 6/29/2012








|               |              |   |  |           |           |
|---------------|--------------|---|--|-----------|-----------|
| LAST REVISION | DESCRIPTION: |  <b>FDOT DESIGN STANDARDS</b><br><b>2013</b> | <b>TRAFFIC RAILING/SOUND BARRIER (8'-0")</b><br><b>JUNCTION SLAB</b> | INDEX NO. | SHEET NO. |
| 01/01/12      |              |   |  | 5212      | 1         |

**REINFORCING STEEL BENDING DIAGRAMS**


| BILL OF REINFORCING STEEL |                 |           |           |
|---------------------------|-----------------|-----------|-----------|
| MARK                      | SIZE            | LENGTH    |           |
|                           |                 | TYPE 1    | TYPE 2    |
| A                         | 5               | 8'-0"     | 9'-0"     |
| B                         | 5               | AS REQ'D. | AS REQ'D. |
| C                         | 5               | 4'-8"     | 5'-8"     |
| L                         | 5               | 4'-5"     | 4'-5"     |
| S3                        | 5               | 10'-0"    | N/A       |
| S4                        | 4               | 3'-1"     | 4'-0"     |
| U1                        | 5               | 4'-9"     | 4'-9"     |
| U2                        | 5               | 12'-10"   | 12'-10"   |
| DOWEL                     | 1" Ø Smooth Bar | 2'-0"     | 2'-0"     |

**REINFORCING STEEL NOTES:**


1. All bar dimensions in the bending diagrams are out to out.
2. All reinforcing steel at the open joints will have a 2" minimum cover.
3. Lap splices for Bars 5B will be a minimum of 2'-0".
4. The Contractor may use Welded Wire Reinforcement when approved by the Engineer. Welded Wire Reinforcement will conform to ASTM A 497.

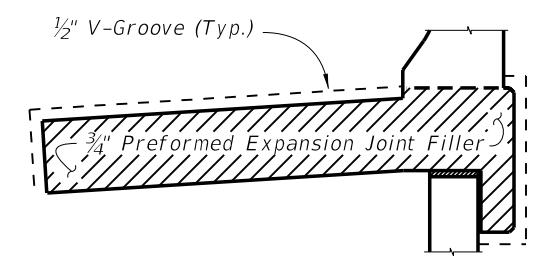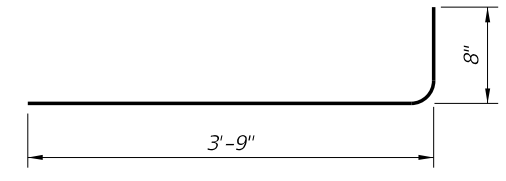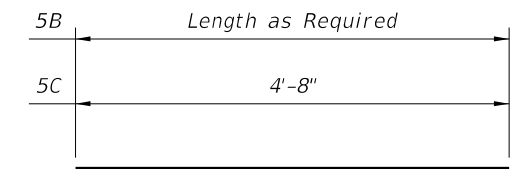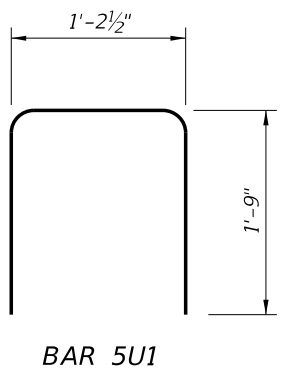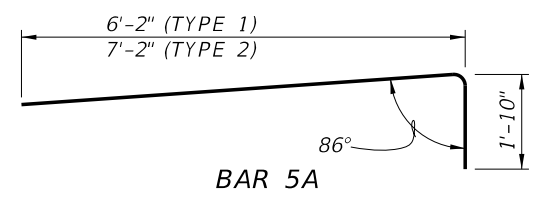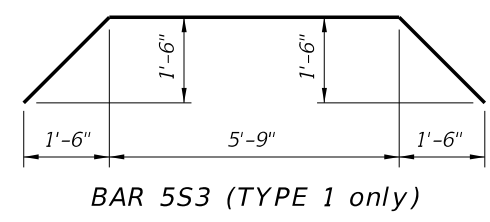

**DETAIL "A"**  
(Showing Locations of 1/2" V-Grooves and 3/4" Preformed Expansion Joint Filler)

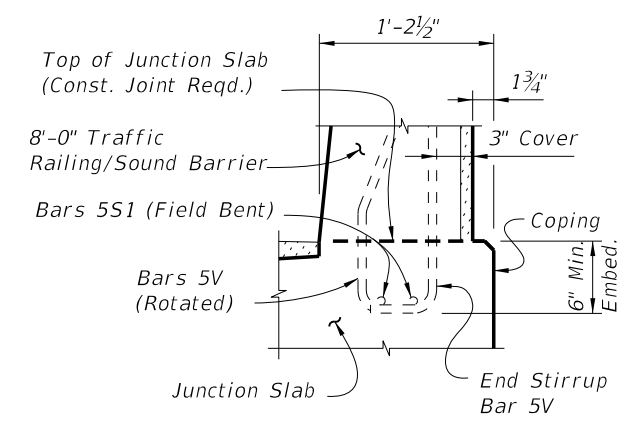

**PARTIAL END VIEW OF RAILING END TRANSITION FOR GUARDRAIL ATTACHMENT**  
(Showing Bars 5V and Bars 5S1)  
NOTE: See Index No. 5210, Detail "A" for details.

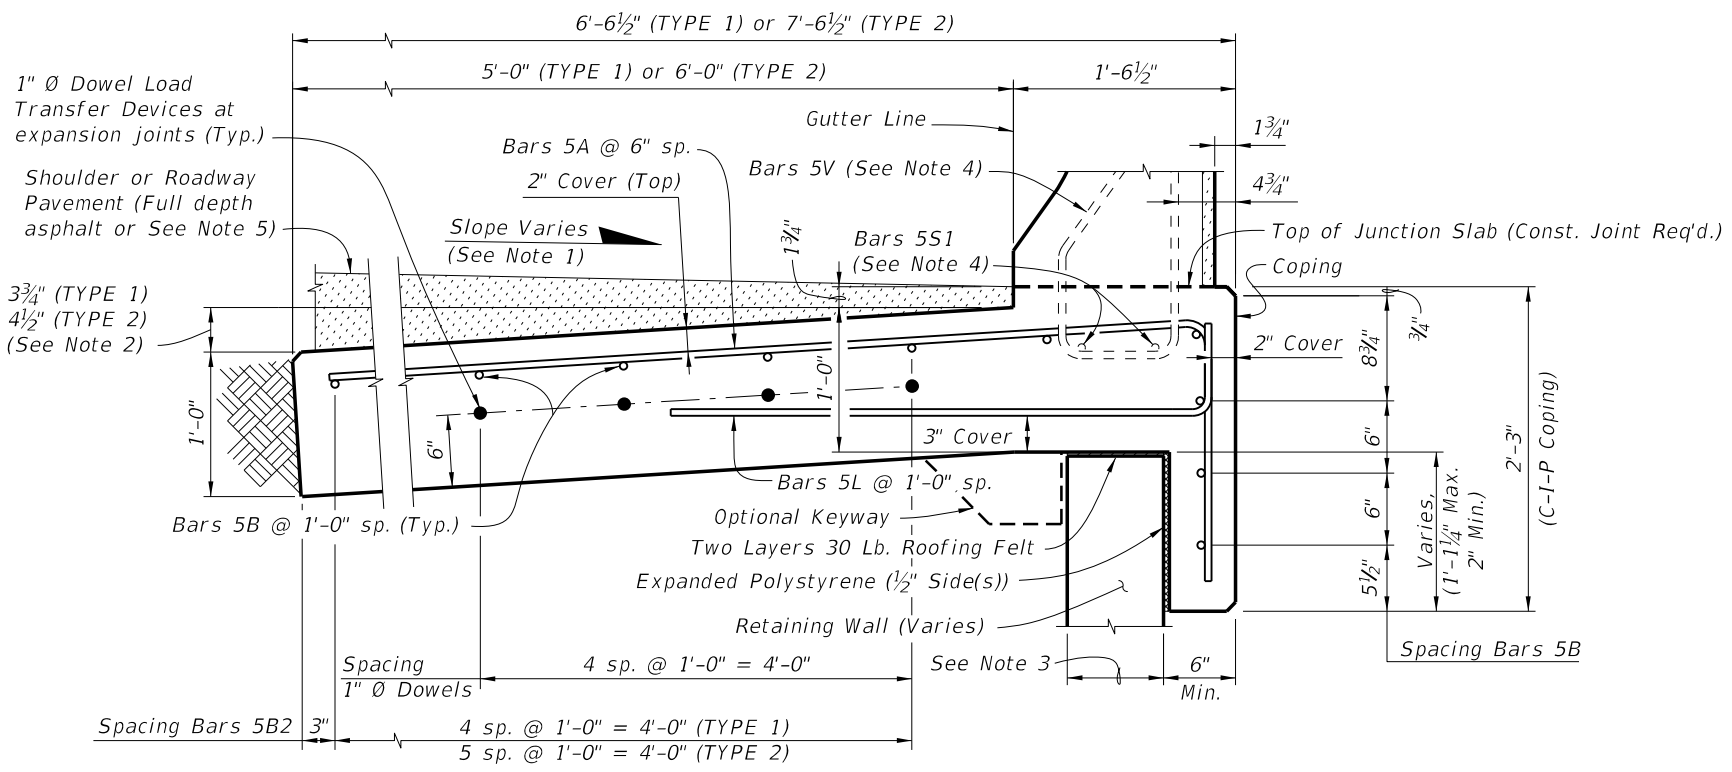


**SECTION B-B**  
**TYPICAL SECTION THRU JUNCTION SLAB AND RETAINING WALL**

| ESTIMATED JUNCTION SLAB QUANTITIES  |       |          |        |
|-------------------------------------|-------|----------|--------|
| ITEM                                | UNIT  | QUANTITY |        |
|                                     |       | TYPE 1   | TYPE 2 |
| Concrete (Junction Slab)            | CY/FT | 0.268    | 0.305  |
| Reinforcing Steel (Typical)         | LB/FT | 30.91    | 34.04  |
| Additional Reinf. @ Expansion Joint | LB    | 21.36    | 21.36  |


- NOTES:**
1. Match Cross Slope of Travel Lane or Shoulder.
  2. The 3 3/4" & 4 1/2" dimensions correspond to a maximum superelevation of 6.25%. For superelevations exceeding 6.25%, increase this dimension as required to match roadway superelevation.
  3. Actual width varies depending on type of Retaining Wall used.
  4. See Index No. 5210 for Bars 5V and 5S1.
  5. For Rigid Pavement (Concrete), Junction Slab may be thickened to match finished grade.

**CROSS REFERENCE:**  
For location of Section B-B, see Sheet 1.


C:\projects\standards\structures\2013book\05212-2of2.dgn  
rd960rh  
3:02:01 PM  
6/28/2012

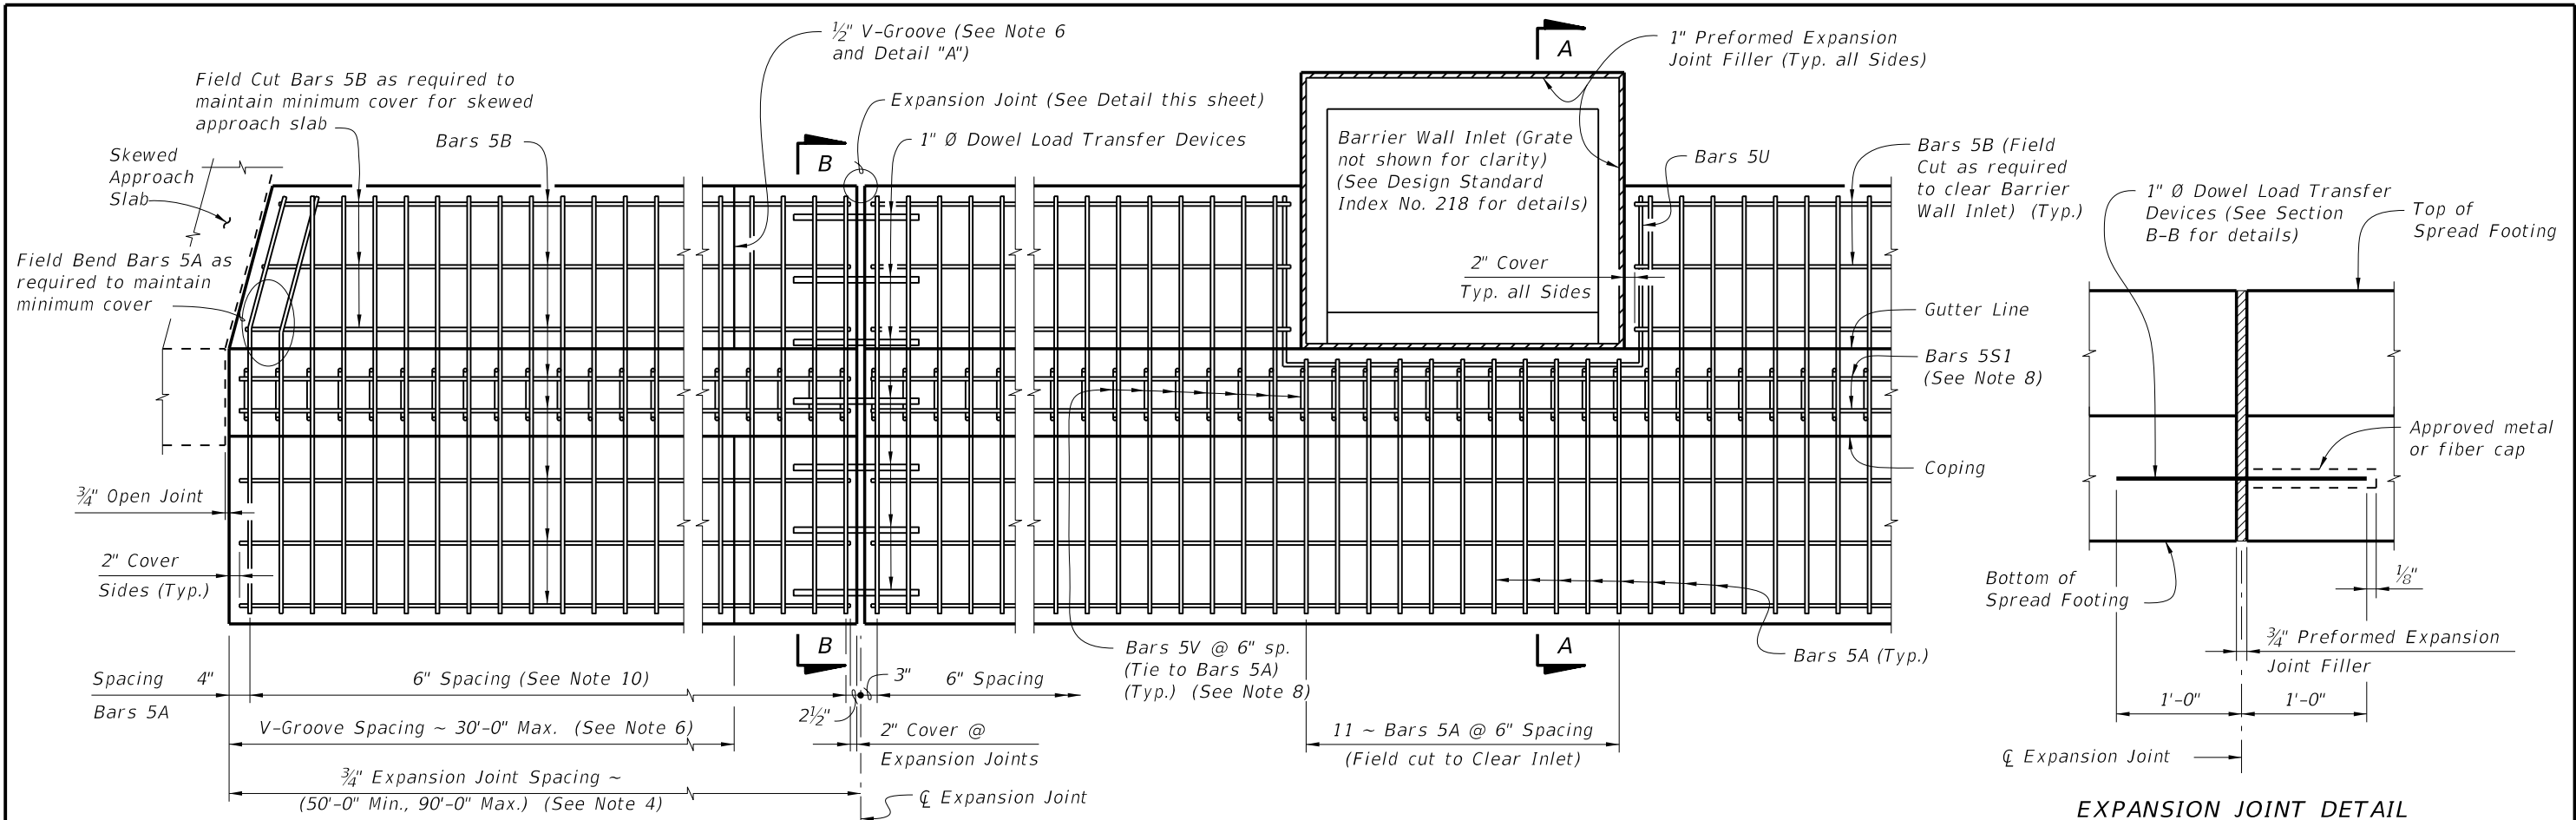

**PLAN**  
**SPREAD FOOTING ADJACENT TO SKEWED APPROACH SLAB AND WITH BARRIER WALL INLET**

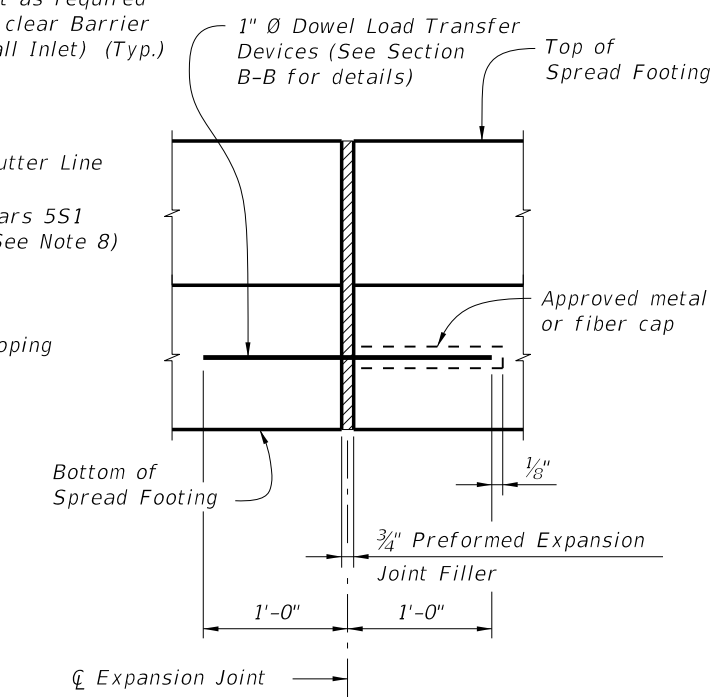

**EXPANSION JOINT DETAIL**  
 (Spread Footing expansion joints are required at 3/4" open joints in Traffic Railing/Sound Barrier)

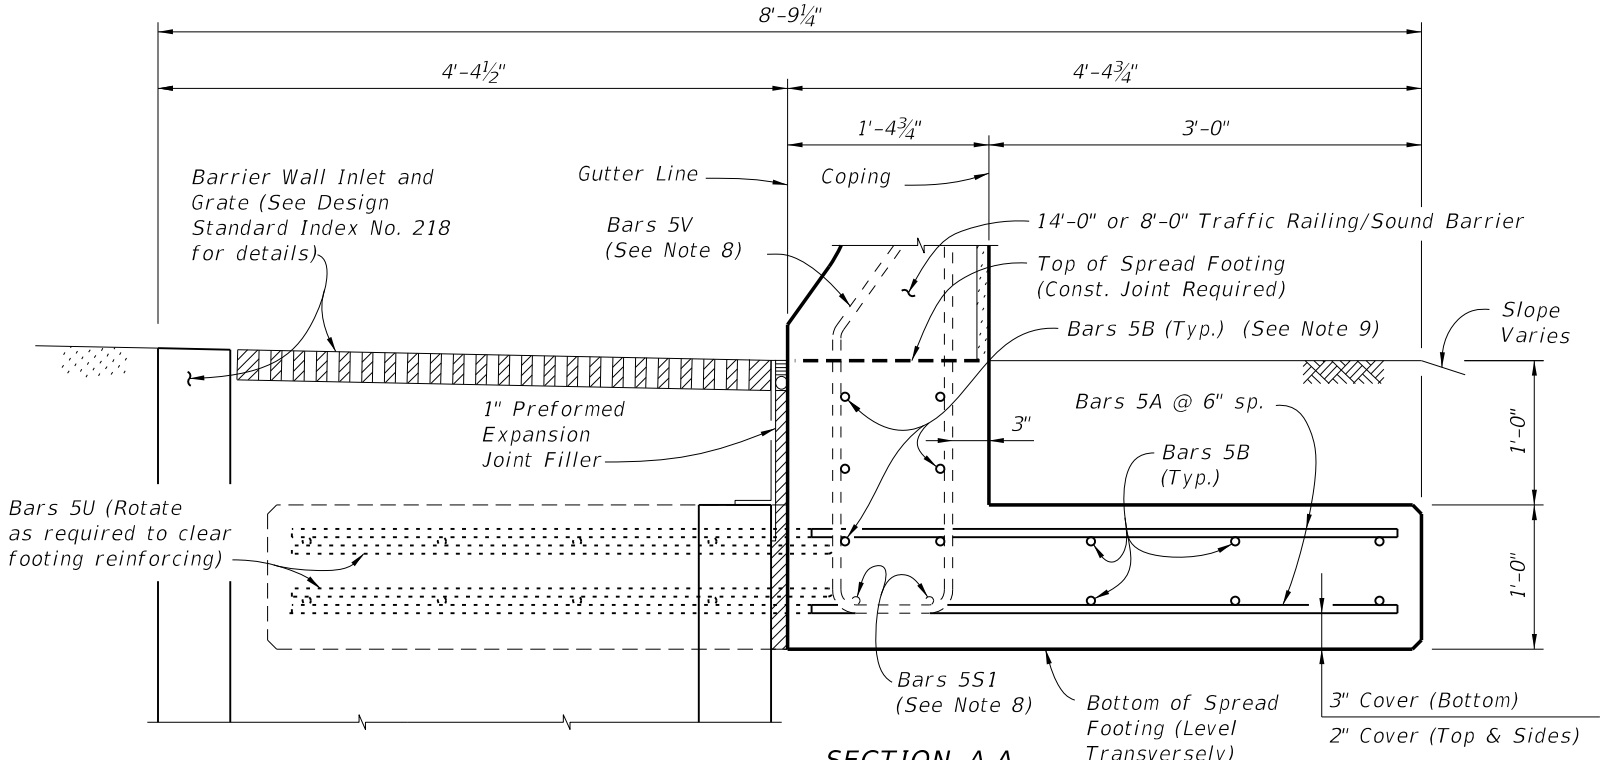

**SECTION A-A**  
**SECTION THRU SPREAD FOOTING AND BARRIER WALL INLET**  
 (Bars 5P, 5R and 5S1 in Traffic Railing/Sound Barrier not shown for clarity)

- NOTES**
- CONSTRUCTION REQUIREMENTS:** Construct the Spread Footing level transversely and expansion joints plumb; do not construct the spread footing perpendicular to the roadway surface. Slip forming is not permitted.
  - CONCRETE:** Use Class II concrete for slightly aggressive environments. Use Class IV concrete for moderately or extremely aggressive environments. Concrete will be in accordance with Specification Section 346.
  - REINFORCING STEEL:** Provide Grade 60 reinforcing steel in accordance with Specification Section 931. Dowel Load Transfer Devices will be ASTM A 36 smooth round bar and hot-dip galvanized in accordance with Specification Section 962. Install Dowel Load Transfer Devices in accordance with Specification Section 350.
  - Construct 3/4" Expansion Joints plumb and perpendicular or radial to Gutter Line. Provide at 90'-0" maximum intervals as shown.
  - Provide and install Preformed Expansion Joint Filler in accordance with Specification Section 932.
  - Construct 1/2" V-Grooves plumb and provide at 30'-0" maximum intervals as shown. Space V-Grooves equally between 3/4" Expansion Joints and/or Begin or End Spread Footing. V-Groove locations are to coincide with V-Groove locations in the Railing/Sound Barrier.
  - FILL REQUIREMENTS:** Shoulder or Roadway Pavement or Fill is required on top (1'-0" minimum depth) for the entire length of the spread footing on both sides of the Railing/Sound Barrier. See Section B-B for details.
  - See Index No. 5210 for Bars 5V and 5S1.
  - Place 6 ~ Bars 5B inside Stirrup Bars 5V as shown.
  - Spacing shown is along the Gutter Line.
  - Work this Standard Drawing with one or both of the following:
    - Index No. 5210 - Traffic Railing/Sound Barrier (8'-0").
    - Index No. 5211 - Traffic Railing/Sound Barrier (14'-0").



**CROSS REFERENCE:**  
 For Section B-B and Detail "A", see Sheet No. 2.

C:\projects\standards\structures\2013book\05213-1of2.dgn  
 rd960rh  
 3:02:03 PM  
 6/29/2012

|                      |                 |                     |   |  |                                 |                              |
|----------------------|-----------------|---------------------|---|--|---------------------------------|------------------------------|
| <b>LAST REVISION</b> | <b>REVISION</b> | <b>DESCRIPTION:</b> |  <b>FDOT DESIGN STANDARDS</b><br><b>2013</b> | <b>TRAFFIC RAILING/SOUND BARRIER</b><br><b>T-SHAPED SPREAD FOOTING</b> | <b>INDEX NO.</b><br><b>5213</b> | <b>SHEET NO.</b><br><b>1</b> |
|----------------------|-----------------|---------------------|---|--|---------------------------------|------------------------------|


REINFORCING STEEL BENDING DIAGRAMS

| BILL OF REINFORCING STEEL |                 |          |
|---------------------------|-----------------|----------|
| MARK                      | SIZE            | LENGTH   |
| A                         | 5               | 6'-8"    |
| B                         | 5               | AS REQD. |
| U                         | 5               | 11'-0"   |
| DOWEL                     | 1" Ø Smooth Bar | 2'-0"    |

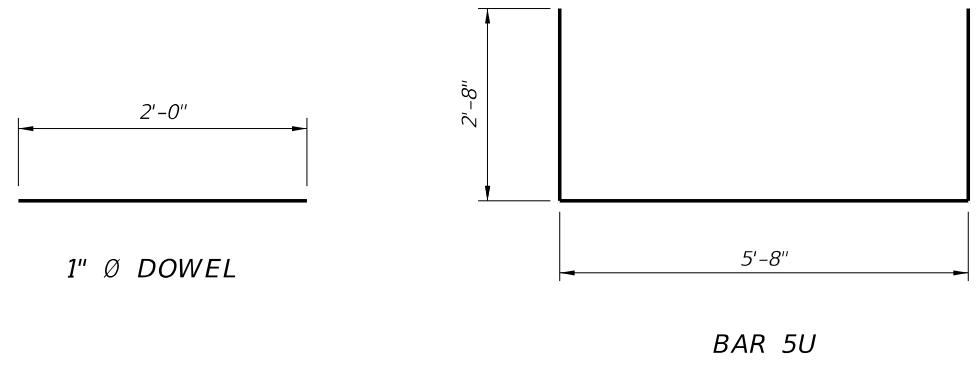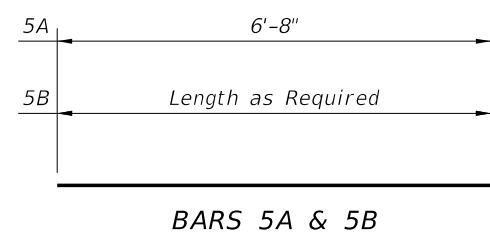


REINFORCING STEEL NOTES:

- All bar dimensions in the bending diagrams are out to out.
- All reinforcing steel at the open joints will have a 2" minimum cover.
- Lap splices for Bars 5B will be a minimum of 2'-2".
- The Contractor may use Welded Wire Reinforcement when approved by the Engineer. Welded Wire Reinforcement will conform to ASTM A 497.

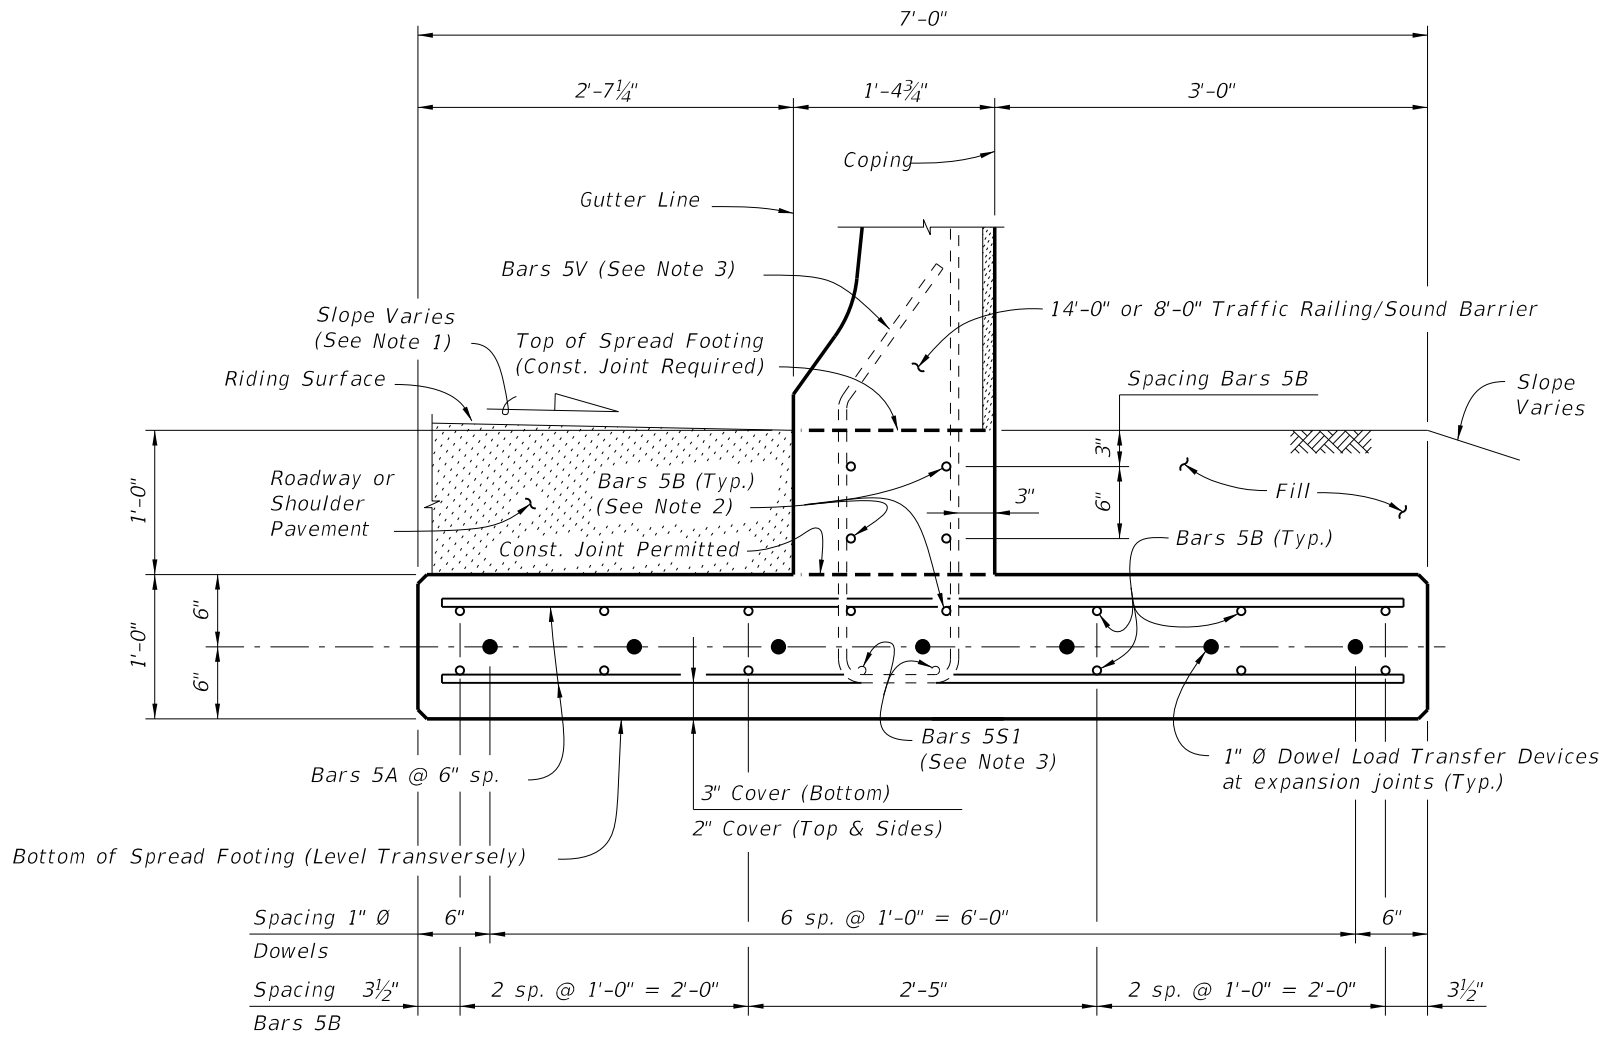


SECTION B-B  
TYPICAL SECTION THRU SPREAD FOOTING  
(Bars 5P, 5R and 5S1 in Traffic Railing/Sound Barrier not shown for clarity)

- NOTES:
- Match Cross Slope of Travel Lane or Shoulder.
  - Place 6 ~ Bars 5B inside Stirrup Bars 5V as shown.
  - See Index No. 5210 for Bars 5V and Bars 5S1.

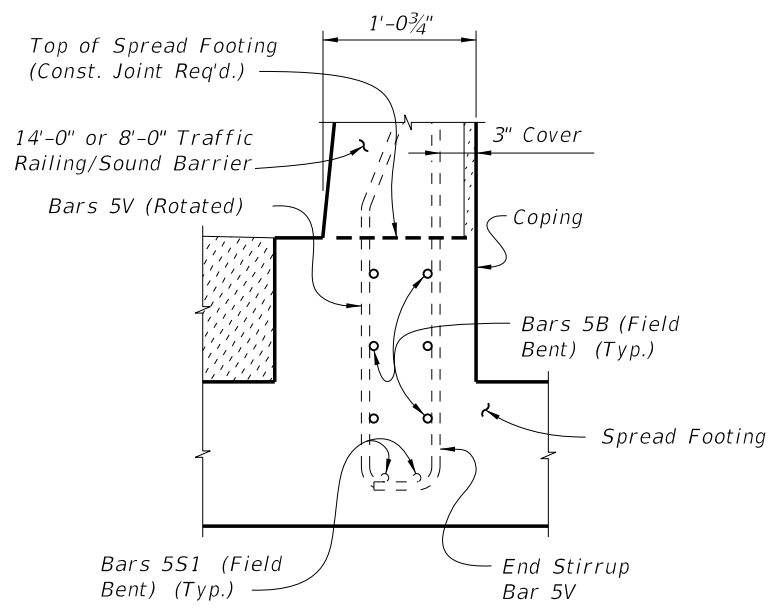

PARTIAL END VIEW OF RAILING END TRANSITION FOR GUARDRAIL ATTACHMENT  
(Showing Bars 5V, Bars 5S1 and Bars 5B inside of Stirrup Bars 5V)

NOTE: See Index No. 5210, Detail "A" for details.

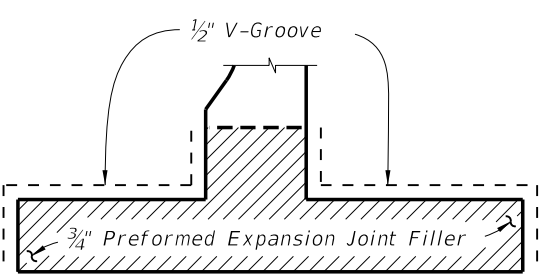

DETAIL "A"  
(Showing Locations of 1/2" V-Grooves and 3/4" Preformed Expansion Joint Filler)

| ESTIMATED T-SHAPED SPREAD FOOTING QUANTITIES |       |          |
|--|-------|----------|
| ITEM   | UNIT  | QUANTITY |
| Concrete (Footing)                           | CY/FT | 0.311    |
| Reinforcing Steel (Typical)                  | LB/FT | 51.80    |
| Additional Reinf. @ Expansion Joint          | LB    | 37.38    |


Note: The reinforcing steel quantity accounts for the difference between the shorter Stirrup Bars 5V for junction slabs or bridges and the longer Stirrup Bars 5V for spread footings.

CROSS REFERENCE:  
For location of Section B-B, see Sheet 1.

C:\projects\standards\structures\2013book\05213-2of2.dgn 6/28/2012 3:02:06 PM rd960rh



C:\projects\standards\structures\2013book\05214-1of4.dgn  
 rd960rh  
 3:02:08 PM  
 6/29/2012

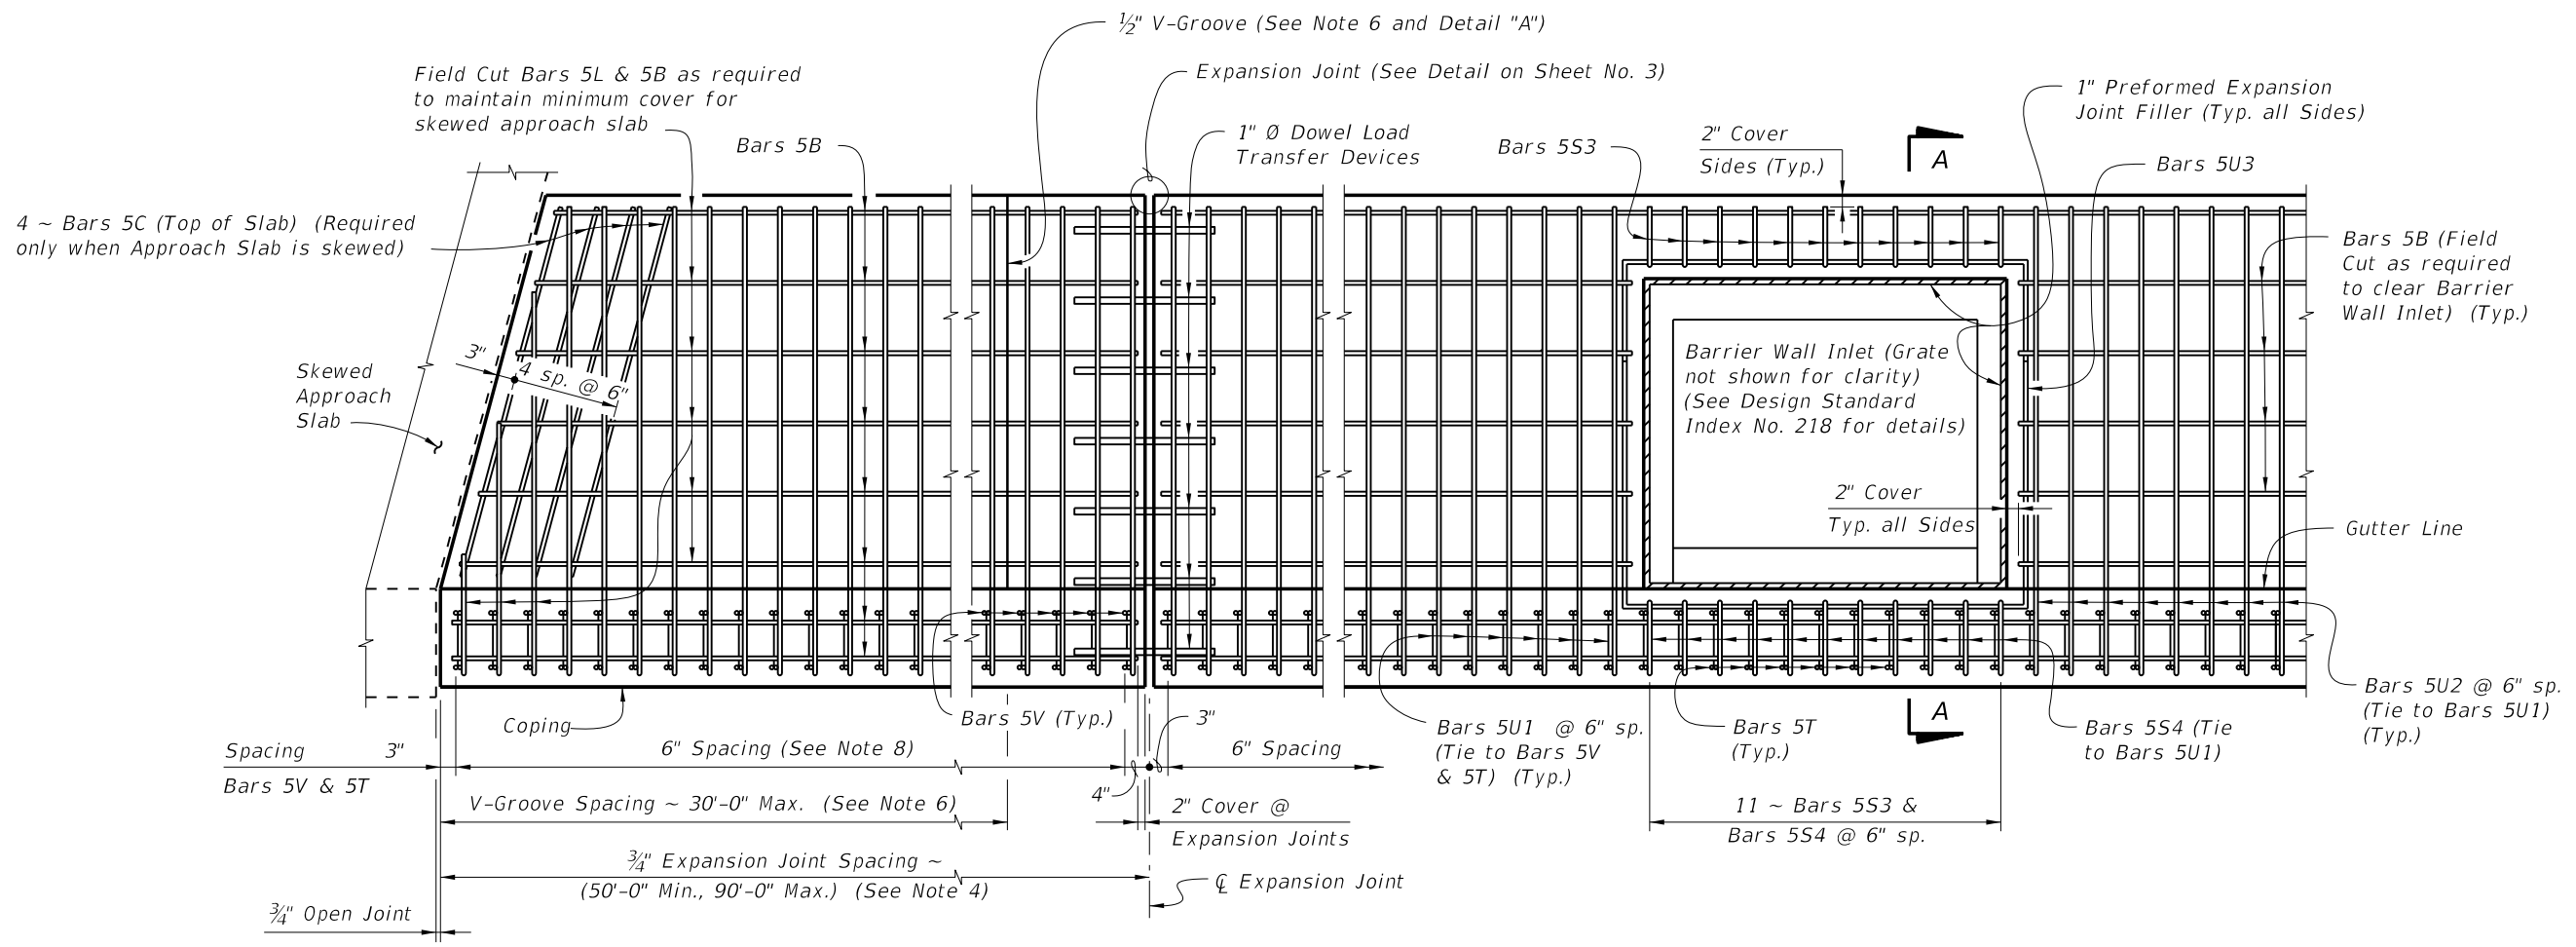


**PLAN - OPTION B**  
**SPREAD FOOTING ADJACENT TO SKEWED APPROACH SLAB AND WITH BARRIER WALL INLET**  
 (Option A Similar)


**NOTES**

1. **CONSTRUCTION REQUIREMENTS:** Construct the Spread Footing level transversely and expansion joints plumb; do not construct the spread footing perpendicular to the roadway surface. Slip forming is not permitted.
2. **CONCRETE:** Use Class II concrete for slightly aggressive environments. Use Class IV concrete for moderately or extremely aggressive environments. Concrete will be in accordance with Specification Section 346.
3. **REINFORCING STEEL:** Provide Grade 60 reinforcing steel in accordance with Specification Section 931. Dowel Load Transfer Devices will be ASTM A 36 smooth round bar and hot-dip galvanized in accordance with Specification Section 962. Install Dowel Load Transfer Devices in accordance with Specification Section 350.
4. Construct 3/4" Expansion Joints plumb and perpendicular or radial to Gutter Line. Provide at 90'-0" maximum intervals as shown.
5. Provide and install Preformed Expansion Joint Filler in accordance with Specification Section 932.
6. Construct 1/2" V-Grooves plumb and provide at 30'-0" maximum intervals as shown. Space V-Grooves equally between 3/4" Expansion Joints and/or Begin or End Spread Footing. V-Groove locations are to coincide with V-Groove locations in the Railing/Sound Barrier.
7. **FILL REQUIREMENTS:** Shoulder or Roadway Pavement and Fill is required on the traffic side of the spread footing for a distance of 4'-0" and the full length of the spread footing (3'-0" minimum depth) on the backside of the spread footing for Option A. Fill is required for a distance of 4'-0" on the backside of the spread footing and the full length of the spread footing (3'-0" minimum depth) on the traffic side of the spread footing for Option B. See Typical Sections on Sheet Nos. 2 and 3 for details.
8. Spacing shown is along the Gutter Line.
9. Work this Standard Drawing with one or both of the following:
  - a. Index No. 5210 - Traffic Railing/Sound Barrier (8'-0").
  - b. Index No. 5211 - Traffic Railing/Sound Barrier (14'-0").


**CROSS REFERENCE:**  
 For Detail "A", see Sheet 3.  
 For Section A-A and Estimated Quantities, see Sheet 4.

|               |          |              |   |  |           |           |
|---------------|----------|--------------|---|--|-----------|-----------|
| LAST REVISION | 07/01/05 | DESCRIPTION: |  <b>FDOT DESIGN STANDARDS</b><br><b>2013</b> | <b>TRAFFIC RAILING/SOUND BARRIER</b><br><b>L-SHAPED SPREAD FOOTING</b> | INDEX NO. | SHEET NO. |
|               |          |              |   |  | 5214      | 1         |

C:\projects\standards\structures\2013book\05214-2of4.dgn  
 r0960rh  
 3:02:11 PM  
 6/29/2012

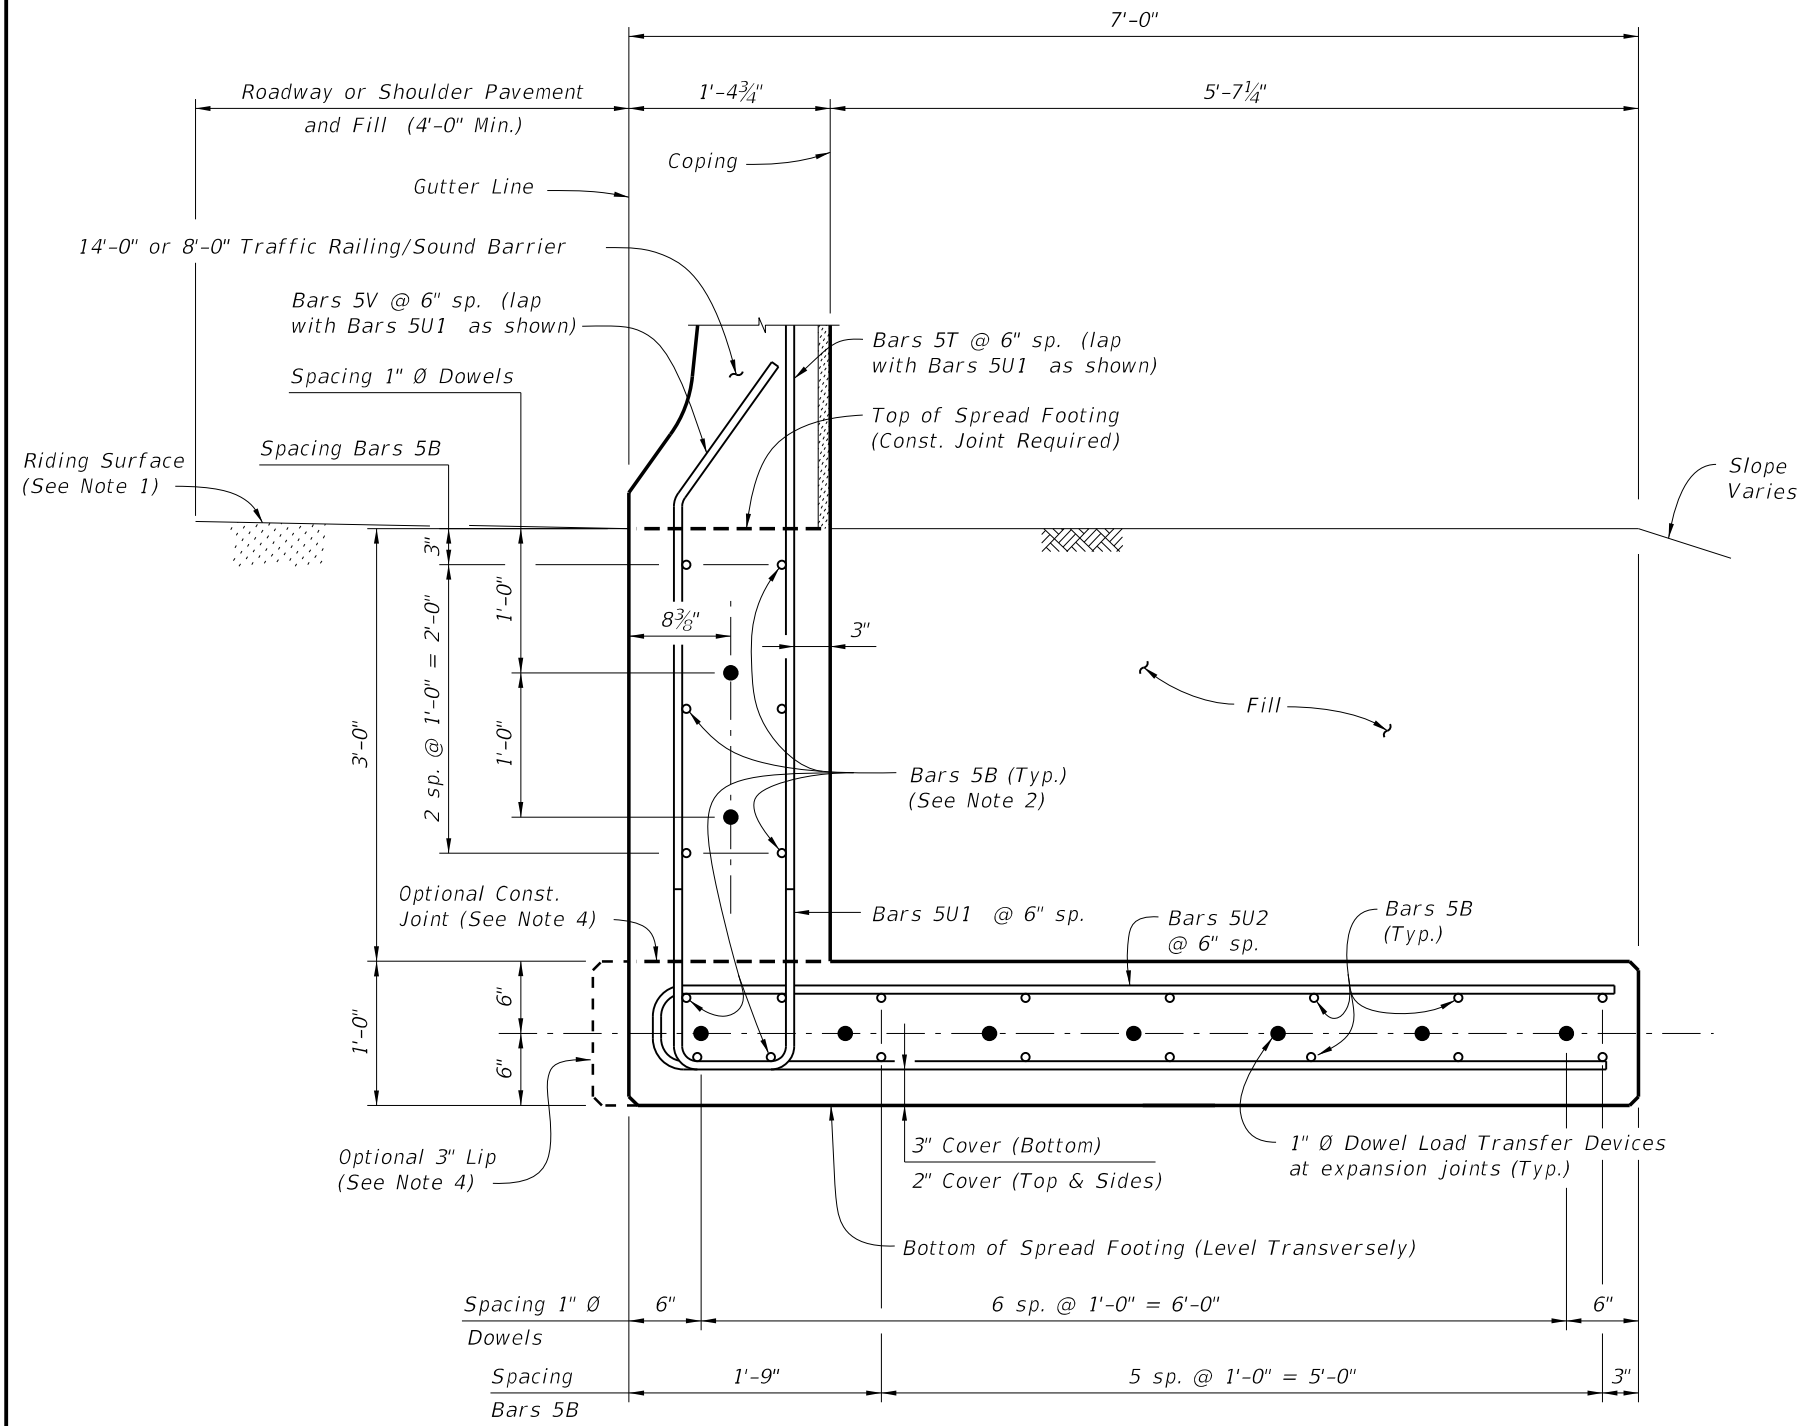


**TYPICAL SECTION THRU SPREAD FOOTING - OPTION A**  
 (Bars 5P, 5R and 5S1 in Traffic Railing/Sound Barrier not shown for clarity)

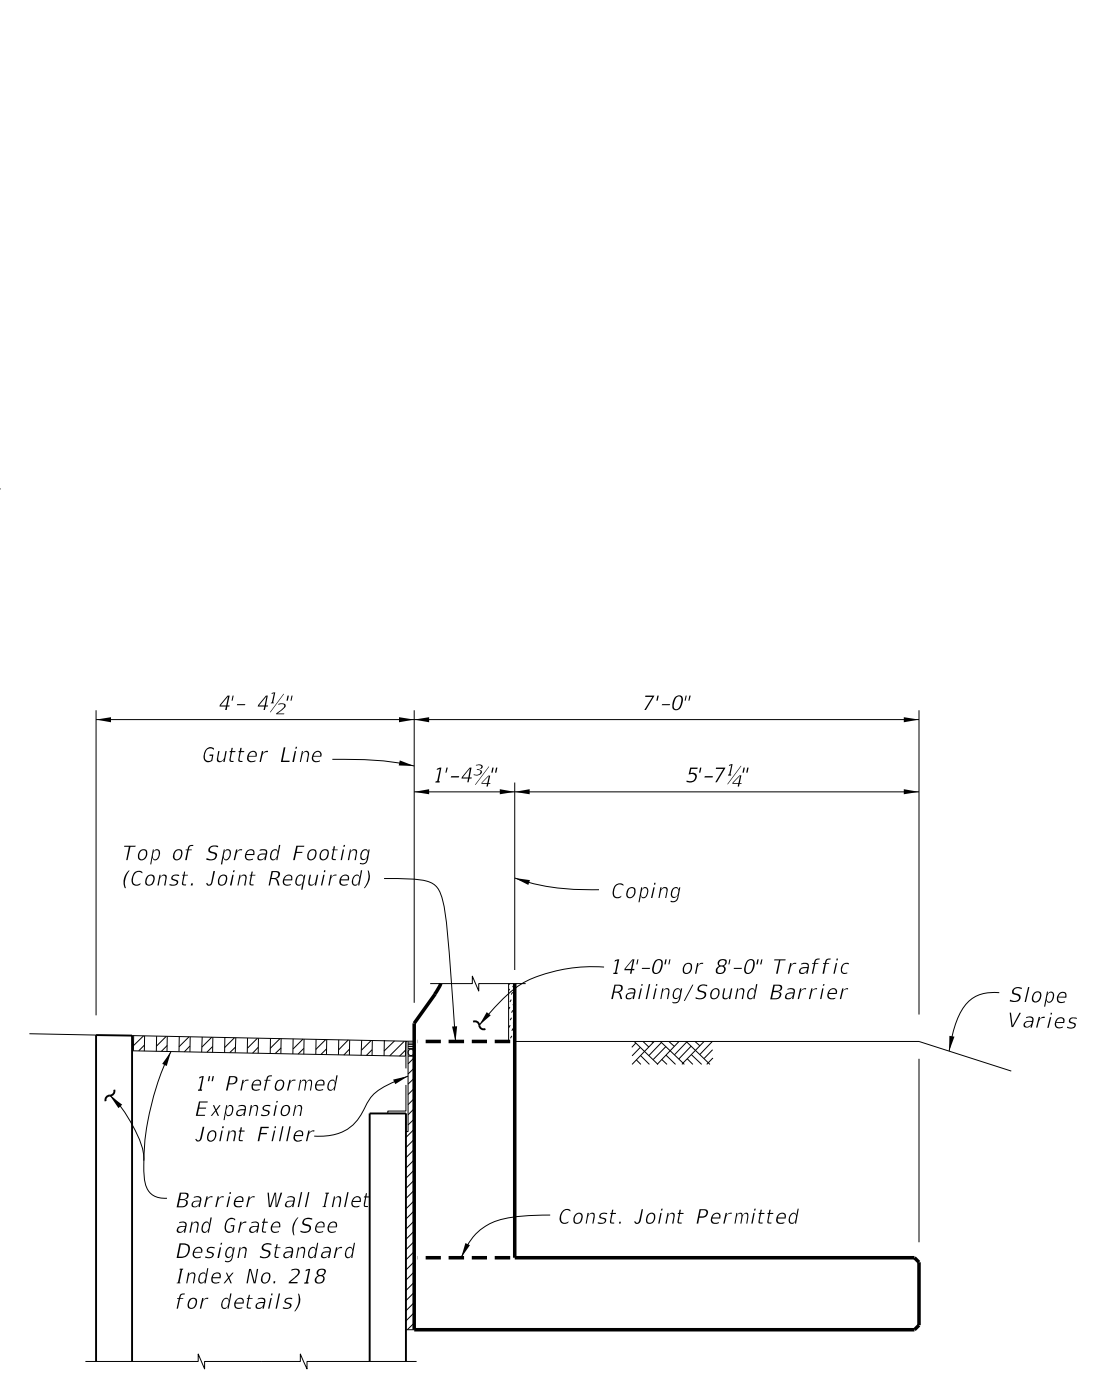

**TYPICAL SECTION THRU SPREAD FOOTING AND BARRIER WALL INLET - OPTION A**  
 (Reinforcing Steel not shown for clarity (See Note 3))


- NOTES:**
1. Match Cross Slope of Travel Lane or Shoulder.
  2. Place 10 ~ Bars 5B inside Bars 5U1 as shown.
  3. For Reinforcing Steel spacing, see Typical Section Thru Spread Footing - Option A this Sheet.
  4. Provide 3" lip when optional construction joint is used.

|                                  |          |              |   |  |                          |                       |
|----------------------------------|----------|--------------|---|--|--------------------------|-----------------------|
| LAST REVISION<br><b>07/01/05</b> | REVISION | DESCRIPTION: |  <b>FDOT DESIGN STANDARDS<br/>2013</b> | <b>TRAFFIC RAILING/SOUND BARRIER<br/>L-SHAPED SPREAD FOOTING</b> | INDEX NO.<br><b>5214</b> | SHEET NO.<br><b>2</b> |
|----------------------------------|----------|--------------|---|--|--------------------------|-----------------------|

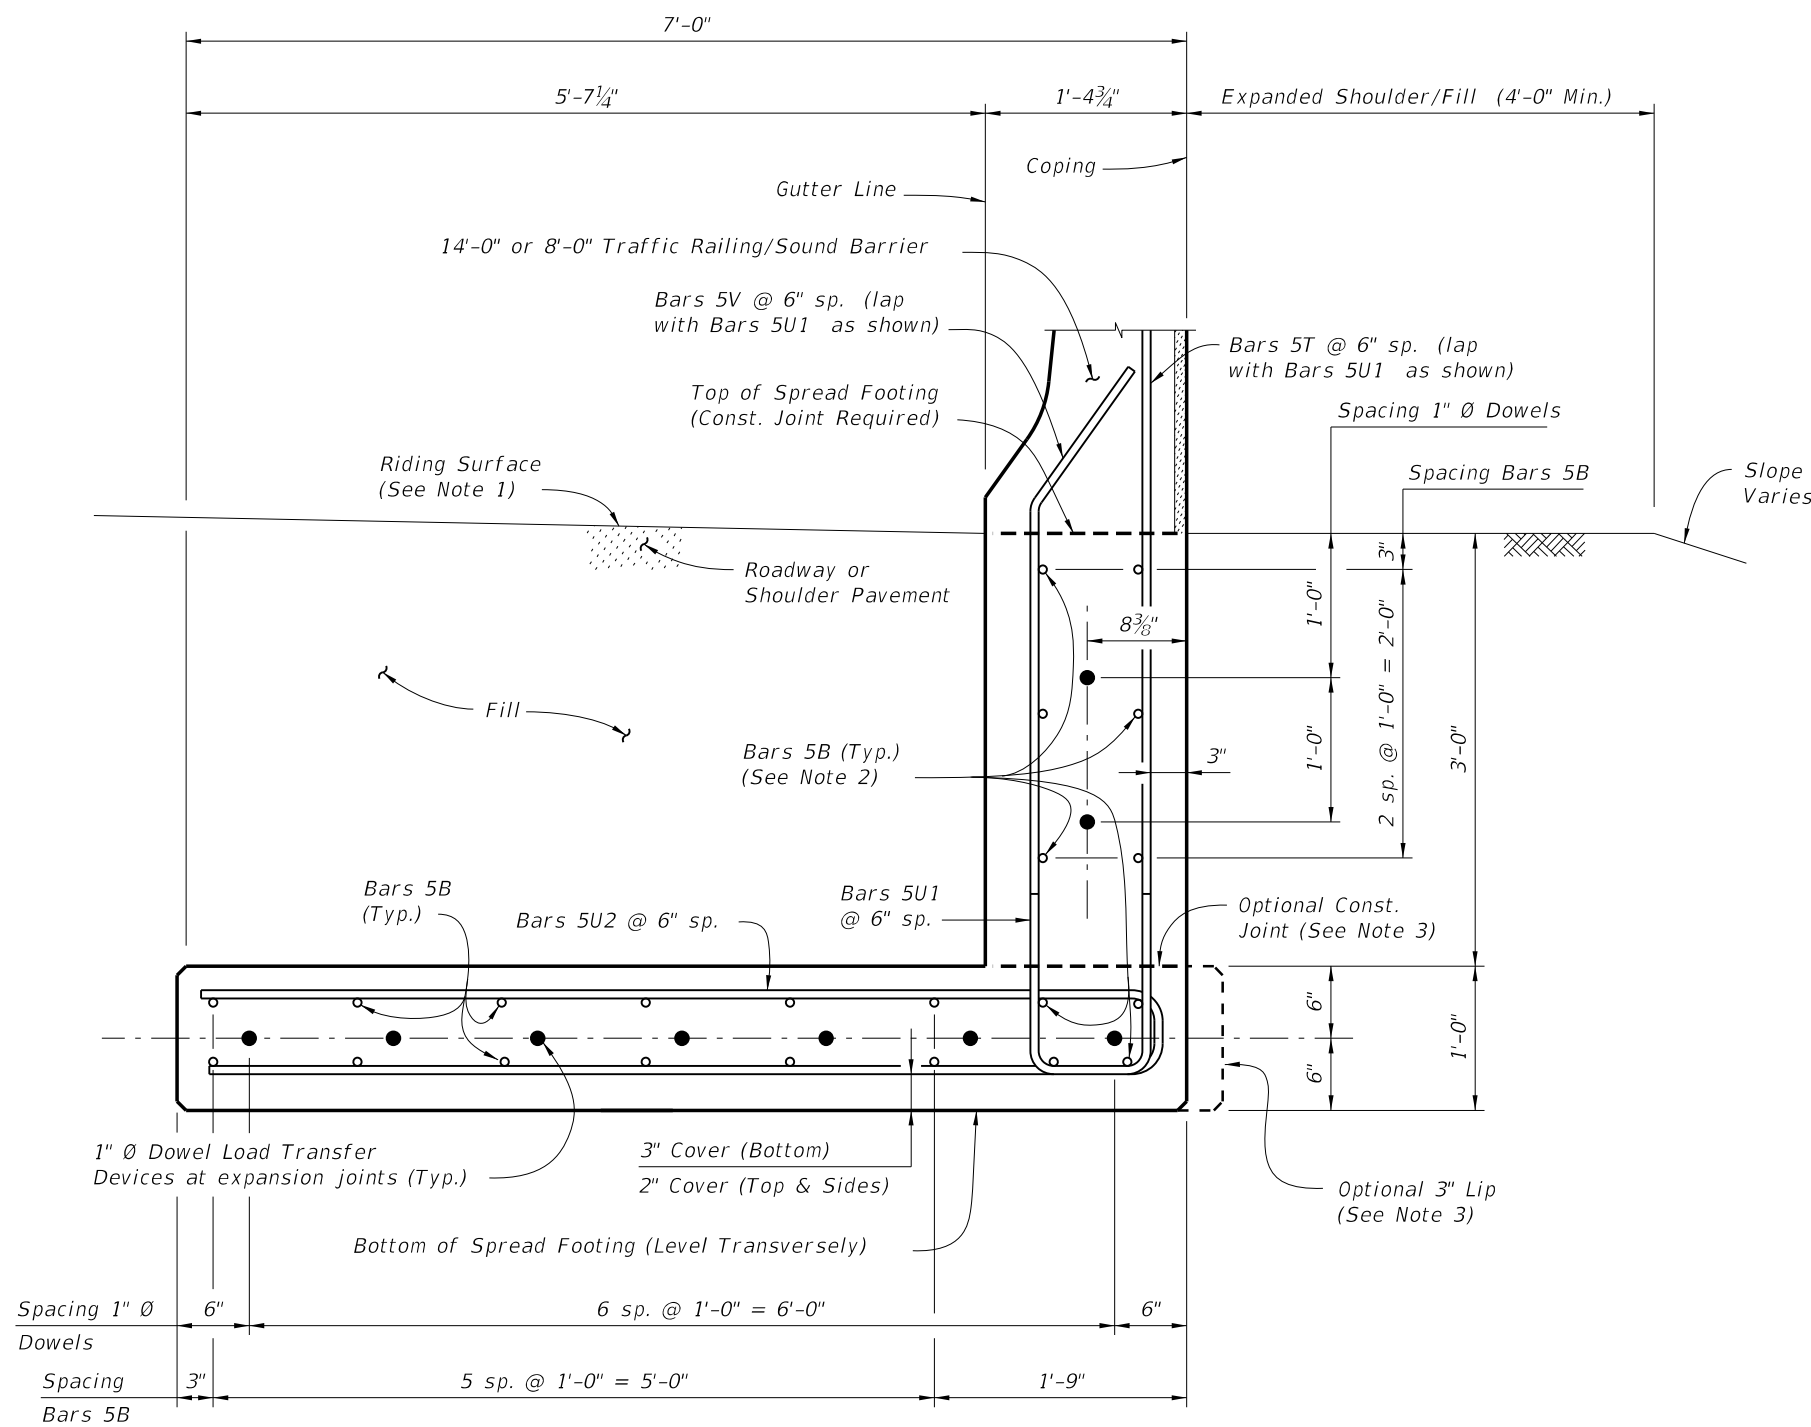


**TYPICAL SECTION THRU SPREAD FOOTING - OPTION B**  
 (Bars 5P, 5R and 5S1 in Traffic Railing/Sound Barrier not shown for clarity)

- NOTES:
1. Match Cross Slope of Travel Lane or Shoulder.
  2. Place 10 ~ Bars 5B inside Bars 5U1 as shown.
  3. Provide 3" lip when optional construction joint is used.

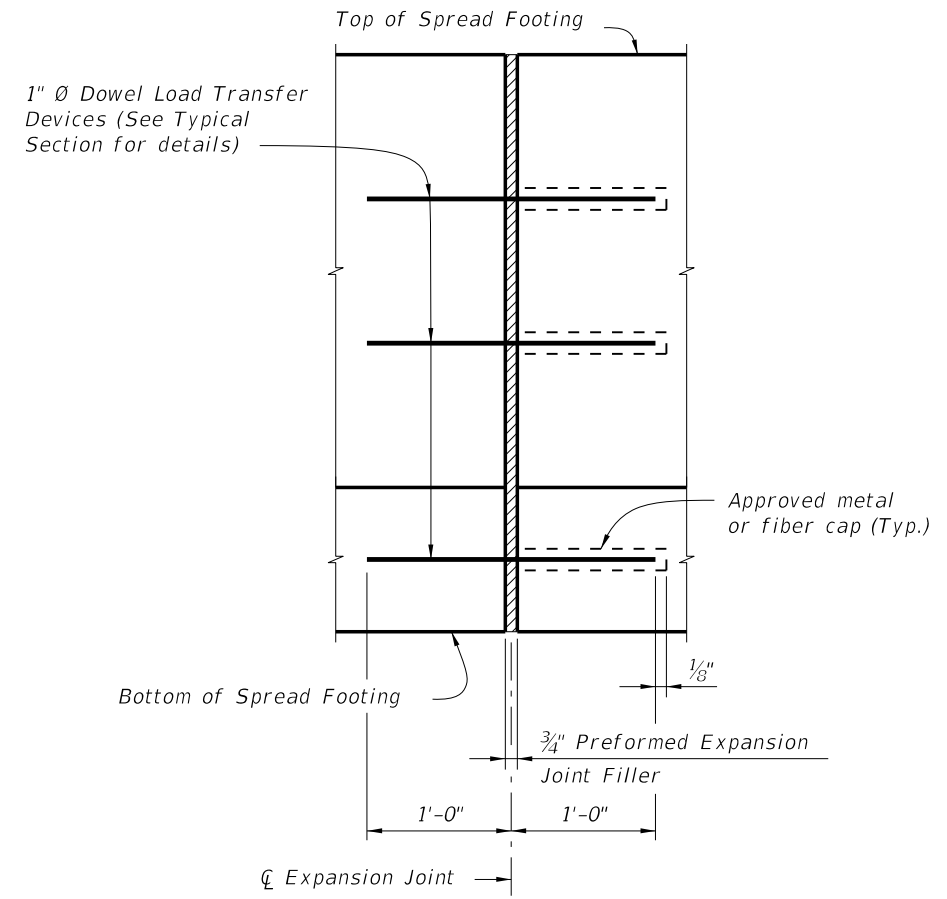


**EXPANSION JOINT DETAIL**  
 (Spread Footing expansion joints are required at 3/4" open joints in Traffic Railing/Sound Barrier)

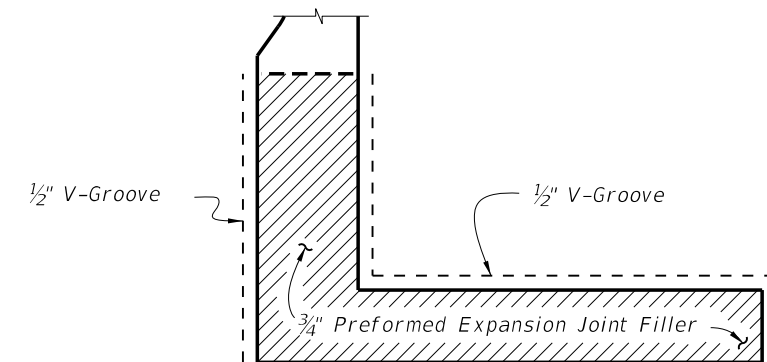

**DETAIL "A"**  
 (Option A Shown, Option B Similar)  
 (Showing Locations of 1/2" V-Grooves and 3/4" Preformed Expansion Joint Filler)

C:\projects\standards\structures\2013book\05214-3of4.dgn  
 r0960rh  
 3:02:14 PM  
 6/28/2012

|               |          |              |   |   |  |           |           |
|---------------|----------|--------------|---|---|--|-----------|-----------|
| LAST REVISION | REVISION | DESCRIPTION: |  | <b>FDOT DESIGN STANDARDS</b><br><b>2013</b> | <b>TRAFFIC RAILING/SOUND BARRIER</b><br><b>L-SHAPED SPREAD FOOTING</b> | INDEX NO. | SHEET NO. |
| 07/01/05      |          |              |   |   |  | 5214      | 3         |

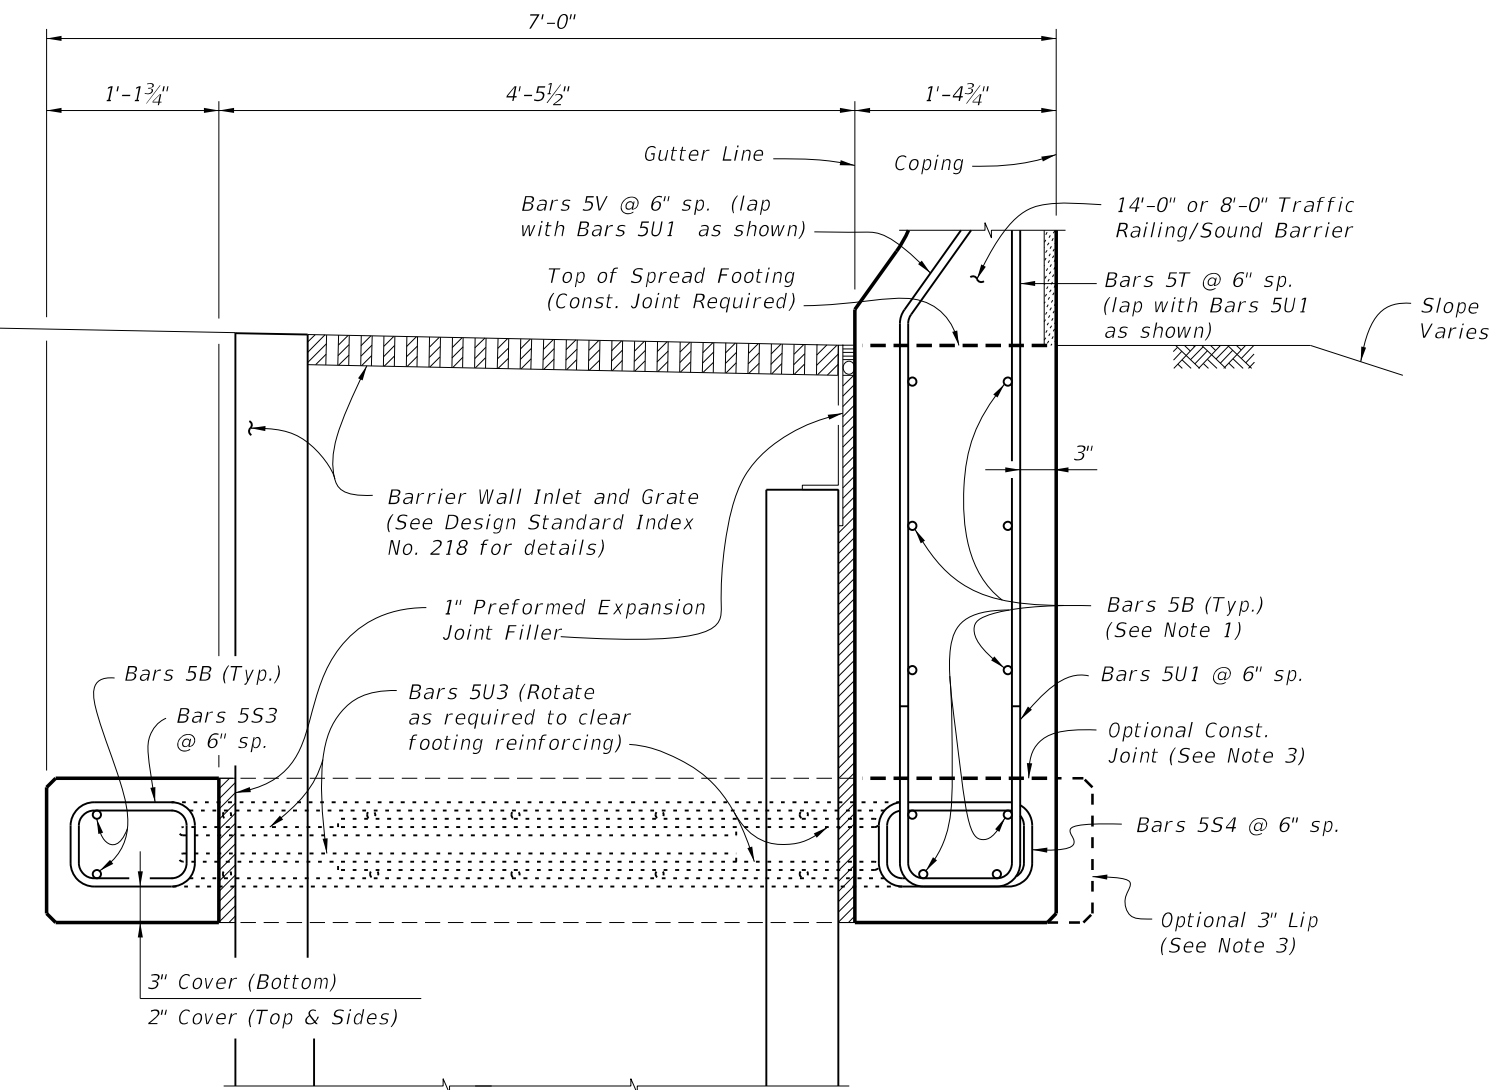

**SECTION A-A**  
**TYPICAL SECTION THRU SPREAD FOOTING AND BARRIER WALL INLET - OPTION B**  
 (Bars 5P, 5R and 5S1 in Traffic Railing/Sound Barrier not shown for clarity)

**NOTES:**

1. Place 10 ~ Bars 5B inside Bars 5U1 as shown.
2. For Reinforcing Steel spacing, see Typical Section Thru Spread Footing - Option B on Sheet 3.
3. Provide 3" lip when optional construction joint is used.


| ESTIMATED L-SHAPED SPREAD FOOTING QUANTITIES |       |          |
|--|-------|----------|
| ITEM   | UNIT  | QUANTITY |
| Concrete (Footing)                           | CY/FT | 0.414    |
| Reinforcing Steel (Typical)                  | LB/FT | 85.53    |
| Additional Reinf. @ Expansion Joint          | LB    | 48.06    |

(Subtract 12.69 lb/ft from typical reinforcing steel quantity shown on Index No. 5210 to account for the absence of Stirrup Bars 5V and 5S1 in L-Shaped Spread Footings.)


**CROSS REFERENCE:**  
 For location of Section A-A, see Sheet 1.

**REINFORCING STEEL BENDING DIAGRAMS**


| BILL OF REINFORCING STEEL |                 |          |
|---------------------------|-----------------|----------|
| MARK                      | SIZE            | LENGTH   |
| B                         | 5               | AS REQD. |
| C                         | 5               | 5'-6"    |
| S3                        | 5               | 3'-10"   |
| S4                        | 5               | 4'-3"    |
| T                         | 5               | 4'-3"    |
| U1                        | 5               | 8'-0"    |
| U2                        | 5               | 13'-11"  |
| U3                        | 5               | 12'-10"  |
| V                         | 5               | 3'-10"   |
| DOWEL                     | 1" Ø Smooth Bar | 2'-0"    |

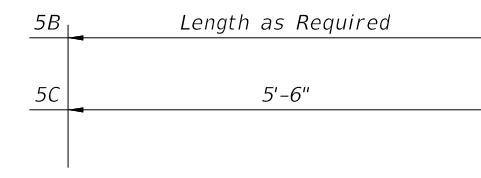


**BARS 5B & 5C**




**1" Ø DOWEL**

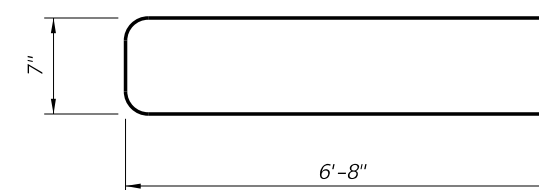


**BAR 5U2**

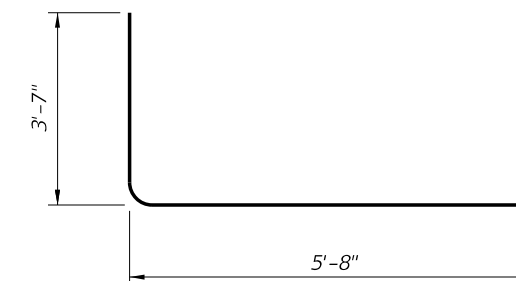


**BAR 5U3**




**BAR 5S3**




**BAR 5S4**



**BAR 5T**

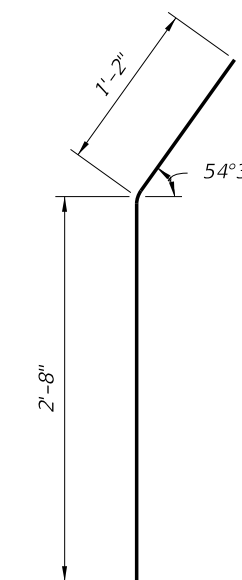

**BAR 5V**

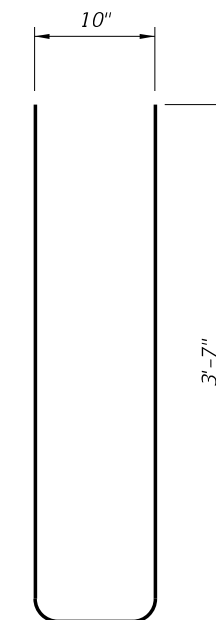

**BAR 5U1**

**REINFORCING STEEL NOTES:**


1. All bar dimensions in the bending diagrams are out to out.
2. All reinforcing steel at the open joints will have a 2" minimum cover.
3. Lap splices for Bars 5B will be a minimum of 2'-2".
4. Lap splices Bars 5T and 5V with 5U1 will be a minimum of 2'-2".
5. The Contractor may use Welded Wire Fabric when approved by the Engineer. Welded Wire Fabric will conform to ASTM A 497.

C:\projects\standards\structures\2013book\05214-4of4.dgn rd960rh 3:02:16 PM 6/29/2012

**REINFORCING STEEL BENDING DIAGRAMS**

**BILL OF REINFORCING STEEL**

| MARK          | SIZE            | LENGTH   |
|---------------|-----------------|----------|
| A (8'-0" SW)  | 5               | 6'-1"    |
| A (14'-0" SW) | 5               | 8'-1"    |
| B             | 5               | AS REQD. |
| T             | 5               | 4'-3"    |
| V             | 5               | 3'-10"   |
| DOWEL         | 1" Ø Smooth Bar | 2'-0"    |

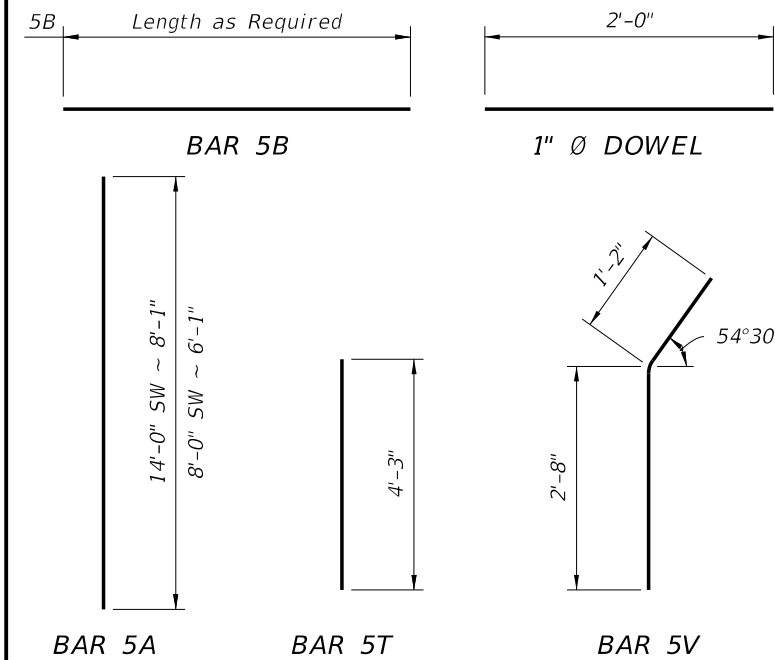

**REINFORCING STEEL NOTES:**

- All bar dimensions in the bending diagrams are out to out.
- All reinforcing steel at the open joints will have a 2" minimum cover.
- Lap splices for Bars 5B will be a minimum of 2'-2".
- Lap splices Bars 5T and 5V with 5U1 will be a minimum of 2'-2".
- The Contractor may use Welded Wire Reinforcement when approved by the Engineer. Welded Wire Reinforcement will conform to ASTM A 497.

**NOTES**


- CONSTRUCTION REQUIREMENTS:** Construct the Trench Footing and expansion joints plumb; do not construct the Trench Footing perpendicular to the roadway surface. Slip forming is not permitted.
- CONCRETE:** Use Class II concrete for slightly aggressive environments. Use Class VI concrete for moderately or extremely aggressive environments. Concrete will be in accordance with Specification Section 346.
- REINFORCING STEEL:** Provide Grade 60 reinforcing steel in accordance with Specification Section 931. Dowel Load Transfer Devices will be ASTM A 36 smooth round bar and hot-dip galvanized in accordance with Specification Section 962. Install Dowel Load Transfer Devices in accordance with Specification Section 350. Provide at 90°-0" maximum intervals as shown.
- Construct 3/4" Expansion Joints plumb and perpendicular or radial to Gutter Line. Provide at 90°-0" maximum intervals as shown.
- Provide and install Preformed Expansion Joint Filler in accordance with Specification Section 932.
- Construct 1/2" V-Grooves plumb and provide at 30'-0" maximum intervals as shown. Space V-Grooves equally between 3/4" Expansion Joints and/or Begin or End Trench Footing. V-Groove locations are to coincide with V-Groove locations in the Railing/Sound Barrier.
- FILL REQUIREMENTS:** Fill is required a distance of 4'-0" on both sides for the entire depth of the trench footing. See Typical Section for details.
- Match Cross Slope of Travel Lane or Shoulder.
- Spacing shown is along the Gutter Line.
- Work this Standard Drawing with one or both of the following:
  - Index No. 5210 - Traffic Railing/Sound Barrier (8'-0").
  - Index No. 5211 - Traffic Railing/Sound Barrier (14'-0").

LEGEND: SW = Traffic Railing Barrier/Soundwall

**ESTIMATED TRENCH FOOTING QUANTITIES**

| ITEM                                | UNIT  | QUANTITY |           |
|-------------------------------------|-------|----------|-----------|
|                                     |       | 8'-0" SW | 14'-0" SW |
| Concrete (Footing)                  | CY/FT | 0.336    | 0.439     |
| Reinforcing Steel (Typical)         | LB/FT | 56.84    | 69.36     |
| Additional Reinf. @ Expansion Joint | LB    | 32.04    | 42.72     |


(Subtract 12.69 lb/ft from typical reinforcing steel quantity shown on Index No. 5210 to account for the absence of Stirrup Bars 5V and 5S1 in Trench Footings.)

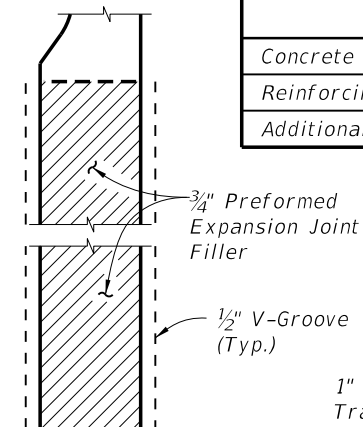

**DETAIL "A"**


(Showing Locations of 1/2" V-Grooves and 3/4" Preformed Expansion Joint Filler)

1" Ø Dowel Load Transfer Devices (See Typical Section for details)

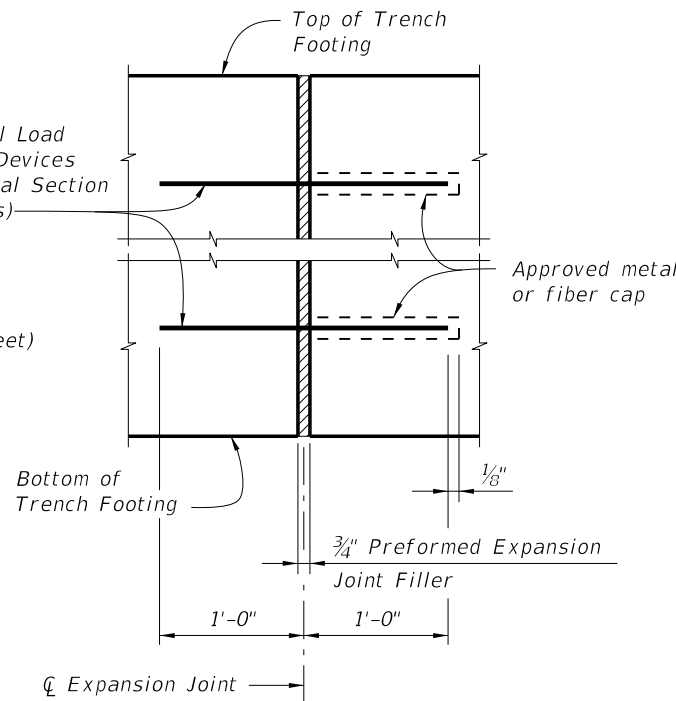


**EXPANSION JOINT DETAIL**

(Trench Footing expansion joints are required at 3/4" open joints in Traffic Railing/Sound Barrier)

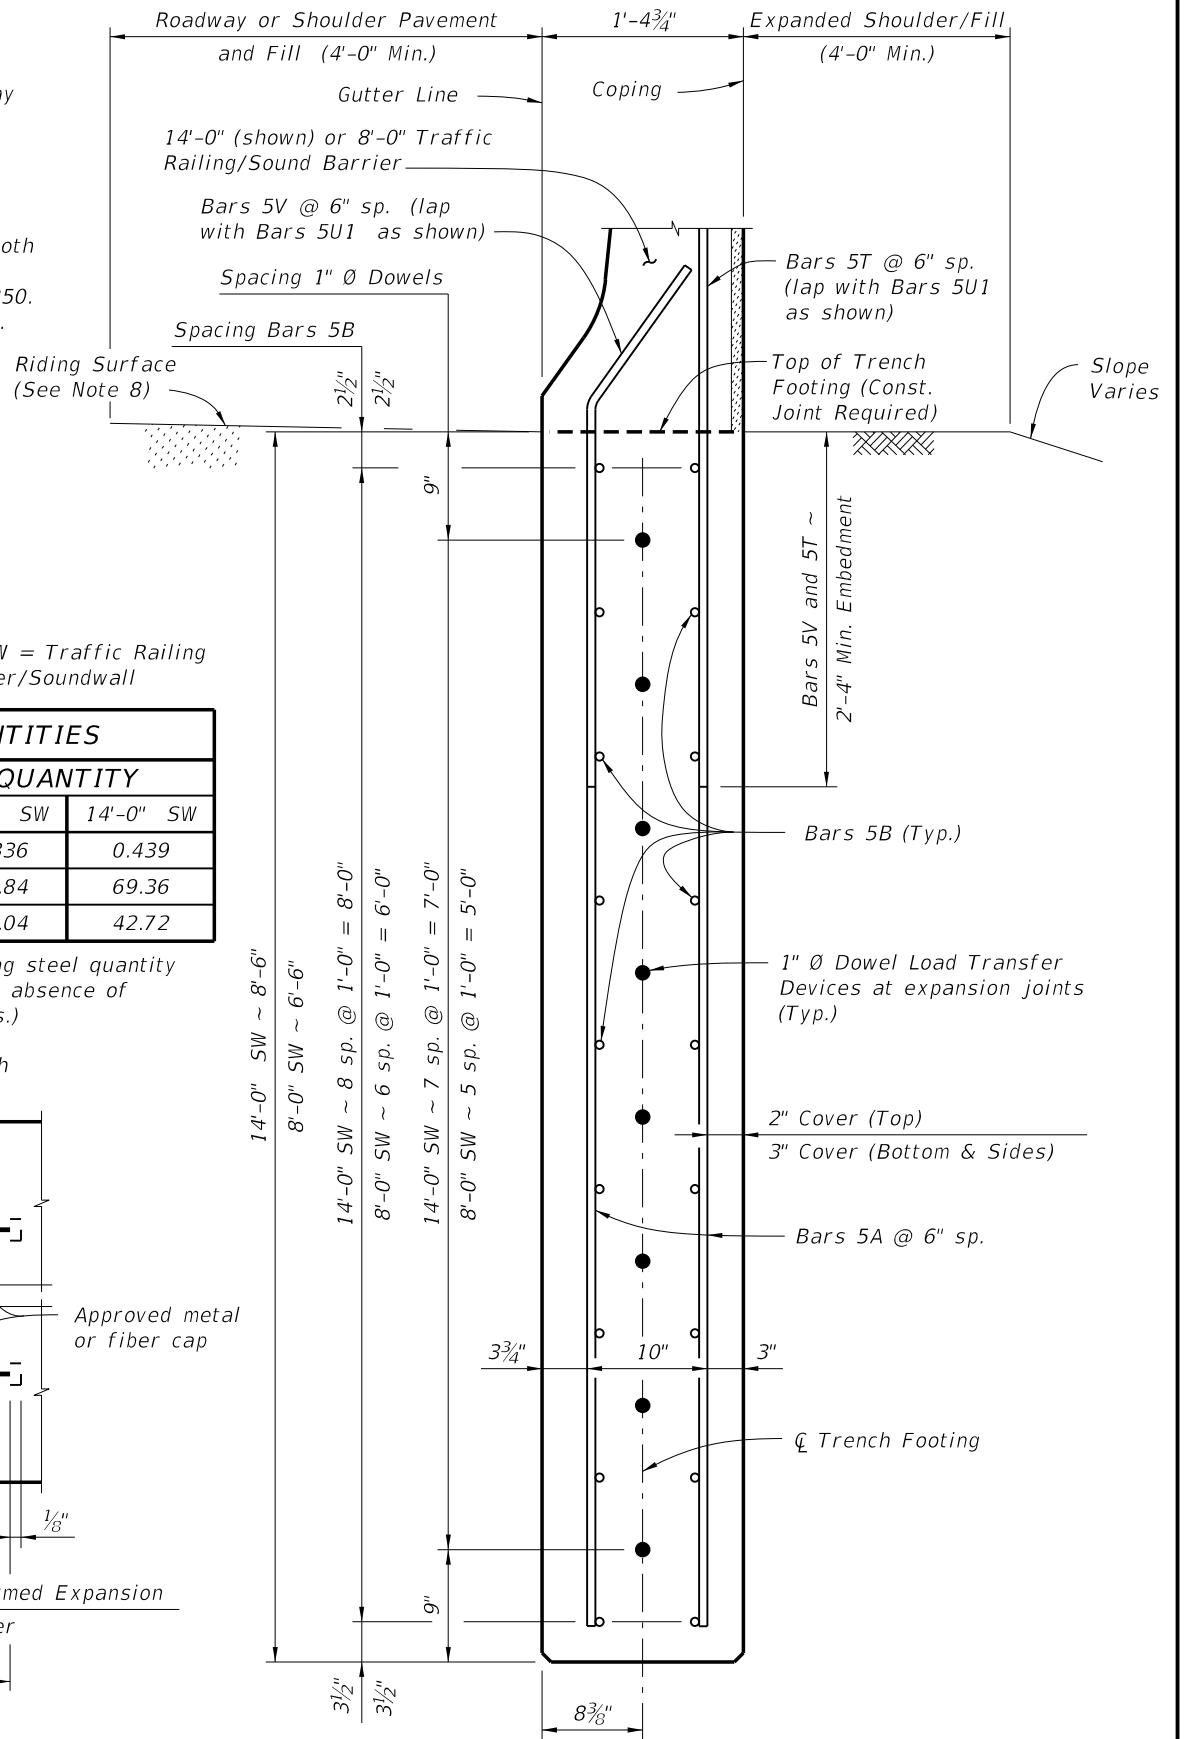

**TYPICAL SECTION THRU TRENCH FOOTING**

(Bars 5P, 5R and 5S1 in Traffic Railing Barrier/Soundwall not shown for clarity)

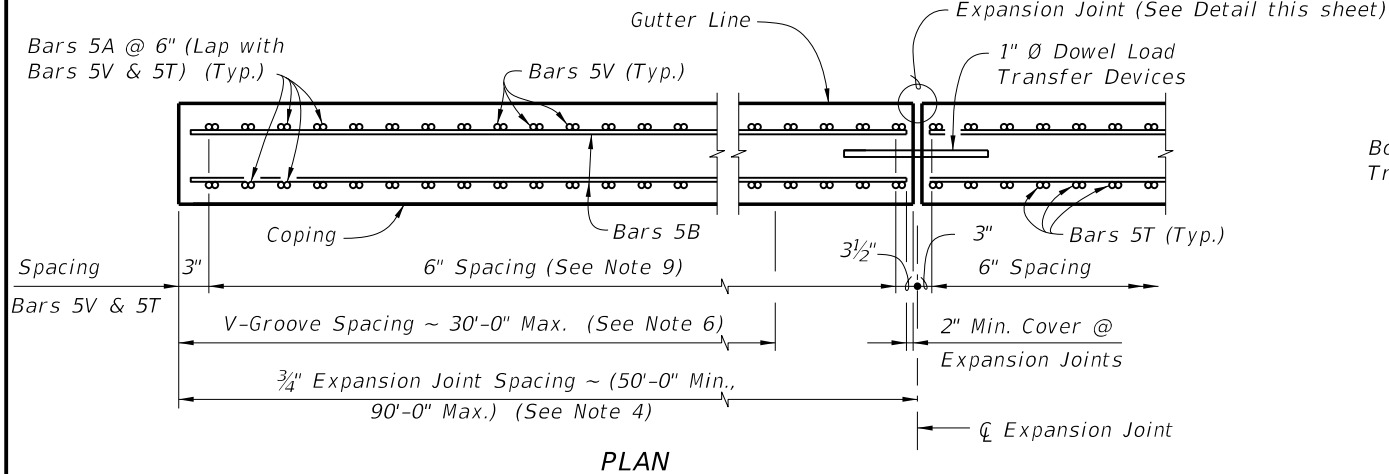

**PLAN**

C:\projects\standards\structures\2013book\05215-1of1.dgn  
rd9607h  
3:02:18 PM  
6/28/2012