



FRONT VIEW

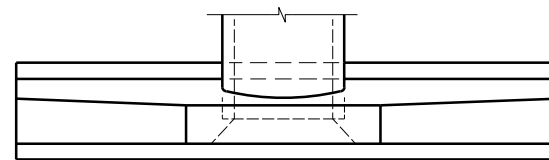


TOP VIEW

Const. Joint Permitted See End View (Enlarged)

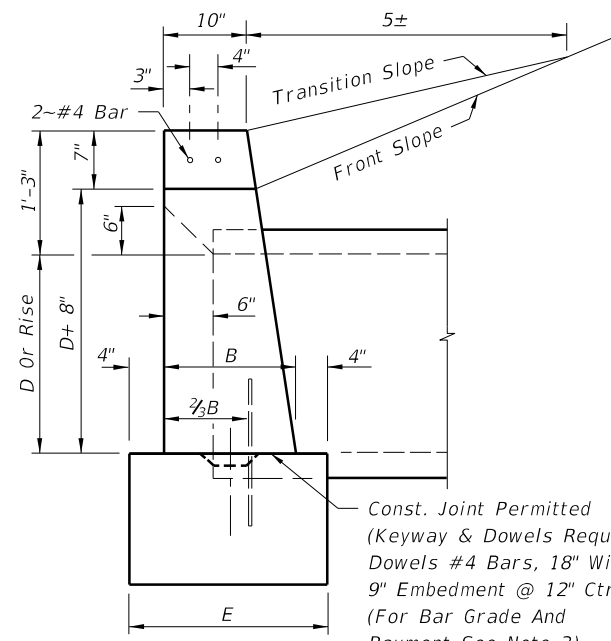

END VIEW (ENLARGED)

Const. Joint Permitted (Keyway & Dowels Required Dowels #4 Bars, 18" With 9" Embedment @ 12" Ctrs (For Bar Grade And Payment See Note 3)

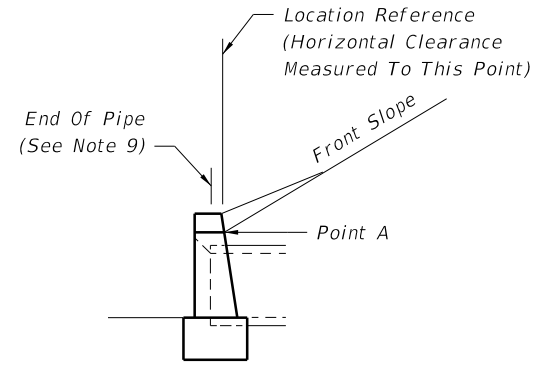

END VIEW

1. Position is set by the intersection of the front slope and Point A where this intersection falls outside the clear zone.
2. Where the front slope and Point A intersects inside the clear zone, the endwall is positioned so the location reference point is at the clear zone limit. The front slope is transitioned to the endwall as shown in Index No. 280.


STANDARD LOCATION CONTROL

GENERAL NOTES


1. Endwall dimensions, locations and positions are for round and elliptical concrete pipe and for round and pipe-arch corrugated metal pipe. Round concrete pipe shown.
2. Front slope and ditch transitions shall be in accordance with Index No. 280.
3. Endwalls may be cast in place or precast concrete. Reinforcing steel shall be Grades 40 or 60. Additional reinforcement necessary for handling precast units shall be determined by the Contractor or the supplier. Cost of reinforcement shall be included in the contract unit price for Concrete, (Endwalls).
4. All exposed corners and edges of concrete are to be chamfered 3/4".
5. Concrete shall be Class I, except ASTM C478 (4000 psi) concrete may be substituted for precast items manufactured in plants meeting the requirements of Section 449 of the Specifications.
6. On outfall ditches with side slopes flatter than 1:1 1/2 provide 20' transitions from the endwall to the flatter side slopes, right of way permitting.
7. For sodding around endwalls see Index No. 281.
8. Payment for concrete quantities for endwalls skewed to the pipe shall be made on the following basis:
 

| Endwall Skew to Pipe | Use Tabulated Value |
|----------------------|---------------------|
| 0° to 5°             | 0°                  |
| 6°                   | 15°                 |
| 16°                  | 30°                 |
| 31° or over          | 45°                 |
9. Pipe length plan quantities shall be based on the pipe end locations shown in the standard location control end view, or lengths based on special endwall locations called for in the plans.
10. Payment for pipe in pipe culverts shall be based on plan quantities, adjusted for endwall locations subsequently established by the Engineer.
11. Endwalls to be paid for under the contract unit price for Class I Concrete (Endwalls), CY.


ENDWALL DIMENSIONS (EXCLUSIVE OF MULTIPLE PIPE SPACING)



FRONT VIEW

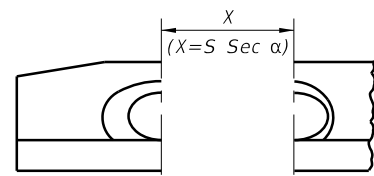


FRONT VIEW

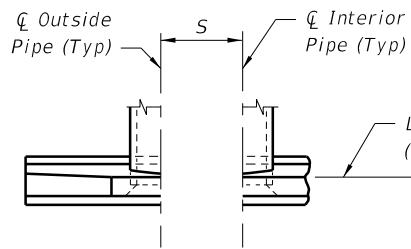

TOP VIEW

NORMAL PIPE

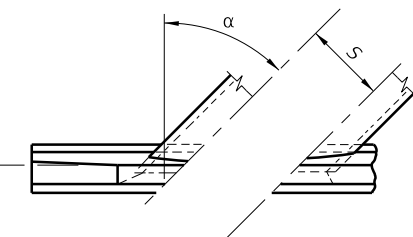

TOP VIEW

SKewed PIPE

LEGEND

- α Pipe Skew
- S Center To Center Pipe Spacing
- X Centerline To Centerline Dimension At Face Of Headwall

PIPE AND SPACING FOR MULTIPLE PIPE  
ENDWALL POSITIONS FOR SINGLE AND MULTIPLE

C:\projects\standards\roadway\02200-s\02250-01.dgn 6/24/2013 4:48:28 PM sm970re

|                           |              |  |                               |  |                  |                     |
|---------------------------|--------------|--|-------------------------------|--|------------------|---------------------|
| LAST REVISION<br>07/01/09 | DESCRIPTION: |  | FDOT 2014<br>DESIGN STANDARDS | STRAIGHT CONCRETE ENDWALLS<br>SINGLE AND MULTIPLE PIPE | INDEX NO.<br>250 | SHEET NO.<br>1 of 2 |
|                           |              |  |                               |  |                  |                     |

## DATA AND ESTIMATED QUANTITIES FOR ONE ENDWALL

### ROUND CONCRETE AND CORRUGATED METAL PIPE

| D   | Opening Area (SF) |       |       |       | Dimensions |        |        |        |       |       |        |        |        |          |         |        |       |          |       |        | Class I Concrete (CY)                          |          |       |           |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       | D     |     |     |     |
|-----|-------------------|-------|-------|-------|------------|--------|--------|--------|-------|-------|--------|--------|--------|----------|---------|--------|-------|----------|-------|--------|--|----------|-------|-----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-----|-----|-----|
|     |                   |       |       |       |            |        |        |        |       |       |        |        |        |          |         |        |       |          |       |        | Number And Type Of Pipe And Skew Angle Of Pipe |          |       |           |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |     |     |     |
|     | Number Of Pipes   |       |       |       | A          | B      | C      | E      | F     | G     | S      | Single |        |          |         | Double |       |          |       | Triple |  |          |       | Quadruple |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |     |     |     |
|     |                   |       |       |       |            |        |        |        |       |       |        | Conc   | Metal  | Concrete |         | Metal  |       | Concrete |       | Metal  |  | Concrete |       | Metal     |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |     |     |     |
| 1   | 2                 | 3     | 4     | 0°    | 15°        | 30°    | 45°    | 0°     | 0°    | 0°    | 15°    | 30°    | 45°    | 0°       | 15°     | 30°    | 45°   | 0°       | 15°   | 30°    | 45°  | 0°       | 15°   | 30°       | 45°   | 0°    | 15°   | 30°   | 45°   |       |       |       |       |       |       |       |       |       |       |       |       |     |     |     |
| 15" | 1.23              | 2.46  | 3.69  | 4.92  | 1'-11"     | 1'-2"  | 4'-0"  | 1'-10" | 1'-2" | 0'-6" | 2'-7"  | 2'-7"  | 2'-8"  | 3'-0"    | 3'-8"   | 1.23   | 1.24  | 1.59     | 1.60  | 1.65   | 1.74   | 1.62     | 1.63  | 1.68      | 1.78  | 1.94  | 1.96  | 2.05  | 2.23  | 1.99  | 2.02  | 2.11  | 2.30  | 2.30  | 2.34  | 2.47  | 2.74  | 2.37  | 2.41  | 2.75  | 2.84  | 15" |     |     |
| 18" | 1.77              | 3.54  | 5.31  | 7.08  | 2'-2"      | 1'-3"  | 4'-6"  | 1'-11" | 1'-3" | 1'-0" | 2'-10" | 2'-10" | 2'-11" | 3'-3"    | 4'-0"   | 1.56   | 1.59  | 1.99     | 2.01  | 2.06   | 2.17   | 2.04     | 2.06  | 2.11      | 2.23  | 2.43  | 2.46  | 2.56  | 2.79  | 2.51  | 2.54  | 2.65  | 2.89  | 2.86  | 2.91  | 3.06  | 3.40  | 2.96  | 3.01  | 3.17  | 3.53  | 18" |     |     |
| 21" | 2.41              | 4.82  | 7.23  | 9.64  | 2'-5"      | 1'-4"  | 5'-0"  | 2'-0"  | 1'-4" | 1'-6" | 3'-2"  | 3'-2"  | 3'-3"  | 3'-8"    | 4'-6"   | 1.97   |       |          |       |        |  |          |       |           |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |     |     | 21" |
| 24" | 3.14              | 6.28  | 9.42  | 12.56 | 2'-8"      | 1'-4"  | 5'-6"  | 2'-0"  | 1'-4" | 2'-0" | 3'-5"  | 3'-5"  | 3'-6"  | 3'-11"   | 4'-10"  | 2.24   | 2.29  | 2.82     | 2.84  | 2.91   | 3.06   | 2.91     | 2.93  | 3.01      | 3.17  | 3.39  | 3.43  | 3.57  | 3.87  | 3.52  | 3.56  | 3.71  | 4.03  | 3.97  | 4.03  | 4.24  | 4.69  | 4.14  | 4.20  | 4.43  | 4.91  | 24" |     |     |
| 27" | 3.98              | 7.96  | 11.94 | 15.92 | 2'-11"     | 1'-5"  | 6'-0"  | 2'-1"  | 1'-5" | 2'-6" | 3'-10" | 3'-10" | 4'-0"  | 4'-5"    | 5'-5"   | 2.73   |       |          |       |        |  |          |       |           |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |     | 27" |     |
| 30" | 4.91              | 9.82  | 14.73 | 19.64 | 3'-2"      | 1'-6"  | 6'-6"  | 2'-2"  | 1'-6" | 3'-0" | 4'-3"  | 4'-3"  | 4'-5"  | 4'-11"   | 6'-0"   | 3.26   | 3.34  | 4.13     | 4.16  | 4.26   | 4.49   | 4.28     | 4.31  | 4.43      | 4.67  | 4.98  | 5.04  | 5.25  | 5.69  | 5.20  | 5.27  | 5.49  | 5.97  | 5.84  | 5.93  | 6.24  | 6.91  | 6.13  | 6.23  | 6.56  | 7.29  | 30" |     |     |
| 36" | 7.07              | 14.14 | 21.21 | 28.28 | 3'-8"      | 1'-8"  | 7'-6"  | 2'-4"  | 1'-8" | 4'-0" | 5'-1"  | 5'-1"  | 5'-3"  | 5'-10"   | 7'-2"   | 4.53   | 4.64  | 5.73     | 5.77  | 5.92   | 6.23   | 5.95     | 6.00  | 6.15      | 6.49  | 6.92  | 7.00  | 7.29  | 7.91  | 7.25  | 7.34  | 7.65  | 8.33  | 8.13  | 8.26  | 8.69  | 9.62  | 8.57  | 8.71  | 9.18  | 10.20 | 36" |     |     |
| 42" | 9.62              | 19.24 | 28.86 | 38.48 | 4'-2"      | 1'-10" | 8'-6"  | 2'-6"  | 2'-0" | 5'-0" | 6'-0"  | 6'-0"  | 6'-3"  | 6'-11"   | 8'-6"   | 6.33   | 6.49  | 8.11     | 8.17  | 8.39   | 8.85   | 8.43     | 8.50  | 8.73      | 9.23  | 9.90  | 10.02 | 10.45 | 11.38 | 10.38 | 10.52 | 10.98 | 11.99 | 11.68 | 11.87 | 12.51 | 13.89 | 12.32 | 12.52 | 13.22 | 14.73 | 42" |     |     |
| 48" | 12.57             | 25.14 | 37.71 | 50.28 | 4'-8"      | 2'-1"  | 9'-6"  | 2'-9"  | 2'-0" | 6'-0" | 6'-9"  | 6'-9"  | 7'-0"  | 7'-10"   | 9'-7"   | 8.15   | 8.38  | 10.40    | 10.48 | 10.75  | 11.33  | 10.85    | 10.94 | 11.23     | 11.87 | 12.64 | 12.80 | 13.34 | 14.50 | 13.34 | 13.51 | 14.11 | 15.39 | 14.89 | 15.13 | 15.93 | 17.68 | 15.82 | 16.08 | 16.97 | 18.90 | 48" |     |     |
| 54" | 15.90             | 31.80 | 47.70 | 63.60 | 5'-2"      | 2'-6"  | 10'-6" | 3'-2"  | 2'-3" | 7'-0" | 7'-8"  | 7'-8"  | 7'-11" | 8'-10"   | 10'-10" | 11.71  | 11.77 | 15.23    | 15.35 | 15.78  | 16.69  | 15.35    | 15.48 | 15.90     | 16.83 | 18.77 | 19.02 | 19.86 | 21.69 | 18.93 | 19.18 | 20.04 | 21.89 | 22.29 | 22.66 | 23.93 | 26.67 | 22.51 | 22.89 | 24.17 | 26.96 | 54" |     |     |

### CORRUGATED METAL PIPE ARCH

| Span | Rise | Opening Area (SF) |      |      |      | Dimensions |        |            |        |       |           |        |        |        |        |        |        |       |       |       |        | Class I Concrete (CY)                 |       |       |        |       |       |       |           |     |     |     |     |  |  |  |  | Span | Rise | Approx. Equiv. Round Pipe |
|------|------|-------------------|------|------|------|------------|--------|------------|--------|-------|-----------|--------|--------|--------|--------|--------|--------|-------|-------|-------|--------|---------------------------------------|-------|-------|--------|-------|-------|-------|-----------|-----|-----|-----|-----|--|--|--|--|------|------|---------------------------|
|      |      |                   |      |      |      |            |        |            |        |       |           |        |        |        |        |        |        |       |       |       |        | Number Of Pipe And Skew Angle Of Pipe |       |       |        |       |       |       |           |     |     |     |     |  |  |  |  |      |      |                           |
|      |      | Number Of Pipes   |      |      |      | A          | B      | C          | E      | F     | G         | S      | X      |        |        |        | Single |       |       |       | Double |                                       |       |       | Triple |       |       |       | Quadruple |     |     |     |     |  |  |  |  |      |      |                           |
|      |      |                   |      |      |      |            |        |            |        |       |           |        | 1      | 2      | 3      | 4      | 0°     | 15°   | 30°   | 45°   | 0°     | 0°                                    | 15°   | 30°   | 45°    | 0°    | 15°   | 30°   | 45°       | 0°  | 15° | 30° | 45° |  |  |  |  |      |      |                           |
| 17"  | 13"  | 1.1               | 2.2  | 3.3  | 4.4  | 1'-9"      | 1'-2"  | 3'-10"     | 1'-10" | 1'-2" | 0'-4"     | 2'-6"  | 2'-6"  | 2'-7"  | 2'-11" | 3'-6"  | 1.16   | 1.47  | 1.48  | 1.52  | 1.60   | 1.78                                  | 1.80  | 1.88  | 2.04   | 2.09  | 2.12  | 2.23  | 2.48      | 17" | 13" | 15" |     |  |  |  |  |      |      |                           |
| 21"  | 15"  | 1.6               | 3.2  | 4.8  | 6.4  | 1'-11"     | 1'-2"  | 4'-3"      | 1'-10" | 1'-2" | 0'-9"     | 2'-10" | 2'-10" | 2'-11" | 3'-3"  | 4'-0"  | 1.33   | 1.69  | 1.70  | 1.75  | 1.84   | 2.04                                  | 2.06  | 2.15  | 2.33   | 2.40  | 2.44  | 2.57  | 2.84      | 21" | 15" | 18" |     |  |  |  |  |      |      |                           |
| 28"  | 20"  | 2.8               | 5.6  | 8.4  | 11.2 | 2'-4"      | 1'-3"  | 5'-2"      | 1'-11" | 1'-3" | 1'-8"     | 3'-5"  | 3'-5"  | 3'-6"  | 3'-11" | 4'-10" | 1.78   | 2.31  | 2.33  | 2.39  | 2.53   | 2.83                                  | 2.87  | 2.99  | 3.26   | 3.36  | 3.42  | 3.60  | 4.01      | 28" | 20" | 24" |     |  |  |  |  |      |      |                           |
| 35"  | 24"  | 4.3               | 8.6  | 12.9 | 17.2 | 2'-8"      | 1'-4"  | 5'-11 1/2" | 2'-0"  | 1'-4" | 2'-5 1/2" | 4'-0"  | 4'-0"  | 4'-2"  | 4'-7"  | 5'-8"  | 2.34   | 3.03  | 3.05  | 3.14  | 3.32   | 3.72                                  | 3.77  | 3.93  | 4.29   | 4.40  | 4.47  | 4.72  | 5.25      | 35" | 24" | 30" |     |  |  |  |  |      |      |                           |
| 42"  | 29"  | 5.9               | 11.8 | 17.7 | 23.6 | 3'-1"      | 1'-5"  | 6'-10 1/2" | 2'-1"  | 1'-5" | 3'-4 1/2" | 4'-9"  | 4'-9"  | 4'-11" | 5'-6"  | 6'-9"  | 3.13   | 4.06  | 4.09  | 4.20  | 4.45   | 4.99                                  | 5.06  | 5.28  | 5.76   | 5.93  | 6.03  | 6.36  | 7.09      | 42" | 29" | 36" |     |  |  |  |  |      |      |                           |
| 49"  | 33"  | 8.4               | 16.8 | 25.2 | 33.6 | 3'-5"      | 1'-6"  | 7'-8"      | 2'-2"  | 1'-6" | 4'-2"     | 5'-6"  | 5'-6"  | 5'-8"  | 6'-4"  | 7'-9"  | 3.83   | 5.00  | 5.04  | 5.18  | 5.48   | 6.16                                  | 6.24  | 6.52  | 7.12   | 7.32  | 7.44  | 7.86  | 8.76      | 49" | 33" | 42" |     |  |  |  |  |      |      |                           |
| 57"  | 38"  | 10.6              | 21.2 | 31.8 | 42.4 | 3'-10"     | 1'-7"  | 8'-7 1/2"  | 2'-3"  | 1'-7" | 5'-1 1/2" | 6'-4"  | 6'-4"  | 6'-7"  | 7'-4"  | 8'-11" | 4.87   | 6.31  | 6.36  | 6.53  | 6.91   | 7.74                                  | 7.84  | 8.18  | 8.93   | 9.18  | 9.33  | 9.85  | 10.96     | 57" | 38" | 48" |     |  |  |  |  |      |      |                           |
| 64"  | 43"  | 13.2              | 26.4 | 39.6 | 52.8 | 4'-3"      | 1'-8"  | 9'-6 1/2"  | 2'-4"  | 1'-8" | 6'-0 1/2" | 7'-1"  | 7'-1"  | 7'-4"  | 8'-2"  | 10'-0" | 5.88   | 7.64  | 7.70  | 7.91  | 8.37   | 9.40                                  | 9.52  | 9.94  | 10.86  | 11.15 | 11.33 | 11.97 | 13.33     | 64" | 43" | 54" |     |  |  |  |  |      |      |                           |
| 71"  | 47"  | 16.9              | 33.8 | 50.7 | 67.6 | 4'-7"      | 1'-10" | 10'-4"     | 2'-6"  | 2'-0" | 6'-10"    | 7'-10" | 7'-10" | 8'-1"  | 9'-1"  | 11'-1" | 7.80   | 10.15 | 10.23 | 10.51 | 11.12  | 12.49                                 | 12.65 | 13.22 | 14.43  | 14.85 | 15.10 | 15.94 | 17.77     | 71" | 47" | 60" |     |  |  |  |  |      |      |                           |

Note: Use the guidelines of General Note No. 8 for selecting tabular quantities.

### CONCRETE ELLIPTICAL PIPE

| Rise | Span | Opening Area (SF) |      |      |       | Dimensions |        |            |        |        |           |        |        |         |        |        |        |       |       |       |        | Class I Concrete (CY)                 |       |       |        |       |       |       |           |     |     |     |     |  |  |  |  | Rise | Span | Approx. Equiv. Round Pipe |
|------|------|-------------------|------|------|-------|------------|--------|------------|--------|--------|-----------|--------|--------|---------|--------|--------|--------|-------|-------|-------|--------|---------------------------------------|-------|-------|--------|-------|-------|-------|-----------|-----|-----|-----|-----|--|--|--|--|------|------|---------------------------|
|      |      |                   |      |      |       |            |        |            |        |        |           |        |        |         |        |        |        |       |       |       |        | Number Of Pipe And Skew Angle Of Pipe |       |       |        |       |       |       |           |     |     |     |     |  |  |  |  |      |      |                           |
|      |      | Number Of Pipes   |      |      |       | A          | B      | C          | E      | F      | G         | S      | X      |         |        |        | Single |       |       |       | Double |                                       |       |       | Triple |       |       |       | Quadruple |     |     |     |     |  |  |  |  |      |      |                           |
|      |      |                   |      |      |       |            |        |            |        |        |           |        | 1      | 2       | 3      | 4      | 0°     | 15°   | 30°   | 45°   | 0°     | 0°                                    | 15°   | 30°   | 45°    | 0°    | 15°   | 30°   | 45°       | 0°  | 15° | 30° | 45° |  |  |  |  |      |      |                           |
| 12"  | 18"  | 1.3               | 2.6  | 3.9  | 5.2   | 1'-8"      | 1'-2"  | 3'-9"      | 1'-10" | 1'-2"  | 0'-3"     | 2'-10" | 2'-10" | 2'-11"  | 3'-3"  | 4'-0"  | 1.09   | 1.45  | 1.46  | 1.51  | 1.60   | 1.80                                  | 1.82  | 1.91  | 2.09   | 2.16  | 2.20  | 2.33  | 2.60      | 12" | 18" | 15" |     |  |  |  |  |      |      |                           |
| 14"  | 23"  | 1.8               | 3.6  | 5.4  | 7.2   | 1'-10"     | 1'-3"  | 4'-2 1/2"  | 1'-11" | 1'-3"  | 8 1/2"    | 3'-5"  | 3'-5"  | 3'-6"   | 3'-11" | 4'-10" | 1.36   | 1.82  | 1.84  | 1.89  | 2.01   | 2.29                                  | 2.32  | 2.43  | 2.68   | 2.75  | 2.80  | 2.97  | 3.33      | 14" | 23" | 18" |     |  |  |  |  |      |      |                           |
| 19"  | 30"  | 3.3               | 6.6  | 9.9  | 13.2  | 2'-3"      | 1'-4"  | 5'-1 1/2"  | 2'-0"  | 1'-4"  | 1'-7 1/2" | 4'-2"  | 4'-2"  | 4'-4"   | 4'-10" | 5'-11" | 1.89   | 2.55  | 2.57  | 2.65  | 2.82   | 3.22                                  | 3.27  | 3.43  | 3.77   | 3.88  | 3.95  | 4.19  | 4.70      | 19" | 30" | 24" |     |  |  |  |  |      |      |                           |
| 24"  | 38"  | 5.1               | 10.2 | 15.3 | 20.4  | 2'-8"      | 1'-5"  | 6'-3"      | 2'-1"  | 1'-5"  | 2'-9"     | 5'-2"  | 5'-2"  | 5'-4"   | 6'-0"  | 7'-4"  | 2.64   | 3.55  | 3.58  | 3.69  | 3.93   | 4.48                                  | 4.54  | 4.77  | 5.24   | 5.39  | 5.49  | 5.82  | 6.53      | 24" | 38" | 30" |     |  |  |  |  |      |      |                           |
| 29"  | 45"  | 7.4               | 14.8 | 22.2 | 29.6  | 3'-1"      | 1'-6"  | 7'-0"      | 2'-2"  | 1'-6"  | 3'-6"     | 6'-0"  | 6'-0"  | 6'-3"   | 6'-11" | 8'-6"  | 3.32   | 4.48  | 4.52  | 4.66  | 4.96   | 5.64                                  | 5.72  | 6.00  | 6.60   | 6.80  | 6.92  | 7.34  | 8.24      | 29" | 45" | 36" |     |  |  |  |  |      |      |                           |
| 34"  | 53"  | 10.2              | 20.4 | 30.6 | 40.8  | 3'-6"      | 1'-7"  | 7'-11 1/2" | 2'-3"  | 1'-7"  | 4'-5 1/2" | 7'-1"  | 7'-1"  | 7'-4"   | 8'-2"  | 10'-0" | 4.24   | 5.76  | 5.81  | 6.00  | 6.39   | 7.29                                  | 7.40  | 7.76  | 8.55   | 8.81  | 8.97  | 9.52  | 10.70     | 34" | 53" | 42" |     |  |  |  |  |      |      |                           |
| 38"  | 60"  | 12.9              | 25.8 | 38.7 | 51.6  | 3'-10"     | 1'-8"  | 8'-9"      | 2'-4"  | 1'-8"  | 5'-3"     | 7'-11" | 7'-11" | 8'-2"   | 9'-2"  | 11'-2" | 5.22   | 7.16  | 7.23  | 7.46  | 7.96   | 9.10                                  | 9.24  | 9.70  | 10.71  | 11.05 | 11.25 | 11.95 | 13.46     | 38" | 60" | 48" |     |  |  |  |  |      |      |                           |
| 43"  | 68"  | 16.6              | 33.2 | 49.8 | 66.4  | 4'-3"      | 1'-10" | 9'-8 1/2"  | 2'-6"  | 1'-10" | 6'-2 1/2" | 8'-10" | 8'-10" | 9'-2"   | 10'-2" | 12'-6" | 6.63   | 9.01  | 9.09  | 9.38  | 10.00  | 11.39                                 | 11.56 | 12.13 | 13.36  | 13.77 | 14.02 | 14.88 | 16.73     | 43" | 68" | 54" |     |  |  |  |  |      |      |                           |
| 48"  | 76"  | 20.5              | 41.0 | 61.5 | 82.0  | 4'-8"      | 2'-1"  | 10'-8"     | 2'-9"  | 2'-0"  | 7'-2"     | 9'-9"  | 9'-9"  | 10'-1"  | 11'-3" | 13'-9" | 8.66   | 11.74 | 11.85 | 12.22 | 13.02  | 14.82                                 | 15.04 | 15.77 | 17.37  | 17.91 | 18.23 | 19.34 | 21.74     | 48" | 76" | 60" |     |  |  |  |  |      |      |                           |
| 53"  | 83"  | 24.8              | 49.6 | 74.4 | 99.2  | 5'-1"      | 2'-6"  | 11'-7"     | 3'-2"  | 2'-6"  | 8'-1"     | 10'-7" | 10'-7" | 10'-11" | 12'-3" | 15'-0" | 12.50  | 16.98 | 16.98 | 17.67 | 18.83  | 21.47                                 | 21.78 | 22.86 | 25.18  | 25.97 | 26.44 | 28.06 | 31.55     | 53" | 83" | 66" |     |  |  |  |  |      |      |                           |
| 58"  | 91"  | 29.5              | 59.0 | 88.5 | 118.0 | 5'-6"      | 2'-10" | 12'-6 1/2" | 3'-6"  | 2'-10" | 9'-0 1/2" | 11'-4" | 11'-4" | 11'-9"  | 13'-1" | 16'-0" | 16.46  | 22.26 | 22.46 | 23.16 | 24.66  | 28.05                                 | 28.46 | 29.85 | 32.85  | 33.85 | 34.46 | 36.55 | 41.05     | 58" | 91" | 72" |     |  |  |  |  |      |      |                           |

C:\project\standards\roadway\00200-s\00250-02.dgn 6/24/2013 4:48:30 PM smg70re