

Junction Box Pole Plate With Steel Band (Or Method Approved By The Engineer) – 1" Chamfer Conduit Bolts (Rigid) Grade Grounding Electrode

POLE MOUNTED

BASE MOUNTED

Cabinet

Junction

Вох

INTERCONNECT JUNCTION BOX

Ground

Line Or

Grade

POLE MOUNTED CABINET

Liquidtight flexible conduit is approved for use from the electrical disconnect to the cabinet when both are installed on the same pole.

Cabinet


1" Chamfer

\* If holes for cabinet mounting require relocation, original holes shall be filled in with concrete or covered with a noncorrosive cover plate.



1. The number, size and orientation of conduit sweep will vary according to site condition or locations. Two spare 2" PVC conduits shall be provided in all bases. The spares shall exit in the direction of the center rear of the cabinet base, into a pullbox and capped with a weathertight fitting. If obstructions prevent the spare conduit from exiting to the rear, or the rear of the cabinet is located on the R/W line, a side exit of the spare conduits will have to be approved by the project engineer. All spare conduit sweeps shall be capped with a weatherproof fitting.

installation procedures are located at: http://www.dot.state.fl.us/TrafficOperations/Doc\_Library /Doc\_Library.shtm for Generator Power for Signalized

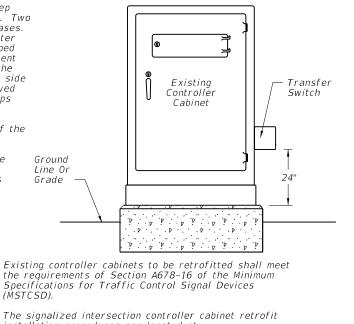

Cabinet Generator 2. Meet all grounding rquirements of Section 620 of the Standard Specifications. Panel 3. New Controller Cabinet installation shall meet the requirements of Section A676-1 of the Minimum 30" Max. Specifications for Traffic Control Signal Devices Existing controller cabinets to be retrofitted shall meet the requirements of Section A678-16 of the Minimum Specifications for Traffic Control Signal Devices Service Slab (Slope 1/4" To 1" For

REVISION 07/01/13

≥ DESCRIPTION:

Ground Line Or Grade

Conduit

Restricted.

FDOT 2014 **DESIGN STANDARDS** 

Drainage) Not Required In Sidewalk Or Pavement Areas Or Where R/W Is

CABINET INSTALLATION DETAILS

INDEX NO. 17841

PEDESTAL MOUNTED

18"

SHEET NO. 1 of 1

6" Min.

Grounding Electrode