
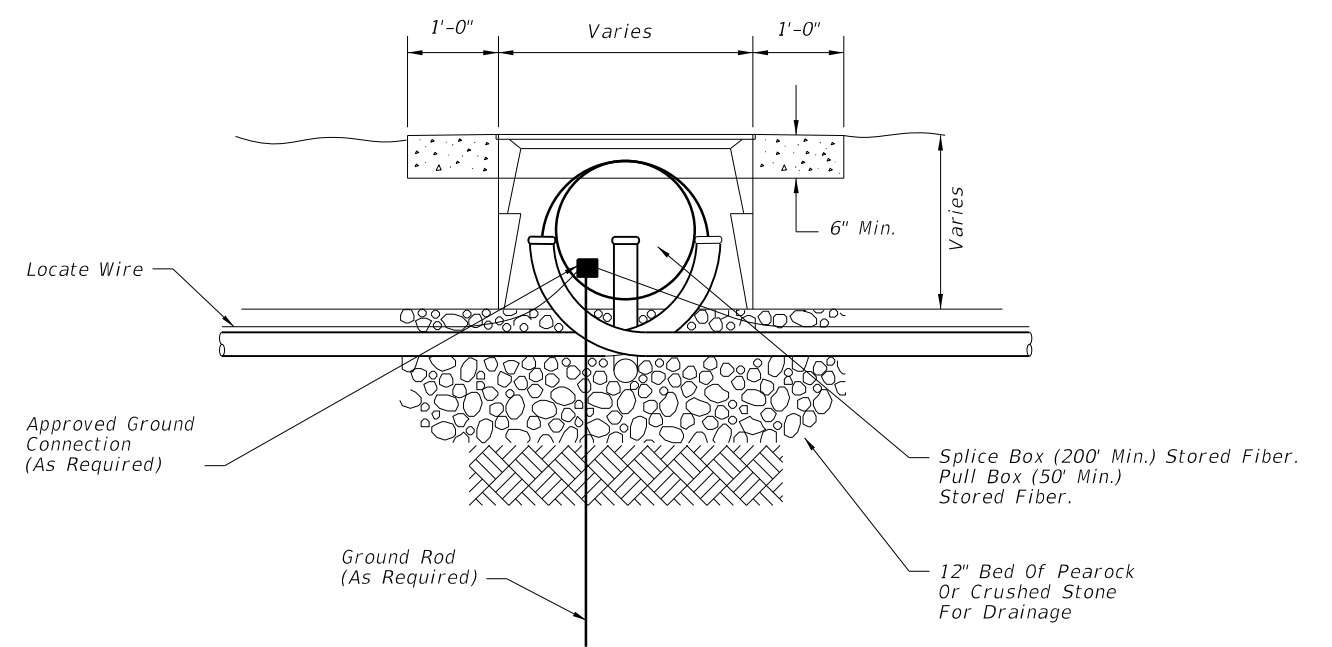


PULL BOX

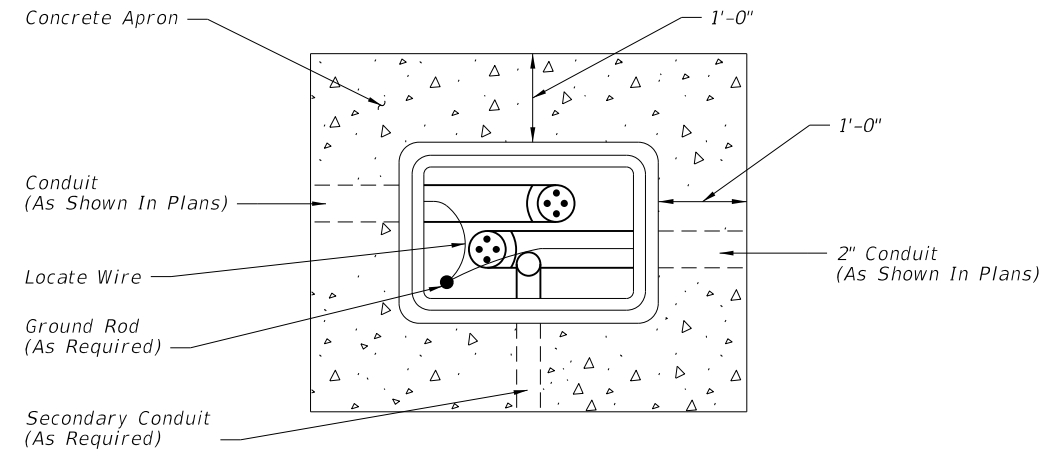


Rectangular boxes are depicted. Round fiber optic splice boxes and lids are allowed.

FIBER OPTIC BOX


1. Boxes shall not be installed in roadways or driveways.
2. Boxes shall be on the Approved Product List (APL).
3. Boxes shall be installed flush with the finished grade surface.
4. Fiber Optic splice boxes shall be provided with cable hanger racks designed to support cables and splice enclosures. Cost of racks to be included in cost of splice box.
5. Fiber optic boxes shall contain only Fiber Optic Cable, Conduit, and Locate Wire.

6. Conduit center line shall be aligned to top edge of box to facilitate cable pulling.
7. All boxes shall have 1'-0" wide (min) concrete apron. Concrete for concrete aprons shall be Class NS with a minimum strength at 28 days of $f'c=2.5$ Ksi. Aprons shall be sloped away from box. Cost of apron to be included in the cost of each box.
8. Prevent the ingress of Water, Dirt, Sand, and other foreign materials into the conduit prior to, during and after construction using a foam-sealing material, rubber plug, or other device designed for this application and approved.

C:\projects\standards\roadway\17700-s\17700-01.dgn
smg70re
4:09:29 PM
6/24/2013

LAST REVISION 07/01/13	REVISION	DESCRIPTION:	 FDOT 2014 DESIGN STANDARDS	PULL AND SPLICE BOX	INDEX NO. 17700	SHEET NO. 1 of 1
------------------------------	----------	--------------	--	----------------------------	------------------------------	-------------------------------

C:\projects\standards\roadway\17700-s\17721-01.dgn
 sm970re
 4:09:31 PM
 6/24/2013

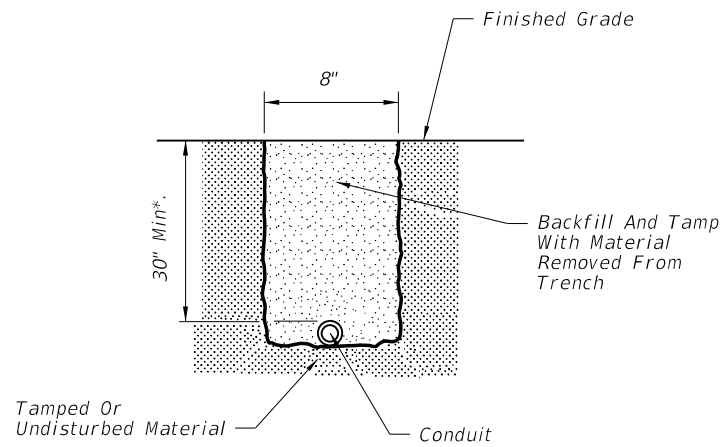


FOR USE IN AREAS NOT EXPOSED TO VEHICULAR TRAFFIC

FIGURE A

Note:

1. Sidewalk patches to match existing joints.
2. Entire sidewalk slab must be replaced when specified in the plans.
3. Backfill and tamp with material from trench except at driveways. At driveways, backfill a length of trench within the driveway entirely with Flowable Fill.

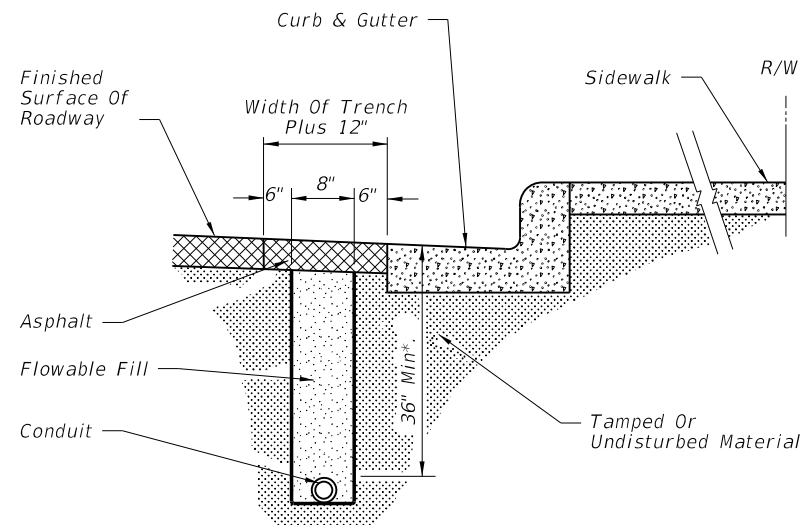


FOR USE IN ASPHALT ROADWAY ADJACENT TO GUTTER WHEN PLACEMENT OUTSIDE OF THE PAVEMENT IS NOT FEASIBLE.

FIGURE B

Note:

1. Trench not to be open more than 250' at a time when construction area is subject to vehicular or pedestrian traffic.
2. Asphalt to be sawcut to leave neat lines at the pavement cut.
3. See note 3 Figure C.

*May be adjusted due to field conditions upon approval of project engineer.

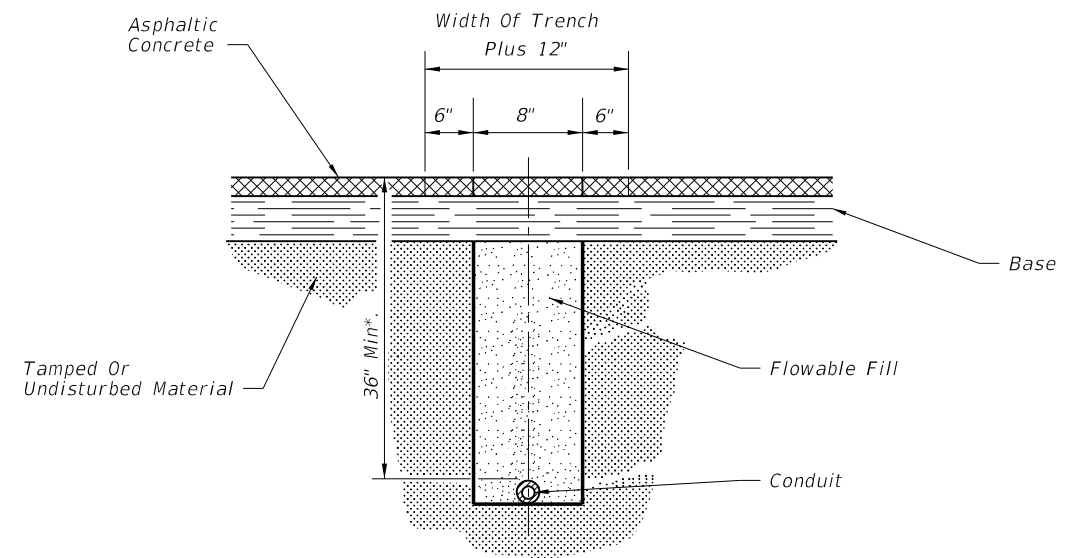


FOR USE IN INSTALLING CONDUIT UNDER EXISTING ASPHALT PAVEMENT NOT ADJACENT TO GUTTER WHEN JACKING OR DIRECT BORING IS NOT FEASIBLE.

FIGURE C


Note:

1. Rigid conduit must be used when jacking under existing pavement at 36" minimum depth.
2. Asphalt to be sawcut at the edges of the trench.
3. The removal and replacement of the additional pavement width (6") will not be required when the trench can be constructed without disturbing the asphalt surface on either side.

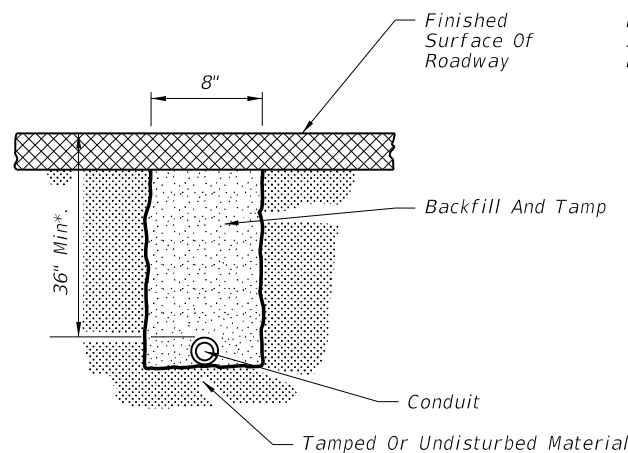


FOR USE INSTALLING CONDUIT UNDER A NEW ROADWAY PRIOR TO INSTALLATION OF BASE AND PAVEMENT

FIGURE D

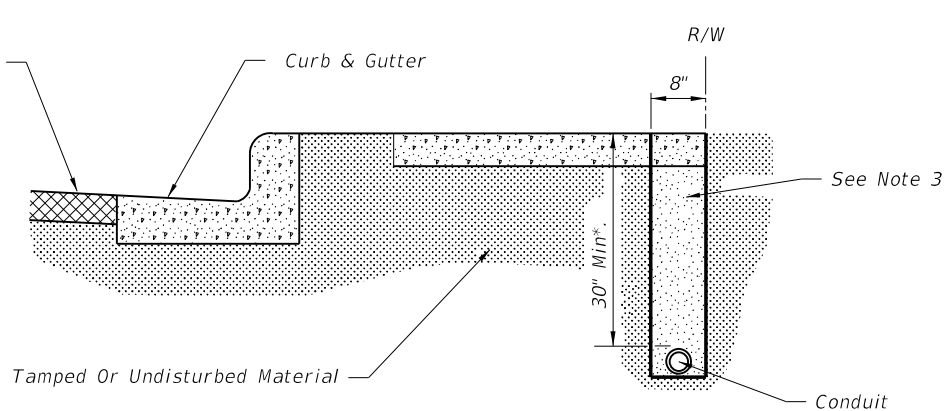

FOR USE IN INSTALLING CONDUIT UNDER SIDEWALK

FIGURE E

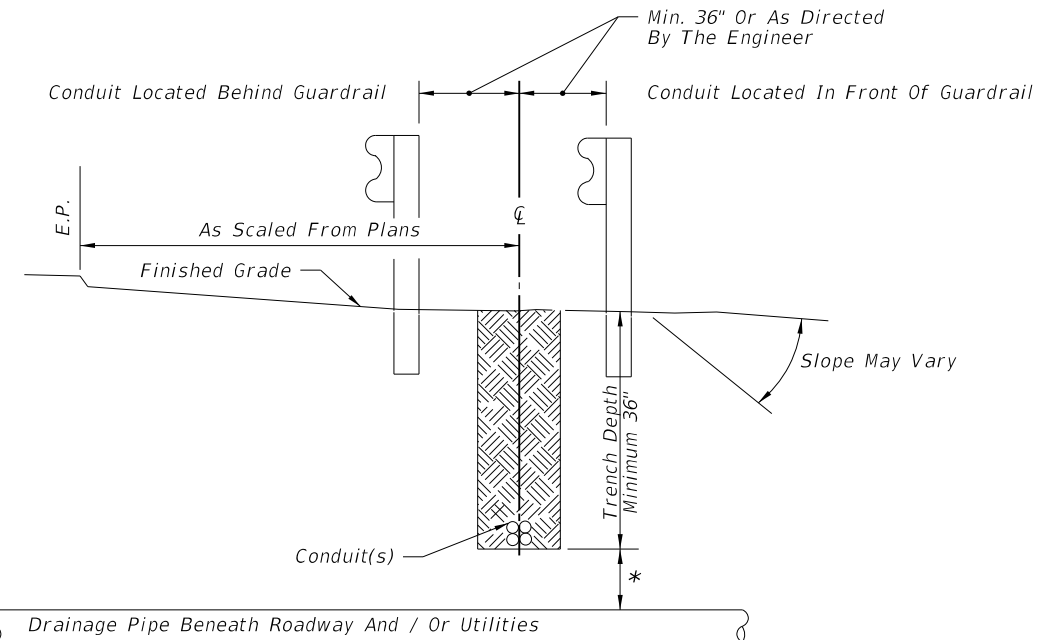


* Maintain 12" Minimum Vertical Clearance When Crossing Over Pipe And / Or Utilities. If Minimum Vertical Clearance Cannot Be Maintained, Then Conduit Is To Be Routed Under Pipe Maintaining 12" Minimum Vertical Clearance.

FIGURE F

LAST REVISION
07/01/13

DESCRIPTION:




FDOT 2014
DESIGN STANDARDS

CONDUIT INSTALLATION DETAILS


INDEX NO.
17721

SHEET NO.
1 of 2

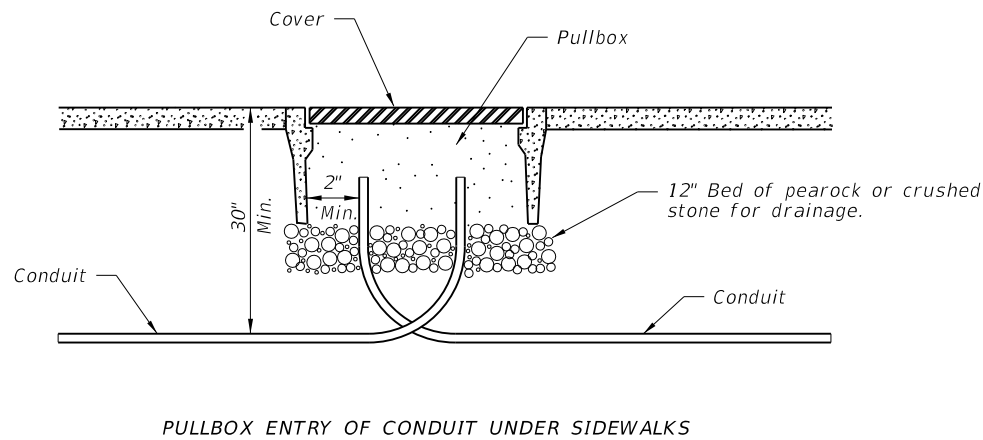


PULLBOX ENTRY OF CONDUIT UNDER SIDEWALKS

FIGURE A

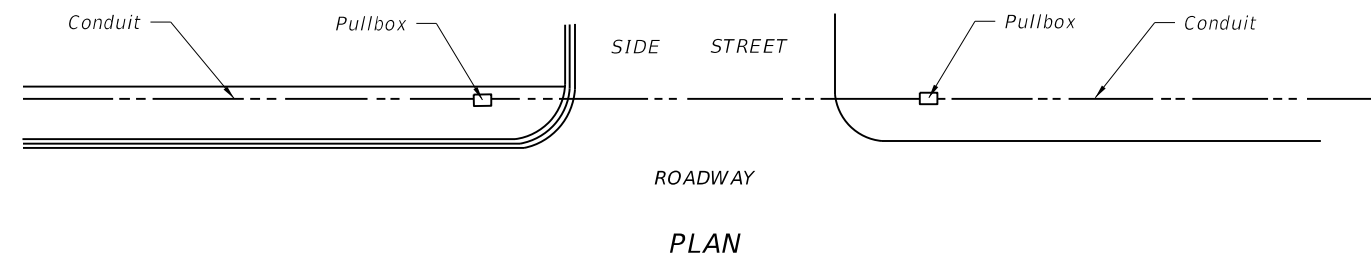

PLAN

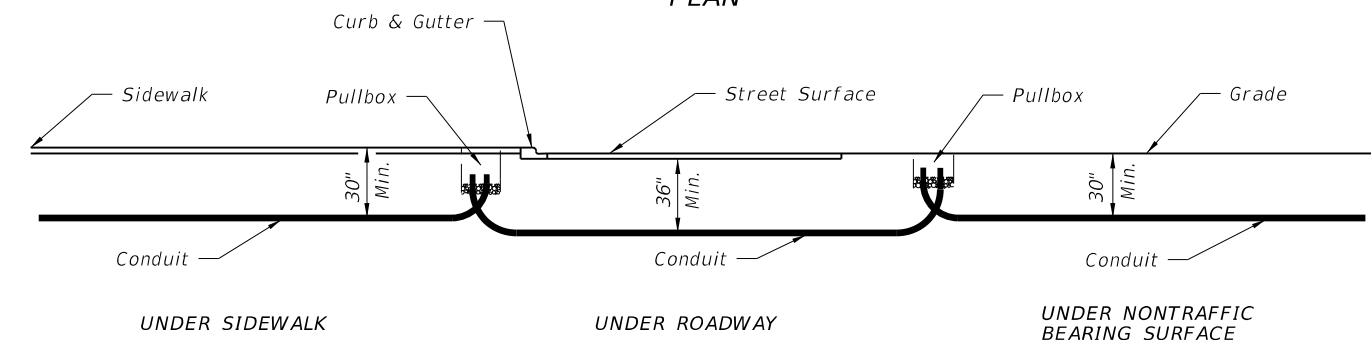


SECTION



FIGURE B

FIGURE C


FOR USE UNDER RAILROADS

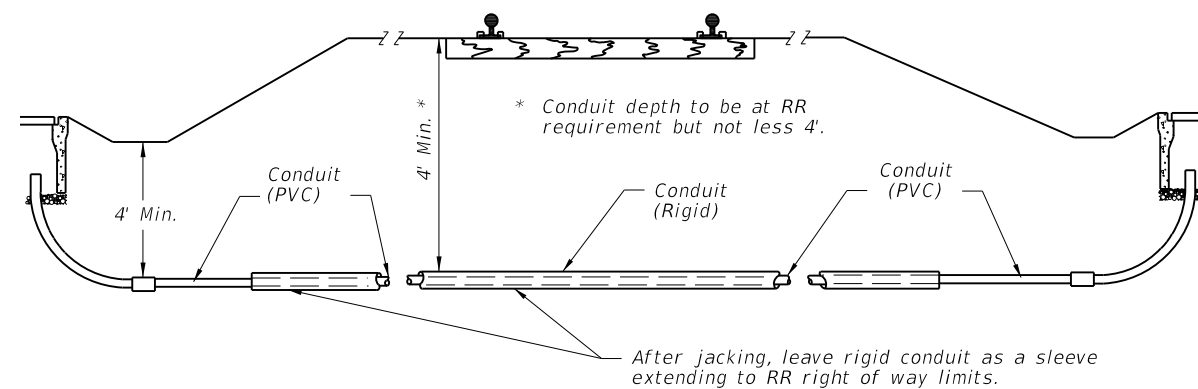

Note:
Ends of conduit shall be sealed in accordance with Section 630 of the Standard Specifications for Road and Bridge Construction.

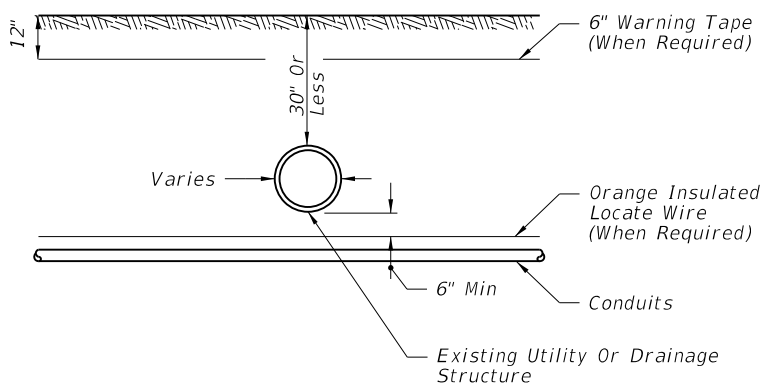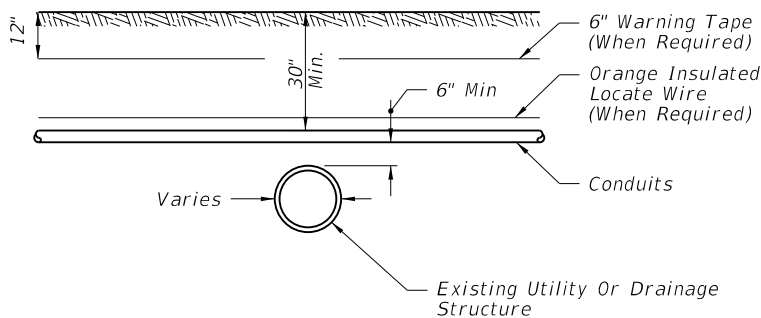

CONDUIT INSTALLATION DETAILS ACROSS EXISTING DRAIN PIPES OR UTILITIES

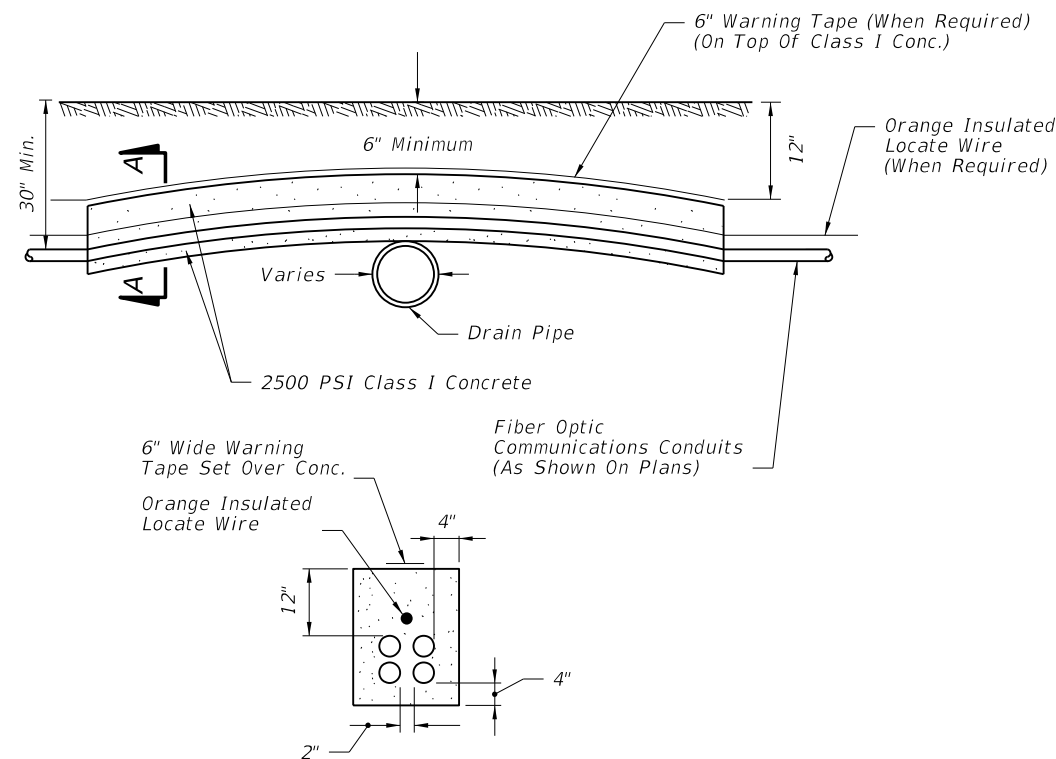


SECTION AA

GENERAL NOTES:


1. The contractor, with approval from the Engineer, may adjust the final burial depth of the conduit(s) in order to transverse nonmovable object conflicts.
2. Backfill with excavated material and compact the soil until firm and unyielding. Remove rock and debris from backfill material.
3. Where conduits are to be installed over existing underground structures (e.g., drain pipes or utility lines) which are less than 30" deep, the contractor shall encase the conduit in 2500 PSI Class I concrete for the entire length of conduit that is installed at a depth of less than 30".
4. If the amount of cover over the encasement is less than 6", the contractor shall install the conduit to pass below the underground structures (e.g., drain pipes).

C:\projects\standards\roadway\17700-s\17721-02.dgn sm970re 4:09:33 PM 6/24/2013

LAST REVISION 07/01/13	DESCRIPTION:	 <p>FDOT 2014 DESIGN STANDARDS</p>	<p>CONDUIT INSTALLATION DETAILS</p>	INDEX NO. 17721	SHEET NO. 2 of 2


STEEL STRAIN POLE NOTES

- 1) Designed in accordance with *FDOT Structures Manual*.
- 2) Perform all welding in accordance with the *American Welding Society Structural Welding Code (Steel) ANSI/AWS D1.1* (current edition). For additional welding requirements see *AASHTO Standard Specification for Structural Supports for Highway Signs, Luminaires and Traffic Signals, Section 5.15, Welded Connections*.
- 3) See *Standard Index No. 17727* for grounding and span wire details.
- 4) **Foundation Materials:**
 - a. Reinforcing Steel: ASTM A615 Grade 60.
 - b. Concrete: Class IV, (Drilled Shaft) 4,000 psi (f'c) minimum Compressive Strength at 28-days for all environmental classifications.
 - c. Anchor Bolts: ASTM F1554 Grade 55 with ASTM A563 Grade A heavy-hex nuts and plate washers (all galvanized in accordance with ASTM F2329).
- 5) **Strain Pole Specifications:**
 - a. Poles: ASTM A1011 Grade 50, 55, 60 or 65 (less than 1/4") or ASTM A572 Grade 50, 55, 60, or 65 (1/4" and over) or ASTM A595 Grade A (55 ksi yield) or Grade B (60 ksi yield).
 - b. Steel Plates: ASTM A36.
 - c. Weld Metal: E70XX.
 - d. Bolts: A325, Type 1, Hole Diameter: Bolt diameter plus 1/16".
 - e. Base Plate: Hole Diameter; anchor bolt diameter plus 1/2".
 - f. Handhole: Frame; ASTM A709 Grade 36 or ASTM A36, Cover; ASTM A1011 Grade 50, 55, 60 or 65.
 - g. Aluminum Caps and Covers: ASTM B-26 (319-F).
 - h. Stainless Steel Screws: AISI Type 316.
 - i. Galvanization: All nuts, bolts and washers; ASTM F2329, All other steel; ASTM A123.
- 6) **Pole Notes:**
 - a. See the *Signalization Plans* for clamp spacing, cable sizes and forces, signal and sign mounting locations and details.
 - b. Tapered with the diameter changing at a rate of 0.14 inch per foot.
 - c. Transverse welds are allowed only at the base.
 - d. Poles constructed out of two or more sections with overlapping splices are not permitted.
 - e. Locate the handhole 180 degrees from 2-inch wire entrance pipe.
 - f. Furnish each pole with a 2"x4" (max) aluminum identification tag. Submit details for approval. Secure to pole with 0.125" stainless steel rivets or screws. Locate Identification Tag on the inside of pole and visible from handhole. Include the following information:
Financial Project ID, Pole Type, Pole Height, Manufacturer's Name, Fy of Steel and Base Wall Thickness.
- 7) This Design Standard is considered fully detailed and no shop drawings are necessary. Submit shop drawings for minor modifications not detailed in the plans.
- 8) Verify CSL access tubes will not interfere with anchor bolt installation before excavating the shaft. When CSL access tube locations conflict with anchor bolt locations, move the CSL access tube location ± two inches along the inner circumference of the reinforcing cage. Notify the Engineer before excavating the shaft if the CSL access tube locations cannot be moved out of conflict with anchor bolt locations.

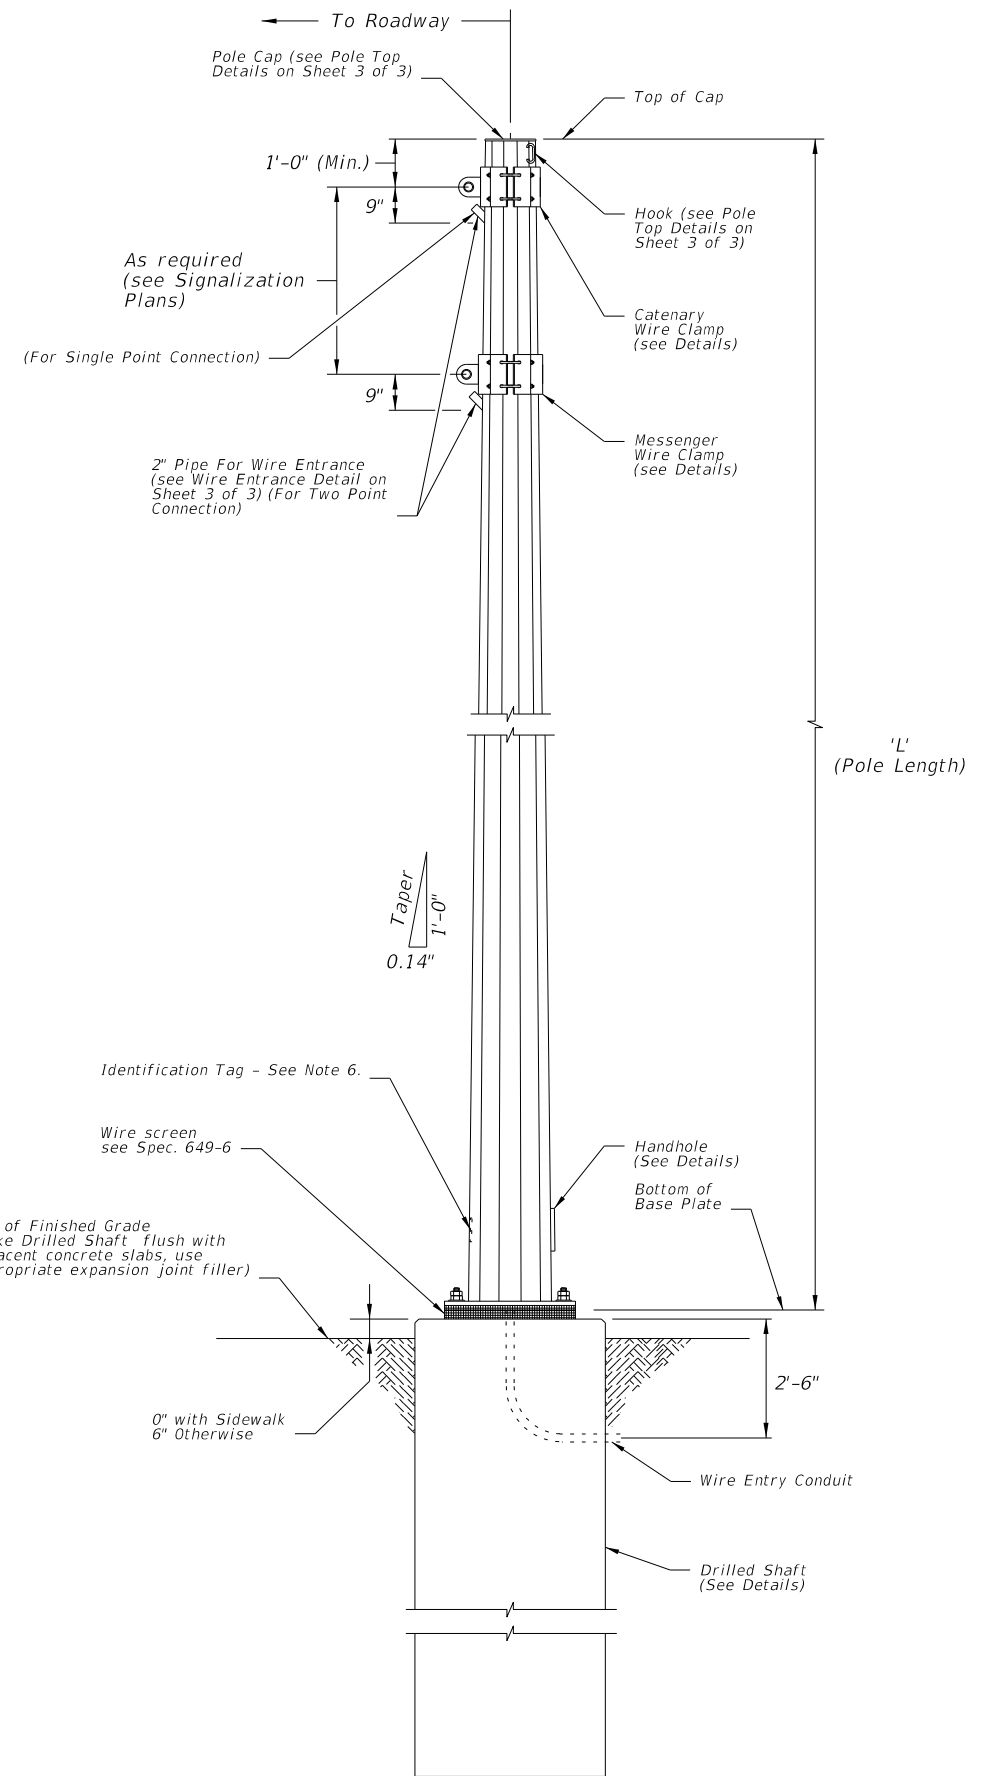


ELEVATION AND NOTES

C:\projects\standards\roadway\17700-s\17723-01.dgn smg70re 4:09:35 PM 6/24/2013


LAST REVISION 07/01/13	DESCRIPTION:	 <p>FDOT 2014 DESIGN STANDARDS</p>	<p>STEEL STRAIN POLE</p>	INDEX NO. 17723	SHEET NO. 1 of 3
----------------------------------	--------------	--	---------------------------------	---------------------------	----------------------------

6/24/2013 4:09:37 PM sm970re C:\projects\standards\roadway\17700-s\17723-02.dgn

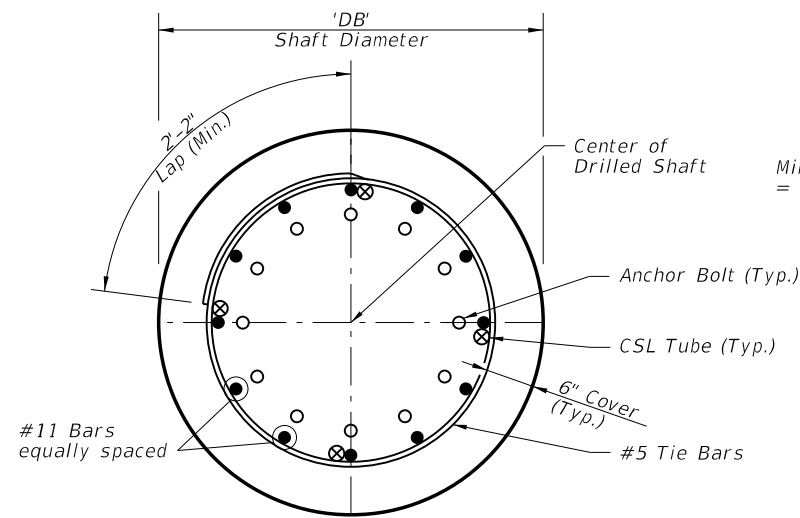


SECTION A-A


(Number of bars shown is for illustration purposes only)

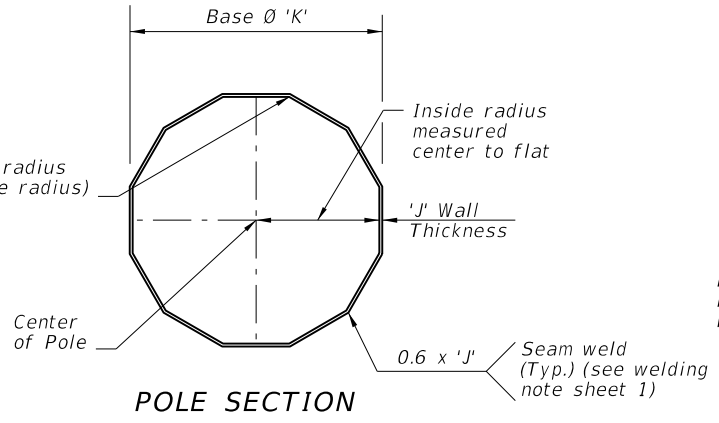


POLE SECTION

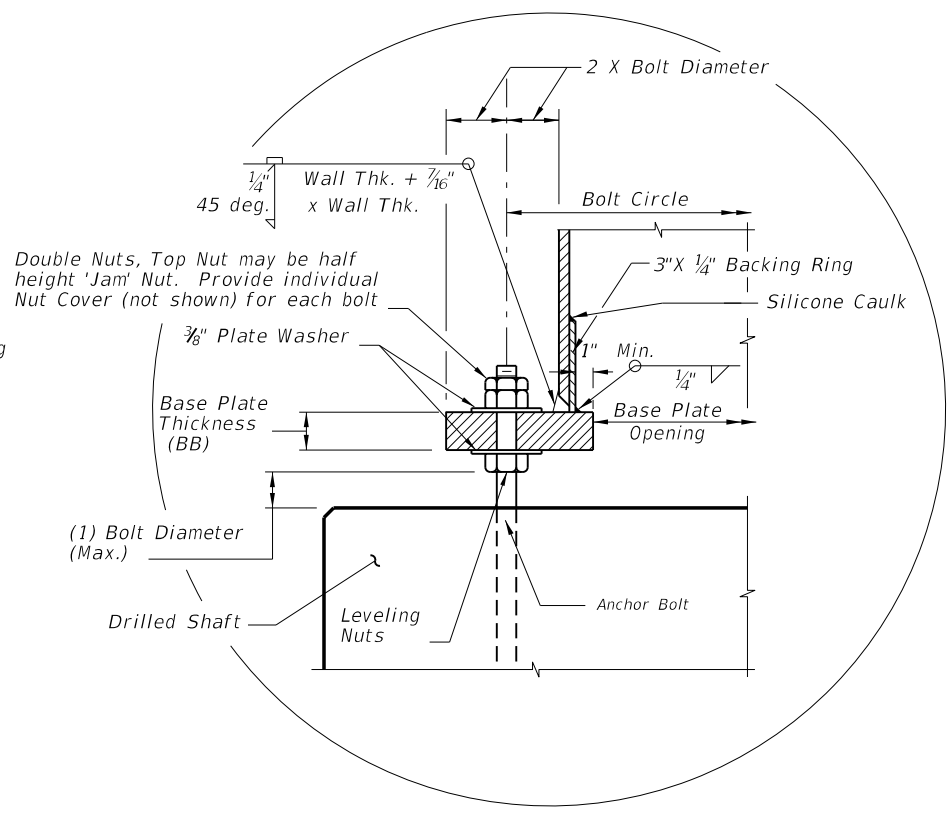

DETAIL C

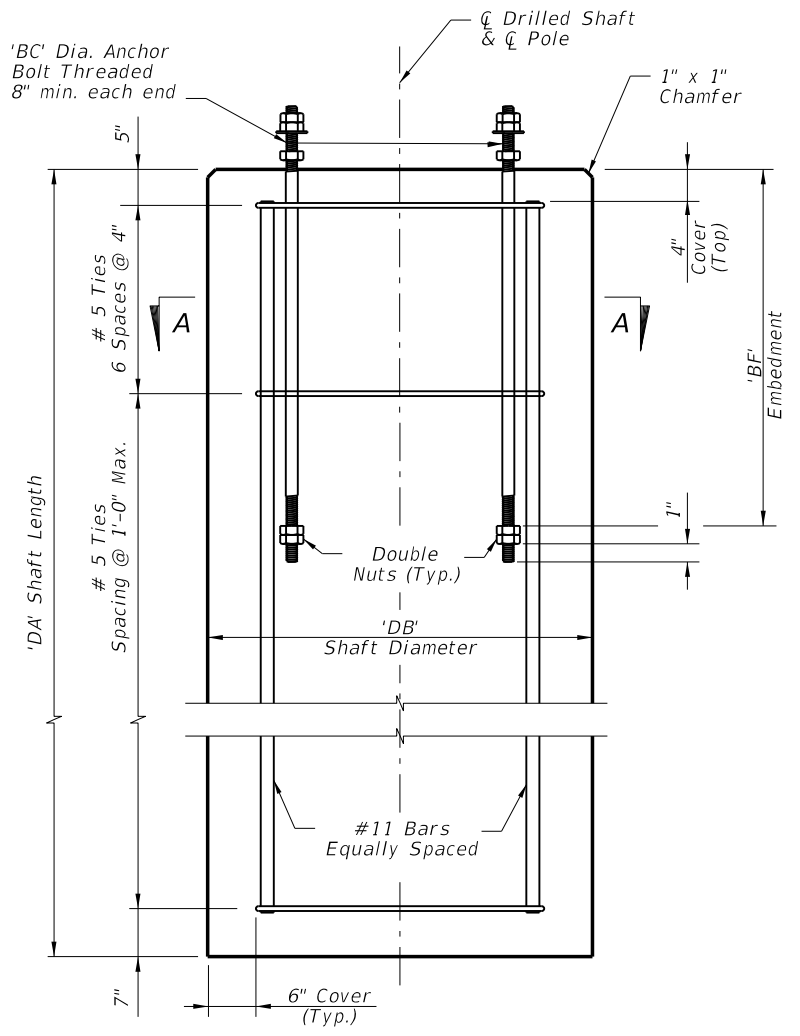


DRILLED SHAFT ELEVATION

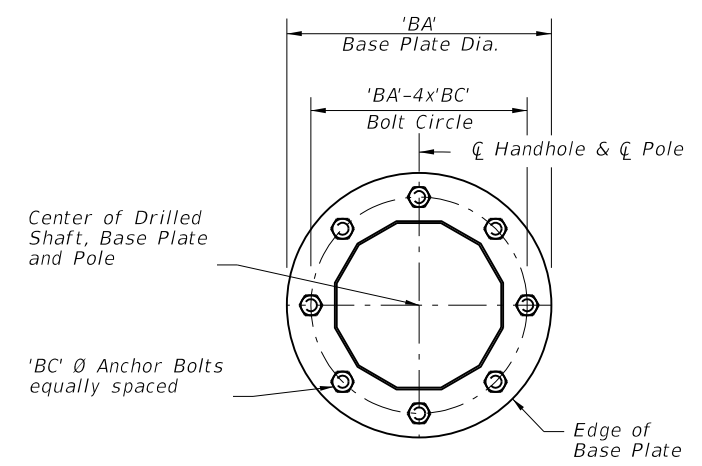

SECTION B-B

NOTE:
Number of bolts shown for illustration purposes only.

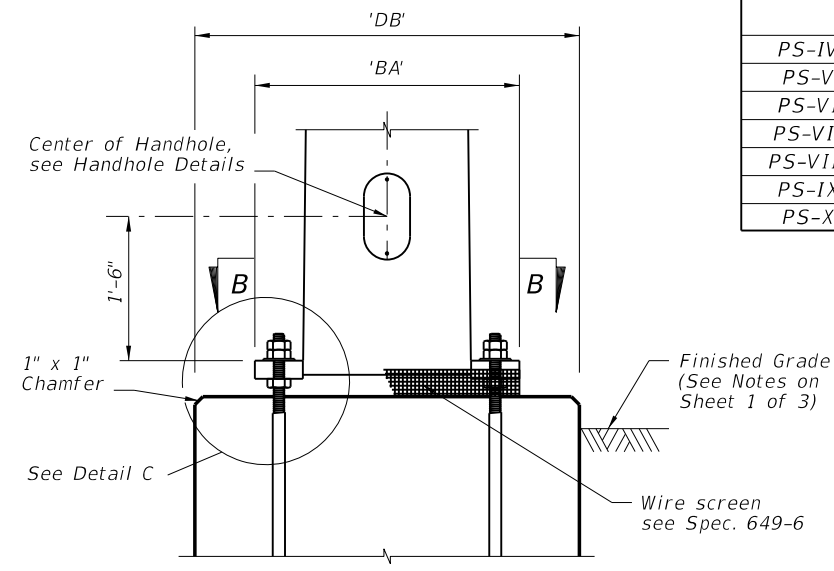

PARTIAL ELEVATION


(Showing Base Plate, Anchor bolts and Handhole)

POLE TYPE	MAXIMUM ALLOWABLE MOMENT (kip-ft)	POLE		BASE CONNECTION				SHAFT			
		J (in)	K (in)	No. of Bolts	BA (in)	BB (in)	BC (in)	BF (in)	DA (FT)	DB (FT)	No. of #11 bars
PS-IV	95.4	0.250	14	8	25	2.50	1 3/8	60	14	4	14
PS-V	158.9	0.313	16	10	28	2.50	1 1/2	60	15	4	14
PS-VI	203.6	0.313	18	12	30	2.50	1 1/2	60	16	4	14
PS-VII	280.3	0.313	21	14	33	2.50	1 1/2	60	16	4.5	16
PS-VIII	338.0	0.313	23	16	35	2.50	1 1/2	60	17	4.5	16
PS-IX	400.9	0.313	25	12	39	3.00	1 3/4	60	17	5	18
PS-X	469.1	0.313	27	14	41	3.00	1 3/4	60	18	5	18


FOUNDATION NOTES:
 The foundations for Steel Strain Poles are designed based upon the following conservative soil criteria which covers the great majority of soil types found in Florida:
 Classification = Cohesionless (Fine Sand)
 Friction Angle = 30 Degrees (30°)
 Unit Weight = 50 pcf (assumed saturated)
 Only in cases where the Designer considers the soil types at the specific site location to be of lesser strength properties should an analysis be required. Auger borings, SPT borings or CPT soundings may be utilized as needed to verify the assumed soil properties, and at relatively uniform sites, a single boring or sounding may cover several foundations. Furthermore, borings in the area that were performed for other purposes may be used to confirm the assumed soil properties.

BASE AND FOUNDATION DETAILS AND TABLE OF VARIABLES


Cable Diameter (in.)	Minimum Breaking Strength (kip)	Plate Thickness (in.)
1/2	25	1
7/16	18	7/8
3/8	11.5	3/4
1/4	3.15	3/8

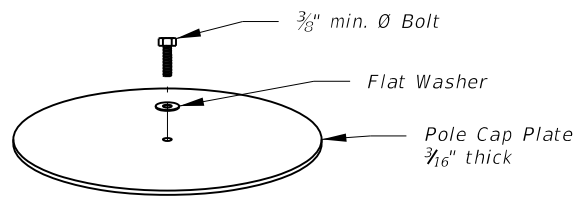


NOTE: A properly sized Service Head (Weather Head), shall be installed and fastened securely on to the standard pipe for each pole location. At locations other than service entrance, the service head face is to be left closed to outside atmosphere. Service entrance installation per Index No. 17727.

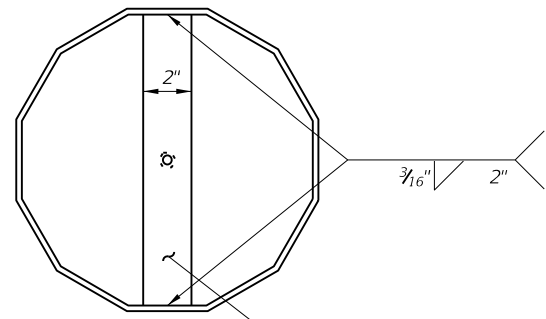

TOP VIEW

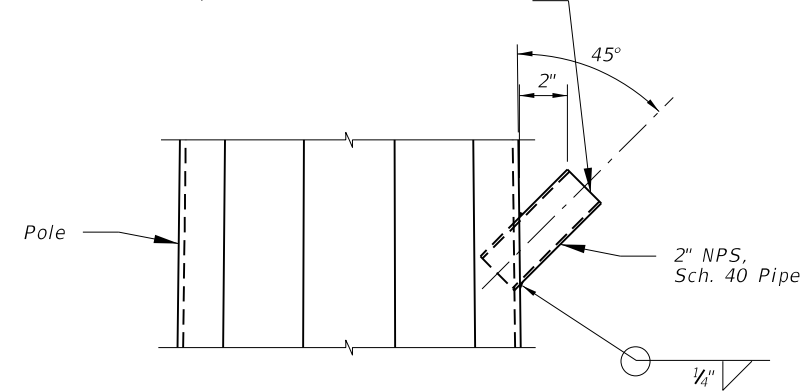


WIRE ENTRANCE DETAILS

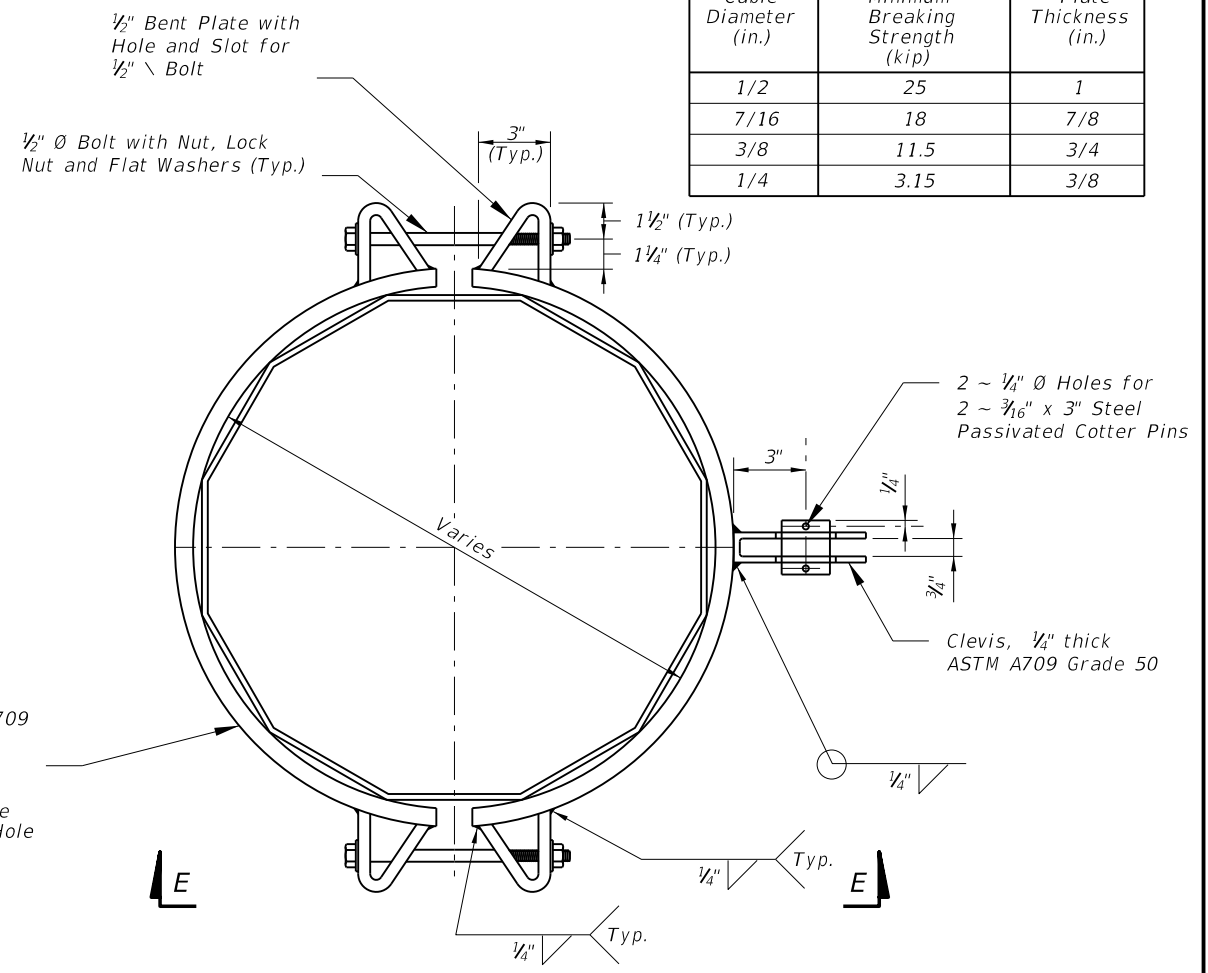


CATENARY AND MESSENGER WIRE CLAMPS

NOTE: Clamps have been sized for Design Cable Loads shown in the Table, and a Maximum Pole Diameter at the Clamp location of 2'-1".

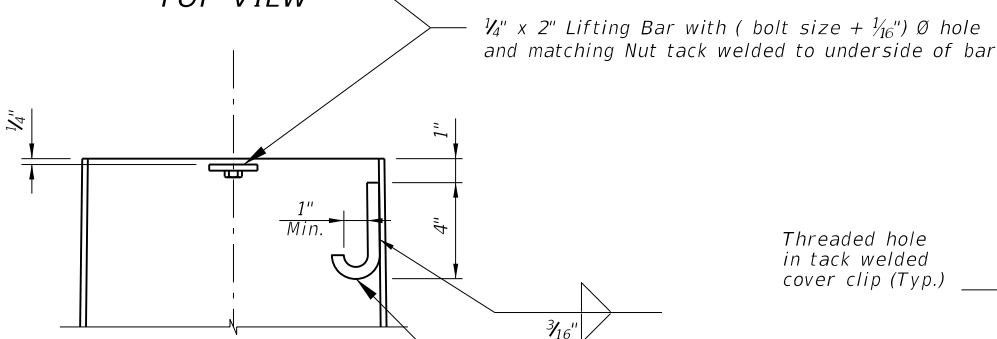


POLE TOP CUT-AWAY (Option 'a')

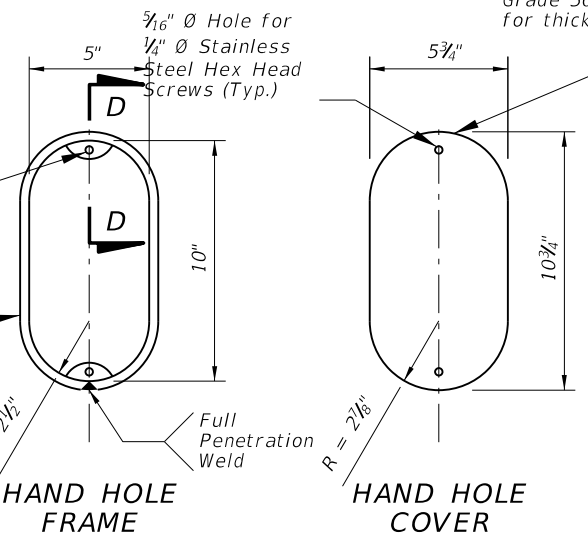


HAND HOLE FRAME


HAND HOLE COVER

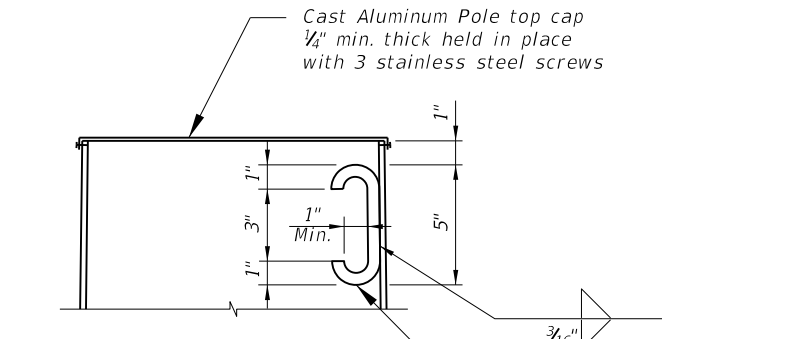

POLE TOP CUT-AWAY (Option 'b')

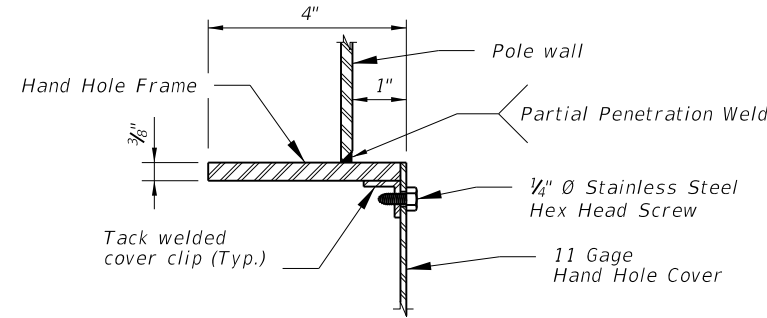

SECTION D-D (thru Hand Hole)

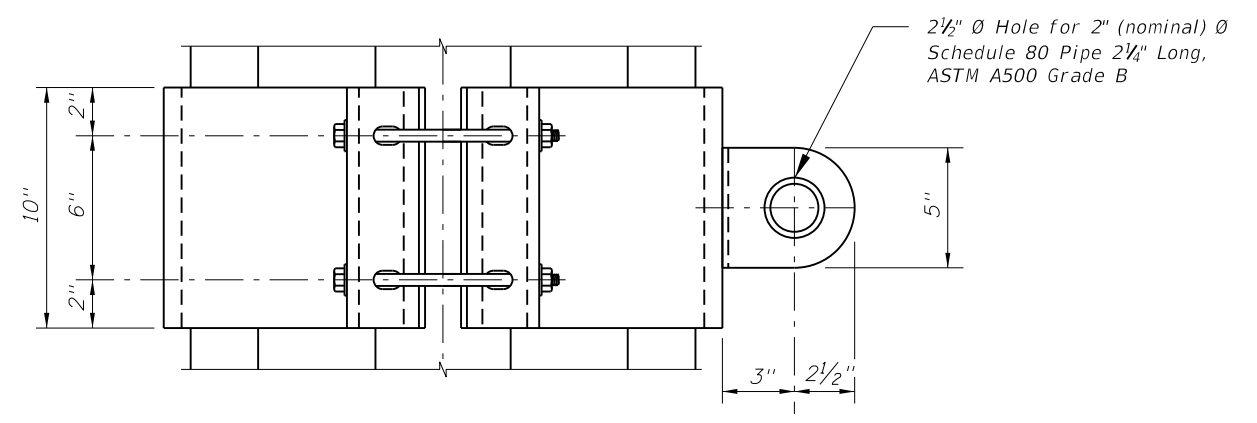


VIEW E-E

POLE TOP NOTE:
Any combination of the above two options may be used, provided both lifting and wiring is accommodated.

ATTACHMENT DETAILS

6/24/2013 4:09:39 PM sm970re C:\projects\standards\roadway\17700-s\17723-03.dgn

LAST REVISION 07/01/13	DESCRIPTION:	 <p>FDOT 2014 DESIGN STANDARDS</p>	STEEL STRAIN POLE	INDEX NO. 17723	SHEET NO. 3 of 3
REVISION					

GENERAL NOTES:

Materials:

Concrete: Class V Special or Class VI
6 ksi minimum at 28 days
4 ksi minimum at transfer

Prestressed Strands: ASTM A416 Grade 270
stress relieved or low relaxation

Spiral Reinforcing: ASTM A82 cold-drawn steel wire

Provide a minimum concrete cover of 1 inch.

For spiral reinforcing, one turn is required for splices and two turns are required at both the tip and butt ends of the pole.

The design Front Face and Back Face of poles may vary transversely from the section shown by $\pm 1/4"$ to assist with removal from forms. Balance addition and subtraction of face widths to maintain section areas shown.

Provide hand hole and coupler cover plates made of non-corrosive materials. Attach cover plates to poles using lead anchors or threaded inserts embedded in the poles in conjunction with round headed chrome plated screws.

Tie ground wires to the interior of reinforcing steel as necessary to prevent displacement during concreting operations.

Provide Aluminum Identification Markings on the poles where indicated on the following sheets. Include the following information using inset numerals with 1" height or as approved in the Producer's Quality Control Plan:

Financial Project ID
Pole Manufacturer
Standard Pole Type Number
Pole Length (L)

Pick-up and support locations shown may vary with a tolerance of $\pm 3"$.


This Design Standard is considered fully detailed and no shop drawings are necessary. Submit shop drawings for minor modifications not detailed in the plans.

Cut the tip end of the prestressed strand first or simultaneously with the butt end.


INSTALLATION NOTES:

If a two point attachment is required by the plans, provide an eye bolt hole for the messenger wire or field-drill at the location indicated in the plans. When required, field-drill the eyebolt hole for the tether wire prior to installation.


C:\projects\standards\roadway\17700-s\17725-01.dgn
sm970re
4:09:41 PM
6/24/2013

LAST REVISION 07/01/13	REVISION	DESCRIPTION:	 FDOT 2014 DESIGN STANDARDS	CONCRETE POLES	INDEX NO. 17725	SHEET NO. 1 of 8
---------------------------	----------	--------------	---	-----------------------	--------------------	---------------------


C:\projects\standards\roadway\17700-s\17725-02.dgn
 sm970re
 4:09:43 PM
 6/24/2013

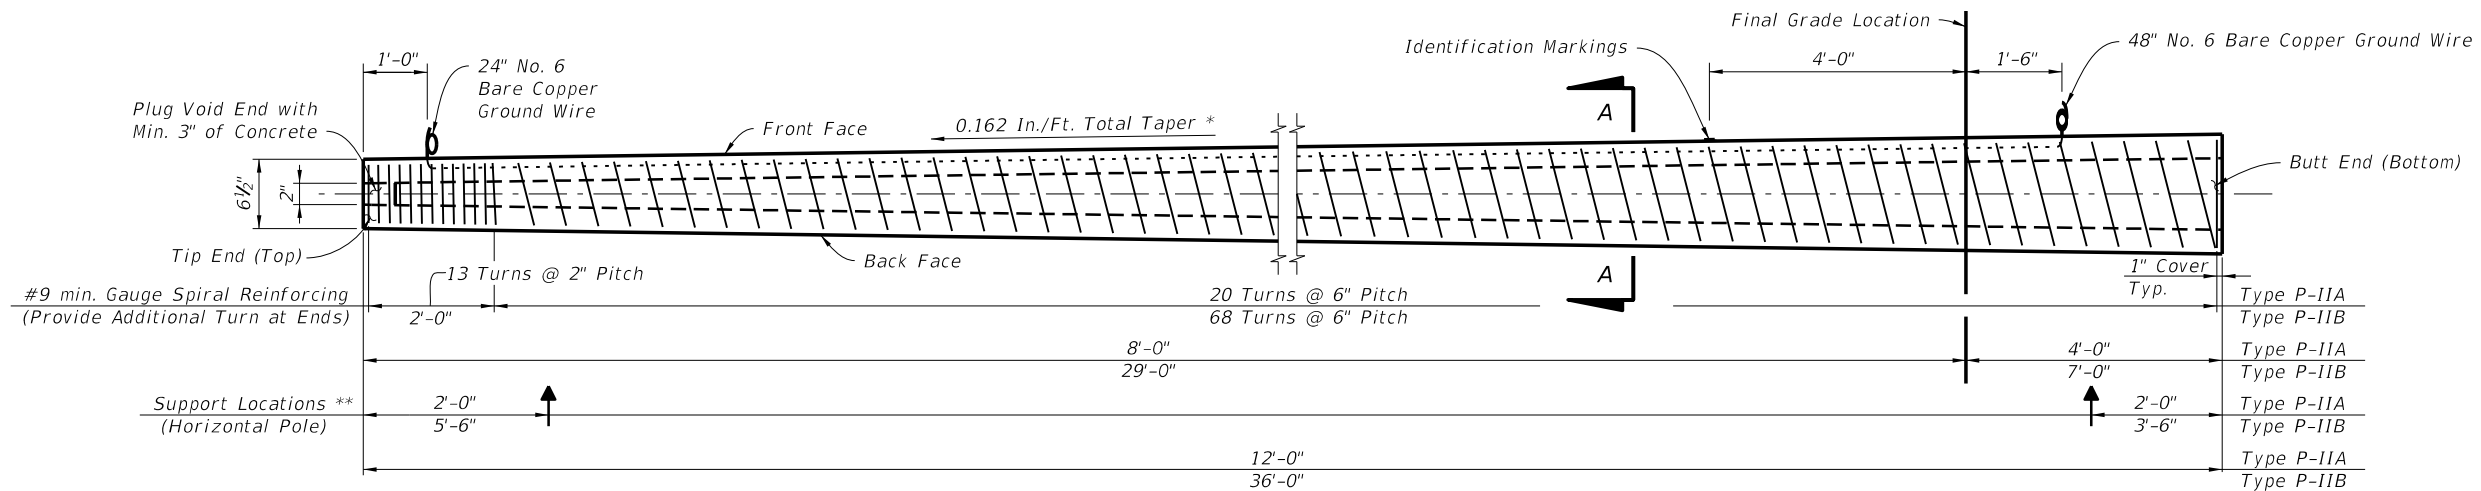

SERVICE POLE P-IIA (12 Ft.) & P-IIB (36 Ft.) ELEVATION
(Strands Not Shown)

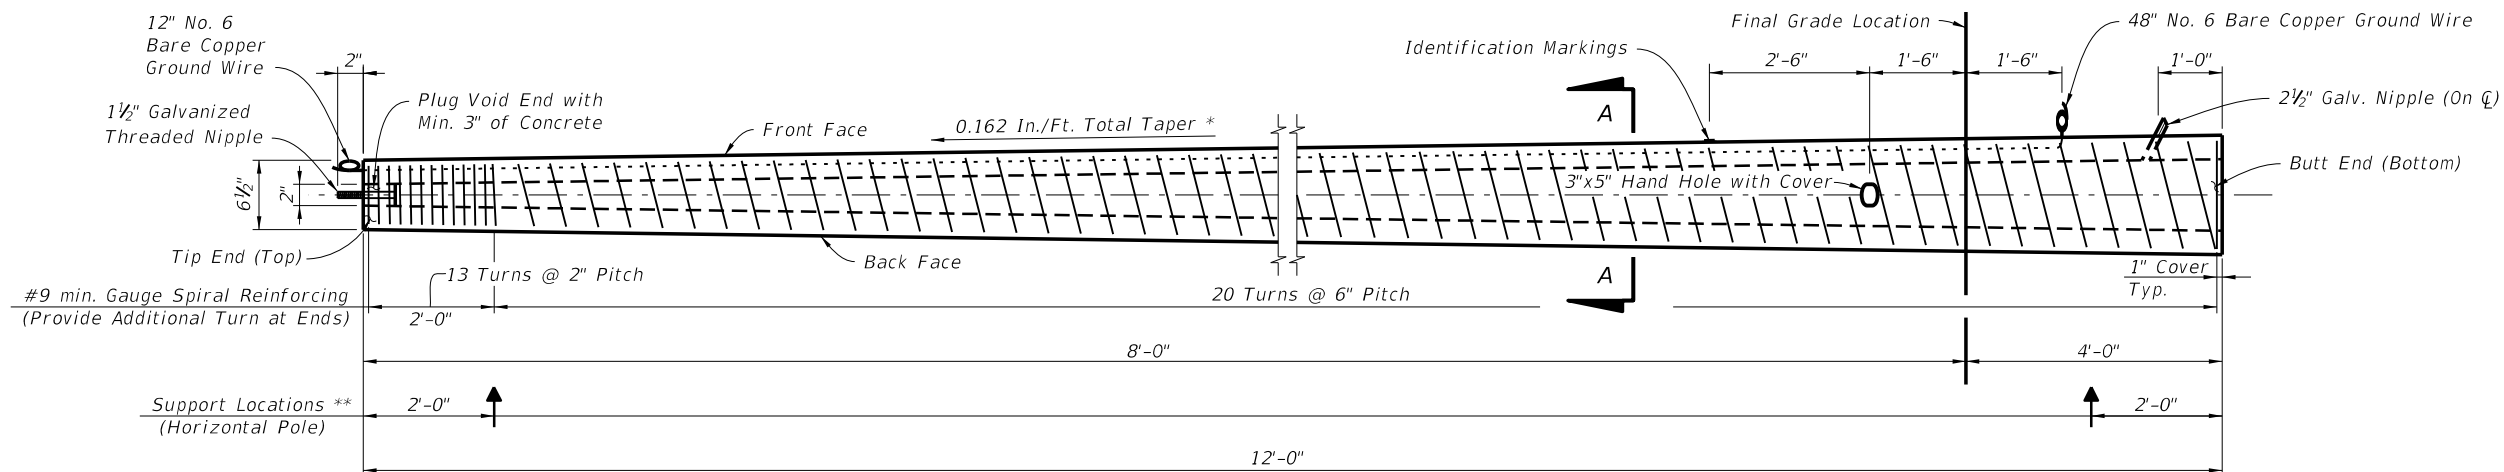


PEDESTAL POLE P-IIC (12 Ft.) ELEVATION
(Strands Not Shown)

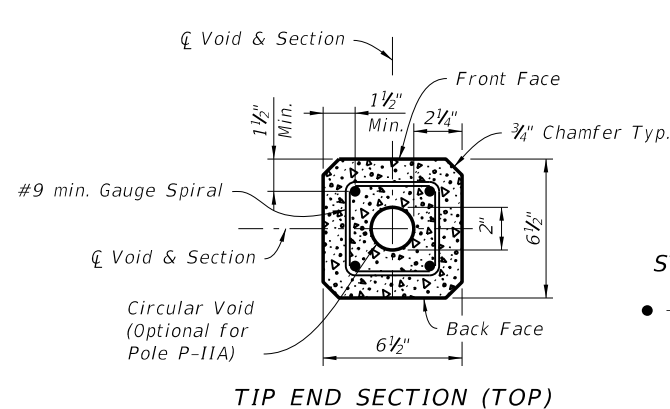

TIP END SECTION (TOP)

STRAND LEGEND

- - Prestressed Strand
0.5 In. Grade 270, LRS
24 Kips Before Transfer
or 0.375 In. Grade 270,
LRS 14 Kips Before
Transfer (4 strands total)

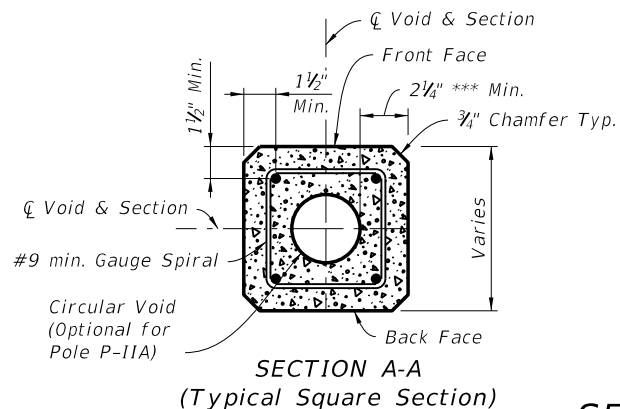


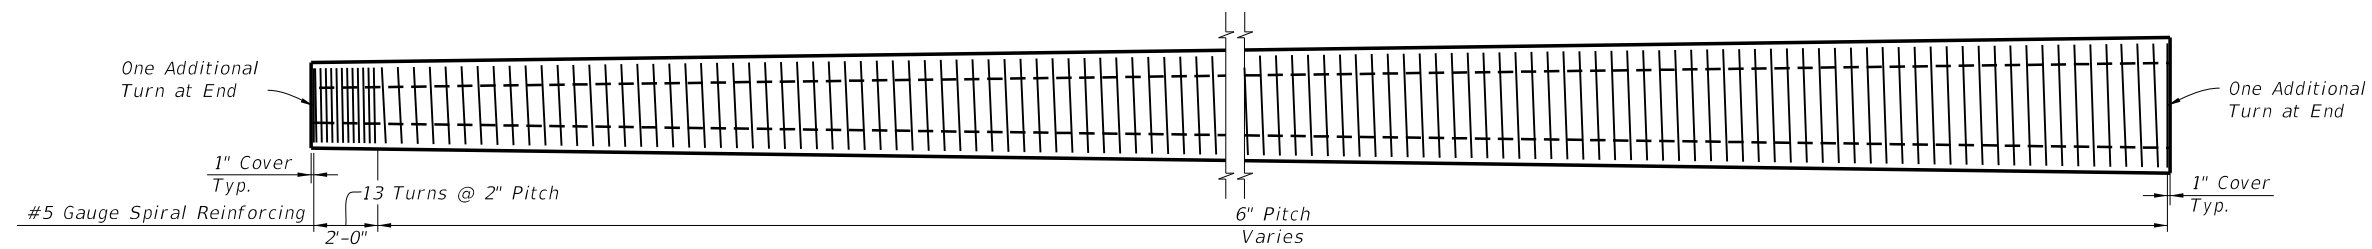
SECTION A-A
(Typical Square Section)

NOTES:


- Work this Index with the Strain Pole Schedule in the plans.
- Strands shown are continuous from Tip End to Butt End.
- Elevation view scale is exaggerated vertically for clarity.
- For final erection, tilt pole upright with single point attachment located a distance 4 Ft. (for P-IIA & P-IIC) or 10 Ft. (for P-IIB) from the Tip End face.
- * Taper includes pole width, strands, reinforcing and void. (0.081 In./Ft. per face)
- ** Support locations are for strand release, storage, lifting and transport. Keep Back Face oriented downward until final erection.
- *** Dimension may vary from 2 1/4" to 3 1/2" to accommodate smaller radius of optional stepped (PVC) void. The void diameter shall not be less than 2".

SERVICE AND PEDESTAL POLE TYPE P-II


LAST REVISION 07/01/13	REVISION	DESCRIPTION:	 FDOT 2014 DESIGN STANDARDS	CONCRETE POLES	INDEX NO. 17725	SHEET NO. 2 of 8
---------------------------	----------	--------------	--	-----------------------	---------------------------	----------------------------



SPIRAL REINFORCING ELEVATION
(Strands, Holes, and Fixtures Not Shown)

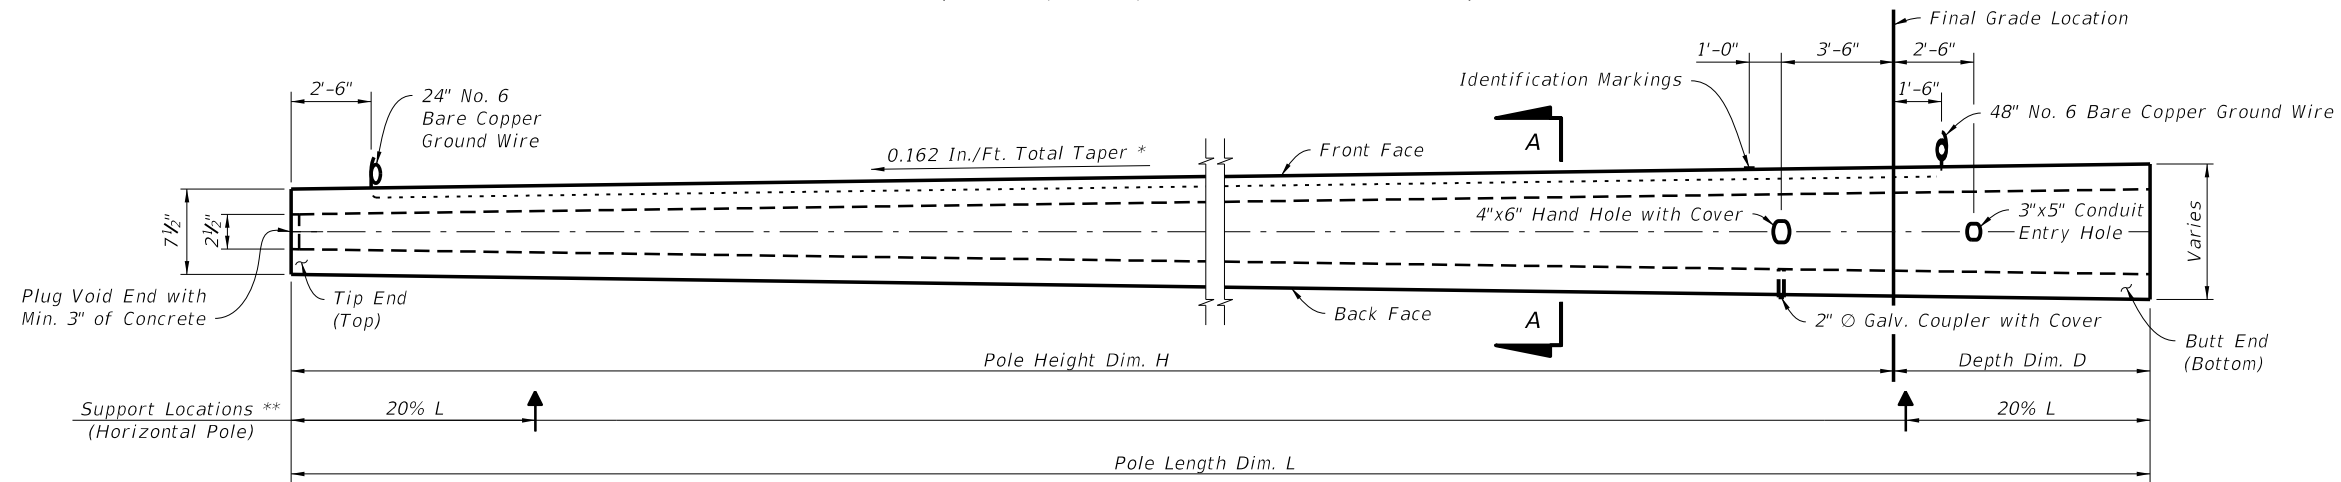


POLE ELEVATION
(Strands and Reinforcing Not Shown)
(See Design Standard Index 17900 and Specification 744 for Modifications to Type P-III Poles Used at Traffic Monitoring Sites)

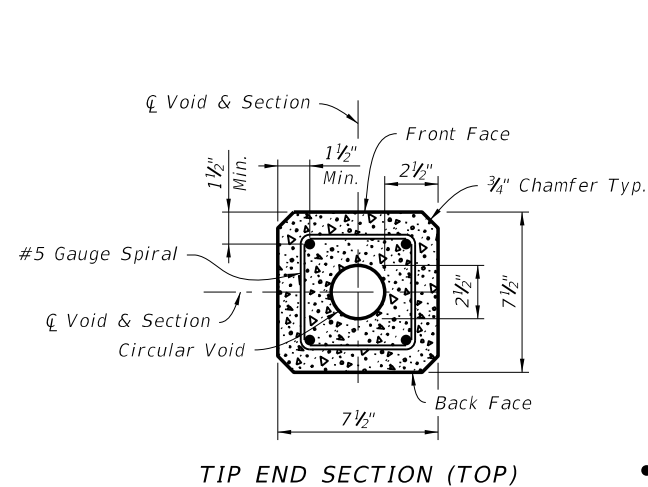

TIP END SECTION (TOP)

STRAND LEGEND

- - Prestressed Strand
0.5 In. Grade 270, LRS
31 Kips Before Transfer
(4 strands total)

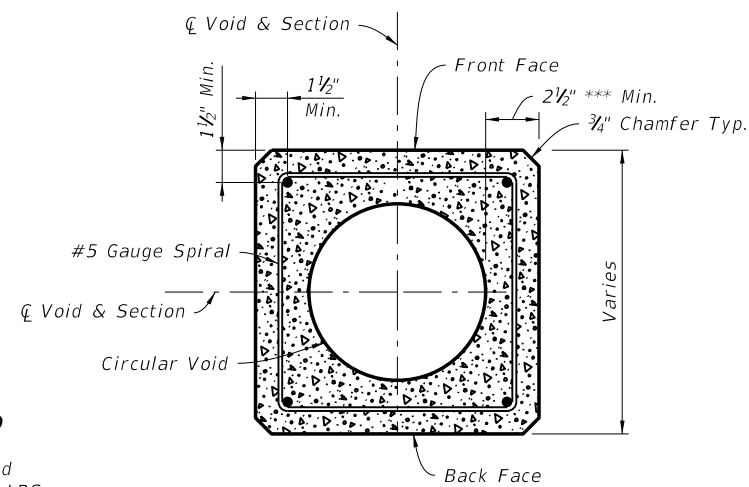

SECTION A-A
(Typical Square Section)

NOTES:

Work this Index with the Strain Pole Schedule in the plans.

Strands shown are continuous from Tip End to Butt End.

Elevation view scale is exaggerated vertically for clarity.

For final erection, tilt pole upright with single point attachment located a distance 33.3% L from Tip End face.


* Taper includes pole width, strands, reinforcing and void.
(0.081 In./Ft. per face)


** Support locations are for strand release, storage, lifting and transport. Keep Back Face oriented downward until final erection.

*** Dimension may vary from 2 1/2" to 3 3/4" to accommodate smaller radius of optional stepped (PVC) void. The void diameter shall not be less than 2 1/2".


LIGHTING AND TRAFFIC MONITORING POLES TYPE P-III

C:\projects\standards\roadway\17700-s\17725-03.dgn 6/24/2013 4:09:45 PM sm970re


LAST REVISION 07/01/13	REVISION	DESCRIPTION:	 <p>FDOT 2014 DESIGN STANDARDS</p>	CONCRETE POLES	INDEX NO. 17725	SHEET NO. 3 of 8
---------------------------	----------	--------------	--	-----------------------	---------------------------	----------------------------

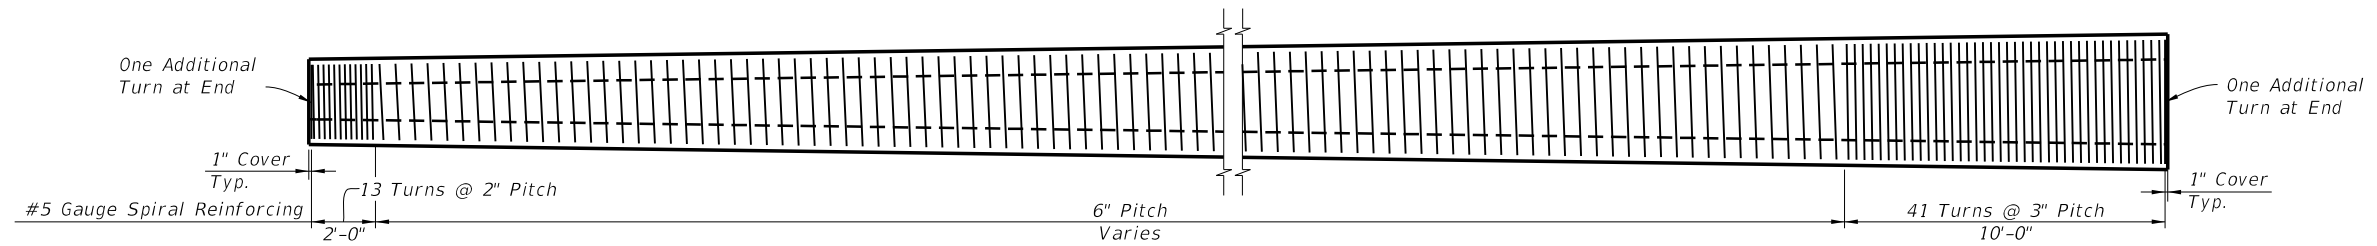

SPIRAL REINFORCING ELEVATION
(Strands, Holes, and Fixtures Not Shown)

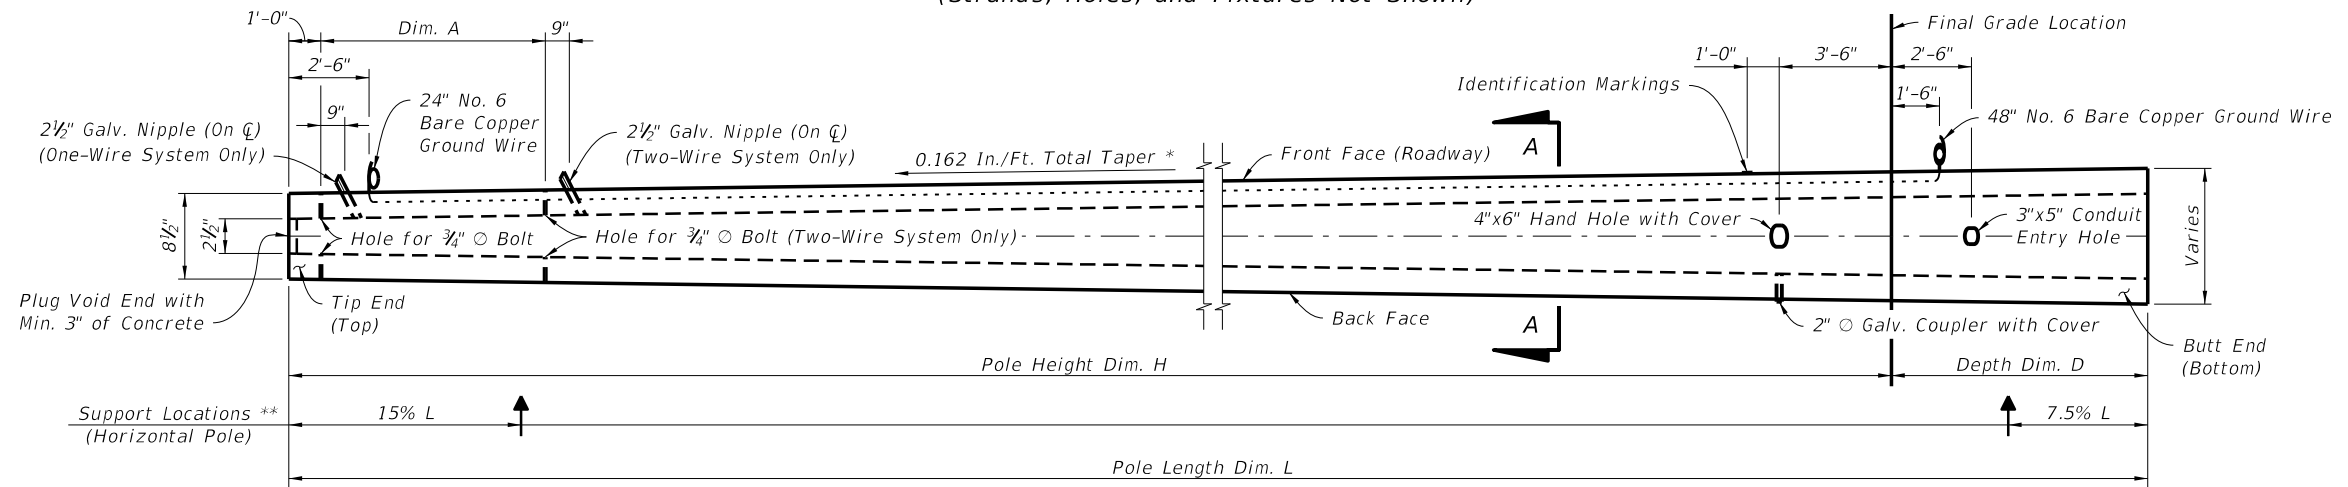


POLE ELEVATION
(Strands and Reinforcing Not Shown)

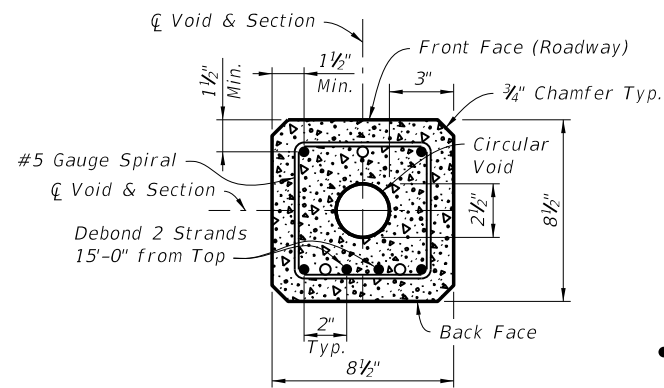

TIP END SECTION (TOP)
(For Dormant Strand Locations See Section A-A)

STRAND LEGEND

- - Prestressed Strand
0.5 In. Grade 270, LRS
31 Kips Before Transfer
(6 strands total)
- - Dormant Strand
0.5 In. Grade 270, LRS
(3 strands total)
One 24" Splice Allowed
Per Strand

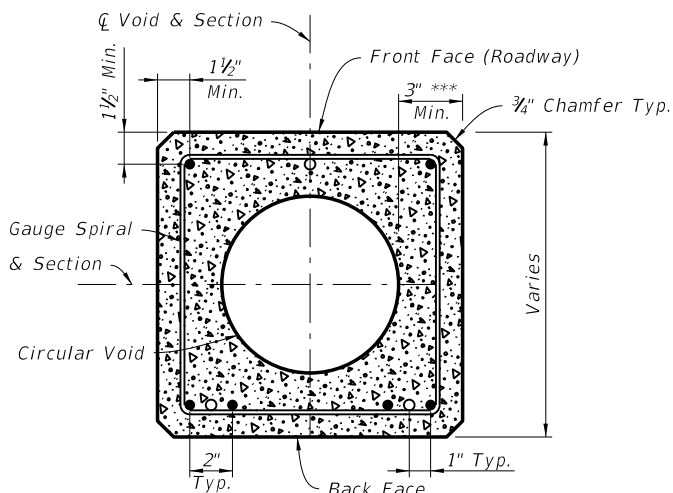


SECTION A-A
(Typical Square Section)


NOTES:

- Work this Index with the Strain Pole Schedule in the plans.
- Strands shown are continuous from Tip End to Butt End.
- Elevation view scale is exaggerated vertically for clarity.
- For final erection, tilt pole upright with single point attachment located a distance 20% L from the Tip End face.
- * Taper includes pole width, strands, reinforcing and void. (0.081 In./Ft. per face)
- ** Support locations are for strand release, storage, lifting and transport. Keep Back Face oriented downward until final erection.
- *** Dimension may vary from 3" to 4 1/4" to accommodate smaller radius of optional stepped (PVC) void. The void diameter shall not be less than 2 1/2".


STRAIN POLE TYPE P-IV

6/24/2013 4:09:46 PM sm970re C:\projects\standards\roadway\17700-s\17725-04.dgn


LAST REVISION 07/01/13	REVISION	DESCRIPTION:	 <p>FDOT 2014 DESIGN STANDARDS</p>	CONCRETE POLES	INDEX NO. 17725	SHEET NO. 4 of 8
---------------------------	----------	--------------	--	-----------------------	---------------------------	----------------------------

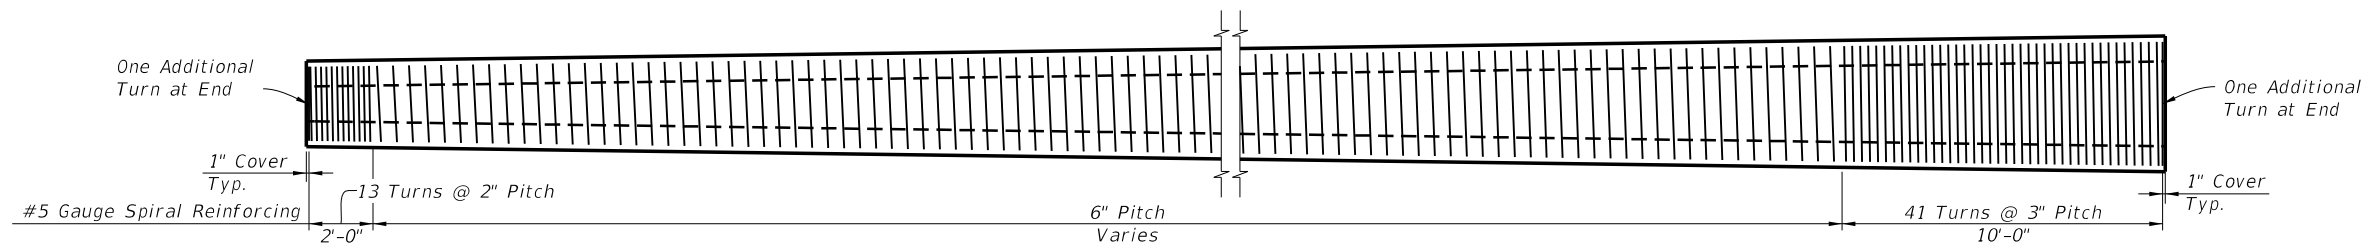

SPIRAL REINFORCING ELEVATION
(Strands, Holes, and Fixtures Not Shown)

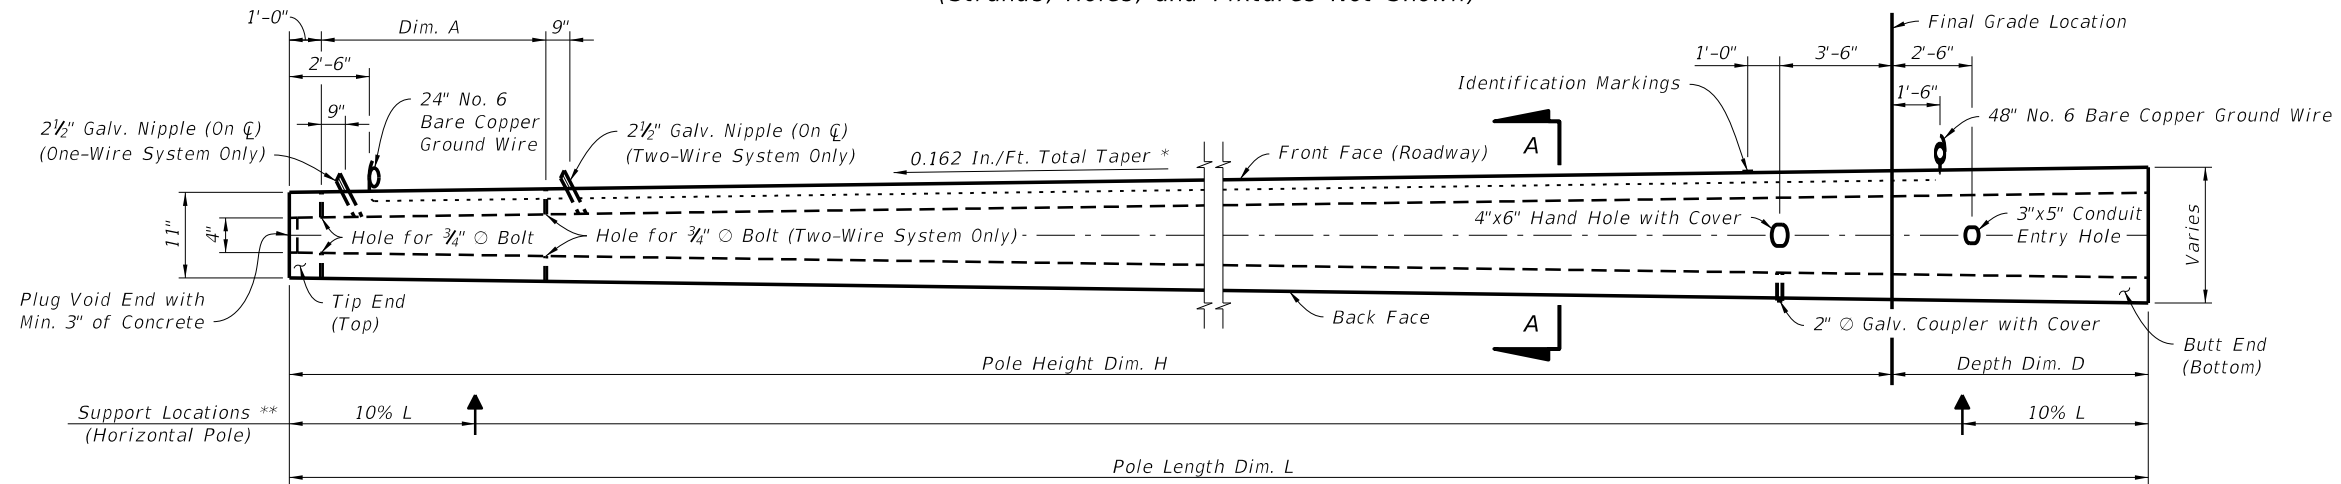


POLE ELEVATION
(Strands and Reinforcing Not Shown)

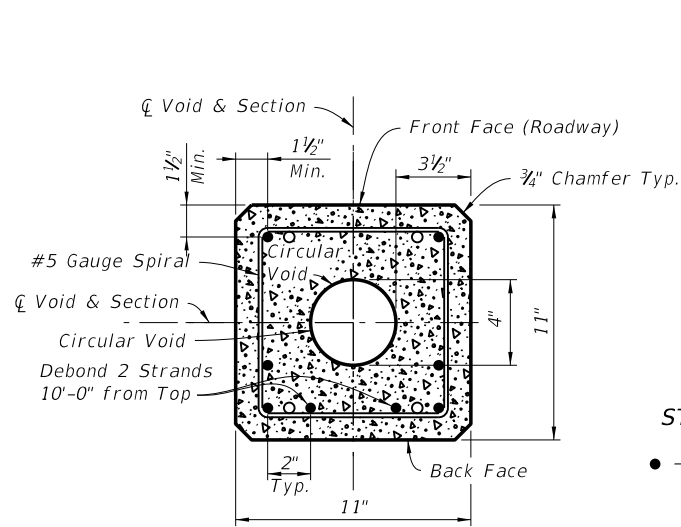

TIP END SECTION (TOP)
(For Dormant Strand Locations, See Section A-A)

STRAND LEGEND

- - Prestressed Strand
0.5 In. Grade 270, LRS
31 Kips Before Transfer
(8 strands total)
- - Dormant Strand
0.5 In. Grade 270, LRS
(4 strands total)
One 24" Splice Allowed
Per Strand

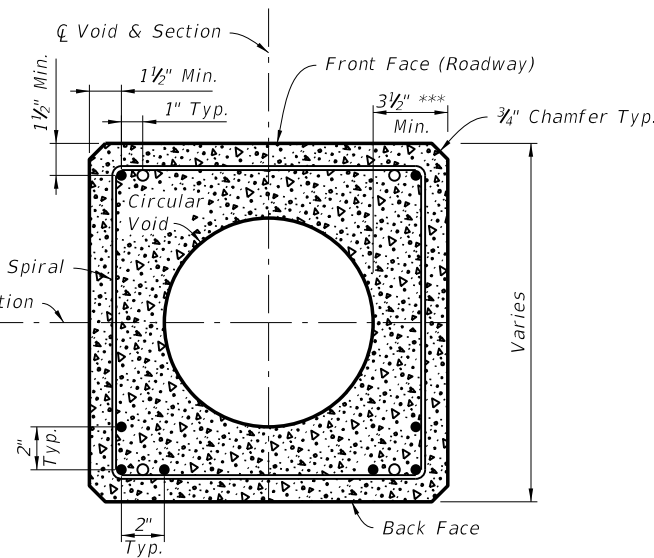


SECTION A-A
(Typical Square Section)

NOTES:


- Work this Index with the Strain Pole Schedule in the plans.
- Strands shown are continuous from Tip End to Butt End.
- Elevation view scale is exaggerated vertically for clarity.
- For final erection, tilt pole upright with single point attachment located a distance 12.5% L from the Tip End face.
- * Taper includes pole width, strands, reinforcing and void. (0.081 In./Ft. per face)
- ** Support locations are for strand release, storage, lifting and transport. Keep Back Face oriented downward until final erection.
- *** Dimension may vary from 3 1/2" to 4 3/4" to accommodate smaller radius of optional stepped (PVC) void. The void diameter shall not be less than 4".

STRAIN POLE TYPE P-V


6/24/2013 4:09:49 PM sm970re C:\projects\standards\roadway\17700-s\17725-05.dgn

LAST REVISION 07/01/13	REVISION	DESCRIPTION:	 <p>FDOT 2014 DESIGN STANDARDS</p>	CONCRETE POLES	INDEX NO. 17725	SHEET NO. 5 of 8
---------------------------	----------	--------------	--	-----------------------	---------------------------	----------------------------


C:\projects\standards\roadway\17700-s\17725-06.dgn
 sm970re
 4:09:50 PM
 6/24/2013

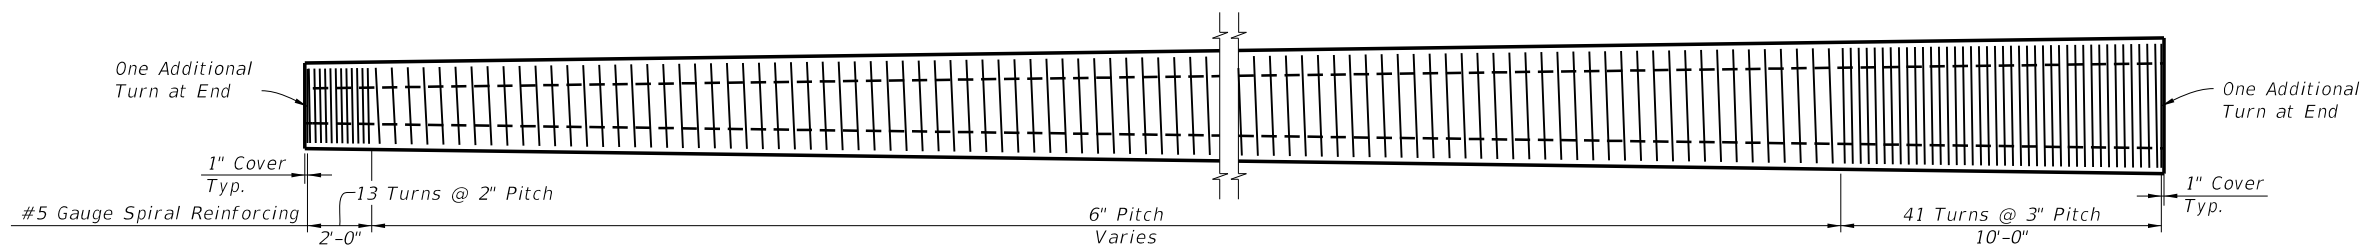

SPIRAL REINFORCING ELEVATION
(Strands, Holes, and Fixtures Not Shown)

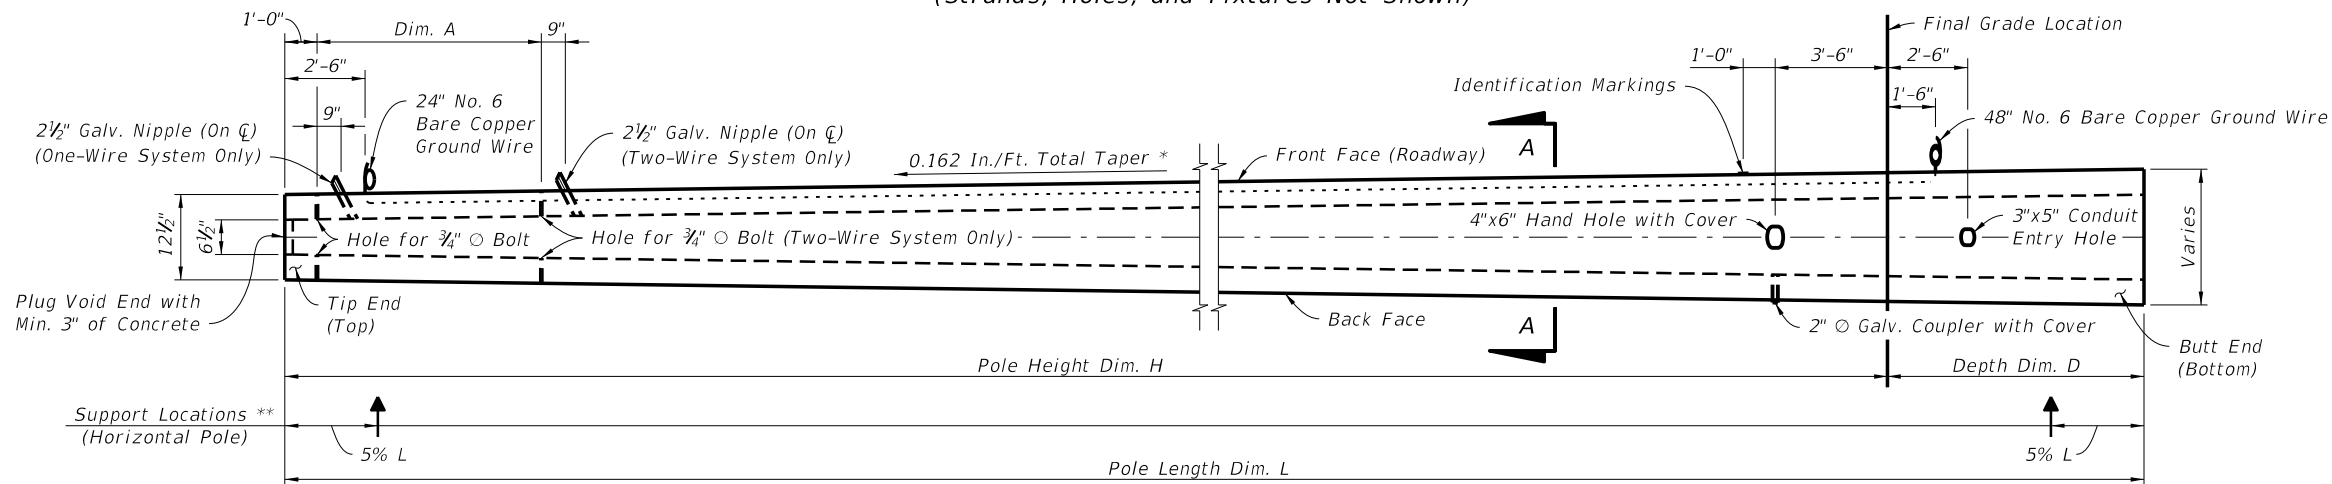


POLE ELEVATION
(Strands and Reinforcing Not Shown)

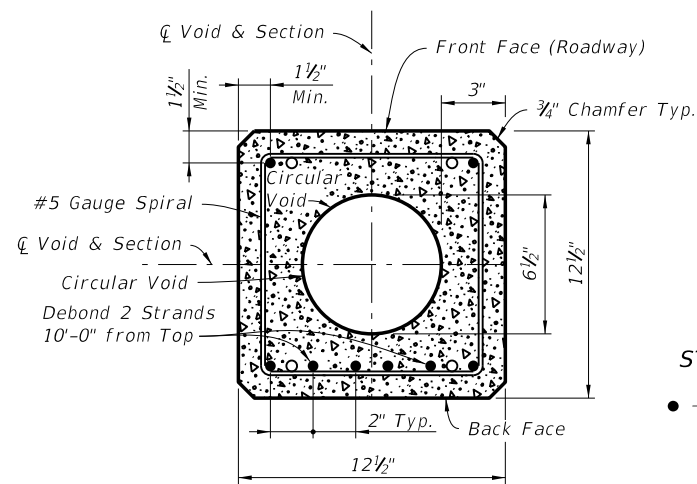

TIP END SECTION (TOP)
(For Dormant Strand Locations,
See Section A-A)

STRAND LEGEND

- - Prestressed Strand
0.5 In. Grade 270, LRS
31 Kips Before Transfer
(8 strands total)
- - Dormant Strand
0.5 In. Grade 270, LRS
(4 strands total)
One 24" Splice Allowed
Per Strand

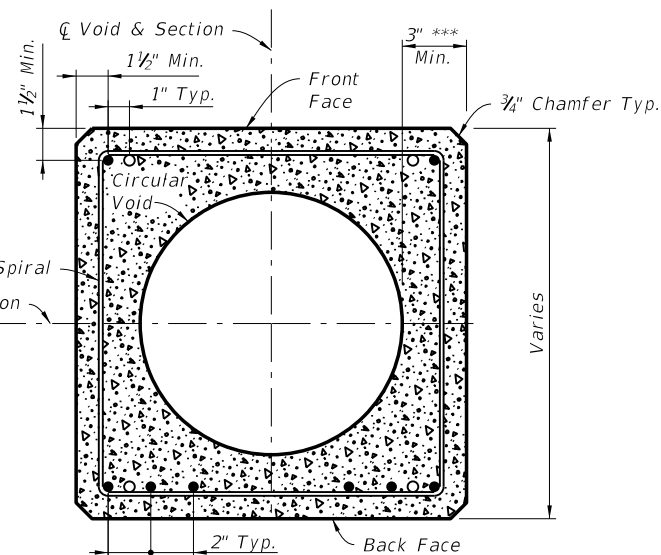


SECTION A-A
(Typical Square Section)

NOTES:


- Work this Index with the Strain Pole Schedule in the plans.
- Strands shown are continuous from Tip End to Butt End.
- Elevation view scale is exaggerated vertically for clarity.
- For final erection, tilt pole upright with single point attachment located a distance 10% L from Tip End Face.
- * Taper includes pole width, strands, reinforcing and void. (0.081 In./Ft. per face)
- ** Support locations are for strand release, storage, lifting and transport. Keep Back Face oriented downward until final erection.
- *** Dimension may vary from 3" to 4 1/4" to accommodate smaller radius of optional stepped (PVC) void. The void diameter shall not be less than 6 1/2".

STRAIN POLE TYPE P-VI


LAST REVISION 07/01/13	REVISION	DESCRIPTION:	 FDOT 2014 DESIGN STANDARDS	CONCRETE POLES	INDEX NO. 17725	SHEET NO. 6 of 8
---------------------------	----------	--------------	---	-----------------------	---------------------------	----------------------------

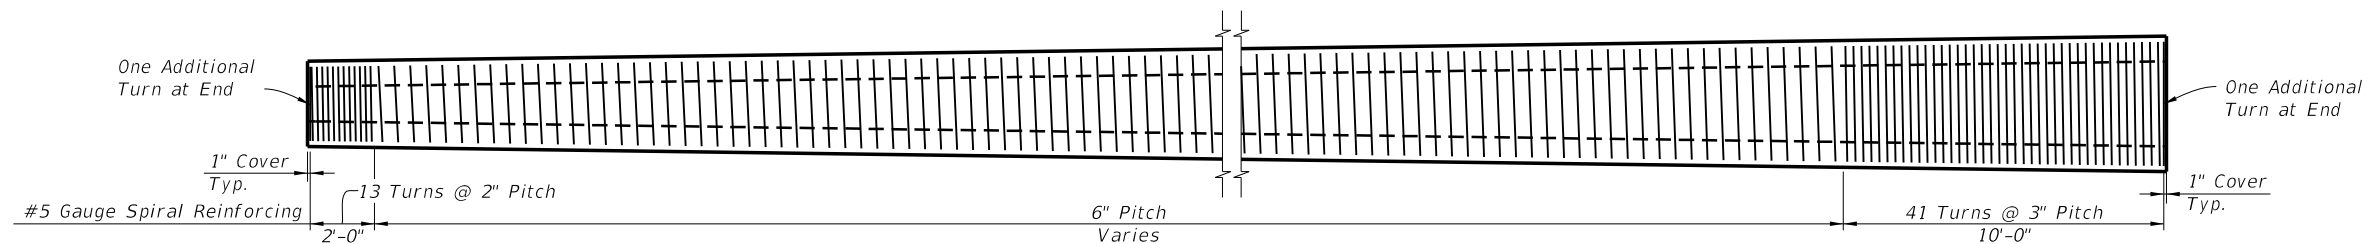

SPIRAL REINFORCING ELEVATION
(Strands, Holes, and Fixtures Not Shown)

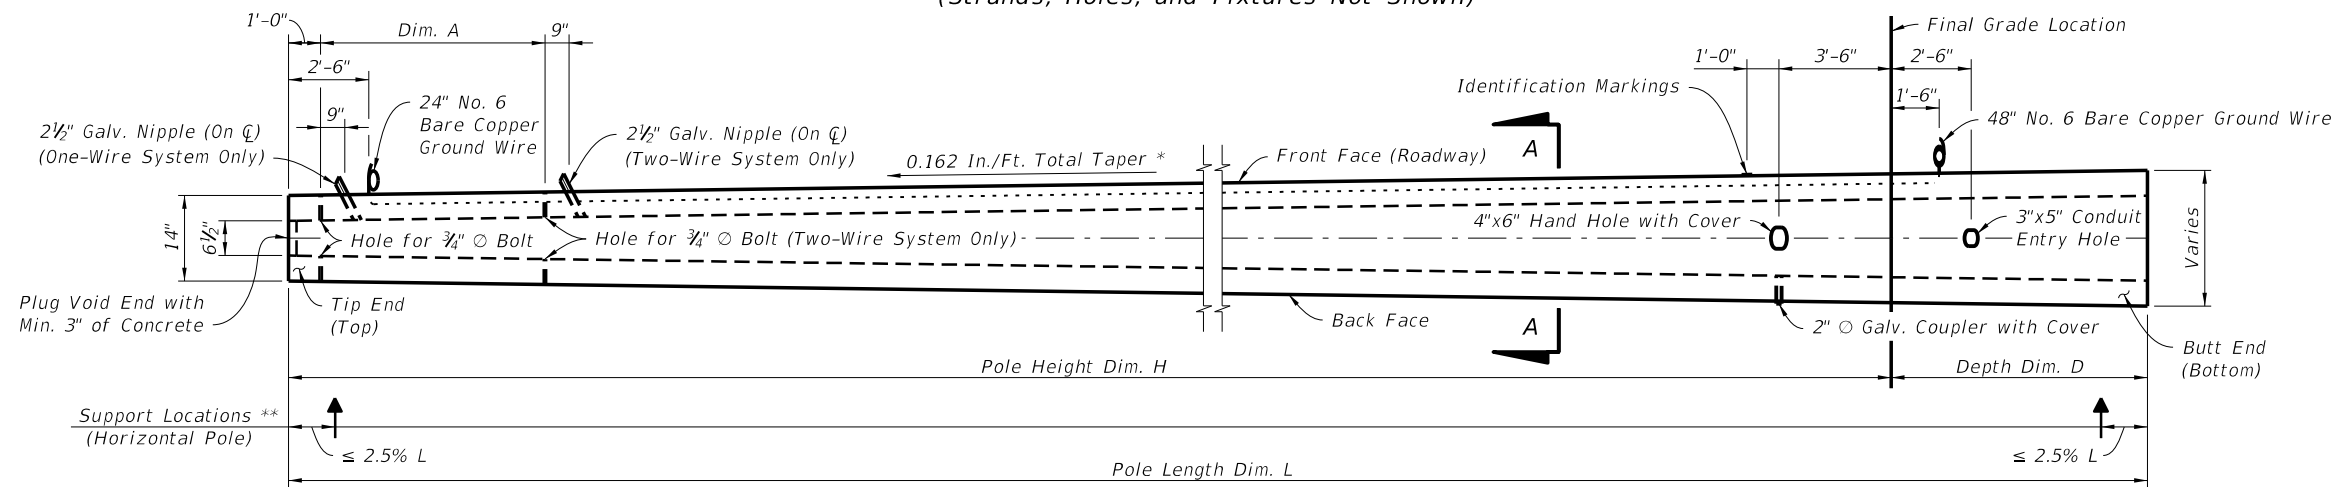


POLE ELEVATION
(Strands and Reinforcing Not Shown)

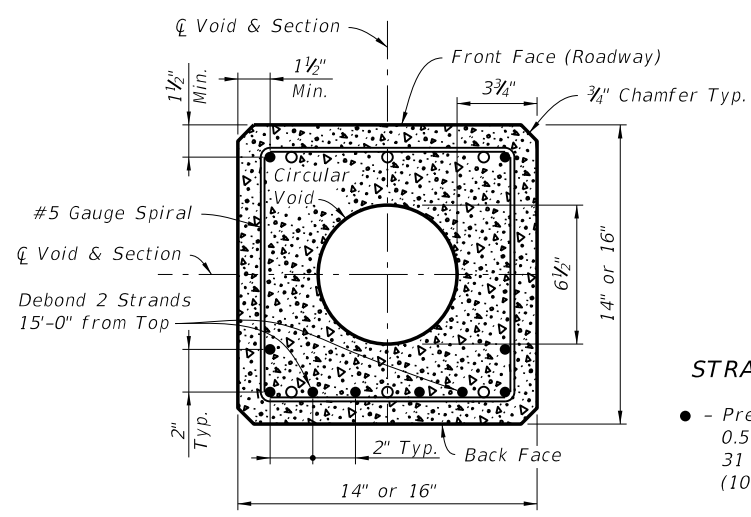

TIP END SECTION (TOP)
(For Dormant Strand Locations, See Section A-A)

STRAND LEGEND

- - Prestressed Strand
0.5 In. Grade 270, LRS
31 Kips Before Transfer
(10 strands total)
- - Dormant Strand
0.5 In. Grade 270, LRS
(6 strands total)
One 24" Splice Allowed
Per Strands

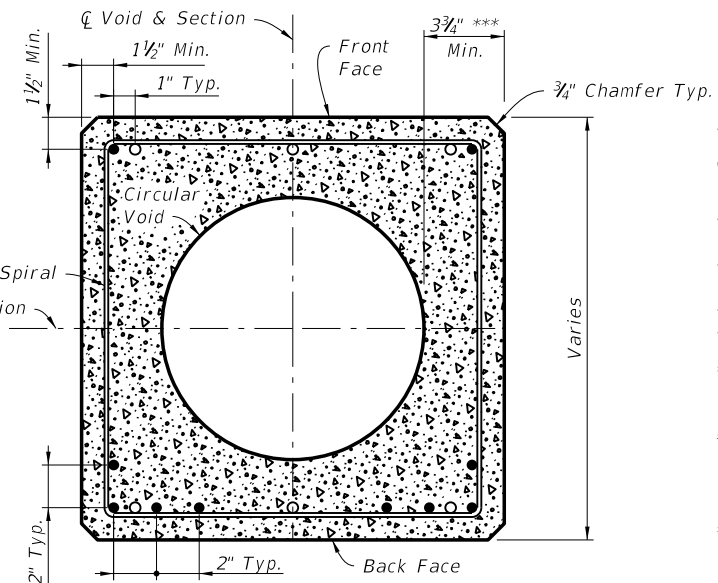


SECTION A-A
(Typical Square Section)


NOTES:

- Work this Index with the Strain Pole Schedule in the plans.
- Strands shown are continuous from Tip End to Butt End.
- Elevation view scale is exaggerated vertically for clarity.
- For final erection, tilt pole upright with single point attachment located a distance 10% L from the Tip End face.
- * Taper includes pole width, strands, reinforcing and void. (0.081 In./Ft. per face)
- ** Support locations are for strand release, storage, lifting and transport. Keep Back Face oriented downward until final erection.
- *** Dimension may vary from 3 3/4" to 5" to accommodate smaller radius of optional stepped (PVC) void. The void diameter shall not be less than 6 1/2".


STRAIN POLE TYPE P-VII

C:\projects\standards\roadway\17700-s\17725-07.dgn 6/24/2013 4:09:52 PM sm970re


LAST REVISION 07/01/13	REVISION	DESCRIPTION:	 <p>FDOT 2014 DESIGN STANDARDS</p>	<p>CONCRETE POLES</p>	INDEX NO. 17725	SHEET NO. 7 of 8
---------------------------	----------	--------------	--	------------------------------	--------------------	---------------------

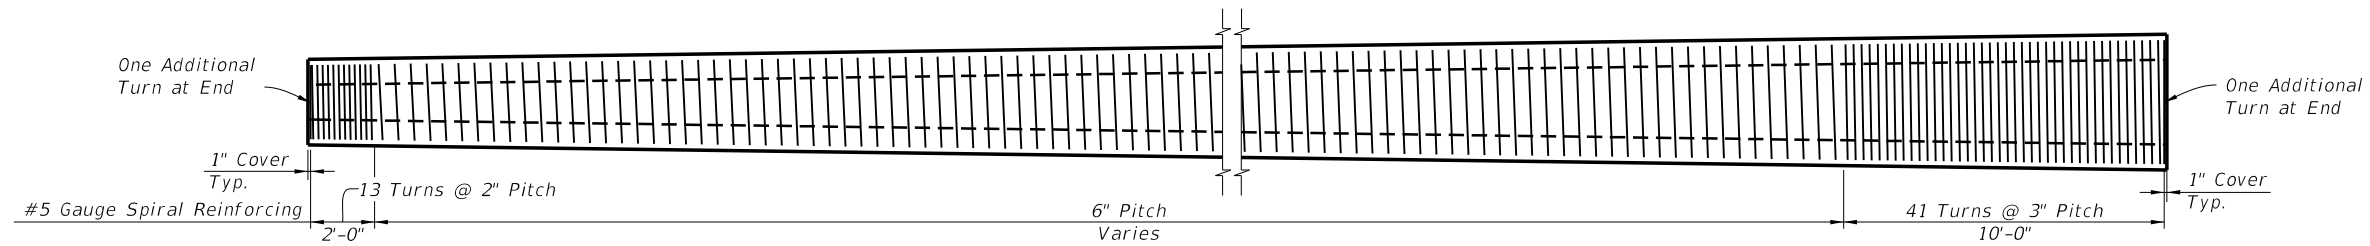

SPIRAL REINFORCING ELEVATION
(Strands, Holes, and Fixtures Not Shown)

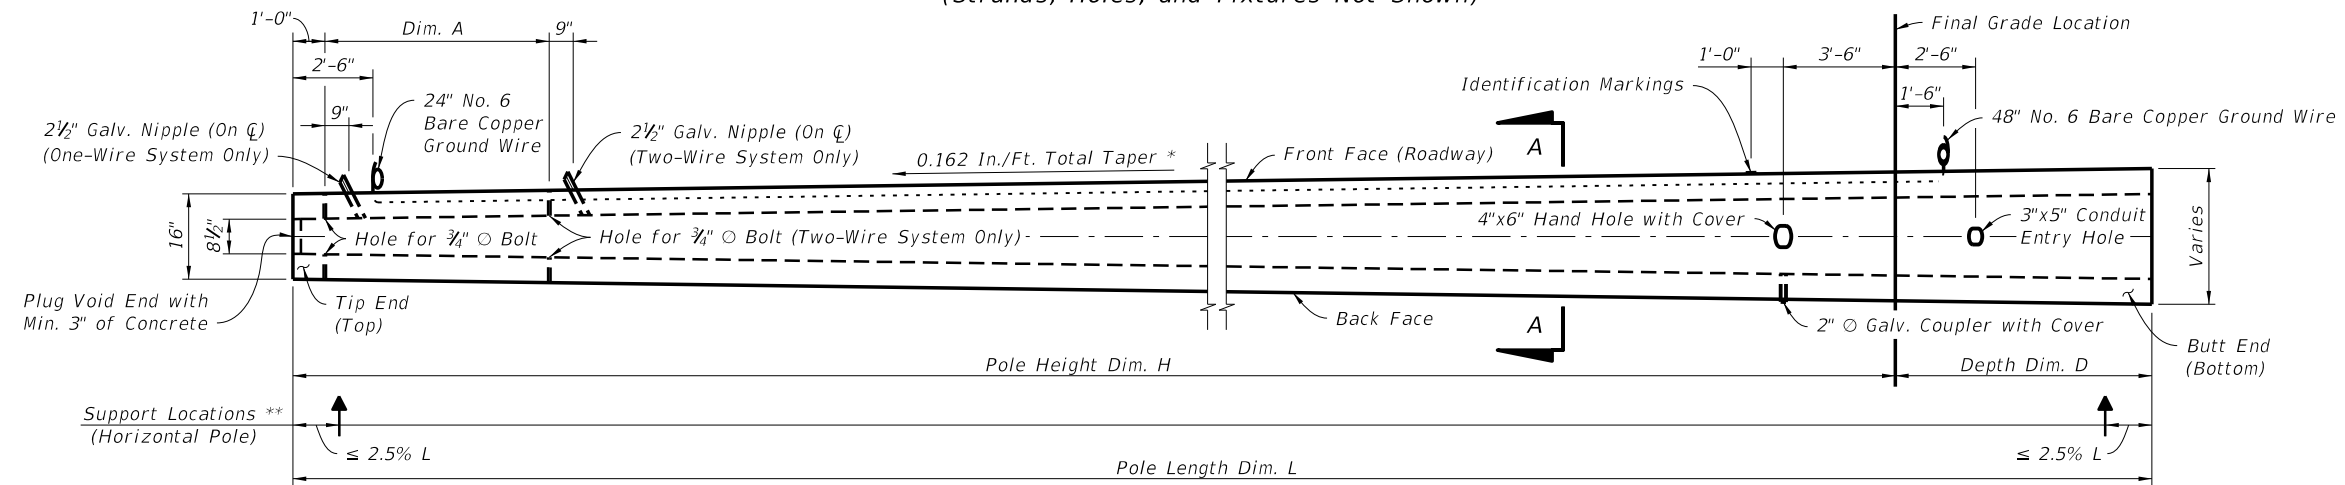


POLE ELEVATION
(Strands and Reinforcing Not Shown)

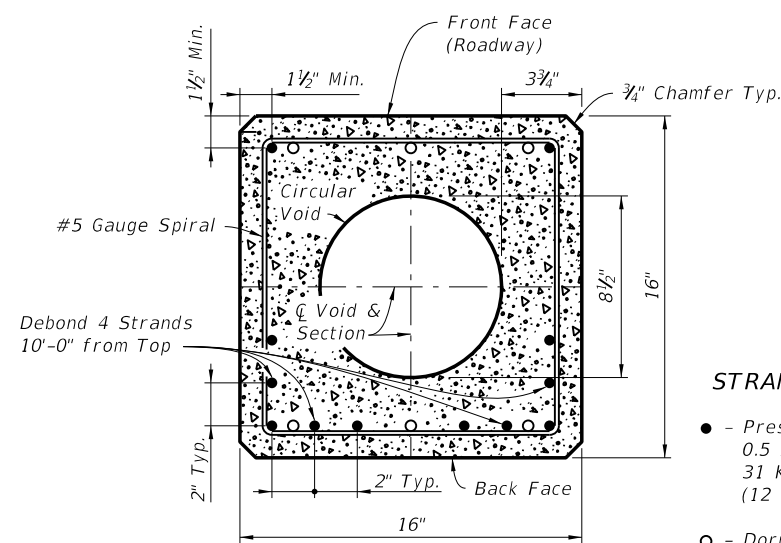

TIP END SECTION (TOP)
(For Dormant Strand Locations, See Section A-A)

STRAND LEGEND

- - Prestressed Strand
0.5 In. Grade 270, LRS
31 Kips Before Transfer
(12 strands total)
- - Dormant Strand
0.5 In. Grade 270, LRS
(6 strands total)
One 24" Splice Allowed
Per Strand

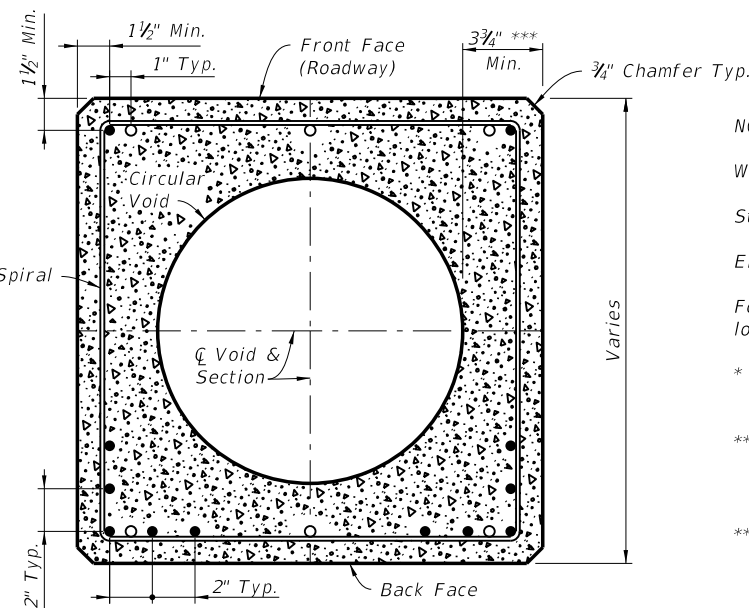


SECTION A-A
(Typical Square Section)

NOTES:




- Work this Index with the Strain Pole Schedule in the plans.
- Strands shown are continuous from Tip End to Butt End.
- Elevation view scale is exaggerated vertically for clarity.
- For final erection, tilt pole upright with single point attachment located a distance 10% L from the Tip End face.
- * Taper includes pole width, strands, reinforcing and void. (0.081 In./Ft. per face)
- ** Support locations are for strand release, storage, lifting and transport. Keep Back Face oriented downward until final erection.
- *** Dimension may vary from 3 3/4" to 5" to accommodate smaller radius of optional stepped (PVC) void. The void diameter shall not be less than 8 1/2".

STRAIN POLE TYPE P-VIII


C:\projects\standards\roadway\17700-s\17725-08.dgn 6/24/2013 4:09:54 PM sm970re

LAST REVISION 07/01/13	REVISION	DESCRIPTION:	 <p>FDOT 2014 DESIGN STANDARDS</p>	<p>CONCRETE POLES</p>	<p>INDEX NO. 17725</p>	<p>SHEET NO. 8 of 8</p>
---------------------------	----------	--------------	--	------------------------------	-----------------------------------	------------------------------------


Clamp And Clevis
See Index 17723

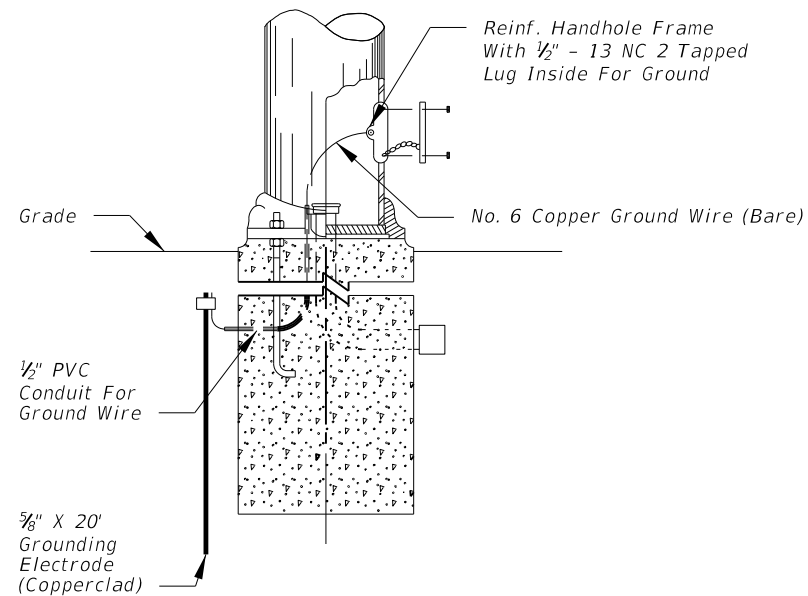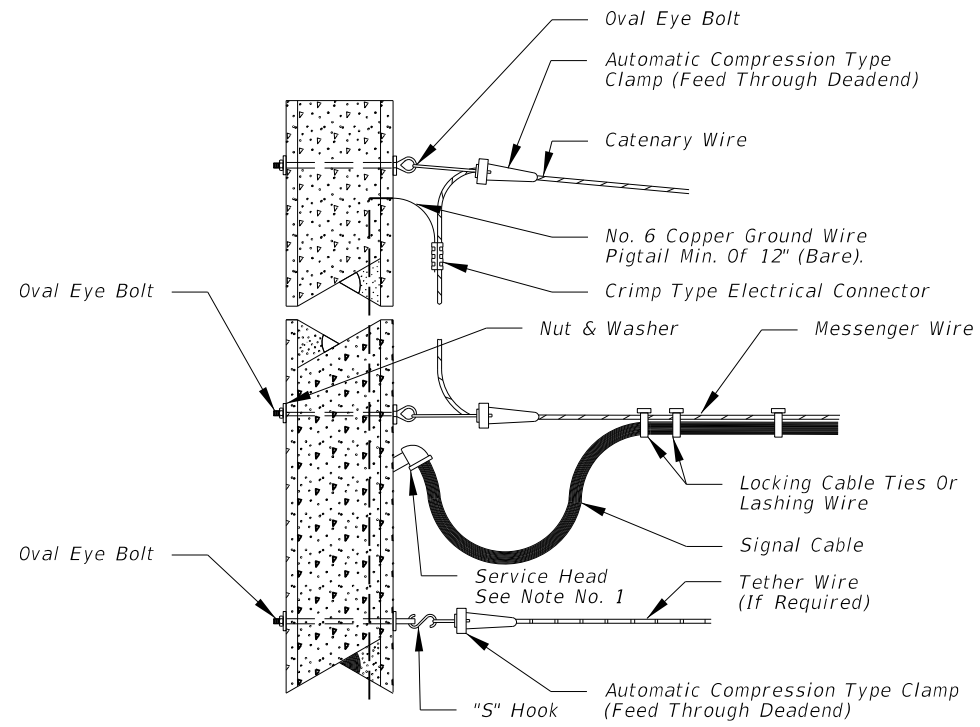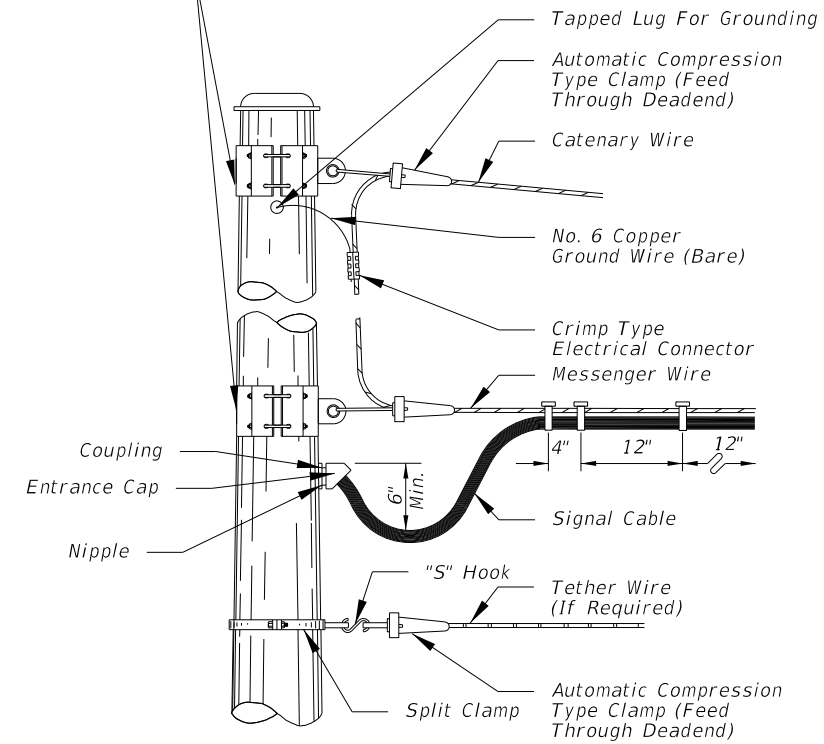

STEEL POLE

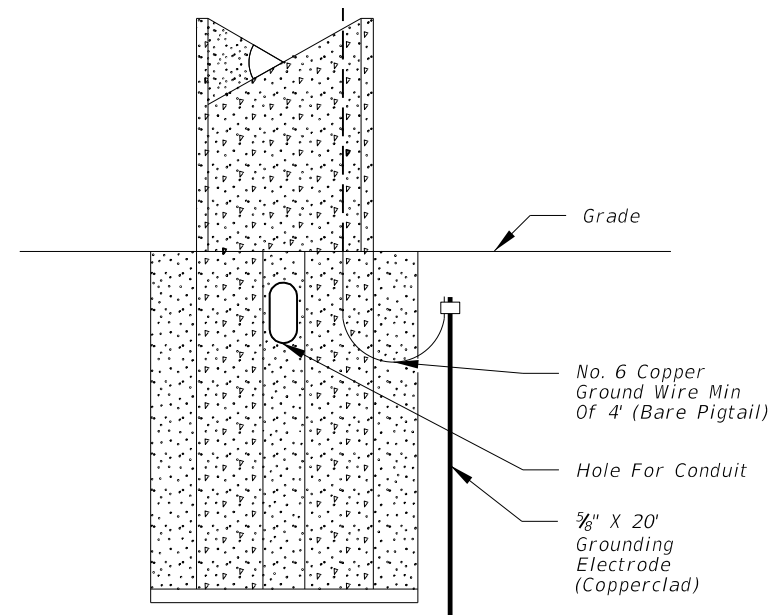

PRESTRESSED CONCRETE POLE

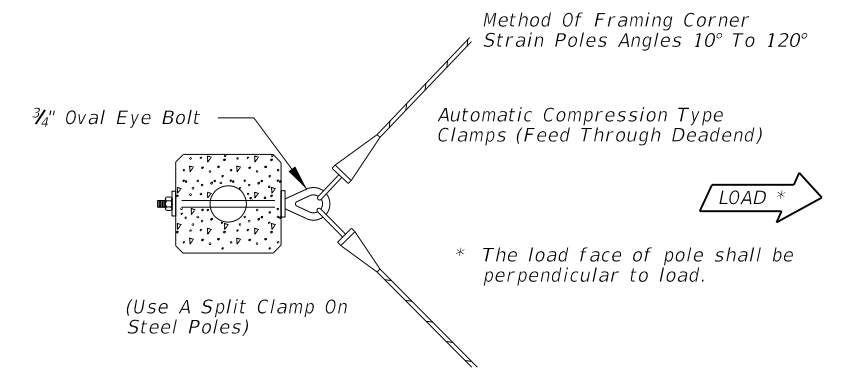

Notes:

1. With the approval of the resident engineer, the service head hole for joint use poles may be drilled by the utility company at an angle of 90° but not less than 45° to the face of the pole.
2. Lashing wire should normally be used for distances of 12' or greater.
3. All hardware for signal attachment shall be stainless steel.
4. Meet all grounding requirements of Section 620 of the Standard Specifications.



C:\projects\standards\roadway\17700-s\17727-01.dgn
smg70re
4:09:56 PM
6/24/2013

LAST REVISION 10/29/12	DESCRIPTION: R2013-03 Removed Singal Point Attachment And Revised Two Point Attachment
---------------------------	---



SIGNAL CABLE & SPAN WIRE
INSTALLATION DETAILS

INDEX NO. 17727	SHEET NO. 1 of 2
--------------------	---------------------

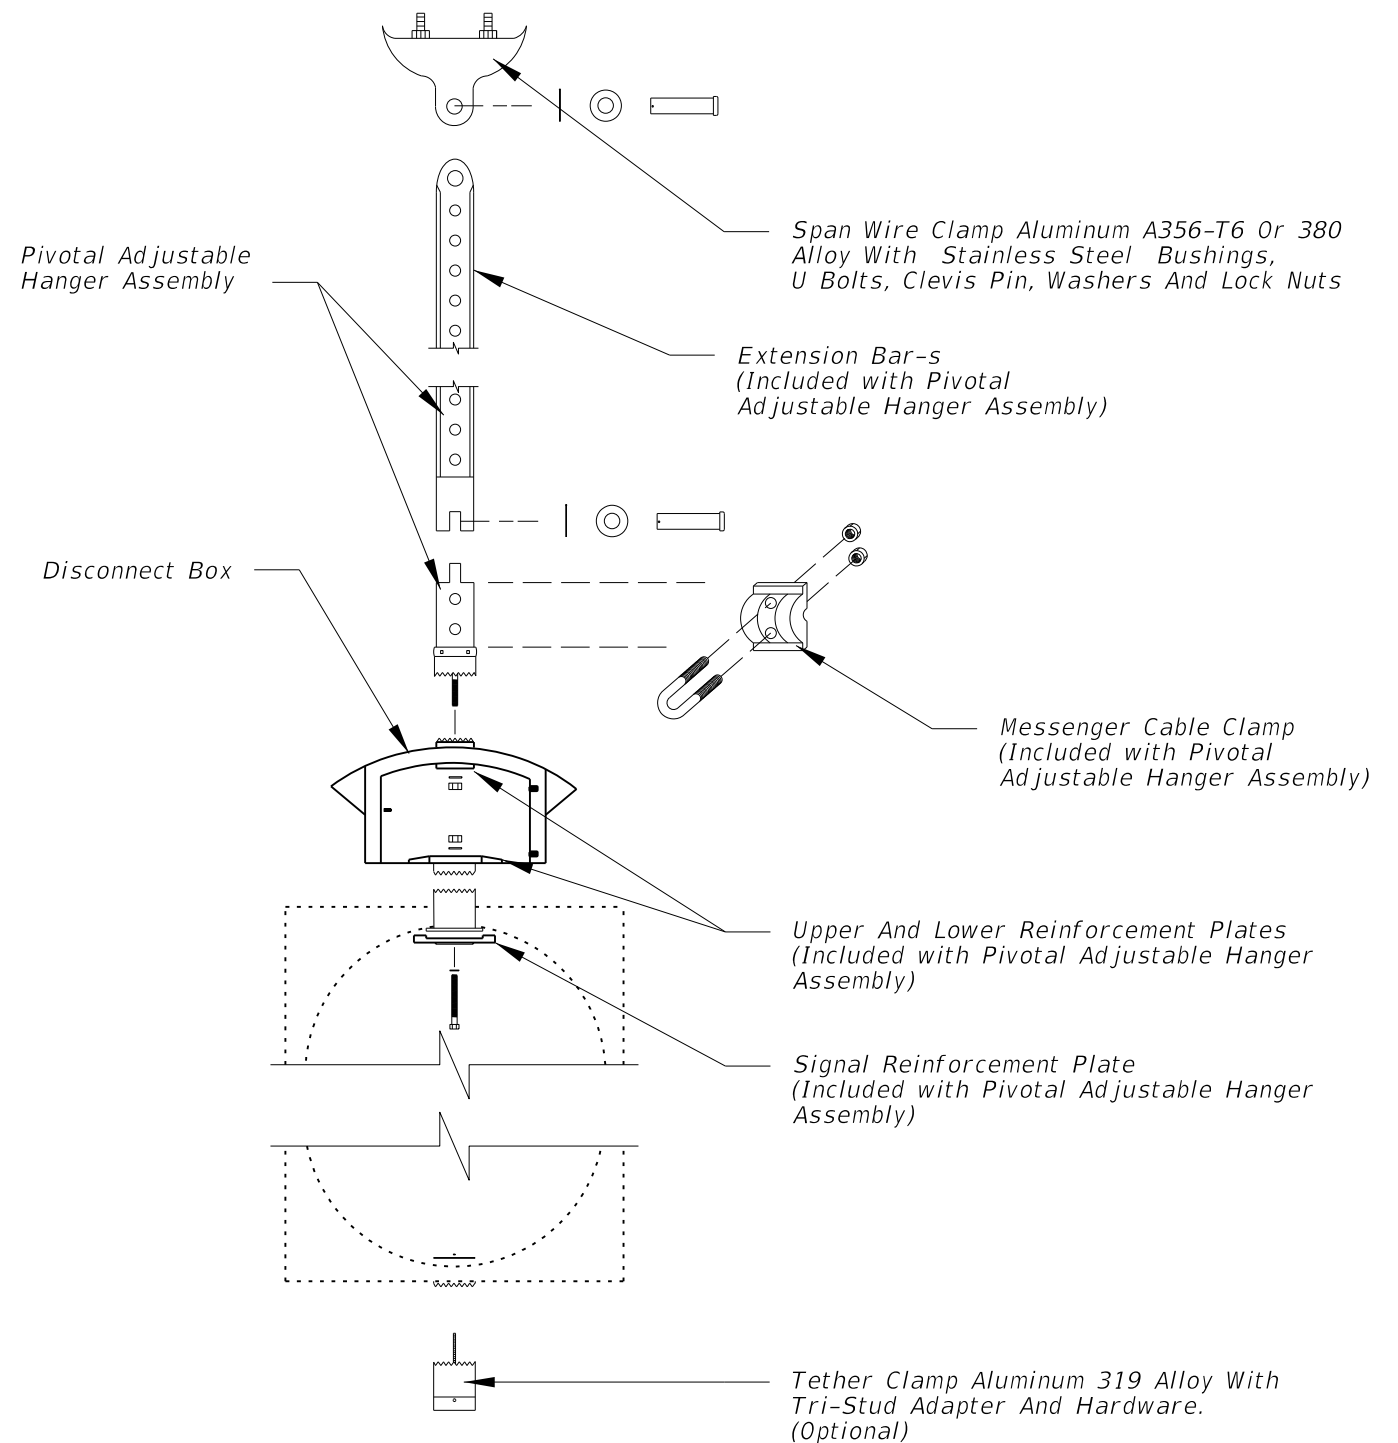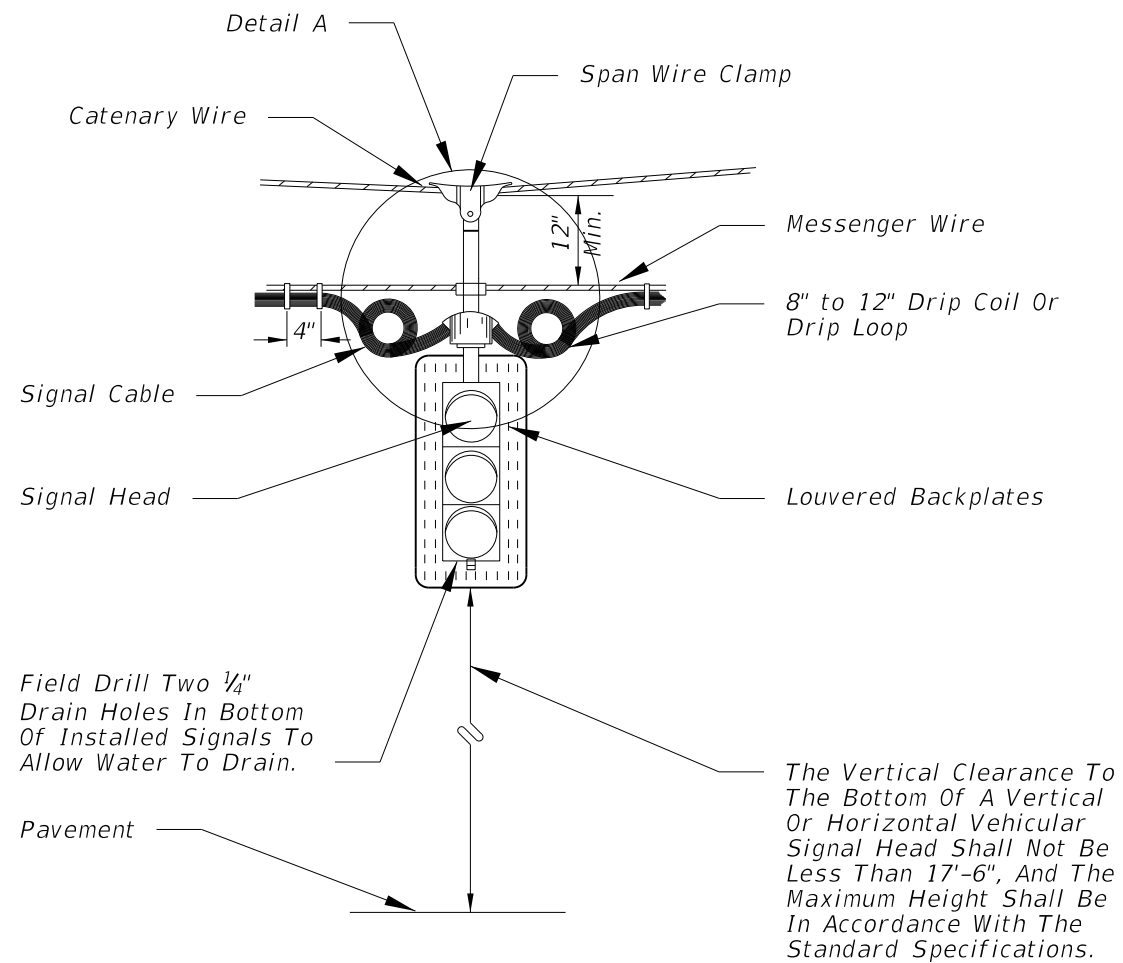


Detail A

Notes:

1. This drawing is representative of a Proprietary Pivotal Adjustable Hanger Assembly listed on the Department's Approved Products List (APL). For specific details and requirements see the vendor drawings on the APL at www3.dot.state.fl.us/trafficcontrolproducts/. The proprietary pivotal adjustable hanger assembly shall be assembled in accordance with the manufacturer's detailed drawings, procedures and specifications.
2. With the approval of the resident engineer, the service head hole for joint use poles may be drilled by the utility company at an angle of 90° but not less than 45° to the face of the pole.
3. Lashing wire should normally be used for distances of 12' or greater.
4. The overlapped connection of adjustable hangers shall use a minimum of 2 bolts with a minimum spacing of 2" between bolts.
5. Meet all grounding requirements of Section 620 of the Standard Specifications.

TWO POINT ATTACHMENT

C:\projects\standards\roadway\17700-s\17727-02.dgn smg70re 4:09:58 PM 6/24/2013

LAST REVISION 07/01/13	REVISION	DESCRIPTION:	 <p>FDOT 2014 DESIGN STANDARDS</p>	<p>SIGNAL CABLE & SPAN WIRE INSTALLATION DETAILS</p>	<p>INDEX NO. 17727</p>	<p>SHEET NO. 2 of 2</p>
---------------------------	----------	--------------	---	--	----------------------------	-----------------------------

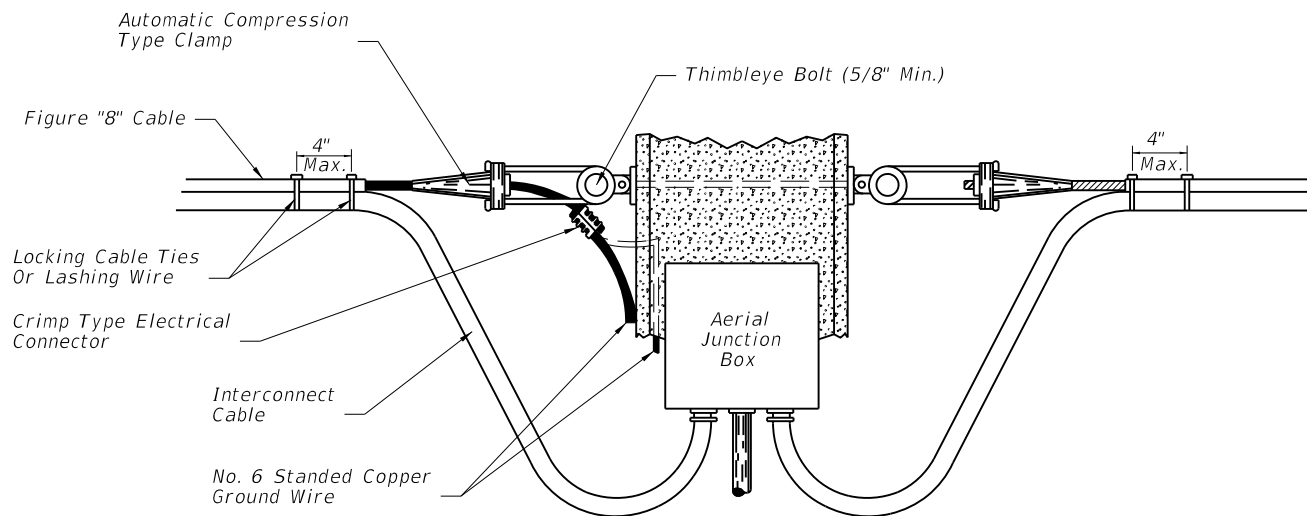


FIGURE A
CABLE DROP AND
TERMINATION DETAIL
AERIAL INTERCONNECT FIGURE "8"

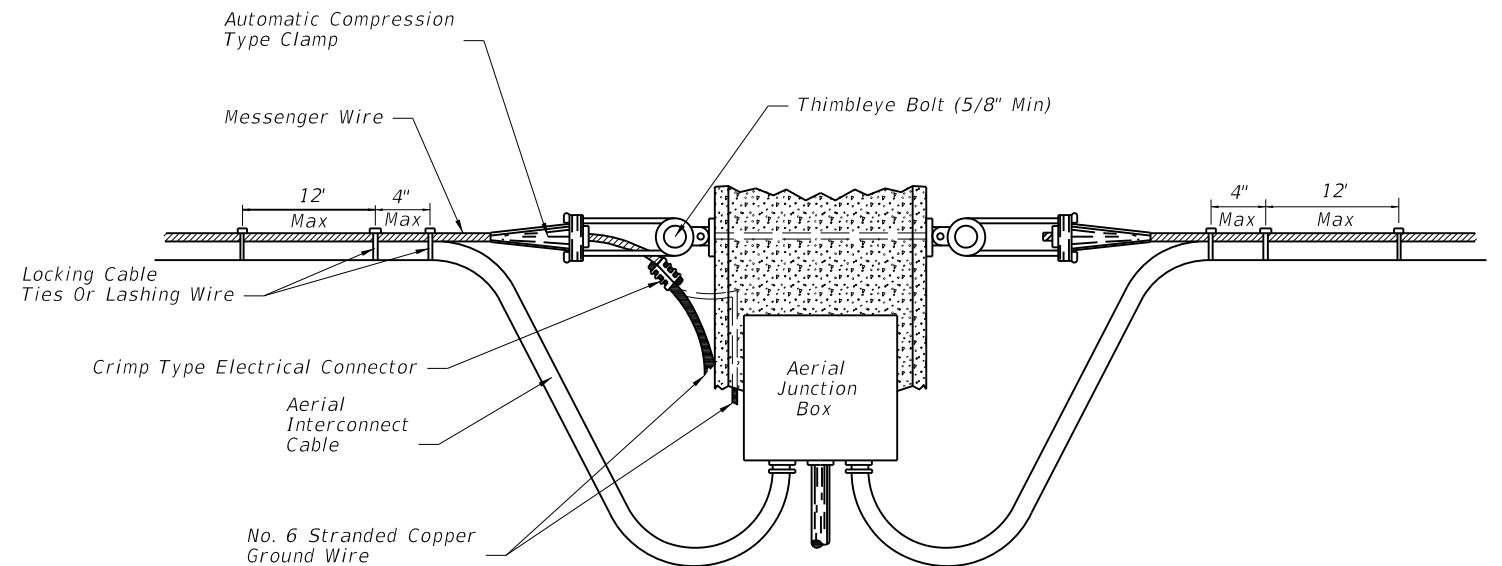


FIGURE B
CABLE DROP AND
TERMINATION DETAIL
AERIAL INTERCONNECT MESSENGER
WIRE WITH CLAMPS





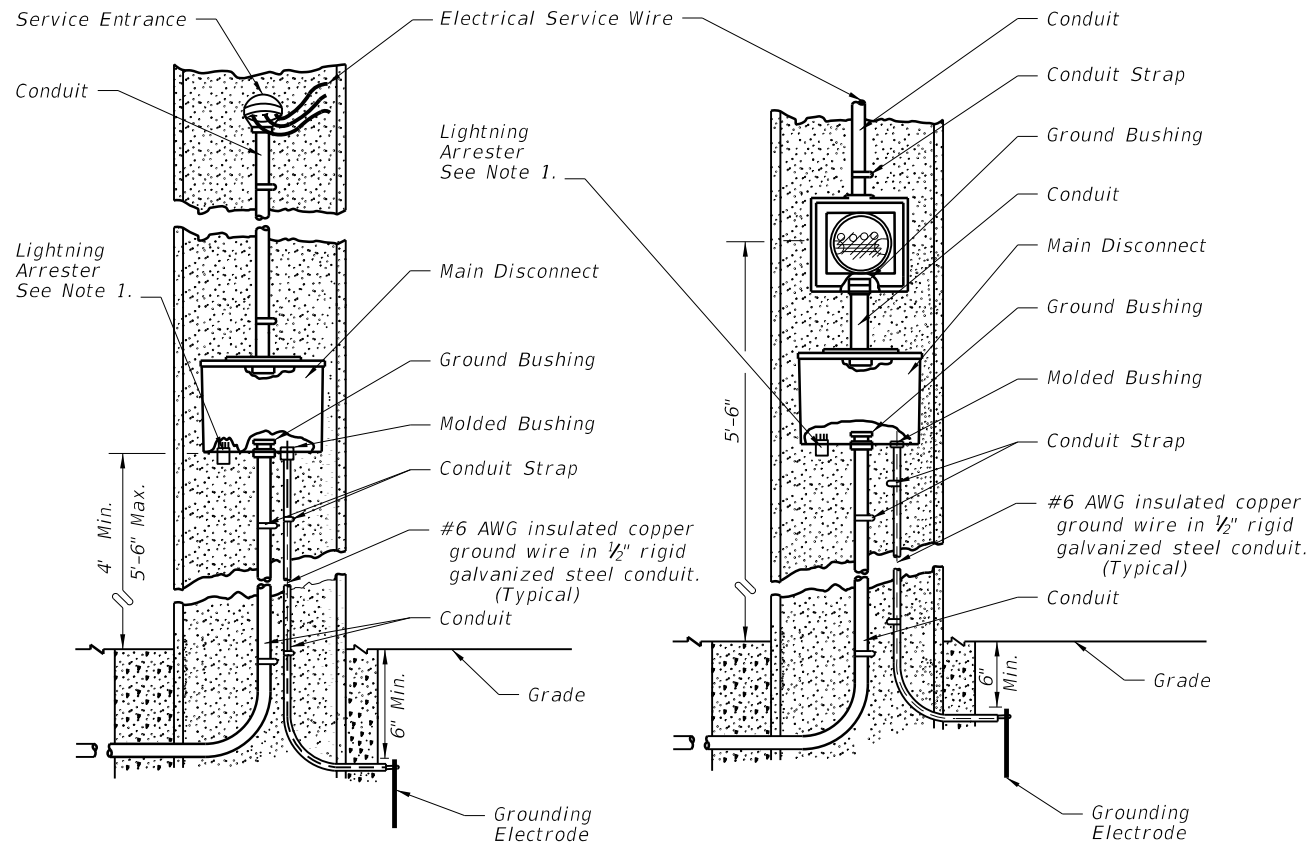
FIGURE C
CABLE DROP DETAIL
AERIAL INTERCONNECT MESSENGER
WIRE WITH CLAMPS

Notes:

1. The messenger wire of the interconnect cables shall be grounded to the copper ground wire of the pole or to the external wire extending down the pole.
2. When utilizing the external ground wire to the pole, a piece of 1/2" conduit shall extend up the pole externally to a point 8' above finish grade to protect the ground wire connecting the messenger wire to the ground rod.
3. Locking cable ties or lashing wire when used shall be placed no further than 12" apart except at the point of cable drop or terminations where one (1) shall be placed at the point where the cables separate from the messenger wire and another placed 4" (max) from that tie. When using figure "8" interconnect cable only the locking cable ties shall be used.
4. If accessible the internal ground wire of the support pole may be used to ground the messenger wire.
5. Lashing wire should normally be used for distances of 12' or greater.
6. Meet all grounding requirements of Section 620 of the Standard Specifications.


6/24/2013 4:10:00 PM sm970re C:\projects\standards\roadway\17700-s\17733-01.dgn

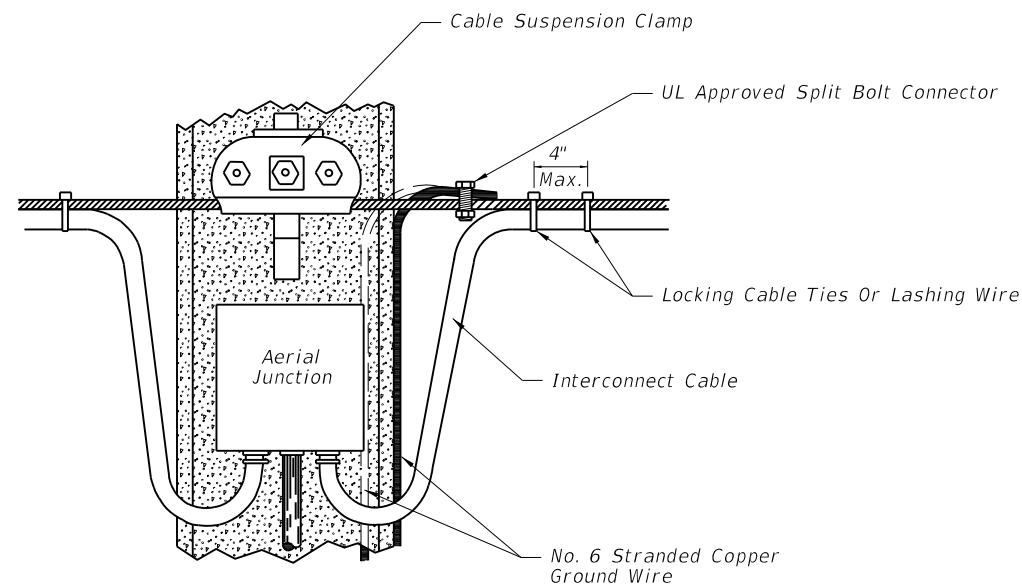LAST REVISION 07/01/00	REVISION	DESCRIPTION:	 FDOT 2014 DESIGN STANDARDS	AERIAL INTERCONNECT	INDEX NO. 17733	SHEET NO. 1 of 1
---------------------------	----------	--------------	--	---------------------	--------------------	---------------------




AERIAL FEED
(NO METER USED)
FIGURE A


AERIAL FEED
(METER USED)
FIGURE B

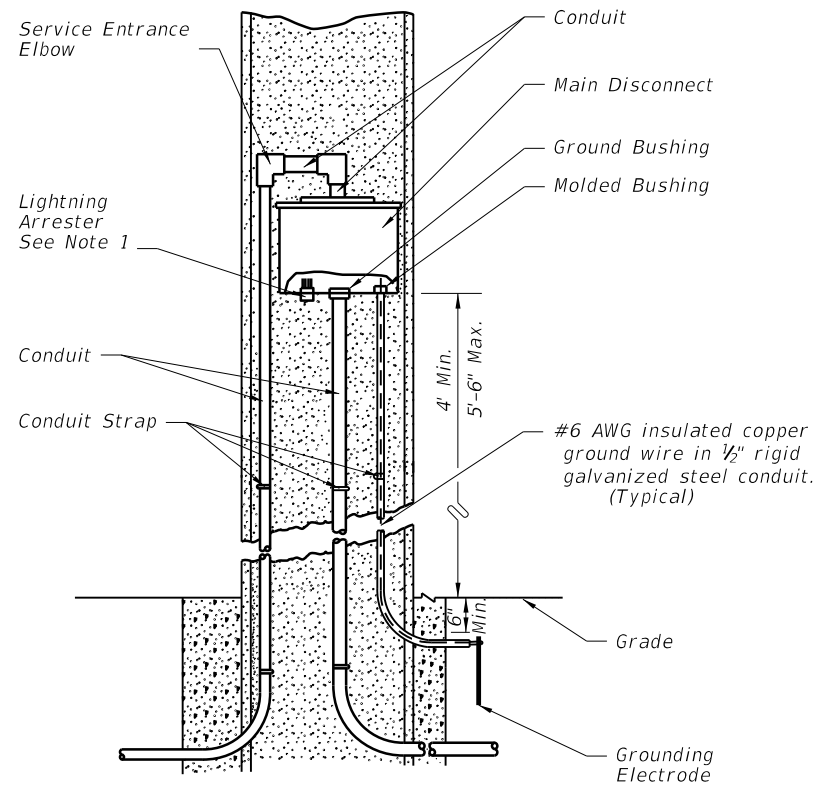

UNDERGROUND FEED
(NO METER USED)
FIGURE C

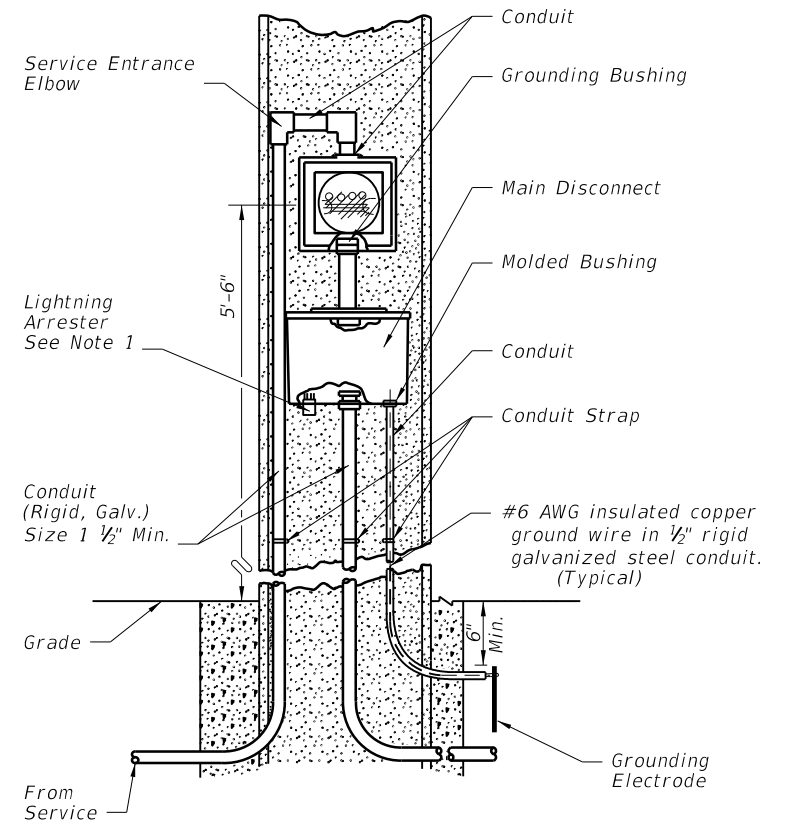

TYPE "B" UNDERGROUND FEED
(METER USED)
FIGURE D

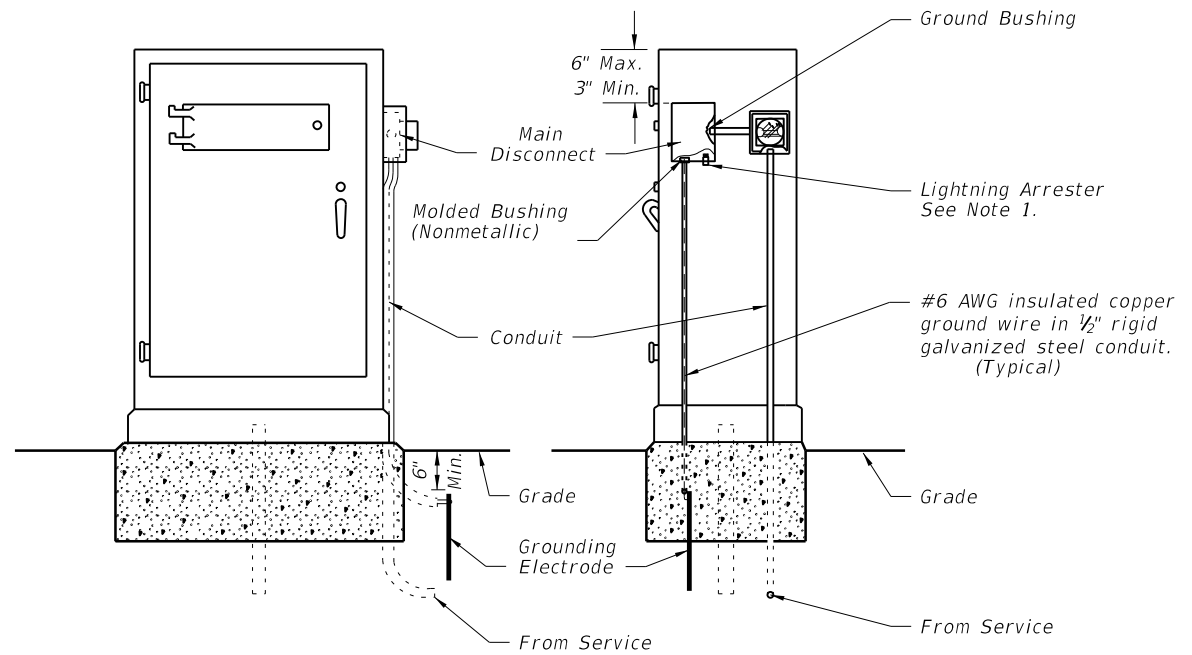


UNDERGROUND CABINET MOUNTED
(METER USED)
FIGURE E

NOTES:

1. The lightning arrester can be located on the side or bottom of the main disconnect enclosure at the Contractor's Option.
2. Liquidtight flexible conduit is approved for use from the electrical disconnect to the cabinet when both are installed on the same pole.
3. Bond all elements together to form an Intersection Grounding Network in accordance with Section 620 of the Department's current Standard Specifications for Road and Bridge Construction. The bond wire shall be run in conduit with the Electrical Service Wire or Signal Cable.
4. Meet all grounding requirements of Section 620 of the Standard Specifications.
5. The Main Disconnect shall be lockable by padlock and four keys provided to the maintaining agency. The door shall have a minimum of three hinges and be lockable. No screws to be used to attach door.
6. The Main Disconnect shall be Nema 3R or better.

6/24/2013 4:10:02 PM sm970re C:\projects\standards\roadway\17700-s\17736-01.dgn

LAST REVISION 07/01/09	REVISION	DESCRIPTION:	 FDOT 2014 DESIGN STANDARDS	ELECTRIC POWER SERVICE	INDEX NO. 17736	SHEET NO. 1 of 1
---------------------------	----------	--------------	--	-------------------------------	---------------------------	----------------------------

POLE SELECTION TABLE - SINGLE ARM - WITH & WITHOUT LUMINAIRE					
ARM TYPE	D1	D3	D5	D6	D7
POLE TYPE	S1 & S21 Lum	S2 & S22 Lum	S3 & S23 Lum	S4 & S24 Lum	S6

POLE SELECTION TABLE - DOUBLE ARM - WITHOUT LUMINAIRE										
ARM TYPE	D1 - D1	D3 - D1	D5 - D2	D6 - D2	D4 - D4	D5 - D4	D6 - D4	D5 - D5	D6 - D5	D6 - D6
POLE TYPE	S1	S2	S3	S4	S3	S4	S4	S4	S4	S5

Arm 1 is listed first

ARM DESIGN TABLE - ALL CASES														
ARM TYPE	ARM LENGTH	MAST ARM				ARM EXTENSION				ARM CONNECTION & WELDS				
		FA/SA (ft)	FB/SB (in)	FC/SC (in)	FD/SD (in)	FE/SE (ft)	FF/SF (in)	FG/SG (in)	FH/SH (in)	HT (in)	FJ/SJ (in)	FK/SK (in)	FM/SM (in)	FQ/SQ (in)
D1	36'-0"	36	8.99	14	0.1793					20	25	2.5	0.125	0.313
D2	36'-0"	36	9.00	14	0.1793					30	36	3	0.125	0.313
D3	46'-0"	36.1	8.95	14	0.1793	11.9	13.36	15	0.313	20	25	2.5	0.25	0.375
D4	46'-0"	36.1	8.95	14	0.1793	11.9	13.37	15	0.313	30	36	3	0.25	0.375
D5	60'-0"	35.8	7.99	13	0.1793	26.2	12.37	16	0.375	30	36	3	0.313	0.563
D6	70'-6"	39.1	9.52	15	0.1793	33.4	14.36	19	0.375	30	36	3	0.313	0.563
D7	78'-0"	40	8.47	14.07	0.1793	40	13.44	19	0.375	30	34	3	0.313	0.625

Arm Camber Angle = 2 degrees

POLE, CONNECTION AND SHAFT DESIGN TABLE - SINGLE & DOUBLE ARM																									
POLE TYPE	UA (ft)	UC (in)	UD (in)	UE (in)	UG (ft)	UPRIGHT BASE CONNECTION					CONNECTION PLATE DATA								DRILLED SHAFT DATA						
						No. Bolts	BA (in)	BB (in)	BC (in)	BF (in)	HT (in)	FJ/SJ (in)	FL/SL (in)	FN/SN (in)	FO/SO (in)	FP/SP (in)	FR/SR (in)	FS/SS (in)	FT/ST (in)	DA (ft)	DB (ft)	RA	RB	RC	RD (in)
S1	25	12.53	16	0.375		6	30	2.5	1.75	36	20	25	0.75	0.438	15.5	1	2	8	0.438	12	4	11	14	9	12
S2	25	14.53	18	0.375		6	32	2.5	1.75	36	20	25	0.75	0.438	15.5	1	2	8	0.438	12	4.5	11	16	9	12
S3	25	17.53	21	0.375		6	37	2.5	2	40	30	36	0.75	0.438	22	1.25	2.5	12.5	0.438	15	4.5	11	16	10	8
S4	25	22.53	26	0.375		6	42	2.5	2	40	30	36	0.75	0.438	22	1.25	2	12.5	0.438	17	5	11	18	10	8
S5	25	23.53	27	0.375		6	45	2.5	2.25	45	30	36	0.75	0.438	22	1.25	2	12.5	0.438	18	5	11	18	10	8
S6	25	21.53	25	0.375		6	41	2.5	2	40	30	34	0.75	0.5	16.5	1.25	2	12.5	0.5	15	5	11	18	10	8
S21 Lum	39	10.54	16	0.375	37.5	6	30	2.5	1.75	40	20	25	0.75	0.438	11.5	1	2	8	0.438	12	4	11	14	9	12
S22 Lum	39	12.54	18	0.375	37.5	6	32	2.5	1.75	40	20	25	0.75	0.438	12.5	1	2	8	0.438	12	4.5	11	16	9	12
S23 Lum	39	15.54	21	0.375	37.5	6	37	2.5	2	40	30	36	0.75	0.438	15	1.25	2.5	12.5	0.438	14	4.5	11	16	10	8
S24 Lum	39	20.54	26	0.375	37.5	6	42	2.5	2	40	30	36	0.75	0.438	17	1.25	2	12.5	0.438	15	5	11	18	10	8

LUMINAIRE AND LUMINAIRE CONNECTION											
LA (ft)	LB (ft)	LC (in)	LD (in)	LE	LF (ft)	LG (in)	LH (in)	LJ (in)	LK (in)	LL (deg)	UG (ft)
40	10	3	0.125	0.5	8	0.5	0.75	0.25	0.25	0	37.5

Notes:
 1. Work this Index with Index No. 17745.
 2. Design Wind Speed = 150 mph with Signal Backplates.

"D" MAST ARMS

LAST REVISION 07/01/13	DESCRIPTION:	 FDOT 2014 DESIGN STANDARDS	STANDARD MAST ARM ASSEMBLIES	INDEX NO. 17743	SHEET NO. 1 of 2
---------------------------	--------------	--	------------------------------	--------------------	---------------------

C:\projects\standards\roadway\17700-s\17743-01.dgn 4:10:04 PM 6/24/2013 sm970re

POLE SELECTION TABLE - SINGLE ARM - WITH & WITHOUT LUMINAIRE

ARM TYPE	E1	E3	E5	E6	E7
POLE TYPE	T1 & T21 Lum	T2 & T22 Lum	T3 & T23 Lum	T4 & T24 Lum	T6

POLE SELECTION TABLE - DOUBLE ARM - WITHOUT LUMINAIRE

ARM TYPE	E1 - E1	E3 - E1	E5 - E2	E6 - E2	E4 - E4	E5 - E4	E6 - E4	E5 - E5	E6 - E5	E6 - E6
POLE TYPE	T1	T2	T3	T4	T3	T4	T4	T4	T4	T5

Arm 1 is listed first

ARM DESIGN TABLE - ALL CASES

ARM TYPE	ARM LENGTH	MAST ARM				ARM EXTENSION				ARM CONNECTION & WELDS		
		FA/SA (ft)	FB/SB (in)	FC/SC (in)	FD/SD (in)	FE/SE (ft)	FF/SF (in)	FG/SG (in)	FH/SH (in)	HT (in)	FJ/SJ (in)	FK/SK (in)
E1	36'-0"	36.0	5.98	11	0.25					22	22	2
E2	36'-0"	36.0	5.99	11	0.25					30	32	2.75
E3	46'-0"	35.1	7.09	12	0.25	12.9	11.22	13	0.313	22	23	2
E4	46'-0"	35.1	7.09	12	0.25	12.9	11.23	13	0.313	30	32	2.75
E5	60'-0"	34.8	6.13	11	0.25	27.2	10.22	14	0.375	30	32	2.75
E6	70'-6"	38.1	6.66	12	0.25	34.4	11.22	16	0.375	30	32	2.75
E7	78'-0"	40.0	7.47	13.07	0.1793	40	12.43	18	0.375	30	32	2.5

Arm Camber Angle = 2 degrees

POLE, CONNECTION AND SHAFT DESIGN TABLE - SINGLE & DOUBLE ARM

POLE TYPE	UA (ft)	UC (in)	UD (in)	UE (in)	UG (ft)	UPRIGHT BASE CONNECTION					CONNECTION PLATE DATA								DRILLED SHAFT DATA						
						No. Bolts	BA (in)	BB (in)	BC (in)	BF (in)	HT (in)	FJ/SJ (in)	FL/SL (in)	FN/SN (in)	FO/SO (in)	FP/SP (in)	FR/SR (in)	FS/SS (in)	FT/ST (in)	DA (ft)	DB (ft)	RA	RB	RC	RD (in)
T1	25	10.53	14	0.375		6	26	2.5	1.5	36	22	22	0.5	0.375	14	1	2.0	9	0.375	11	4	11	14	8	12
T2	25	12.53	16	0.375		6	28	2.5	1.5	36	22	23	0.5	0.375	14	1	2.0	9	0.375	12	4	11	14	9	12
T3	25	15.53	19	0.375		6	35	2.5	2	40	30	32	0.75	0.375	19.5	1.25	2.25	12.5	0.375	12	4.5	11	16	9	12
T4	25	18.53	22	0.5		6	38	2.5	2	40	30	32	0.75	0.375	19.5	1.25	2.0	12.5	0.375	15	4.5	11	16	10	8
T5	25	18.53	22	0.5		6	38	2.5	2	40	30	32	0.75	0.375	19.5	1.25	2.0	12.5	0.375	16	4.5	11	16	10	8
T6	25	18.53	22	0.375		6	38	2.5	2	40	30	32	0.75	0.438	15	1.25	2.0	12.5	0.438	14	4.5	11	16	10	8
T21 Lum	39	8.54	14	0.375	37.5	6	26	2.5	1.5	40	22	22	0.5	0.375	10	1	2.0	9	0.375	11	4	11	14	8	12
T22 Lum	39	10.54	16	0.375	37.5	6	30	2.5	1.75	40	22	22	0.5	0.375	11	1	2.0	9	0.375	12	4	11	14	9	12
T23 Lum	39	13.54	19	0.375	37.5	6	35	2.5	2	40	30	32	0.75	0.375	13	1.25	2.25	12.5	0.375	12	4.5	11	16	9	12
T24 Lum	39	16.54	22	0.375	37.5	6	38	2.5	2	40	30	32	0.75	0.375	15	1.25	2.0	12.5	0.375	14	4.5	11	16	10	12

LUMINAIRE AND LUMINAIRE CONNECTION

LA (ft)	LB (ft)	LC (in)	LD (in)	LE	LF (ft)	LG (in)	LH (in)	LJ (in)	LK (in)	LL (deg)	UG (ft)
40	10	3	0.125	0.5	8	0.5	0.75	0.25	0.25	0	37.5

Notes:


1. Work this Index with Index No. 17745.
2. Design Wind Speed = 150 mph without Signal Backplates.
130 mph with or without Signal Backplates.
110 mph with or without Signal Backplates.

"E" MAST ARMS

LAST REVISION 07/01/13	REVISION	DESCRIPTION:	 FDOT 2014 DESIGN STANDARDS	STANDARD MAST ARM ASSEMBLIES	INDEX NO. 17743	SHEET NO. 2 of 2
---------------------------	----------	--------------	---	-------------------------------------	--------------------	---------------------

C:\projects\standards\roadway\17700-s\17743-02.dgn smg70re 4:10:06 PM 6/24/2013

C:\projects\standards\roadway\17700-s\17745-01.dgn
smg70re
4:10:08 PM
6/24/2013

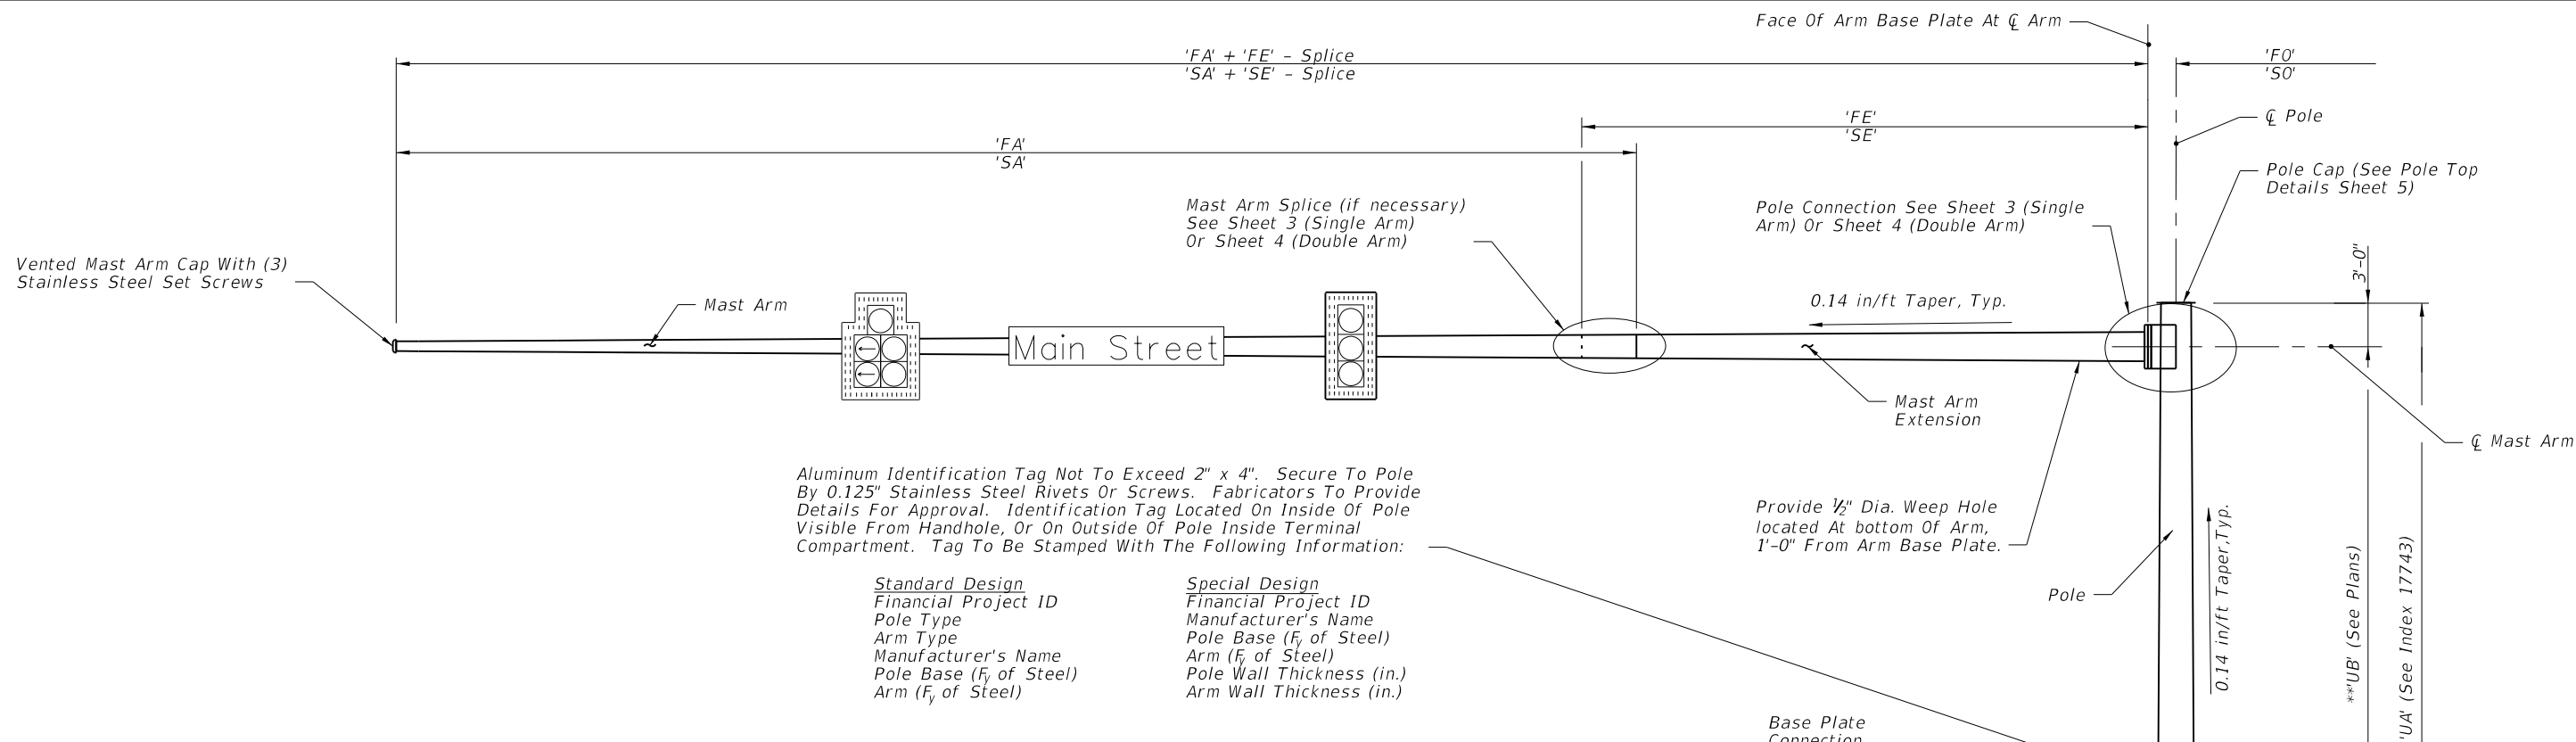

Aluminum Identification Tag Not To Exceed 2" x 4". Secure To Pole By 0.125" Stainless Steel Rivets Or Screws. Fabricators To Provide Details For Approval. Identification Tag Located On Inside Of Pole Visible From Handhole, Or On Outside Of Pole Inside Terminal Compartment. Tag To Be Stamped With The Following Information:

<u>Standard Design</u>	<u>Special Design</u>
Financial Project ID	Financial Project ID
Pole Type	Manufacturer's Name
Arm Type	Pole Base (F _y of Steel)
Manufacturer's Name	Arm (F _y of Steel)
Pole Base (F _y of Steel)	Pole Wall Thickness (in.)
Arm (F _y of Steel)	Arm Wall Thickness (in.)

MAST ARM ASSEMBLIES GENERAL NOTES

- 1) Signal Structure Materials shall be as follows:

Poles & Mast Arms & Backing Rings	->	ASTM A1011 Grade 50, 55, 60 or 65 (less than 1/4") or ASTM A572 Grade 50, 55, 60 or 65 (1/4" and over) or ASTM A595 Grade A (55 ksi yield) or Grade B (60 ksi yield)
Steel Plates	->	ASTM A36
Weld Metal	->	E70XX
Bolts (except Anchor Bolts)	->	ASTM A325 Type 1
Anchor Bolts	->	ASTM F1554 Grade 55 ksi
Nuts for Anchor Bolts	->	ASTM A563 Grade A Heavy Hex
Handhole Frame	->	ASTM A709 Grade 36 ksi or ASTM A36
Handhole Cover	->	ASTM A1011 Grade 50, 55, 60 or 65 ksi
Caps	->	ASTM A1011 Grade 50, 55, 60 or 65 ksi or ASTM B209
Nut Covers	->	ASTM B26 (319-F)
Stainless Steel Screws	->	AISI Type 316
Threaded Bars/Studs	->	ASTM A36 or ASTM A307
- 2) Reinforcing Steel shall be ASTM A615 Grade 60 ksi.
- 3) Concrete shall be Class IV (Drilled Shaft) with a minimum 28-day compressive strength of 4,000 psi for all environmental classifications.
- 4) Perform all welding in accordance with the American Welding Society Structural Welding Code (Steel) ANSI/AWS D1.1 (current edition). For additional welding requirements see AASHTO Standard Specification for Structural Supports for Highway Signs, Luminaires and Traffic Signals, Section 5.15, Welded Connections.
- 5) All steel items shall be galvanized as follows:





All Nuts, Bolts, Washers and Threaded Bars/Studs	->	F2329
All other steel items (including Pole & Mast Arm)	->	ASTM A123
- 6) Locate handhole 180° from arm on single arm poles or 180° from first arm of double arm poles or see special instructions on Mast Arm Tabulation Sheet.
- 7) Except for Anchor Bolts, all bolt hole diameters shall be equal to the bolt diameter plus 1/16", prior to galvanizing. Hole diameters for Anchor Bolts shall not exceed the bolt diameter plus 1/2".
- 8) Sign Panels and Signals attached to the Mast Arm shall be centered in elevation on the arm. Wire access holes shall not exceed 1 1/2" in diameter.
- 9) Mast Arms and Poles shall be tapered with the diameter changing at a rate of 0.14 inch per foot.
- 10) The Pole shall be installed vertically. Camber shall be accounted for in the Mast Arm connection as detailed.
- 11) If a Mast Arm damping device is required by the Engineer, it shall be installed within eight feet of the Mast Arm tip.
- 12) Design according to FDOT Structures Manual. Alternate Designs for Special Mast Arm Assemblies are not allowed.
- 13) Provide "J", or "C"-Hook at top of pole for signal cable support.
- 14) First and Second Arm Camber Angle = 2°.
- 15) Details for Signal and Sign Locations, Signal Head attachment, Sign Attachment, Pedestrian Head Attachment, and Foundation Conduit are not shown for clarity.
- 16) Use of split lock washer is not permitted.
- 17) This Design Standard is considered fully detailed and no shop drawings are necessary. Submit shop drawings for minor modifications not detailed in the plans.
- 18) Verify CSL access tubes will not interfere with anchor bolt installation before excavating the shaft. When CSL access tube locations conflict with anchor bolt locations, move the CSL access tube location +/- two inches along the inner circumference of the reinforcing cage. Notify the Engineer before excavating the shaft if the CSL access tube locations cannot be moved out of conflict with anchor bolt locations.

ELEVATION VIEW
(Single Arm Shown, Double Arm Similar)
(Luminaire Arm Not Shown)


TYPICAL ELEVATION AND NOTES

LAST REVISION 07/01/13	REVISION	DESCRIPTION:	<p>FDOT 2014 DESIGN STANDARDS</p>	<p>MAST ARM ASSEMBLIES</p>	INDEX NO. 17745	SHEET NO. 1 of 5
----------------------------------	----------	--------------	--	-----------------------------------	---------------------------	----------------------------




C:\projects\standards\roadway\17700-s\17745-02.dgn
 sm970re
 4:10:10 PM
 6/24/2013

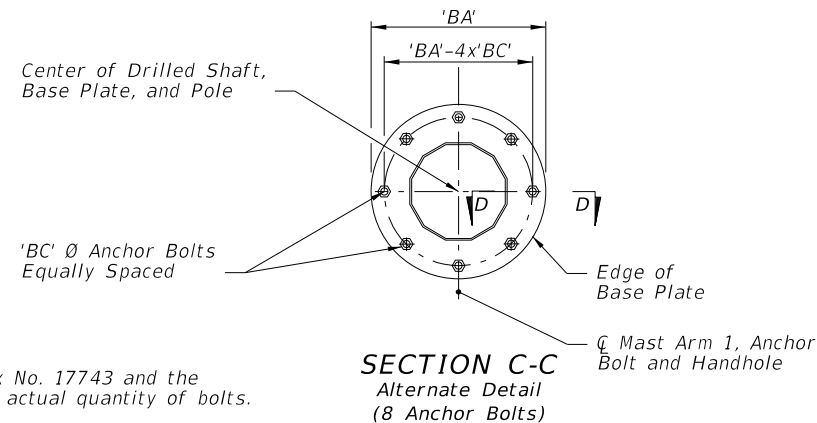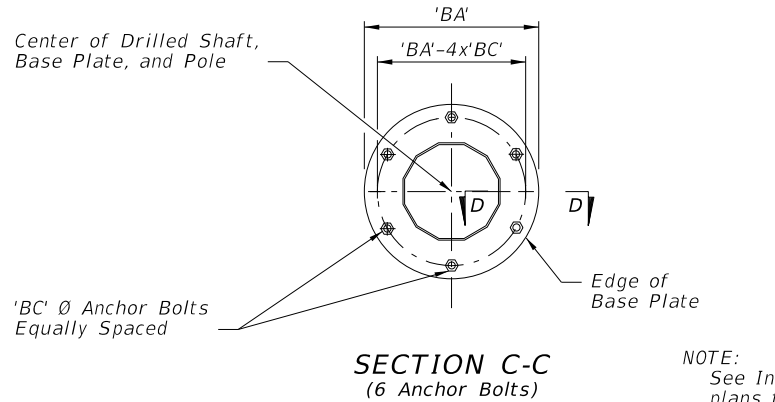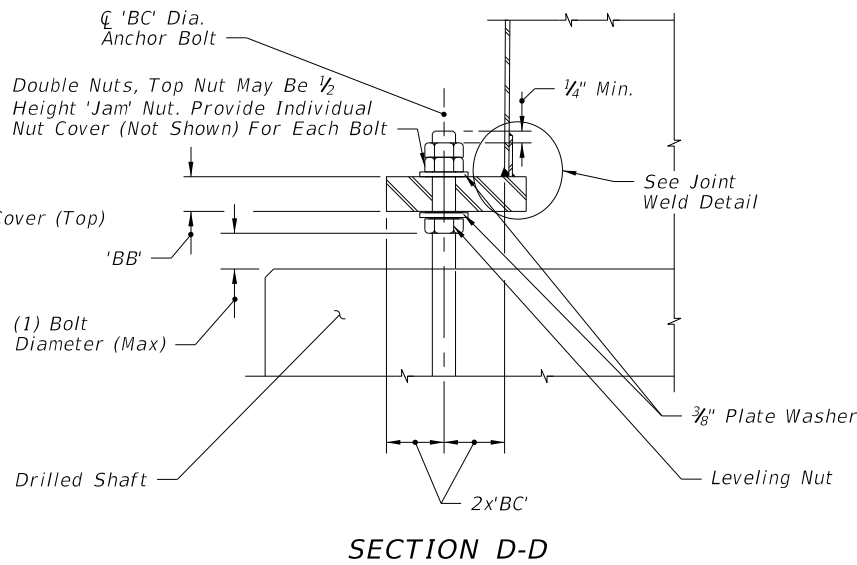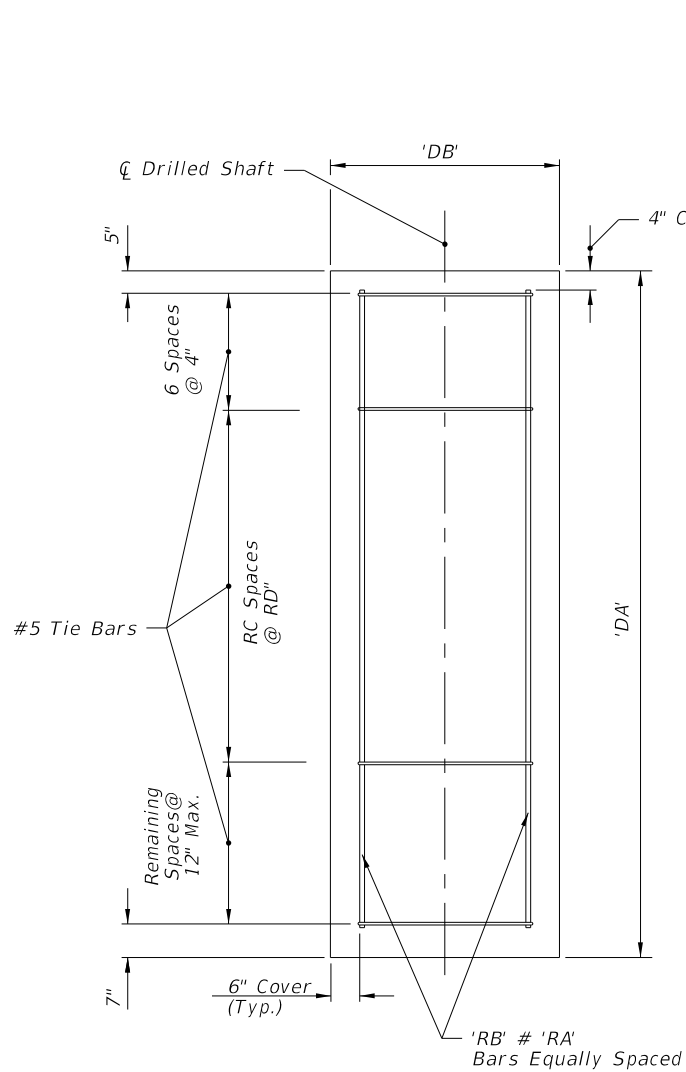


NOTE:
See Index No. 17743 and the plans for actual quantity of bolts.

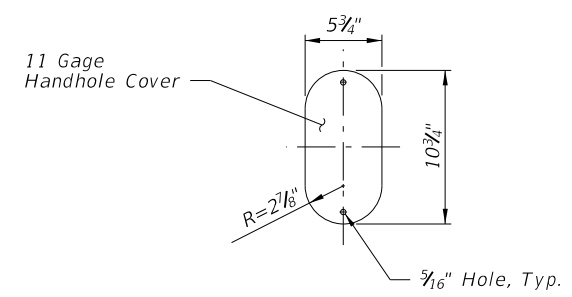


Note:
Handhole Cover may be omitted when Terminal Compartment is provided.

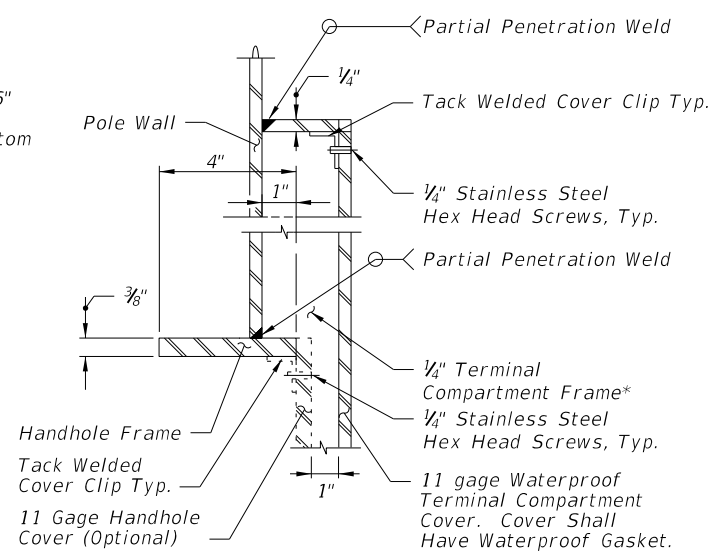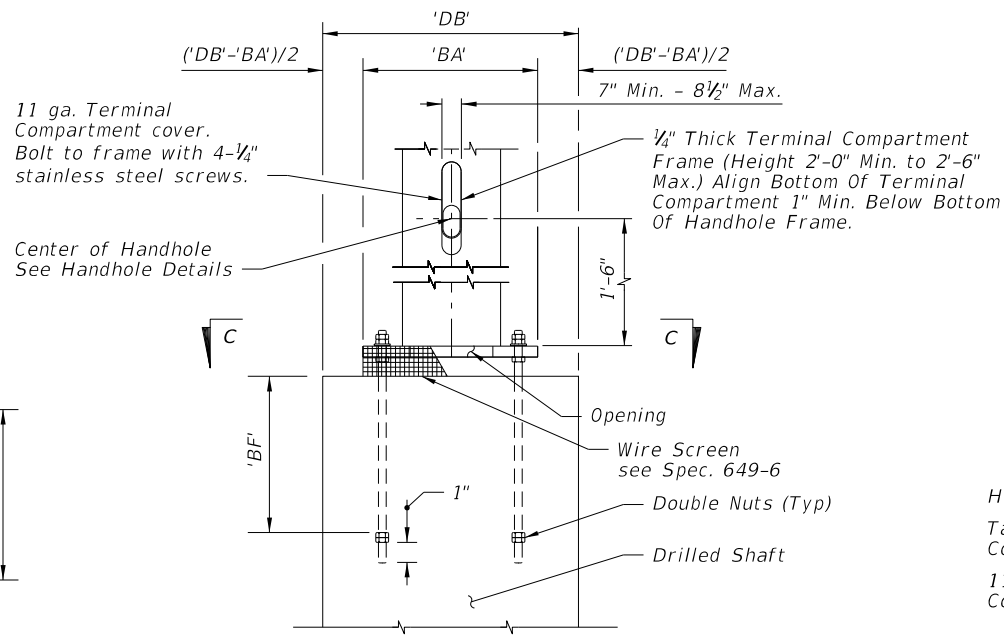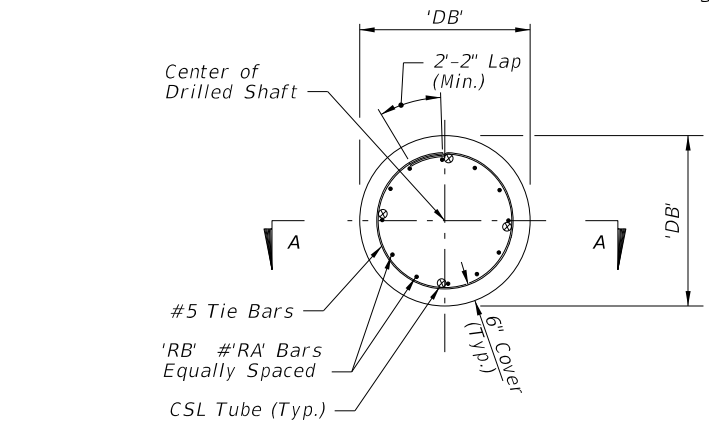


* Terminal Compartment is optional.
See Mast Arm Tabulation to see if required and for locations.

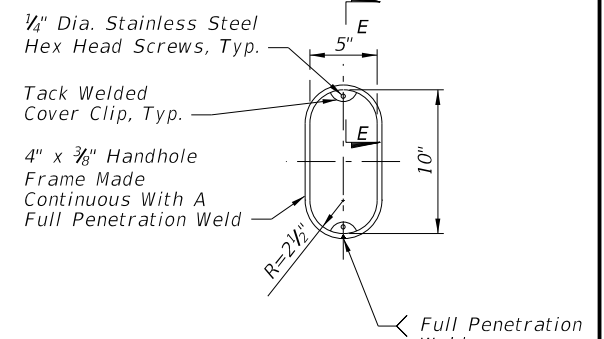


TYPICAL FOUNDATION AND BASE PLATE DETAILS

LAST REVISION 07/01/13	DESCRIPTION:	 FDOT 2014 DESIGN STANDARDS	MAST ARM ASSEMBLIES	INDEX NO. 17745	SHEET NO. 2 of 5
---------------------------	--------------	--	----------------------------	---------------------------	----------------------------


C:\projects\standards\roadway\17700-s\17745-03.dgn
 sm970re
 4:10:12 PM
 6/24/2013

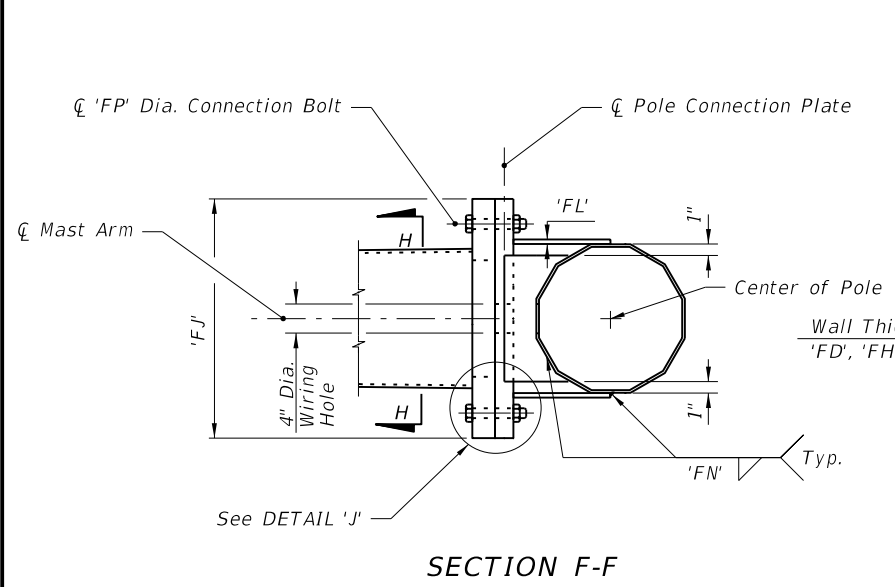


SECTION F-F

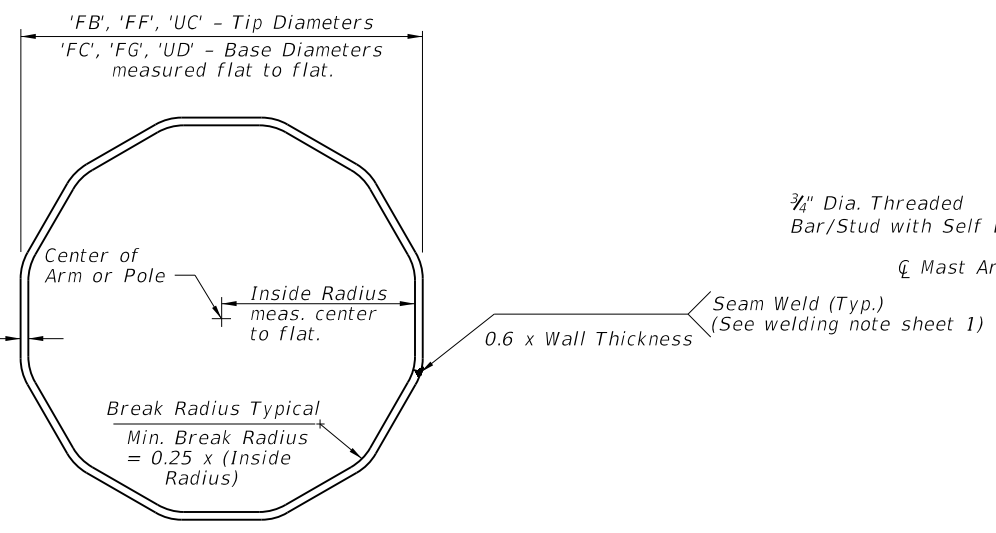


SECTION H-H

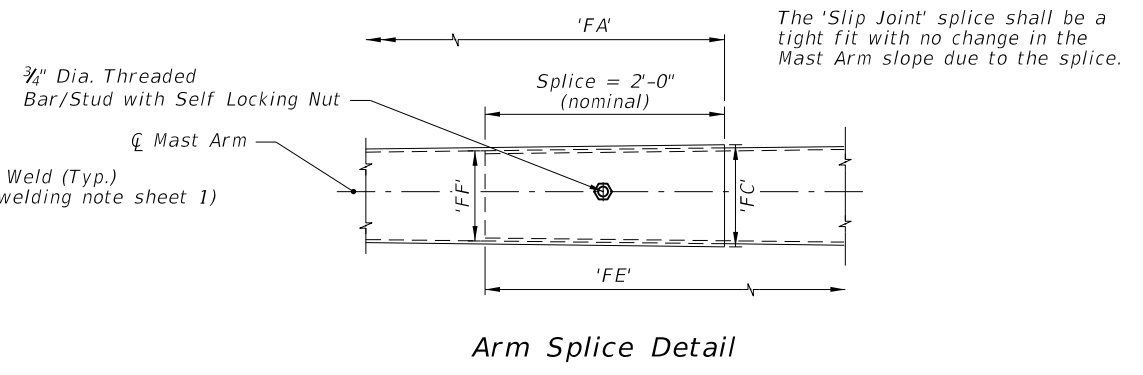


Arm Splice Detail

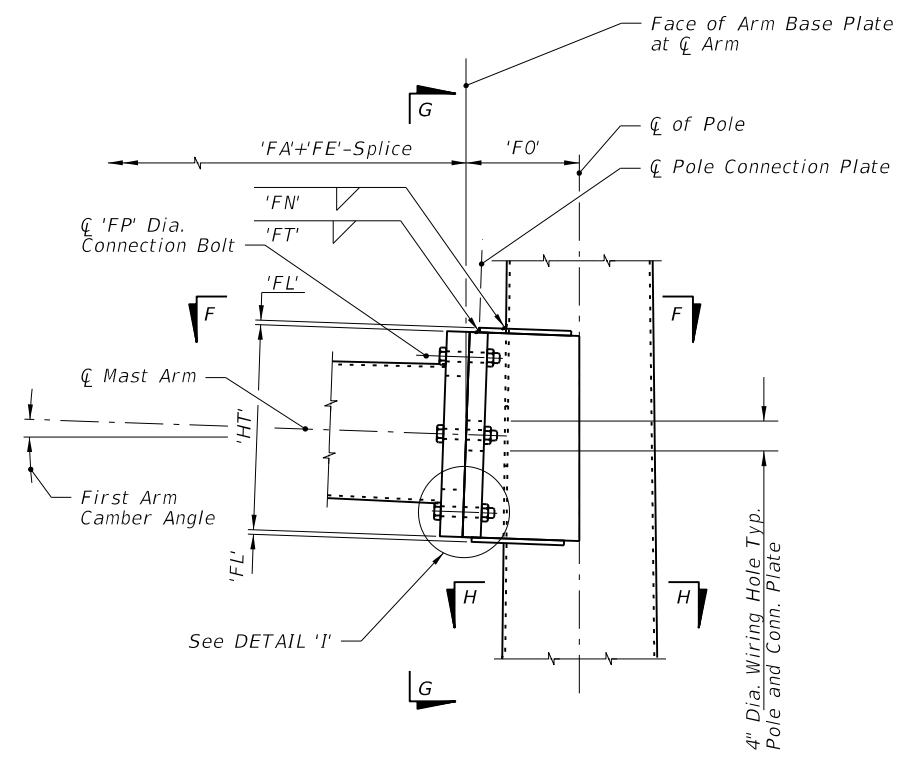


ELEVATION
(Single Arm Connection)

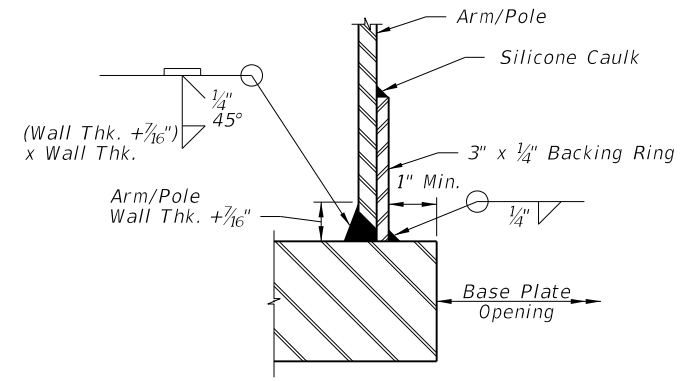


JOINT WELD DETAIL

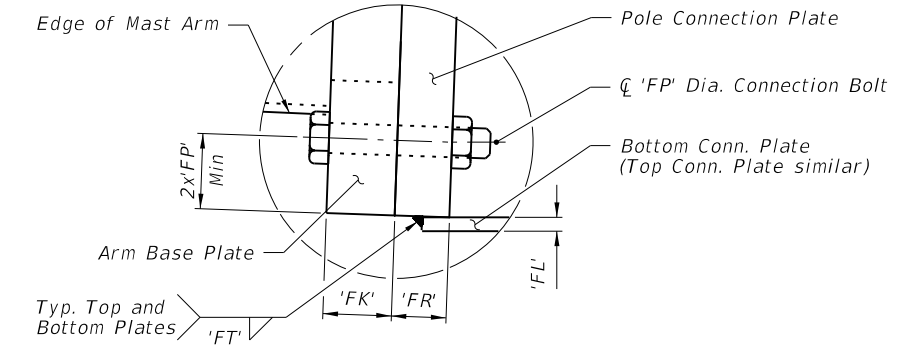

DETAIL 'I'

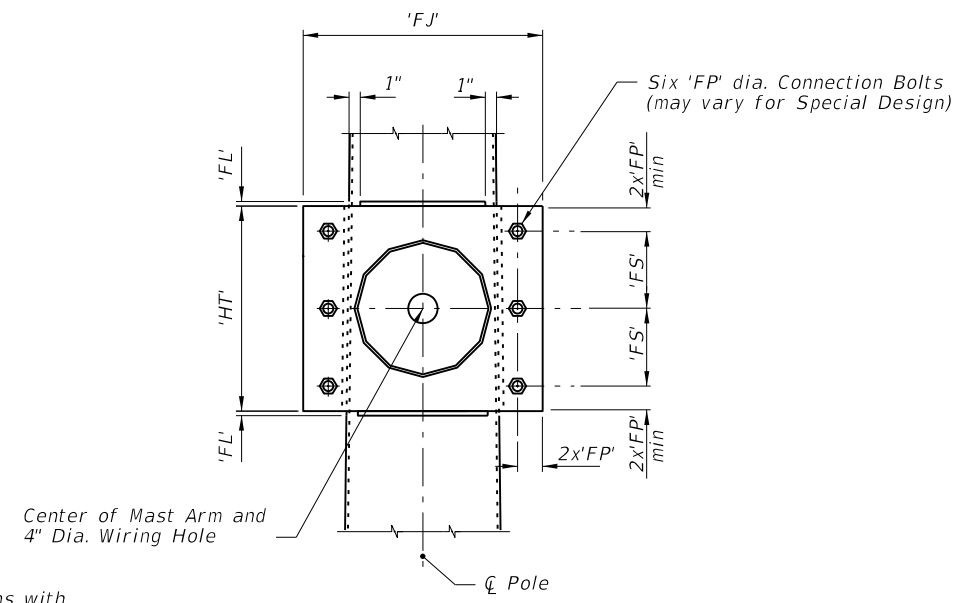

SECTION G-G

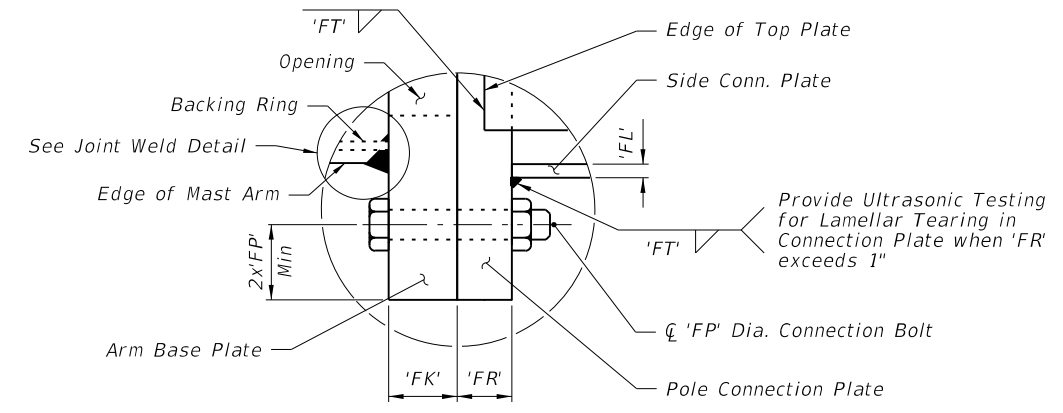


DETAIL 'J'

TYPICAL SINGLE ARM CONNECTION DETAILS


- NOTE:
1. Details shown on this sheet are for 12 sided pole sections. However, sections with more than 12 sides and round sections are permitted provided outside diameter and wall thickness are not reduced.
 2. Mast Arm and Connection Plates shall be match marked to ensure proper assembly.

LAST REVISION 07/01/13	DESCRIPTION:		FDOT 2014 DESIGN STANDARDS	MAST ARM ASSEMBLIES	INDEX NO. 17745	SHEET NO. 3 of 5
REVISION						


C:\projects\standards\roadway\17700-s\17745-04.dgn
 sm970re
 4:10:13 PM
 6/24/2013

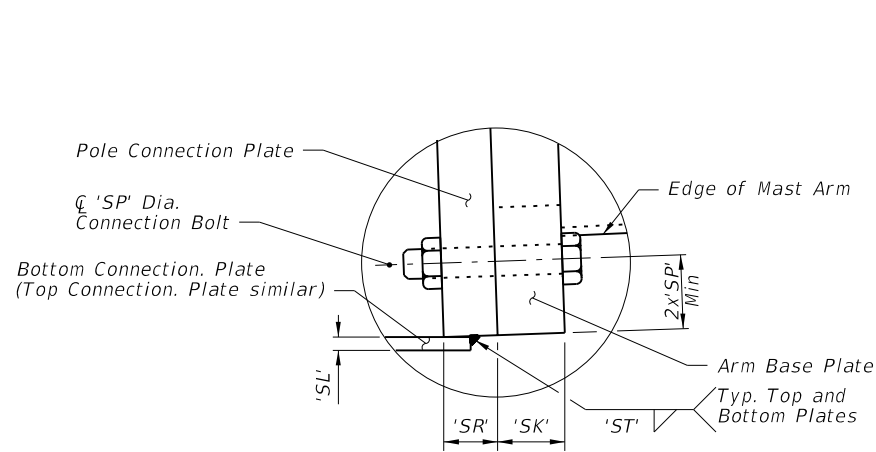

DETAIL 'N'

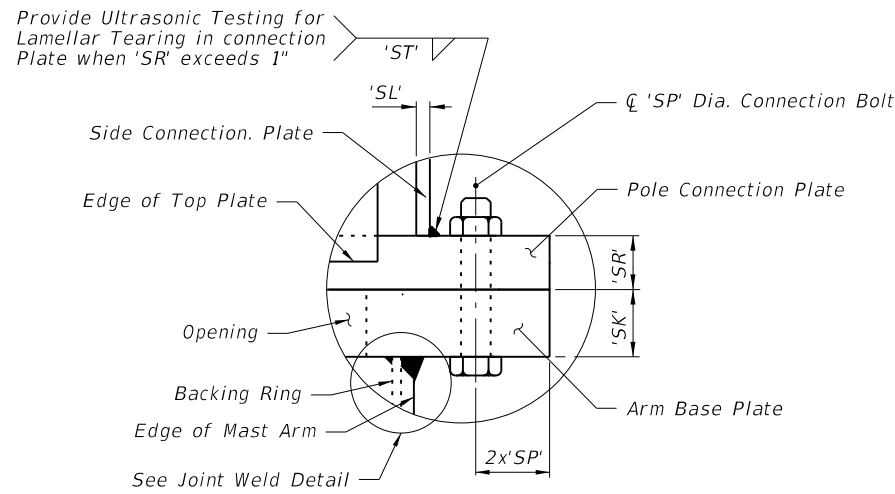


DETAIL 'O'

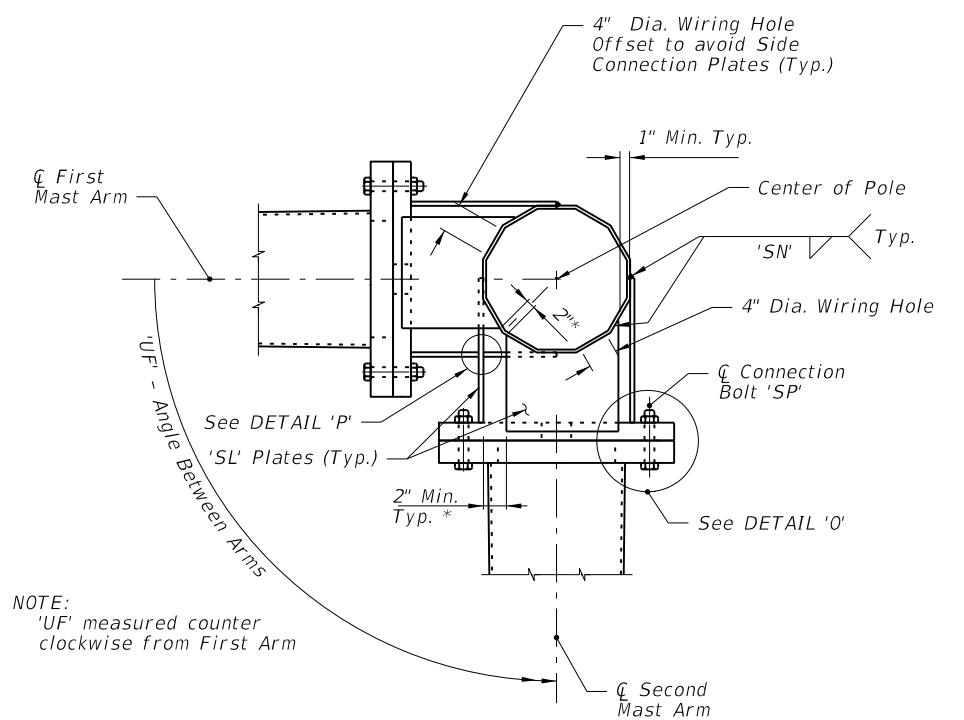


SECTION K-K

NOTE:
'UF' measured counter clockwise from First Arm


* Adjust width of top and bottom Connection Plates to maintain minimum clearance shown

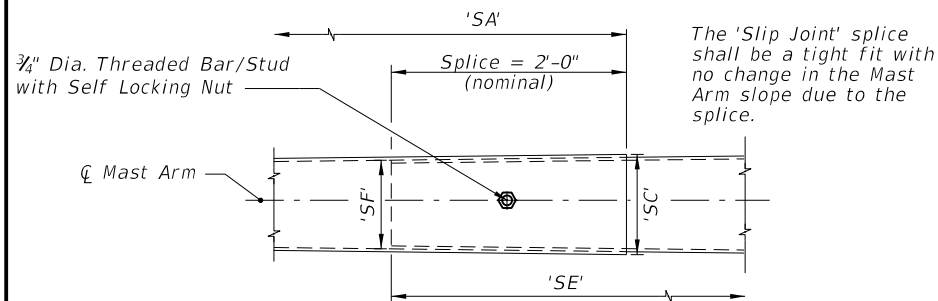


Arm Splice Detail

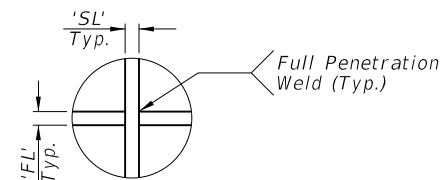


DETAIL 'P'

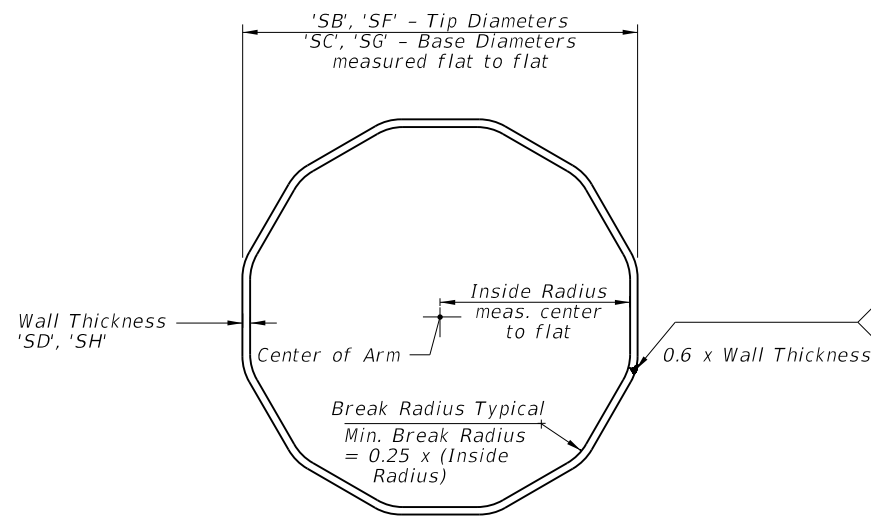

SECTION M-M

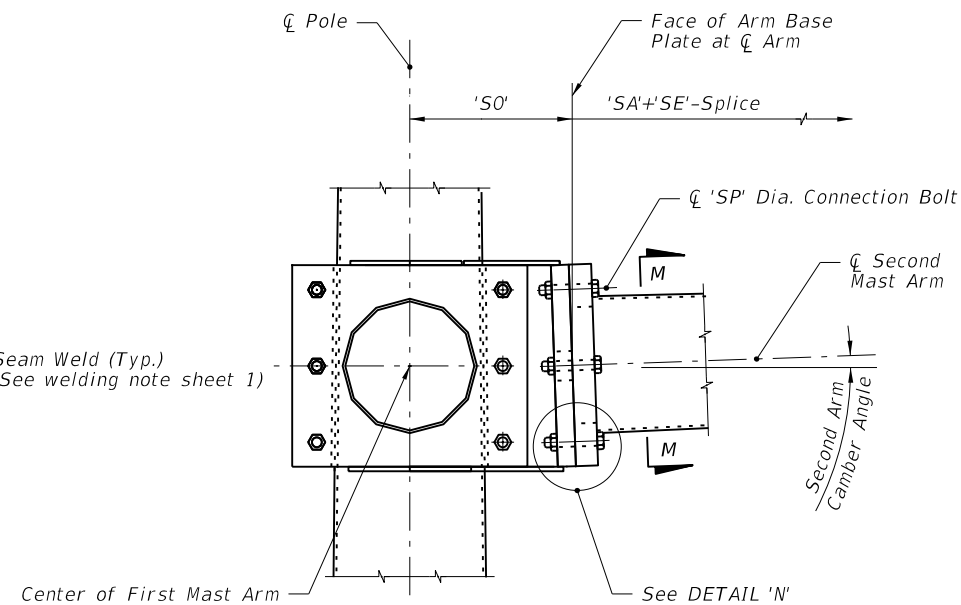

SECTION L-L

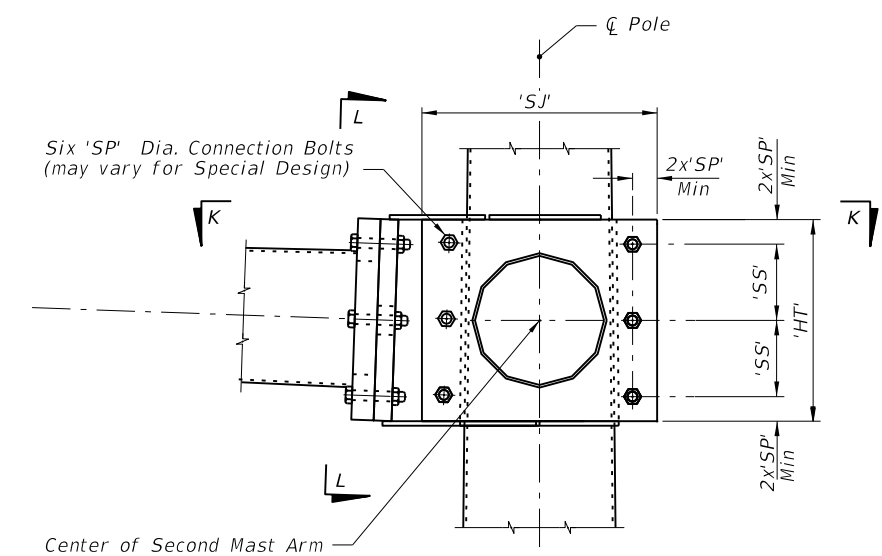


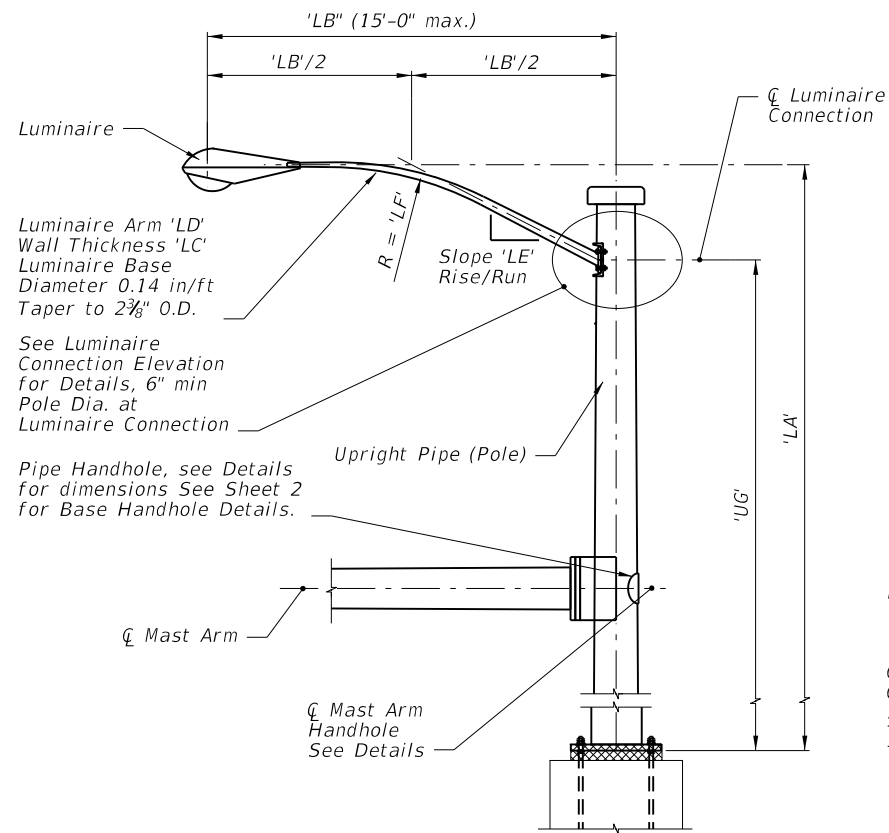
ELEVATION

(Double Arm Connection)


NOTE:
 1. Details shown on this sheet are for 12 sided pole sections. However, sections with more than 12 sides and round sections are permitted provided outside diameter and wall thickness are not reduced.
 2. Mast Arm and Connection Plates shall be match marked to ensure proper assembly.

TYPICAL DOUBLE ARM CONNECTION DETAILS


LAST REVISION 01/01/12	DESCRIPTION:	 FDOT 2014 DESIGN STANDARDS	MAST ARM ASSEMBLIES	INDEX NO. 17745	SHEET NO. 4 of 5




LUMINAIRE ELEVATION

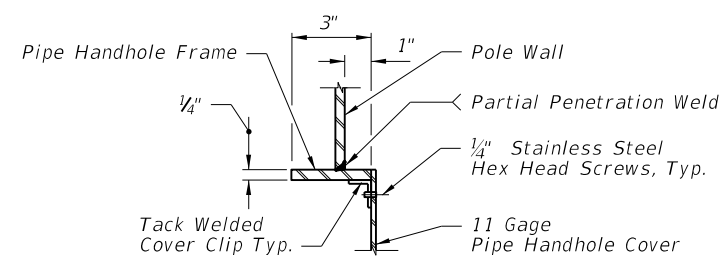


SECTION E-E
(thru Pipe Handhole)

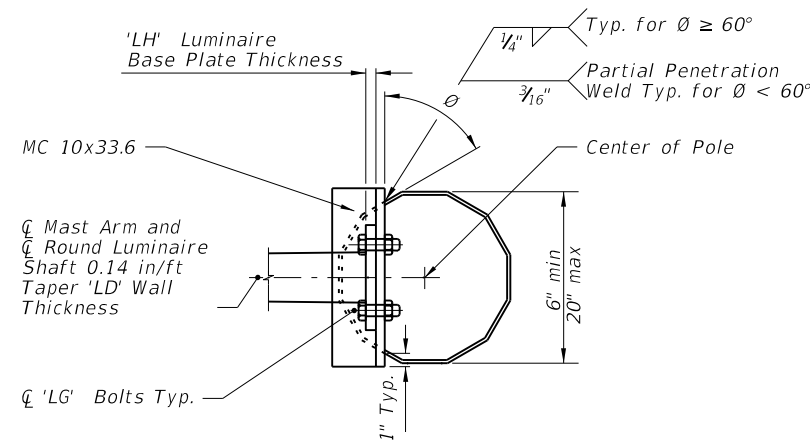


SECTION A-A

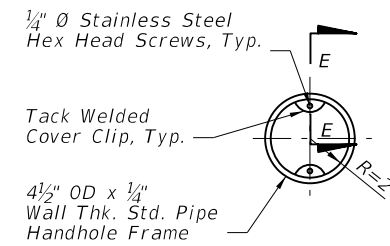


PIPE HANDHOLE FRAME

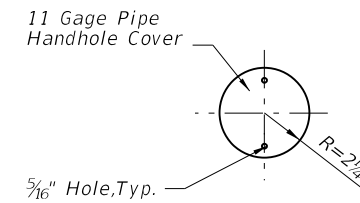


PIPE HANDHOLE COVER

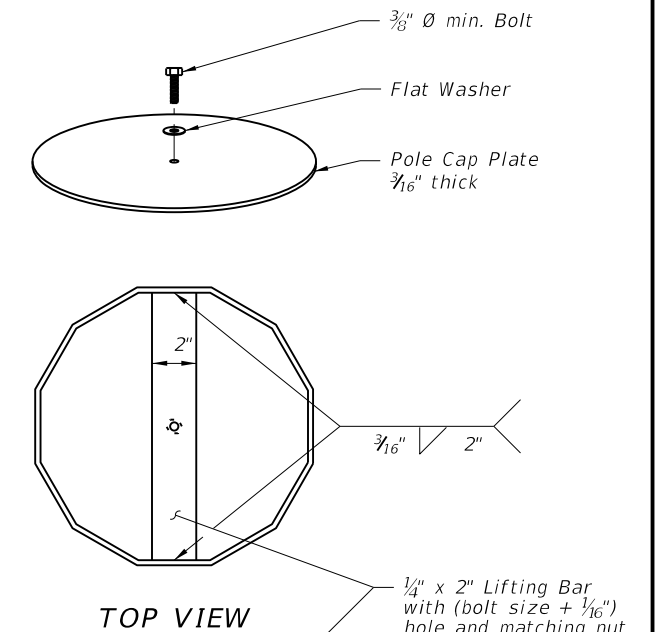

POLE TOP CUT-AWAY
(Option 'a')

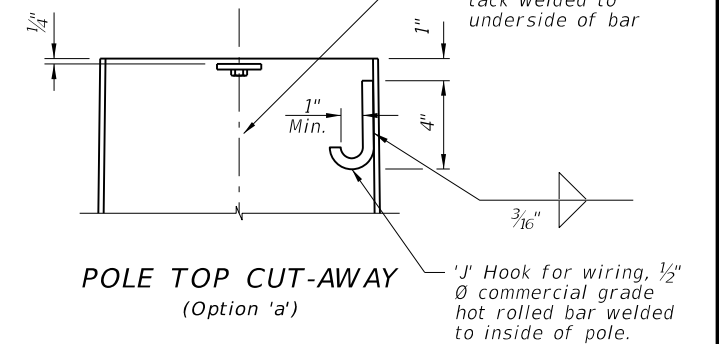


POLE TOP CUT-AWAY
(Option 'b')

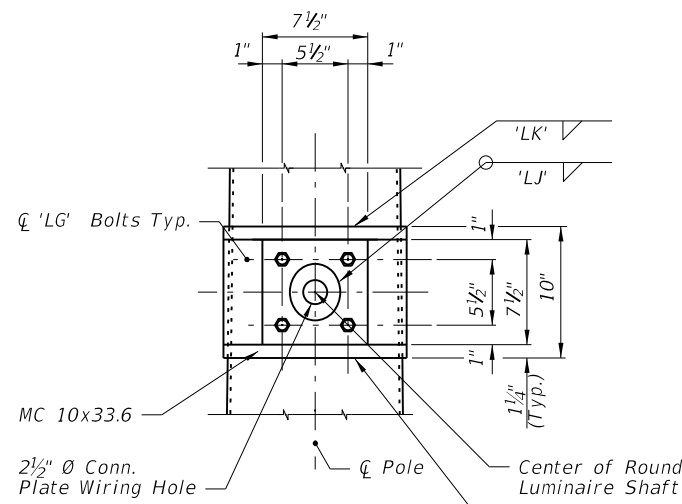


SECTION B-B

NOTE:
The Fabricator may substitute a 1/2" thick bent plate with the same flange width, height, and length as the MC 10x33.6 Channel section.

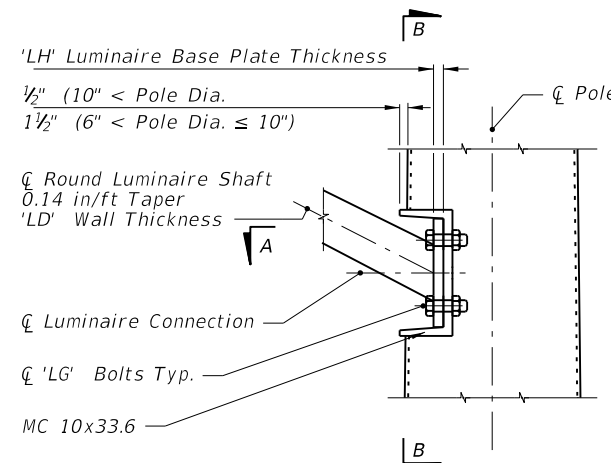


LUMINAIRE CONNECTION ELEVATION

NOTE:
The Pole shown on this sheet is a 12 sided section. However, sections with more than 12 sides and round sections are permitted provided outside diameter and wall thickness are not reduced

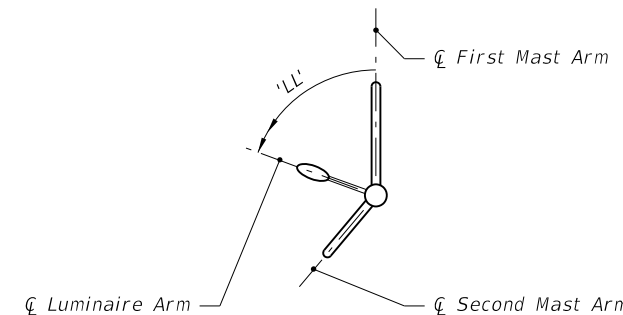

LUMINAIRE ORIENTATION

NOTE:
'LL' measured counter clockwise from First Arm.

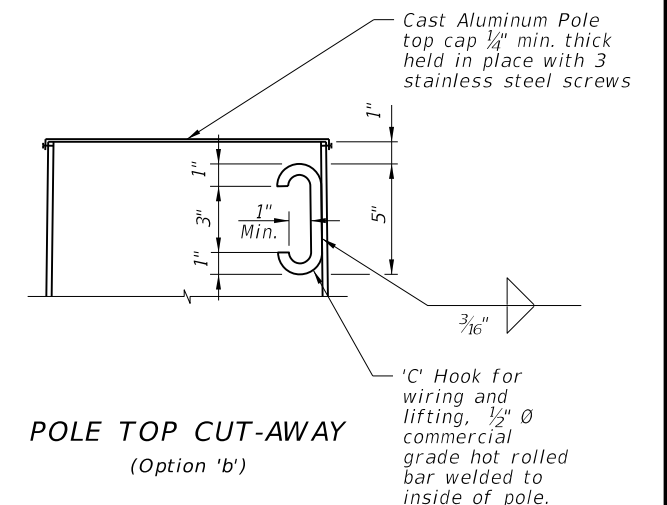

POLE TOP CUT-AWAY
(Option 'b')

POLE TOP DETAILS

NOTE:
Any combination of the above two options may be used, provided both lifting and wiring is accommodated.


NOTES:

- Luminaire type and Luminaire to Arm Connection Details can be found elsewhere.
- Align Luminaire Arm with single Mast Arm or first Arm of Double Mast Arm unless indicated otherwise in plans.

TYPICAL LUMINAIRE ARM AND CONNECTION DETAILS

C:\projects\standards\roadway\17700-s\17745-05.dgn 4:10:15 PM sm970re 6/24/2013


LAST REVISION 07/01/13	DESCRIPTION:		<p>FDOT 2014 DESIGN STANDARDS</p>	<p>MAST ARM ASSEMBLIES</p>	INDEX NO. 17745	SHEET NO. 5 of 5

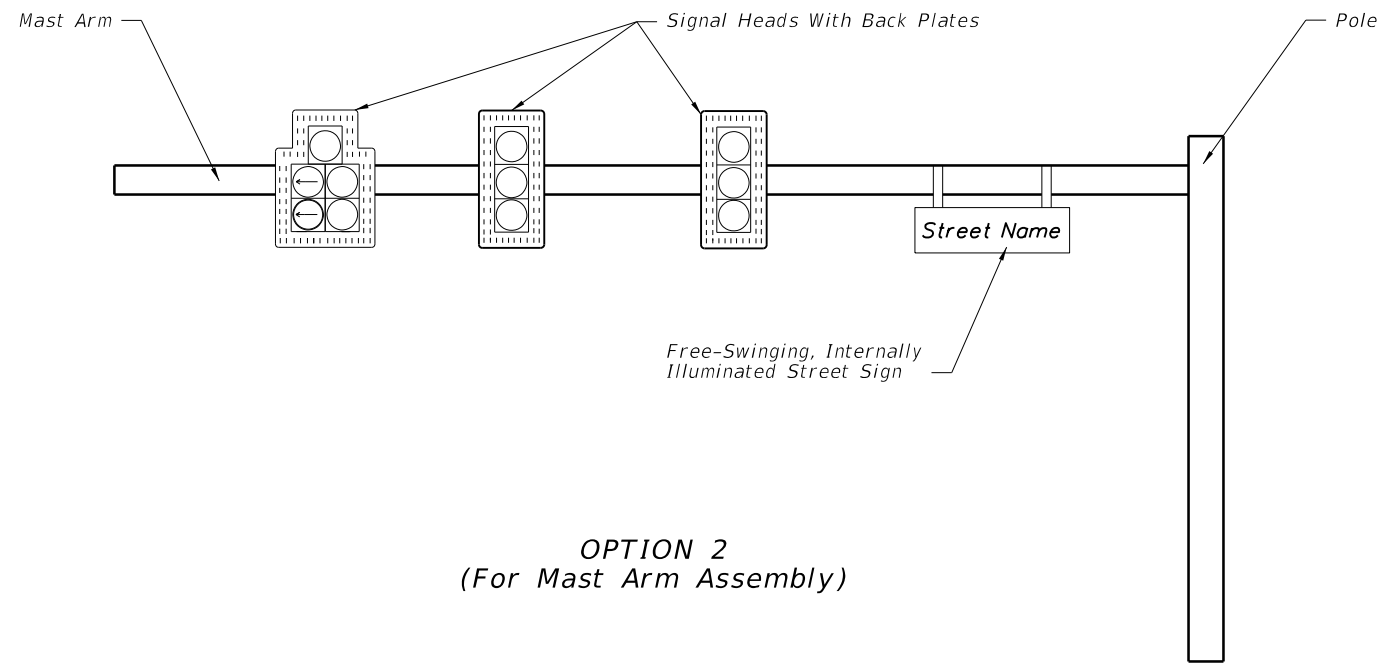

OPTION 2
(For Mast Arm Assembly)


NOTES:

1. Free-swinging, internally-illuminated street signs shall only be installed on the signal pole for span wire assemblies. For mast arm assemblies the street sign may be installed on the arm or pole.
2. Free-swinging, internally-illuminated street signs shall meet the requirements of Section 699 of the Standard Specifications for Road and Bridge Construction.
3. Pole attachments and cantilever arm (or truss) assemblies may be accepted by Contractor certification provided the signs being supported meet the weight and area limitations included in Section 699 for "Acceptance by Certification".
4. Pole attachments and cantilever arm (or truss) assemblies supporting signs not meeting the weight or area limitations included in Section 699 for "Acceptance by Certification" require the submittal of structural calculations and Shop Drawings that have been prepared by and sealed by the Specialty Engineer.

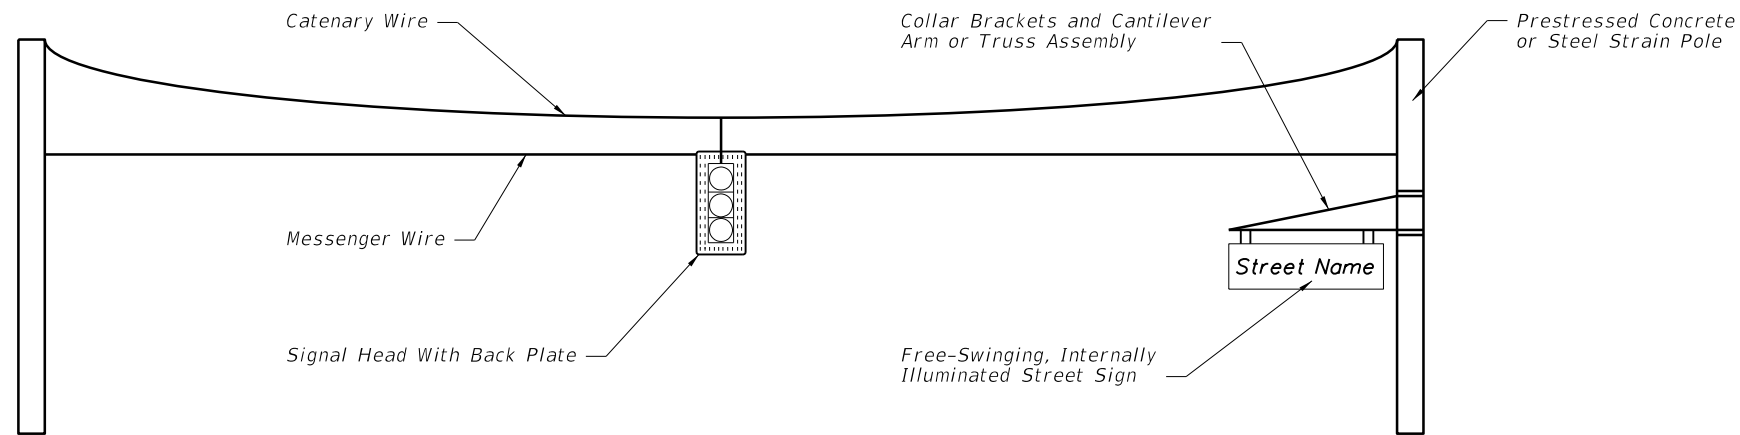

OPTION 1
(For Span Wire Assembly)

C:\projects\standards\roadway\17700-s\17748-01.dgn sm970re 4:10:17 PM 6/24/2013

LAST REVISION 07/01/09	REVISION	DESCRIPTION:	 <p>FDOT 2014 DESIGN STANDARDS</p>	<p>FREE-SWINGING INTERNALLY-ILLUMINATED STREET SIGN ASSEMBLIES</p>	<p>INDEX NO. 17748</p>	<p>SHEET NO. 1 of 1</p>
---------------------------	----------	--------------	--	---	-----------------------------------	------------------------------------

6/24/2013 4:10:19 PM sm970re C:\projects\standards\roadway\17700-s\17764-01.dgn

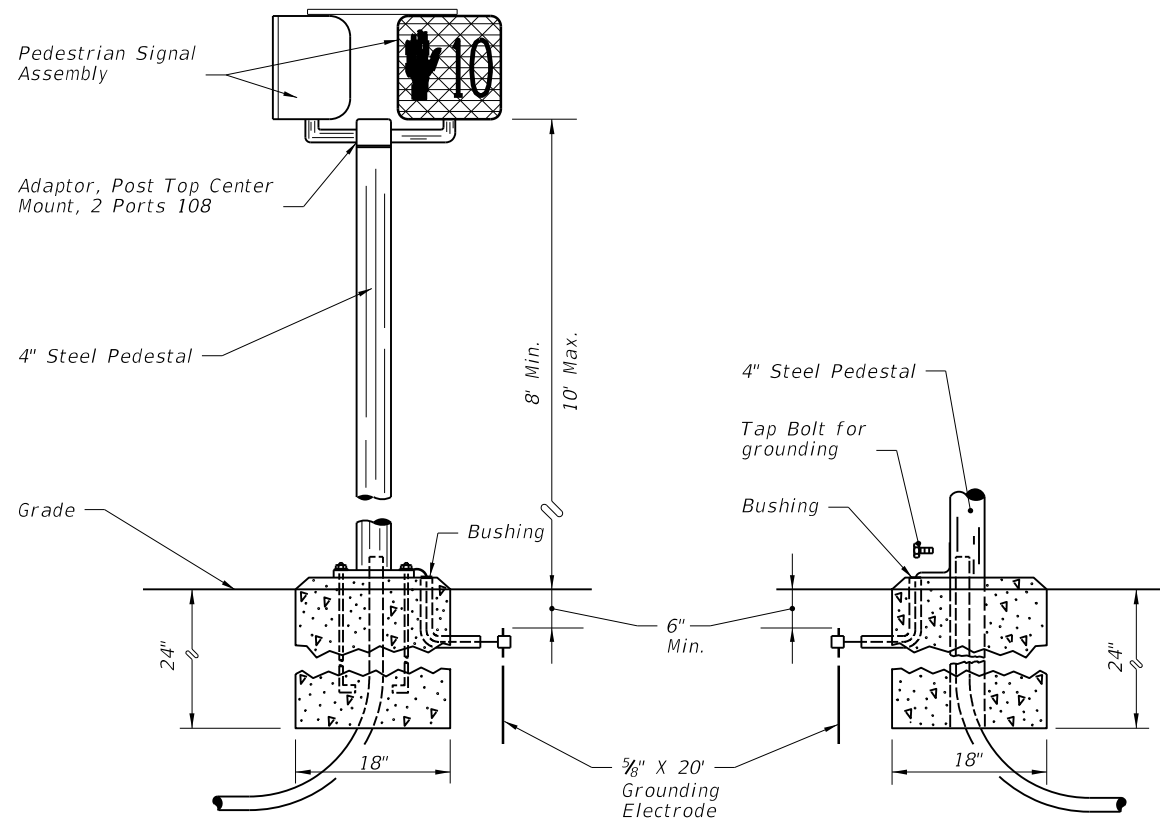


FIGURE A

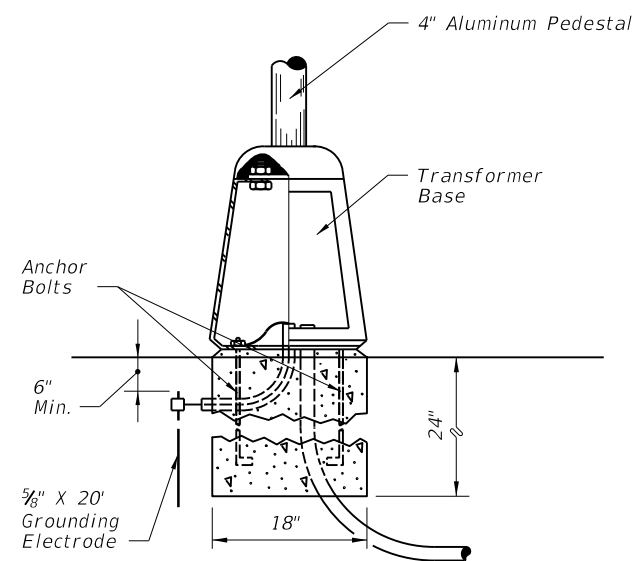


FIGURE B

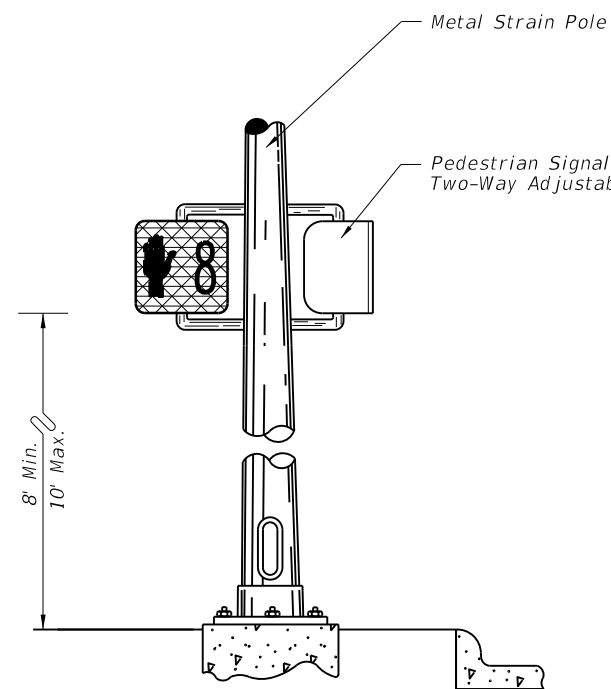


FIGURE C

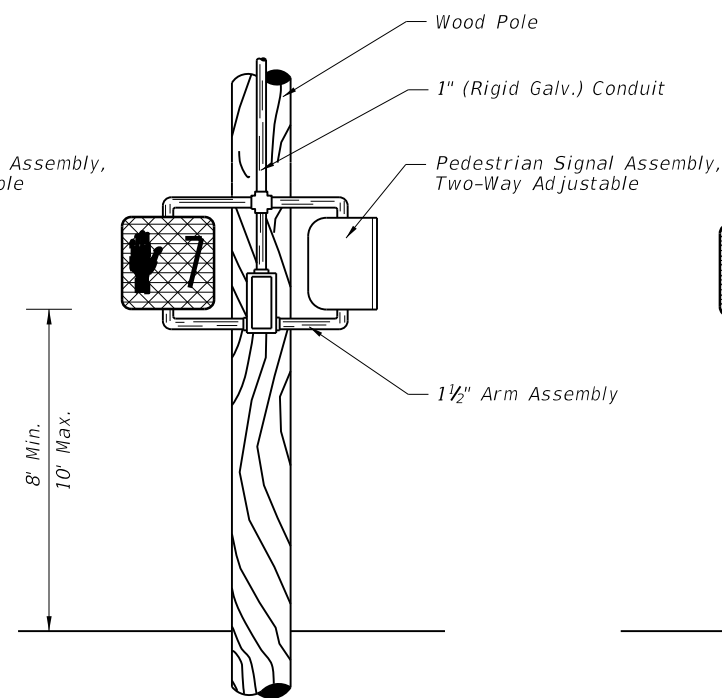


FIGURE D

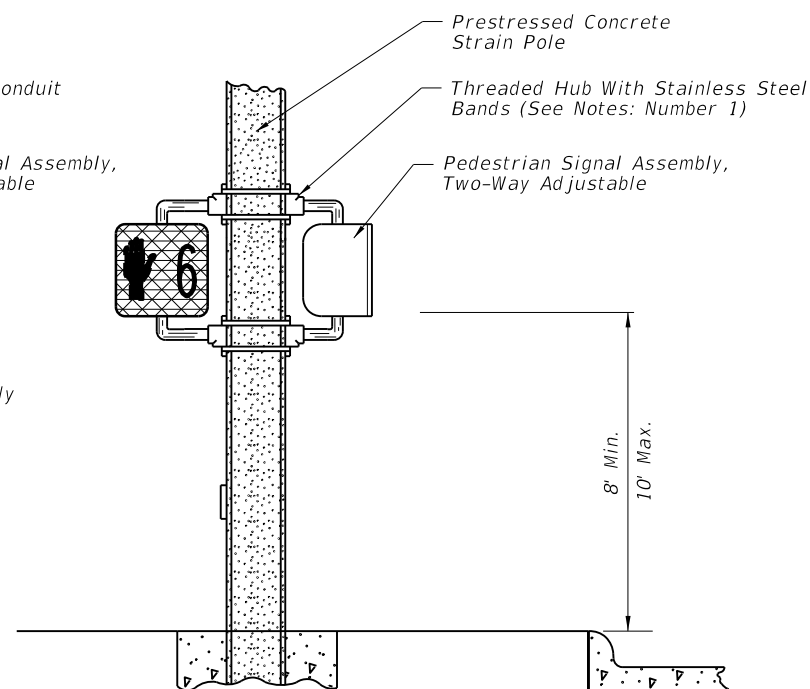



FIGURE E

Notes:


1. As an option, the contractor will be allowed to install pedestrian signals on concrete poles and pedestals with the use of lead anchors (two bolts same size per hub) in lieu of the stranded steel bands.
2. Holes drilled or punched in metal poles or pedestals shall be thoroughly reamed, cleaned of all burrs and covered with two (2) coats of zinc rich paint as specified in the standard specifications for road and bridge, construction. Grommets or bushings shall be installed in holes.
3. Meet all grounding requirements of Section 620 of the Standard Specifications.

LAST REVISION	REVISION	DESCRIPTION:	 <p>FDOT 2014 DESIGN STANDARDS</p>	<p>PEDESTRIAN CONTROL SIGNAL INSTALLATION DETAILS</p>	<p>INDEX NO. 17764</p>	<p>SHEET NO. 1 of 1</p>
---------------	----------	--------------	---	---	----------------------------	-----------------------------

**TWISTED PAIR AND LOOP LEAD-IN
INSTALLATION WITH CURB & GUTTER**


ALTERNATIVE 1

Drill A Hole Through The Curb At The Point Which The Required Saw-Cut Depth Is Obtained Just Prior To Cutting The Top Inside Edge Of The Curb. Slide A Section Of Flexible Conduit At Least 6" Into The Hole From The Back Side Of The Curb But Not Within 2" Of The Top Of The Hole. The Conduit Shall Fit Snug Within The Drilled Hole. Fill The Top Of The Hole With Loop Sealant To The Level Of The Curb Surface. A Nonmetallic Material Should Be Used To Prevent Excessive Loop Sealant From Entering The Flexible Conduit.

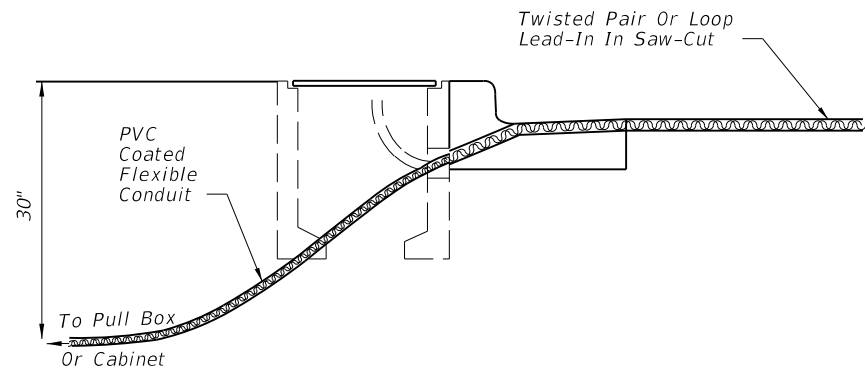

ALTERNATIVE 2


Drill A Hole 1/2" To 1" Larger In Diameter Than The Rigid Conduit To Be Used Through The Roadway Asphalt (Or Concrete) Surface And Base At An Appropriate Angle To Intercept The Trench Or Pull Box Hole. Place A Predetermined Length Of Rigid Conduit In The Hole And Drive The Conduit Into The Trench Or Hole. Install A Molded Bushing (Nonmetallic) On The Roadway End Of The Rigid Conduit. The Top Of The Rigid Conduit Shall Be Approximately 2" Below The Roadway Surface. Fill The Hole With Loop Sealant To The Level Of The Roadway Surface. A Nonmetallic Material Should Be Used To Prevent Excessive Loop Sealant From Entering The Rigid Conduit.

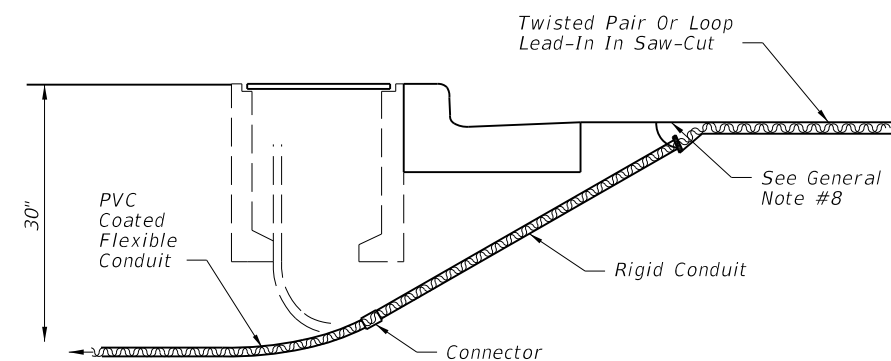

NOTE:
Other alternatives may be approved by the State Traffic Operations Engineer.

**TWISTED PAIR AND LOOP LEAD-IN
INSTALLATION WITHOUT CURB & GUTTER**

Cut A Slot In The Edge Of The Roadway Of Sufficient Size And Depth To Snugly Place The End Of The Flexible conduit. The End Of The Conduit Shall Be At Least 6" Into The Roadway And approximately 2" Below The Top Of The Roadway Surface. The Departure Angle Of The Conduit From The Roadway Shall Be 30° To 45°.

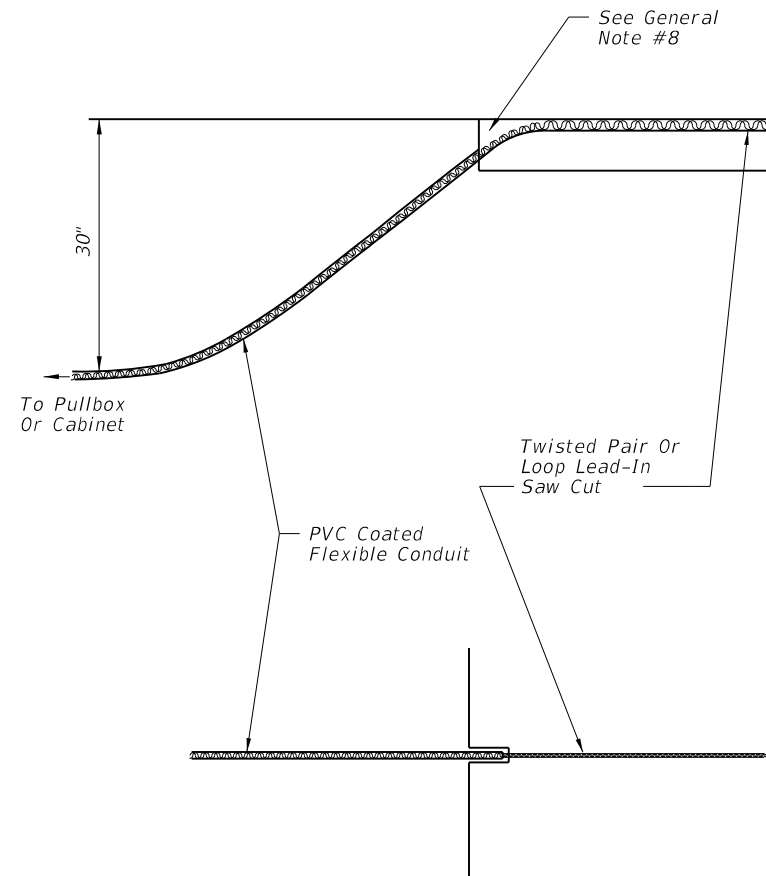


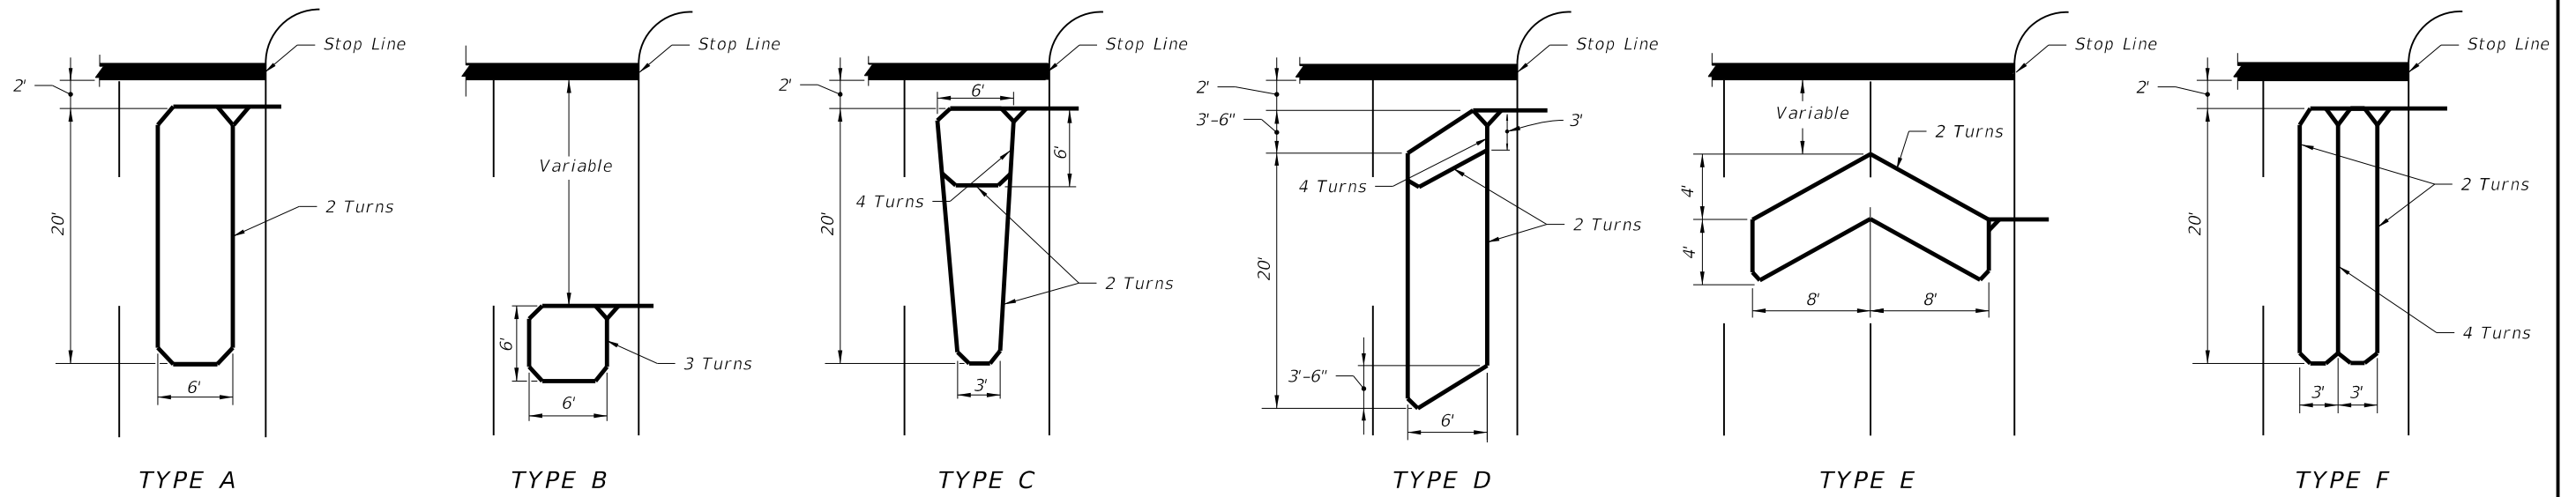
NOTE:
Other alternatives may be approved by the State Traffic Operations Engineer.

GENERAL NOTES


1. If the loop lead-in is 75' or less from the edge of the loop detector to controller cabinet, continue the twisted pair to the cabinet. If the loop lead-in is greater than 75' continue the twisted pair to the specified pullbox, splice to shielded lead-in wire and continue to the controller cabinet.
2. The width of all saw cuts shall be sufficient to allow unforced placement of loop wires or lead-in cables into the saw cut. The depth of all saw cuts, except across expansion joints, shall be 3" standard with a maximum of 4".
3. On resurfacing or new roadway construction projects, the loop wires and lead-in cables may be installed in the asphalt structural course prior to the placement of the final asphalt wearing course. The loop wires and lead-in cables shall be placed in a saw cut in the structural course. The depth of the cables below the top of the final surface shall comply with note 2.
4. A nonmetallic hold down material shall be used to secure loop wires and lead-ins to the bottom of saw-cuts. Hold down material shall be placed at approximately 12" intervals around loops and 24" intervals on lead-ins.
5. The minimum distance between the twisted pairs of loop lead-in wire is 6" from the loop to 12" from the pavement edge or curb.
6. Splice Connections in pull boxes with UL listed, watertight, insulated enclosures. Place one enclosure over the end of each conductor and place a third enclosure over the exposed end of the shielded cable.
7. As an alternate, a larger diameter enclosure that will accommodate both the splices of the conductors and the exposed end of the shielded cable may be used.
8. The maximum area of asphalt to be disturbed shall be 6"x 6". This area shall be restored as directed by the Engineer.

C:\projects\standards\roadway\17700-s\17781-01.dgn
smg70re
4:10:21 PM
6/24/2013



LAST REVISION 07/01/02	REVISION	DESCRIPTION:	 <p>FDOT 2014 DESIGN STANDARDS</p>	<p>VEHICLE LOOP INSTALLATION DETAILS</p>	<p>INDEX NO. 17781</p>	<p>SHEET NO. 1 of 2</p>
---------------------------	----------	--------------	--	---	-----------------------------------	------------------------------------



Note:
Loop conductors must follow saw-cut to bottom forming slack section at joint.

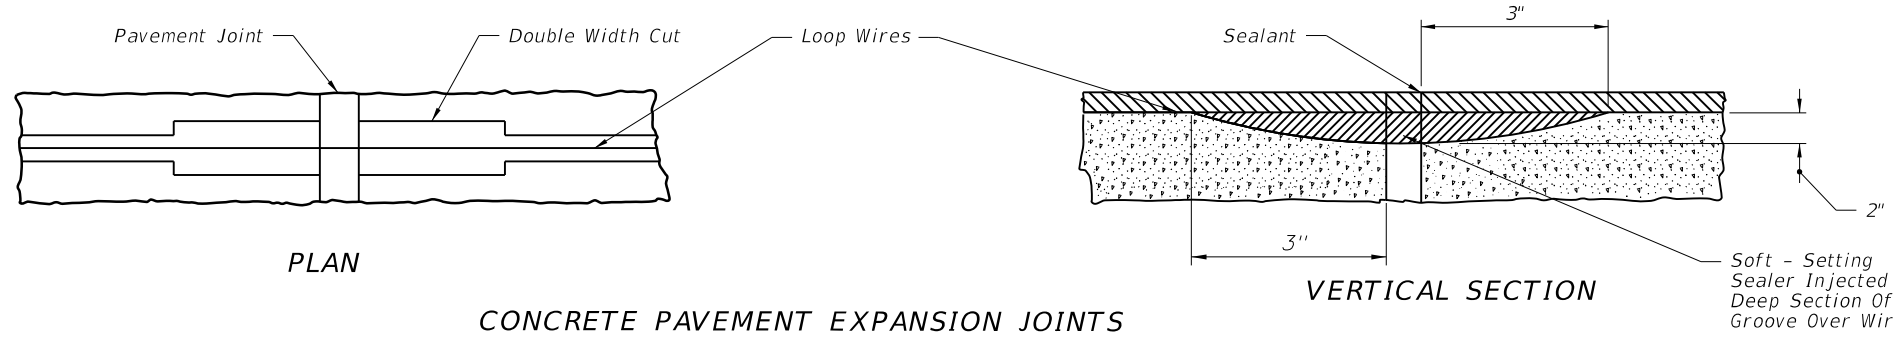


CONCRETE PAVEMENT EXPANSION JOINTS

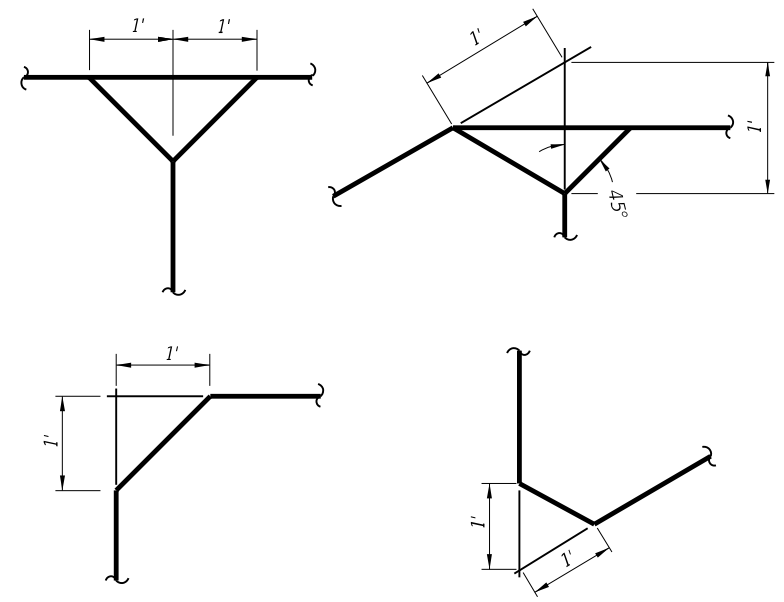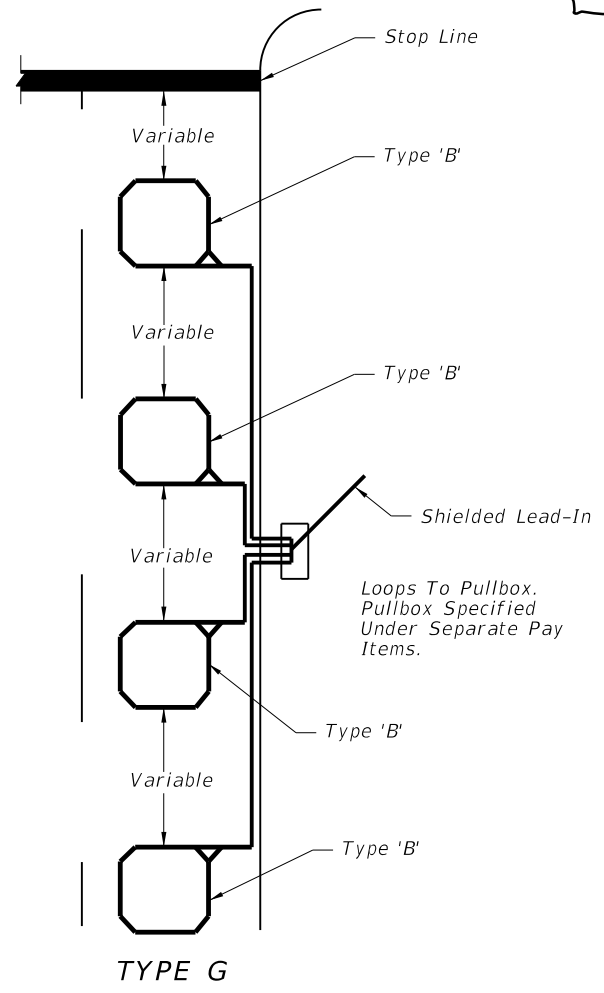


LOOP CORNER AND LEAD-IN DETAILS


- Notes:
1. The "number of turns" indicated at the specified point on the loop refers to the number of passes of loop wires which are placed in the saw-cut forming the complete loop.
 2. Loop types or details not drawn to scale.
 3. Loop Types are centered in a single lane except Type E which is centered on two lanes.
 4. The number of individual loops in the Type G loop may vary up to a maximum of four (4).
 5. Lead-in may be connected to either end of loop.
 6. The leading edge of loop Types A,C,D,& F may extend past the stop line a maximum of 10'. The length of these loops may be extended to a maximum of 60'. Each intersection should be individually designed and if the modifications noted above is required it must be noted or detailed in the plans.
 7. Loop lead-in wires should not be installed in the same pull box with signal power cable.

6/24/2013 4:10:23 PM sm970re C:\projects\standards\roadway\17700-s\17781-02.dgn



LAST REVISION 07/01/00	REVISION	DESCRIPTION:	 <p>FDOT 2014 DESIGN STANDARDS</p>	<p>VEHICLE LOOP INSTALLATION DETAILS</p>	<p>INDEX NO. 17781</p>	<p>SHEET NO. 2 of 2</p>
---------------------------	----------	--------------	---	--	----------------------------	-----------------------------

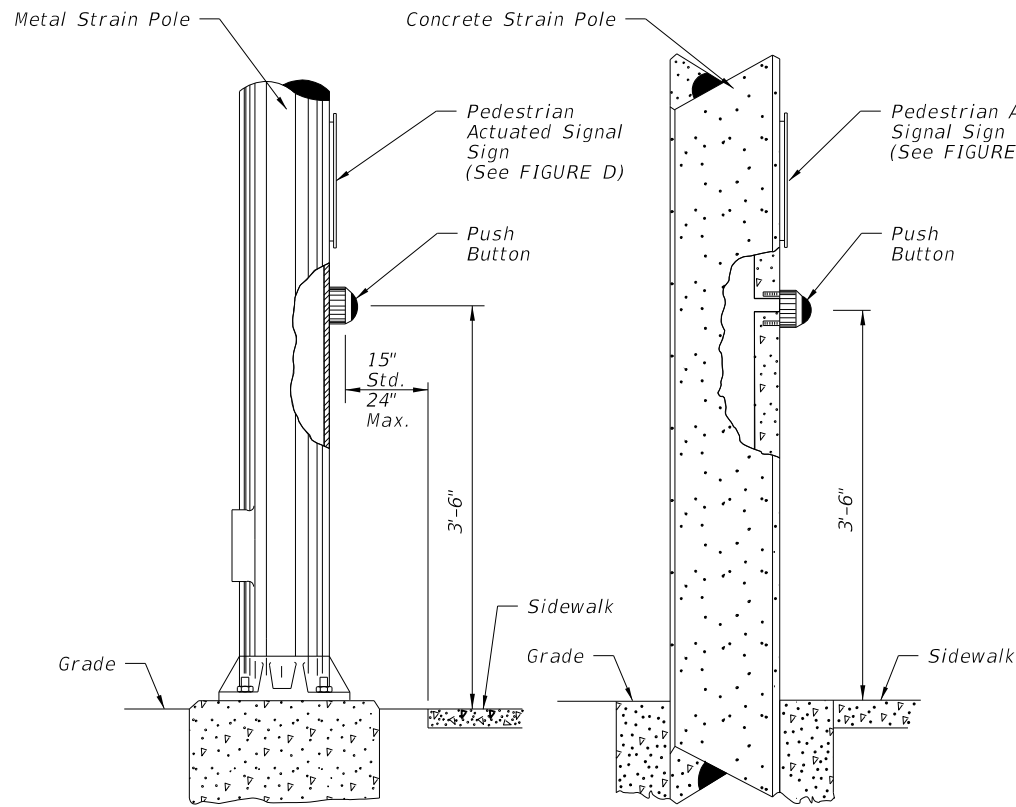

**FIGURE A
POLE MOUNTED
DETECTOR STATION**

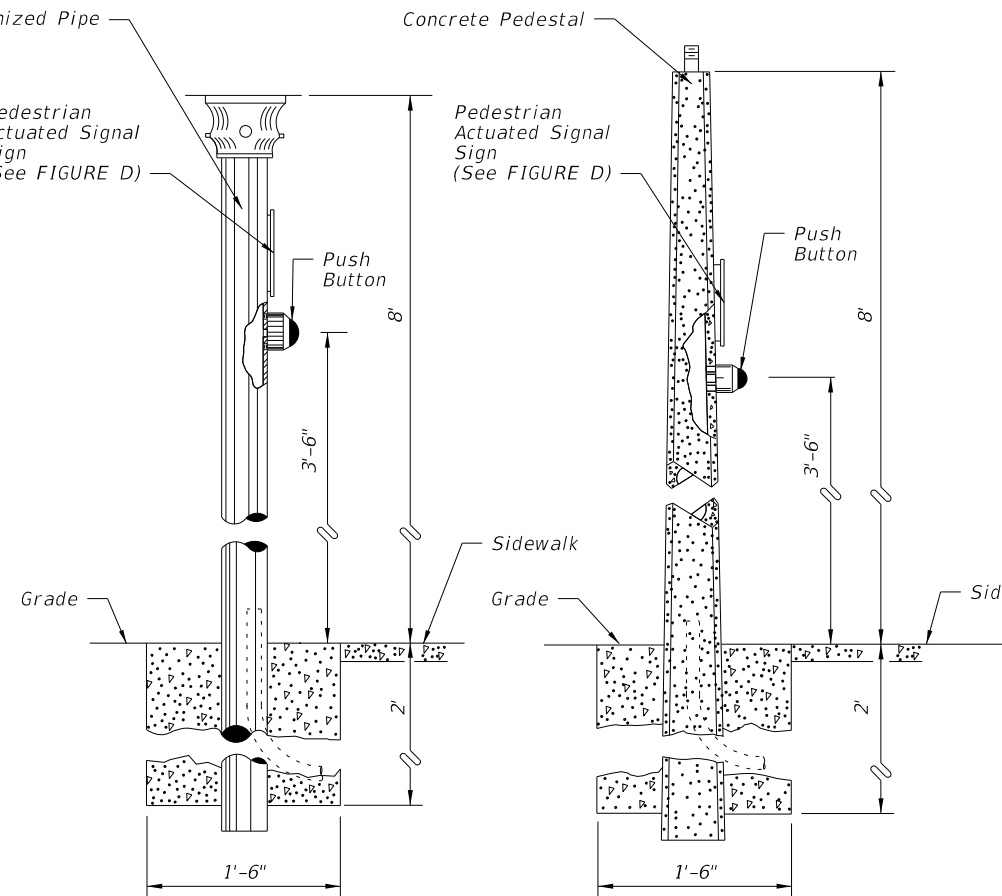

**FIGURE B
PEDESTAL STATION
DETECTOR STATION**

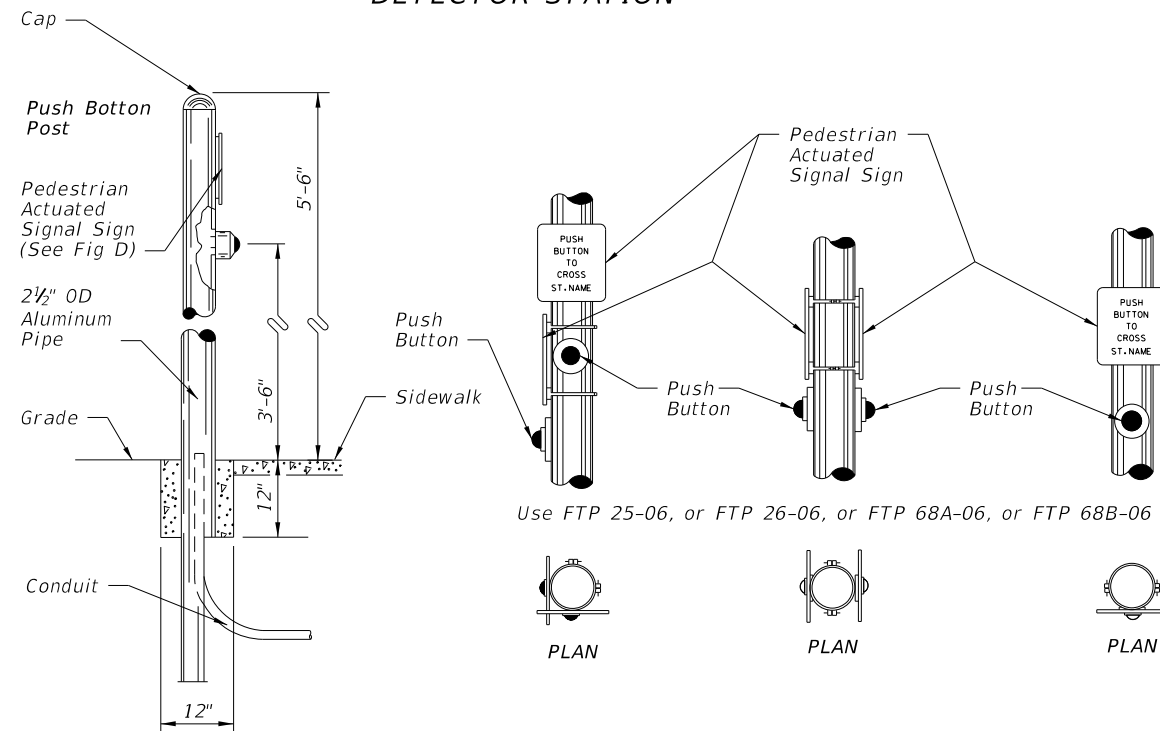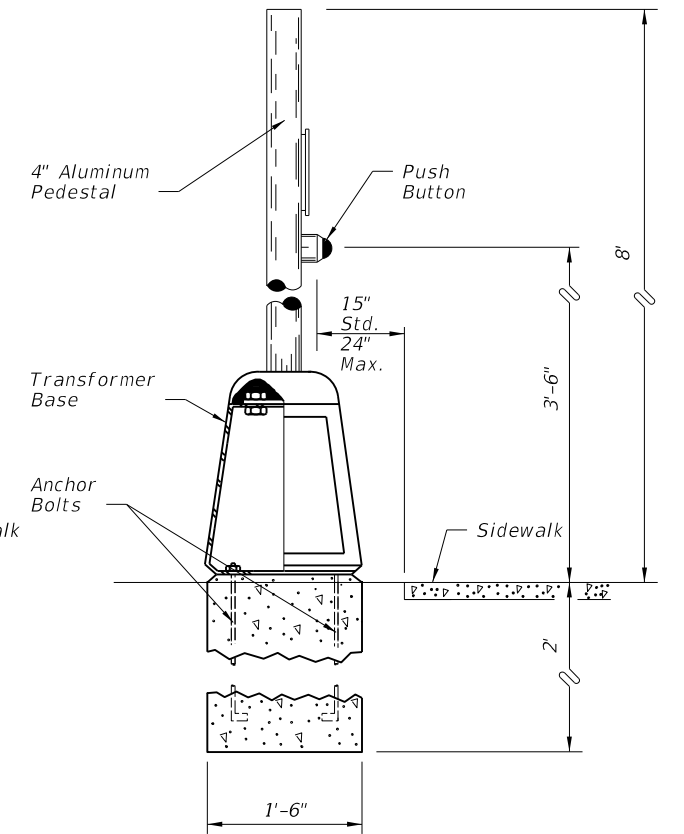

**FIGURE C
POST DETECTOR STATION
DETECTOR STATION**

FIGURE D

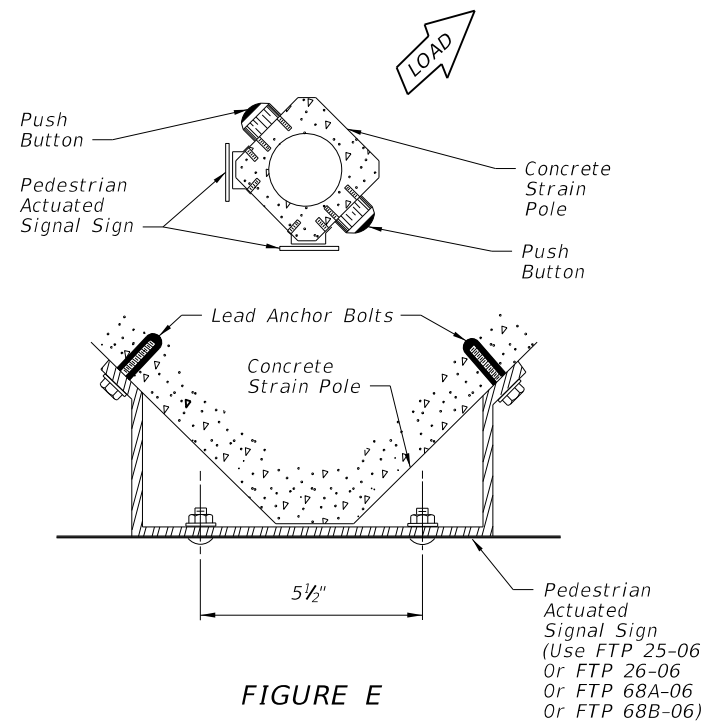


FIGURE E


Notes:


1. Payment for sign is included in the price for the pedestrian detector.
2. Signs shall be mounted above detectors, explaining their purpose and use.
3. The positioning of pedestrian push button should clearly indicate which crosswalk signal is actuated by each push button.
4. Push buttons and signs are to be mounted in accordance with Standard Specifications, section 665.
5. Meet all grounding requirements of Section 620 of the Standard Specifications.
6. A 30"X48" landing is required centered on each push button.

Note To Designers:


The designer should ensure the distance to the Push Button in FIGURE A & B is maintained. This distance can vary depending on post or pedestal type or whether a frangible base is used and sidewalk configuration. This is specified to meet Americans with Disabilities Act.

6/24/2013 4:10:24 PM sm970re C:\projects\standards\roadway\17700-s\17784-01.dgn


LAST REVISION	REVISION	DESCRIPTION:	 FDOT 2014 DESIGN STANDARDS	PEDESTRIAN DETECTOR ASSEMBLY INSTALLATION DETAILS	INDEX NO. 17784	SHEET NO. 1 of 2
01/01/12						

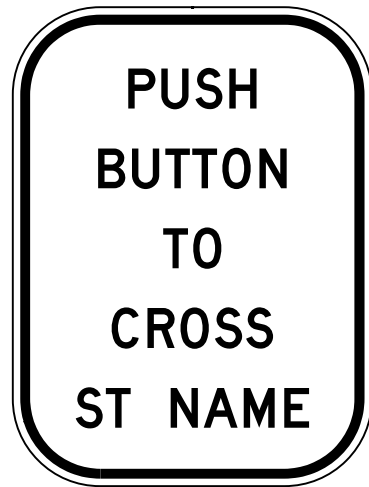


FTP-25-06

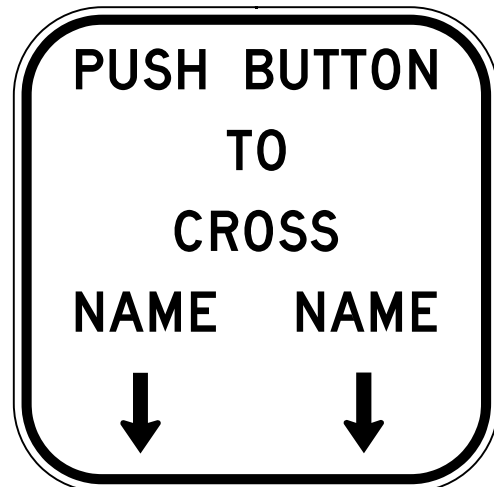


FTP-26-06

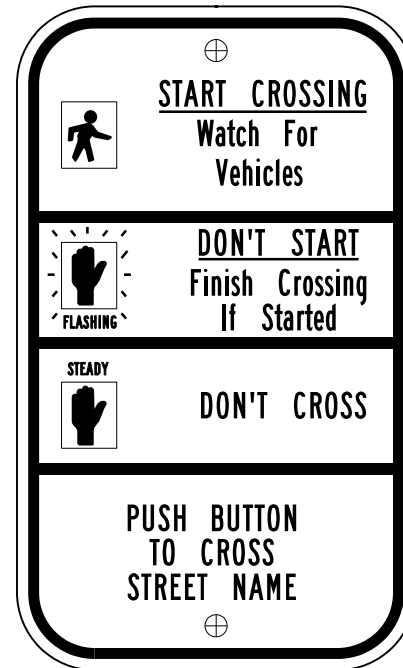


FTP-68A-06

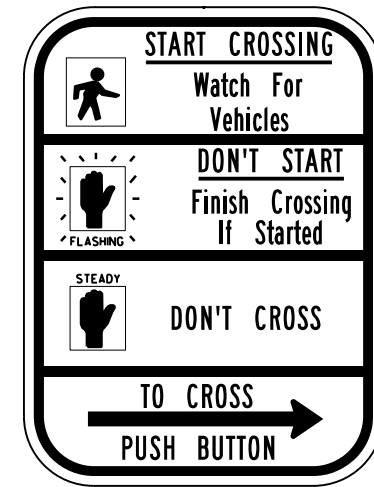


R10-3b
(Use Only for Case I)

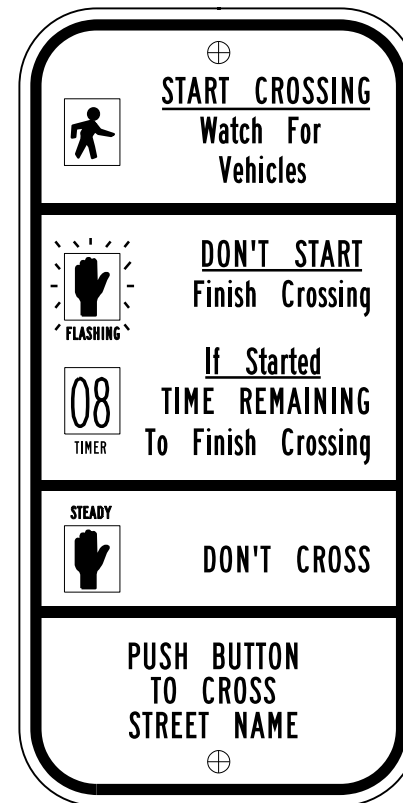


FTP-68B-06

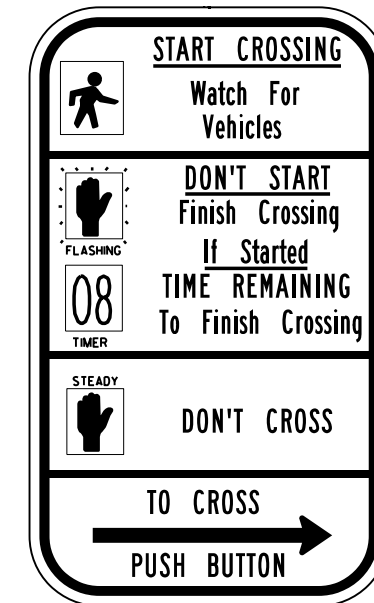

R10-3e
(Use Only for Case I)

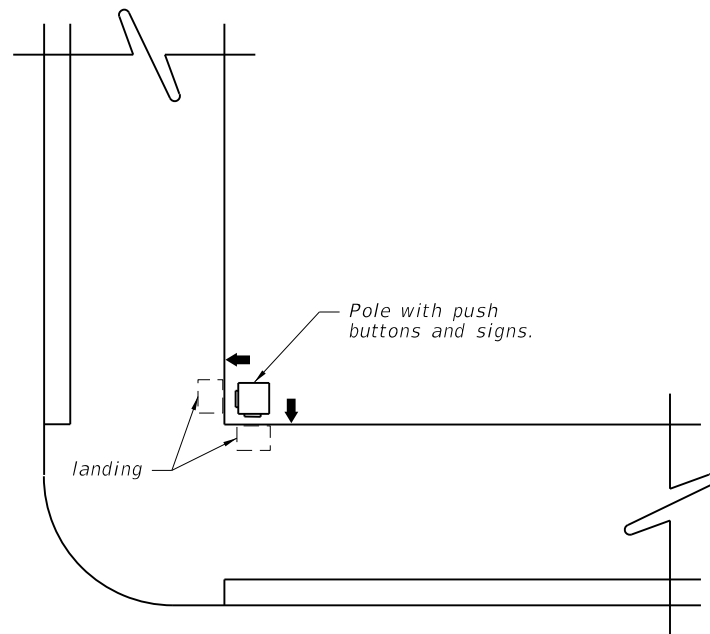

CASE I
POLE PARALLEL TO CURBLINE
ALTERNATE TO FIGURE E

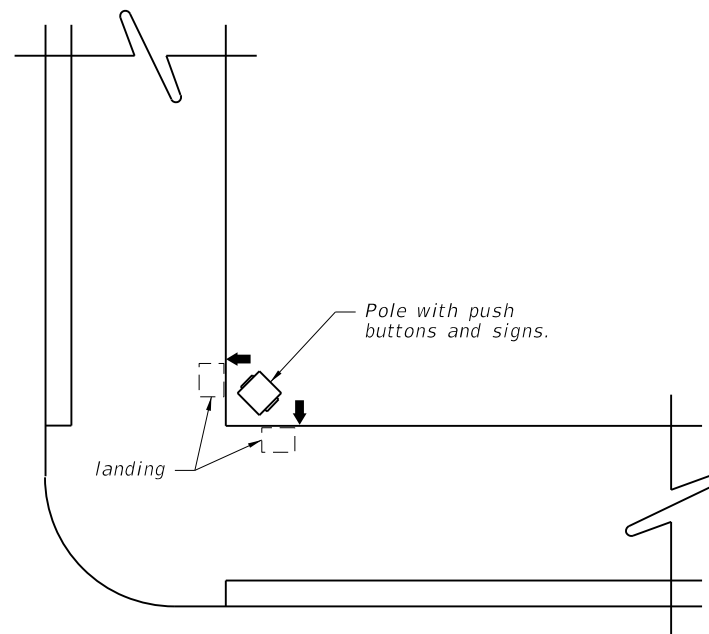

CASE II
POLE DIAGONAL TO CURBLINE
ALTERNATE TO FIGURE E

NOTE:
1. Refer to the MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES figure 2B-26 Pedestrian Signs, The STANDARD HIGHWAY SIGNS MANUAL (English) Sign R10-3b for Text Size, Spacing and Symbol size. Also see DESIGN STANDARDS Index 17355 for details of FTP signs.

6/24/2013 4:10:26 PM sm970re C:\projects\standards\roadway\17700-s\17784-02.dgn

LAST REVISION	07/01/12
---------------	----------


DESCRIPTION:	
--------------	--



**PEDESTRIAN DETECTOR ASSEMBLY
INSTALLATION DETAILS**

INDEX NO.	17784
-----------	-------

SHEET NO.	2 of 2
-----------	--------

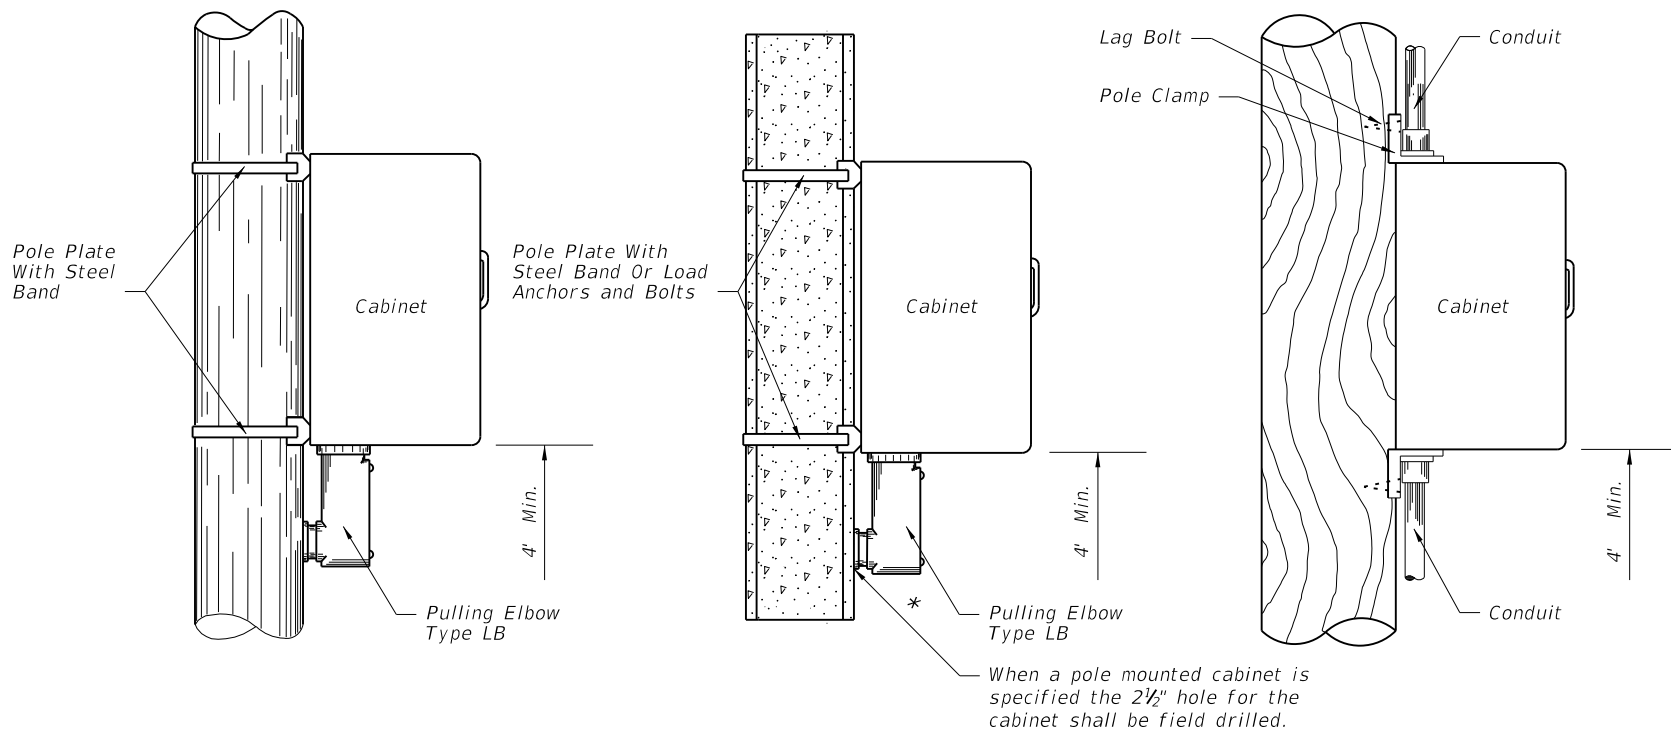

METAL POLE


CONCRETE POLE

WOOD POLE

POLE MOUNTED CABINET

Liquidtight flexible conduit is approved for use from the electrical disconnect to the cabinet when both are installed on the same pole.


* If holes for cabinet mounting require relocation, original holes shall be filled in with concrete or covered with a noncorrosive cover plate.

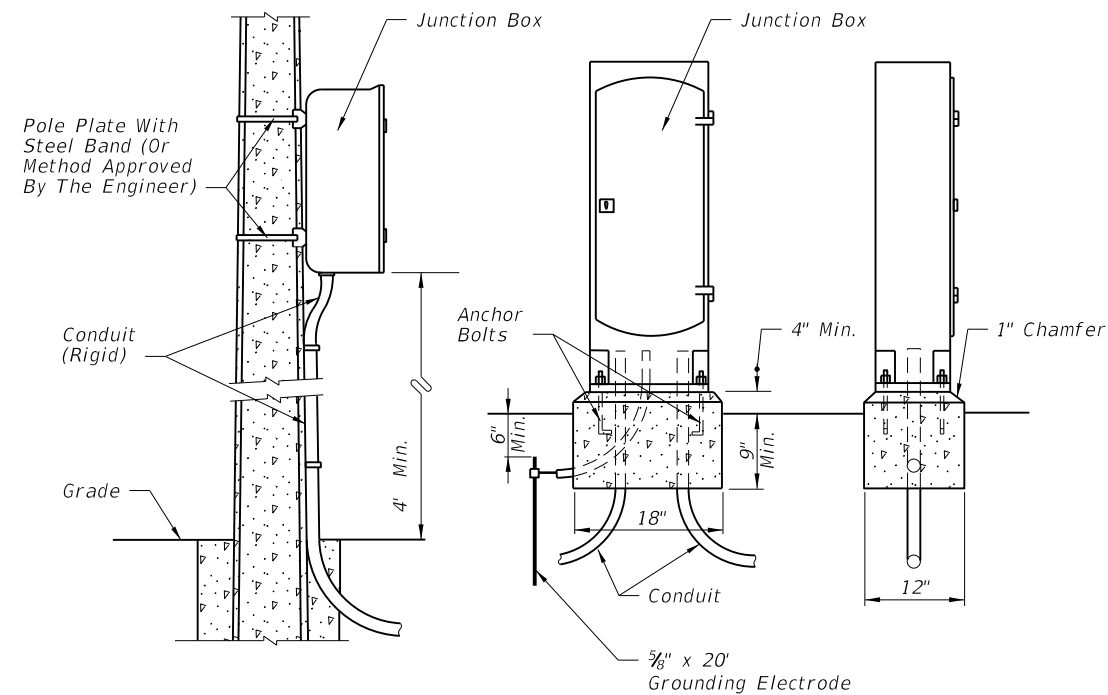

POLE MOUNTED


BASE MOUNTED

INTERCONNECT JUNCTION BOX

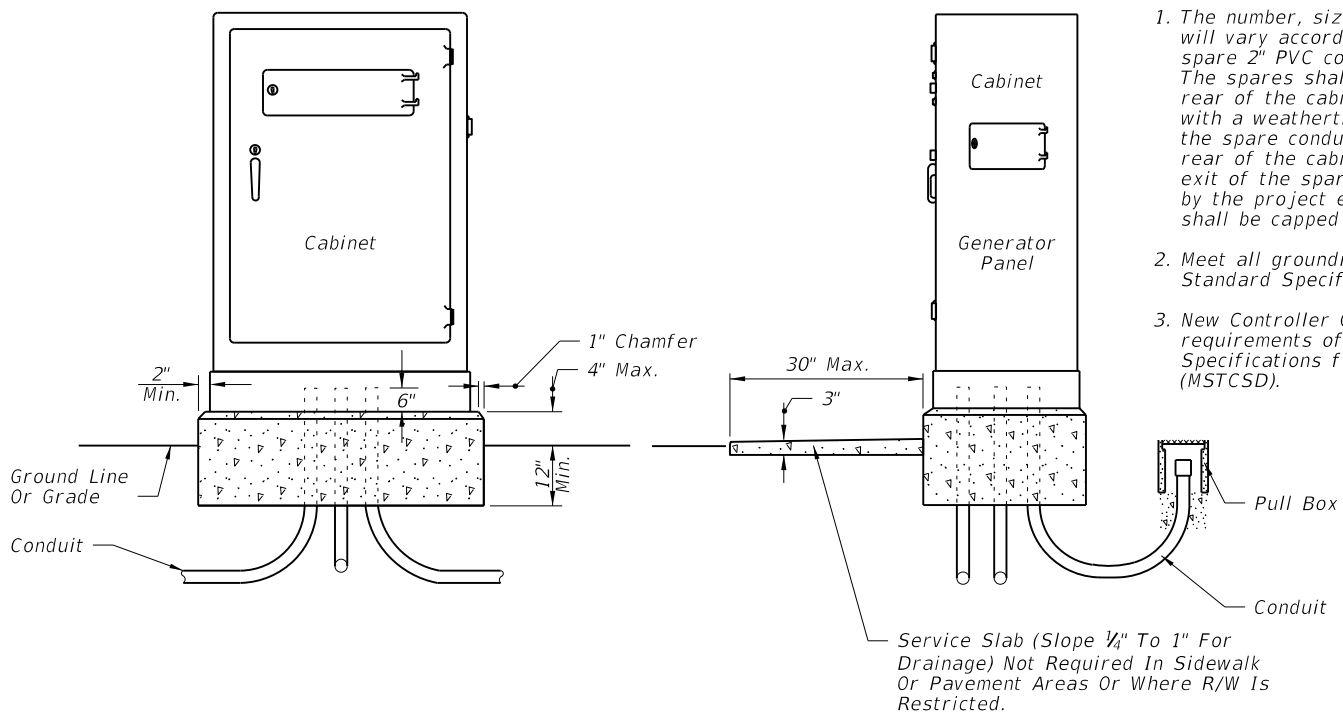


Notes:

1. The number, size and orientation of conduit sweep will vary according to site condition or locations. Two spare 2" PVC conduits shall be provided in all bases. The spares shall exit in the direction of the center rear of the cabinet base, into a pullbox and capped with a weathertight fitting. If obstructions prevent the spare conduit from exiting to the rear, or the rear of the cabinet is located on the R/W line, a side exit of the spare conduits will have to be approved by the project engineer. All spare conduit sweeps shall be capped with a weatherproof fitting.
2. Meet all grounding requirements of Section 620 of the Standard Specifications.
3. New Controller Cabinet installation shall meet the requirements of Section A676-1 of the Minimum Specifications for Traffic Control Signal Devices (MSTCSD).

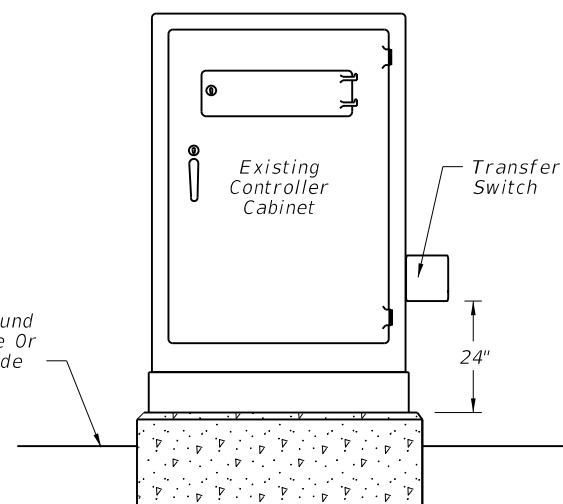

Existing controller cabinets to be retrofitted shall meet the requirements of Section A678-16 of the Minimum Specifications for Traffic Control Signal Devices (MSTCSD).

The signalized intersection controller cabinet retrofit installation procedures are located at: http://www.dot.state.fl.us/TrafficOperations/Doc_Library/Doc_Library.shtm for Generator Power for Signalized Intersection

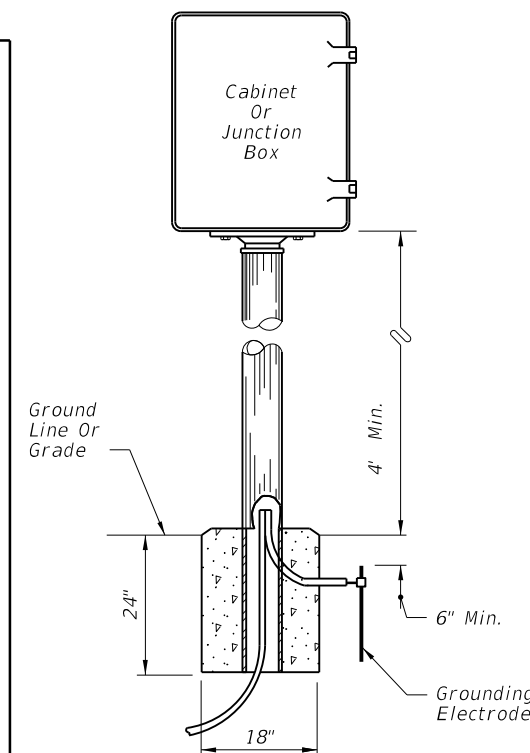

PEDESTAL MOUNTED

C:\projects\standards\roadway\17800-s\17841-01.dgn
sm970re
4:10:28 PM
6/24/2013

LAST REVISION
07/01/13

DESCRIPTION:





FDOT 2014
DESIGN STANDARDS

CABINET INSTALLATION DETAILS



INDEX NO.
17841

SHEET NO.
1 of 1



6/24/2013 4:10:30 PM sm970re C:\v\projects\standards\roadway\17800-s\17870-01.dgn





SOP 1





SOP 2





SOP 3





SOP 4





SOP 5





SOP 6

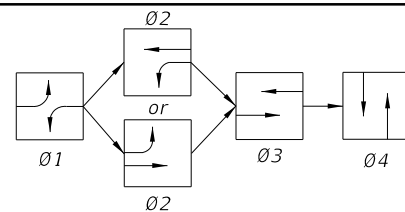



SOP 7

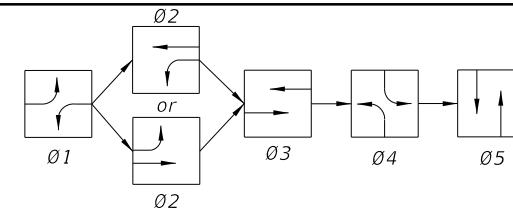


SOP 8

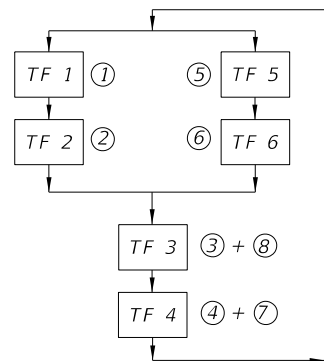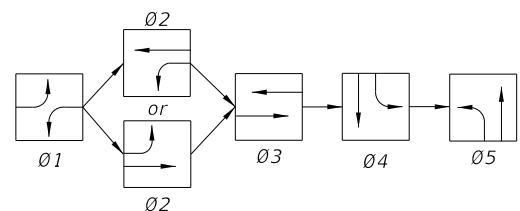

SOP 9

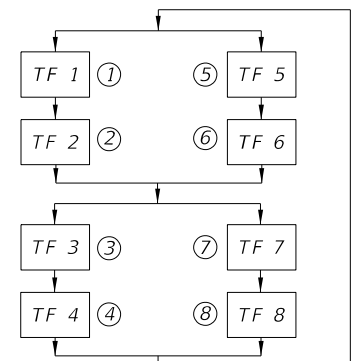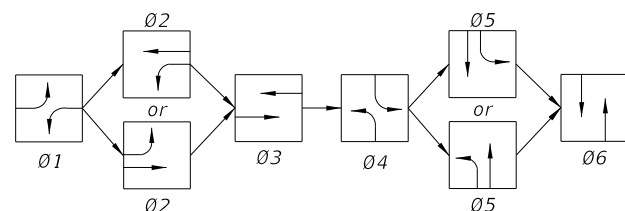

SOP 10

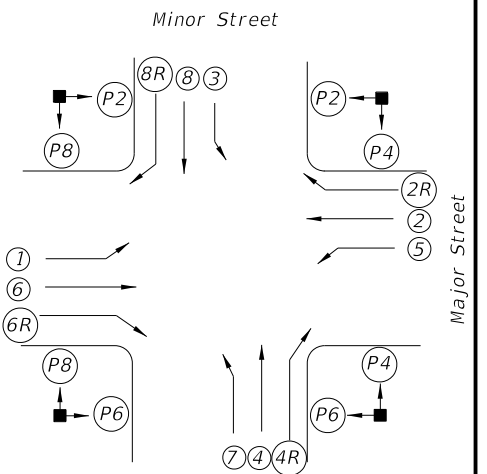

SIGNALIZED INTERSECTION

Vehicle movements & signal head number assignments are not directionally oriented but shall maintain their relative orientation about the intersection (I.E., movements 7 and 4 are always to the right of movements 1 and 6 etc.).

LEGEND

- (X) Vehicle Movement Number
- (PX) Pedestrian Movement Number
- TF X Timing Function Number
- 0X Phase Number
- ←G Green Arrow (Left or Right)
- ←R Red Arrow
- ←Y Yellow Arrow

SIGNAL CLEARANCE TABLE
(Blank Indicates No Clearance Required)

From \ To	SIGNAL INDICATIONS						
	R	←R	G	←G	↑	WALK	DONT WALK
R			Y	←Y	Y		
←R			Y	←Y	Y		
G				←G			
←G							
↑							
WALK							
DONT WALK						Flash DONT WALK	

LAST REVISION 07/01/05

DESCRIPTION:





FDOT 2014 DESIGN STANDARDS

STANDARD SIGNAL OPERATING PLANS



INDEX NO. 17870

SHEET NO. 1 of 2



C:\projects\standards\roadway\17800-s\17870-02.dgn
sm970re
4:10:32 PM
6/24/2013



SOP 11





SOP 12





SOP 13

(ONE-WAY STREET INTERSECTION)





SOP 14

(DIAMOND INTERCHANGE OPERATION)





SOP 15

(DIAMOND INTERCHANGE OPERATION)





SOP 16



SOP 17



(MIDBLOCK)



SOP 18

(DIAMOND INTERCHANGE OPERATIONS)


NOTE:
Only 02 Or 04 Used, Not Both To Obtain
ABC, Or ACB Operation.




SOP 19

(DIAMOND INTERCHANGE OPERATIONS)


NOTE:
Only 02 Or 04 Used, Not Both To Obtain
ABC, Or ACB Operation.





POP 1



POP 2



POP 3

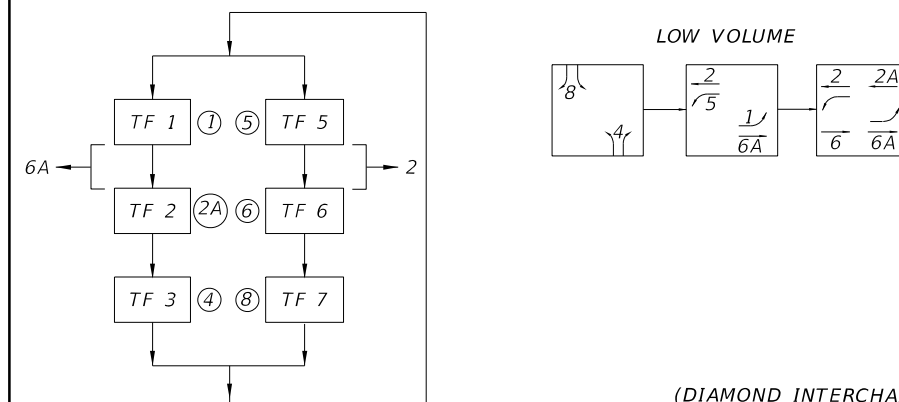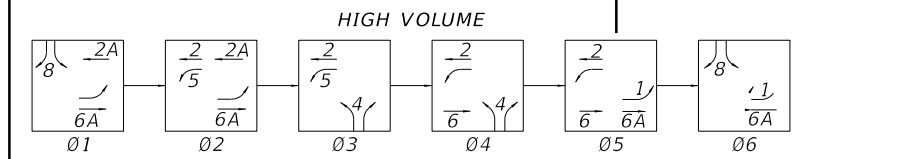

SOP 20

(DIAMOND INTERCHANGE OPERATIONS)

LAST REVISION
07/01/00

REVISION DESCRIPTION:


FDOT 2014
DESIGN STANDARDS

STANDARD SIGNAL OPERATING PLANS

INDEX NO.
17870

SHEET NO.
2 of 2


The Distance Is Measured Along Right Edge Of Pavement From RR Stop Bar To Sign Advance Warning Sign.

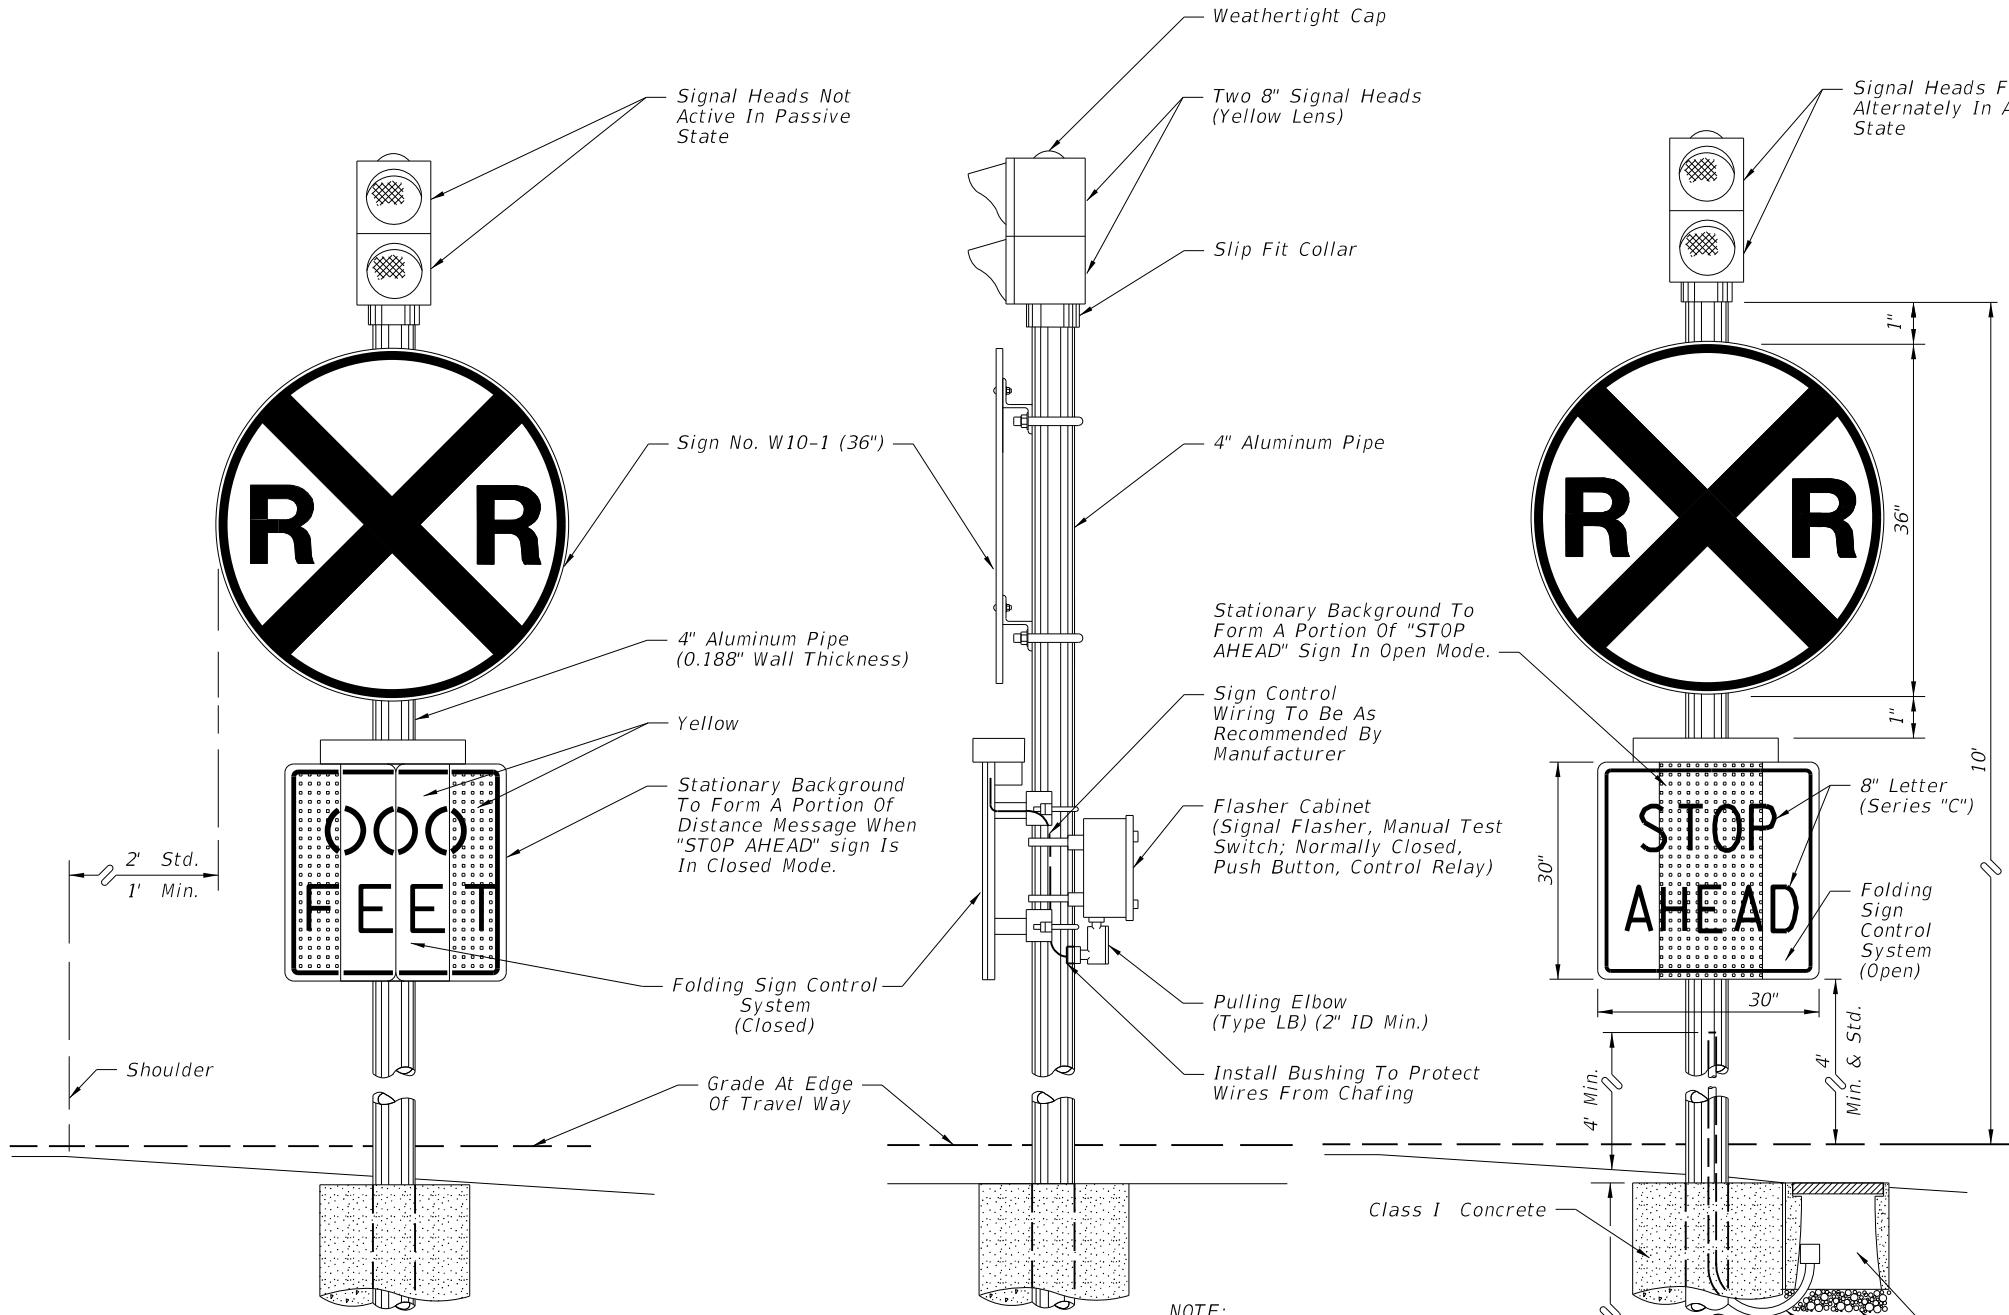

LOCATION OF THE ADVANCE WARNING SIGN

SPEED (mph)	DISTANCE (ft)
Min.	50
30	75
40	125
50	250
55	325

Advance Warning Sign (Location May Be Adjusted To Fit Field Condition)

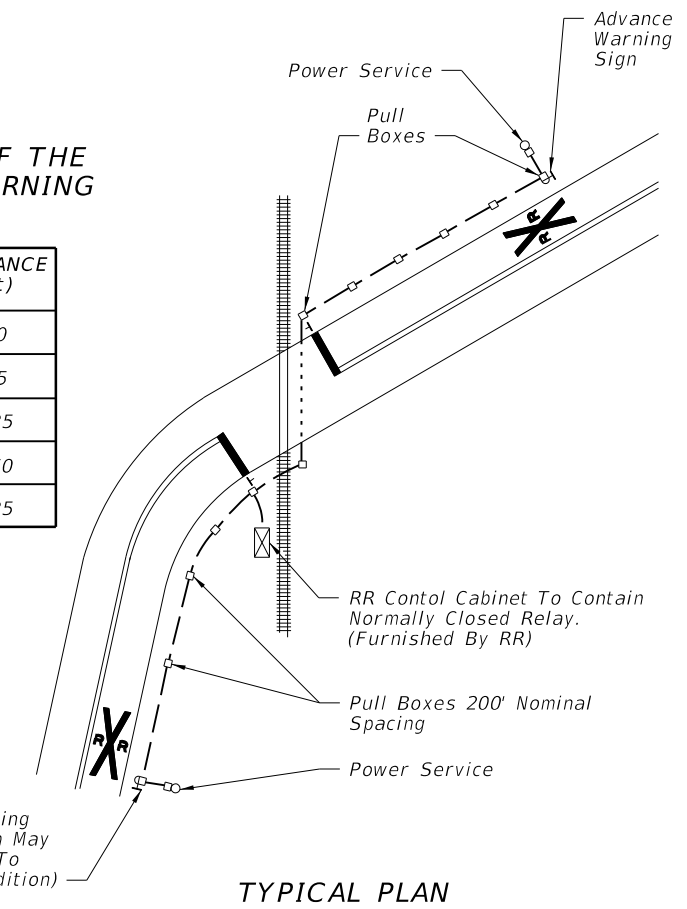


FRONT VIEW

SIDE VIEW


FRONT VIEW
ACTIVE STATE
(TRAIN CIRCUIT ACTUATED)

PASSIVE STATE
(TRAIN CIRCUIT NOT ACTUATED)


NOTE:
1. "STOP AHEAD" is standard and preferred sign message.
Another message may be approved when appropriate for specific situations.

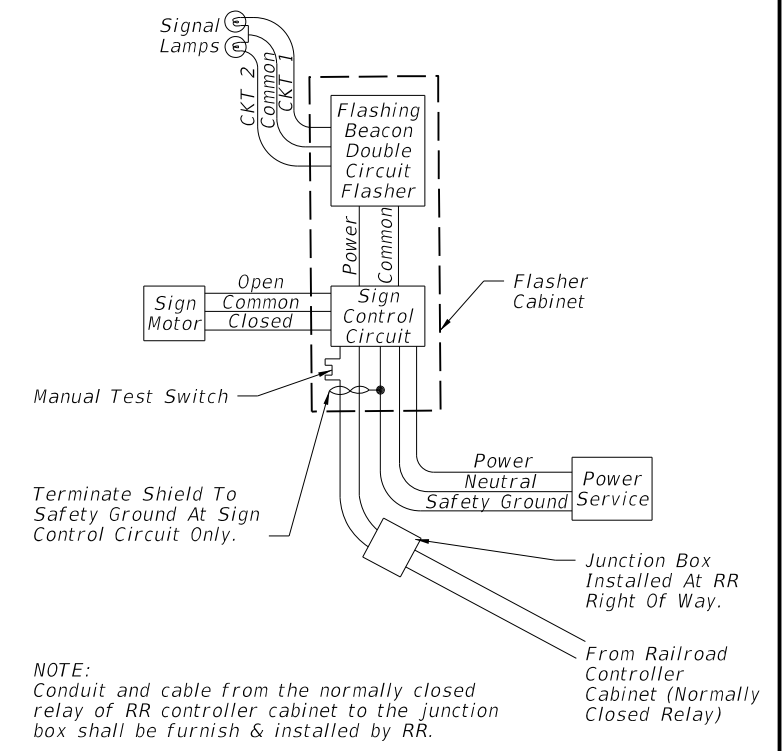

C:\projects\standards\roadway\17800-s\17881-01.dgn
sm970re
4:10:33 PM
6/24/2013

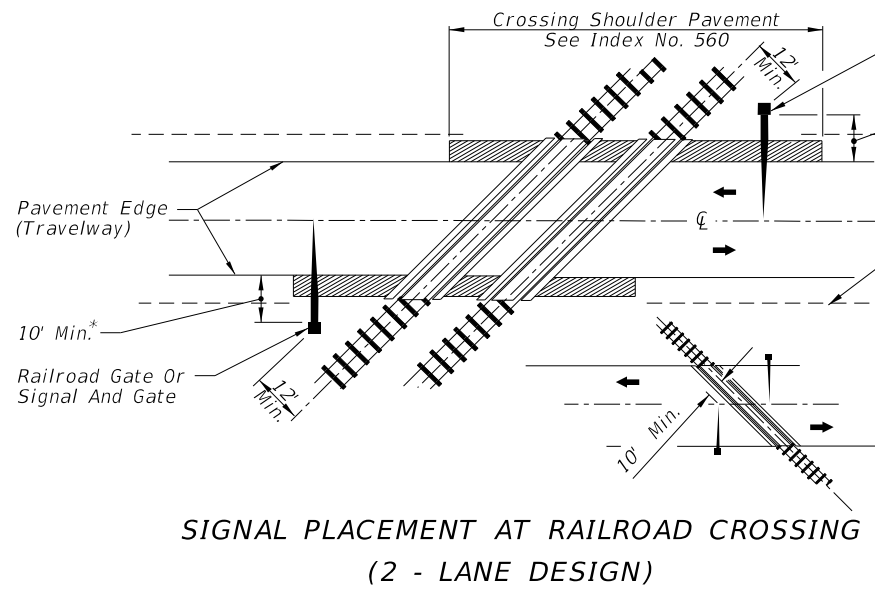

**SIGNAL PLACEMENT AT RAILROAD CROSSING
(2 - LANE DESIGN)**

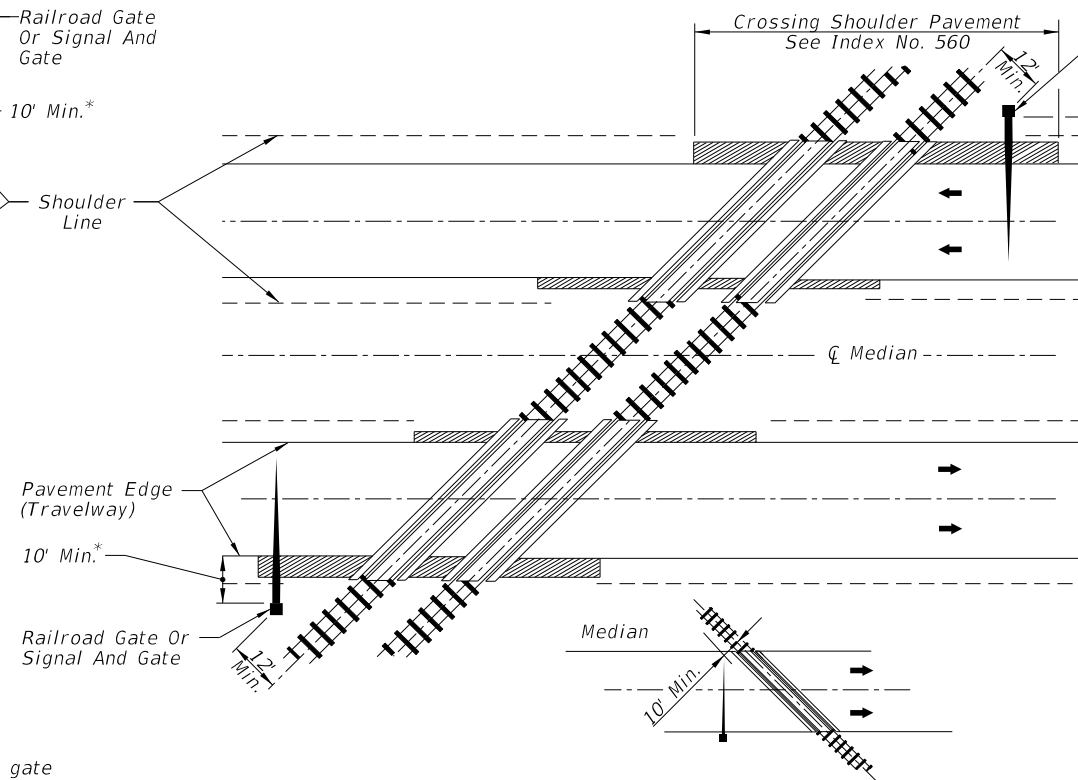

**SIGNAL PLACEMENT AT RAILROAD CROSSING
(4 - LANE DESIGN)**

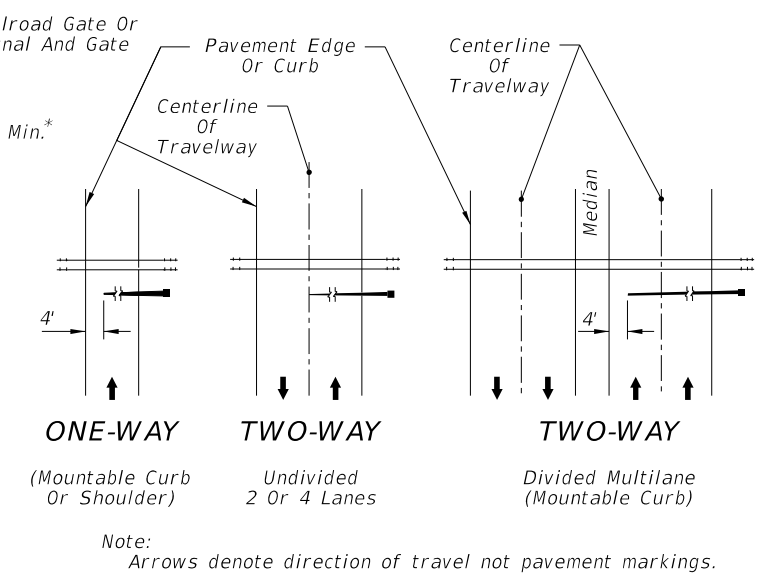


FIGURE 1


Gate Length Requirements
See Note 5 Sheet 3

General Notes


- No guardrail is proposed for signals; however, some form of impact attenuation device may be specified for certain locations.
- Advance flasher to be installed when and if called for in plans or specifications.
- Top of foundation shall be no higher than 4" above finished shoulder grade.
- Type of traffic control device
I Flashing signals
II Flashing signals with cantilever
III Flashing signals with gate
IV Flashing signals with cantilever and gate
V Gate
- Class of traffic control devices
I Flashing signals-one track
II Flashing signals-multiple tracks
III Flashing signals and gates-one track
IV Flashing signals and gates-multiple tracks

Note:
Two separate foundations may be required (one for signals, one for gate), depending on type of equipment used.


* When 10' is deemed impracticable the control device can be located as close as 2' from the edge of a paved shoulder but not less than 6' from the edge of the near traffic lane.

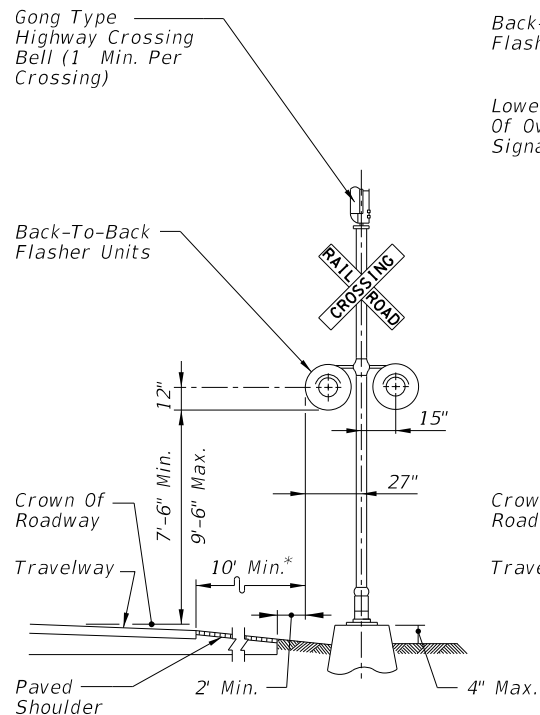


TYPE I

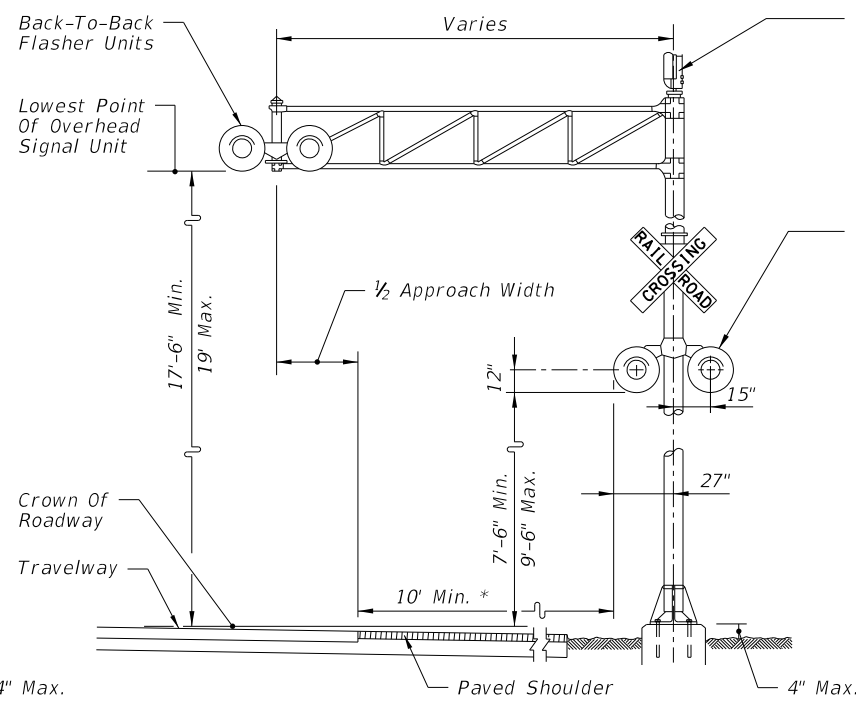

TYPE II

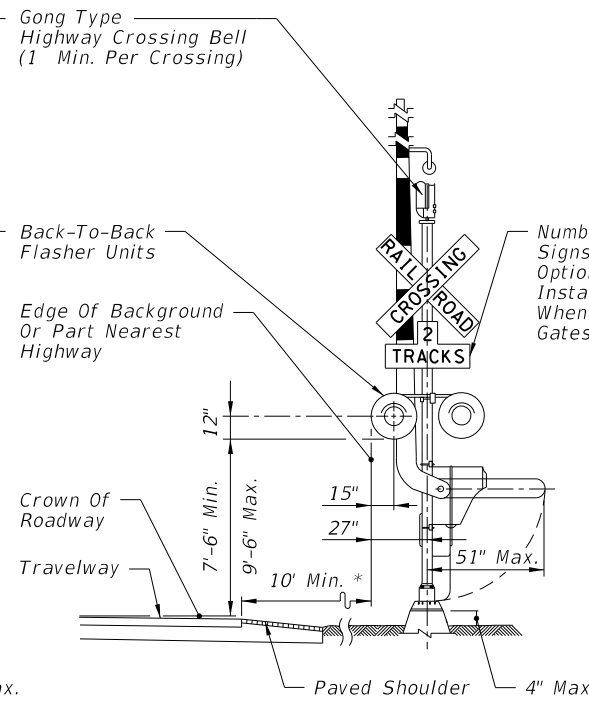


TYPE III

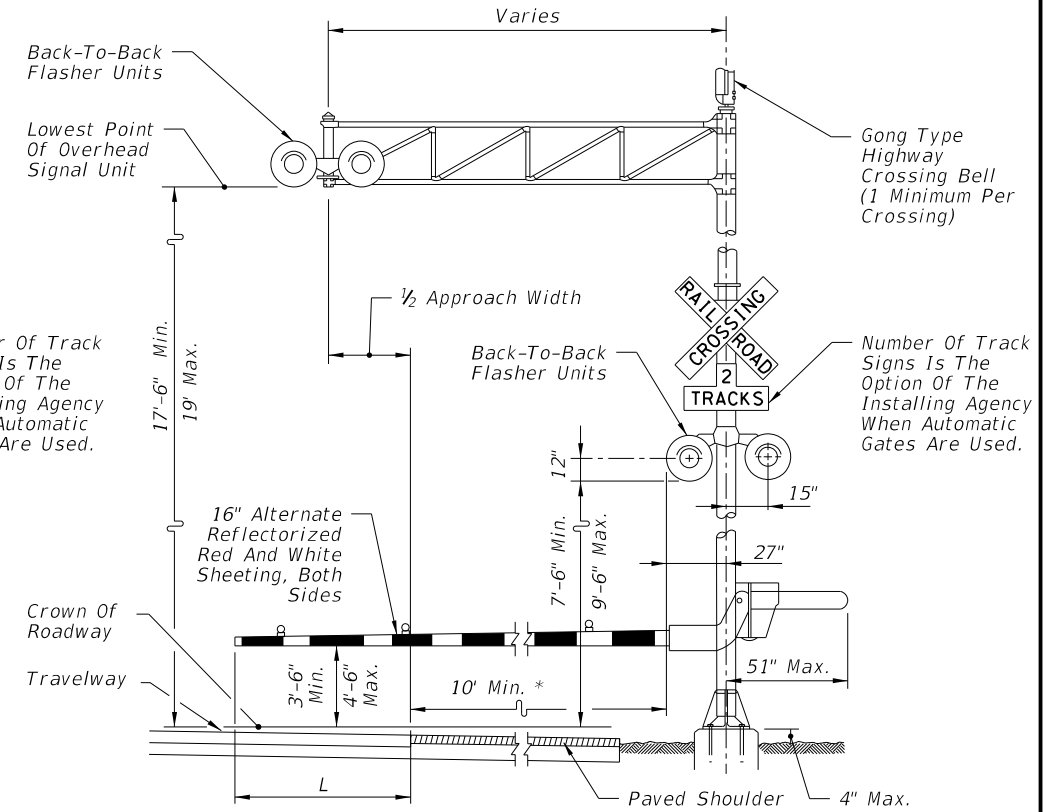

TYPE IV


C:\projects\standards\roadway\17800-s\17882-01.dgn
sm970re
4:10:35 PM
6/24/2013

LAST REVISION 07/01/13	REVISION	DESCRIPTION:		FDOT 2014 DESIGN STANDARDS	RAILROAD GRADE CROSSING TRAFFIC CONTROL DEVICES	INDEX NO. 17882	SHEET NO. 1 of 4

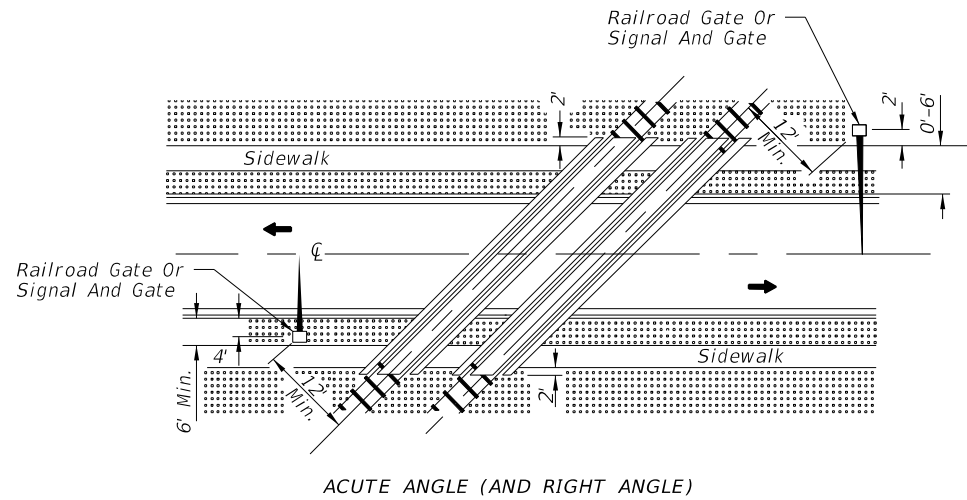

ACUTE ANGLE (AND RIGHT ANGLE)

SIGNAL PLACEMENT AT RAILROAD CROSSING
(2 LANES, CURB & GUTTER)

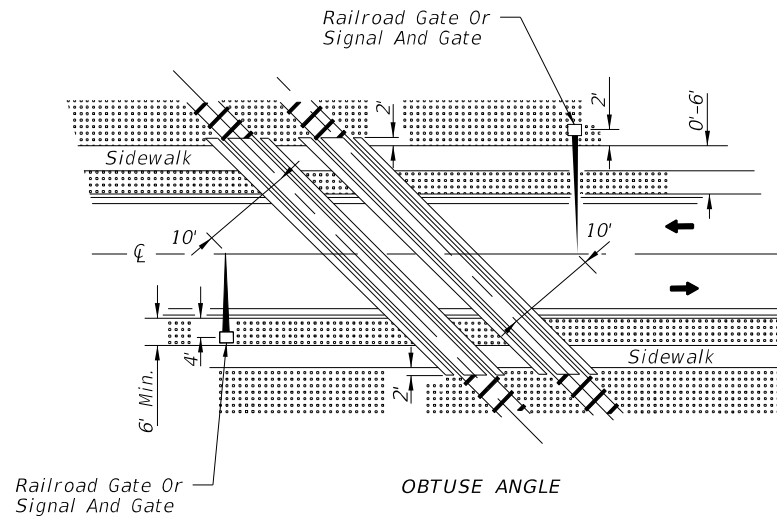


OBTUSE ANGLE

SIGNAL PLACEMENT AT RAILROAD CROSSING
(2 LANES, CURB & GUTTER)

GENERAL NOTES

1. The location of flashing signals and stop lines shall be established based on future (or present) installation of gate with appropriate track clearances.
2. Where plans call for railroad traffic control devices to be installed in curbed medians, the minimum median width shall be 12'-6".
3. Location of railroad traffic control device is based on the distance available between face of curb & sidewalk. 0' to 6' - Locate device outside sidewalk. Over 6' - Locate device between face of curb and sidewalk.
4. Stop line to be perpendicular to edge of roadway, approx. 15' from nearest rail; or 8' from and parallel to gate when present.
5. When a cantilevered-arm flashing-light signal is used, the minimum vertical clearance shall be 17' from above the Crown of Roadway to the Lowest Point of the Overhead Signal Unit.

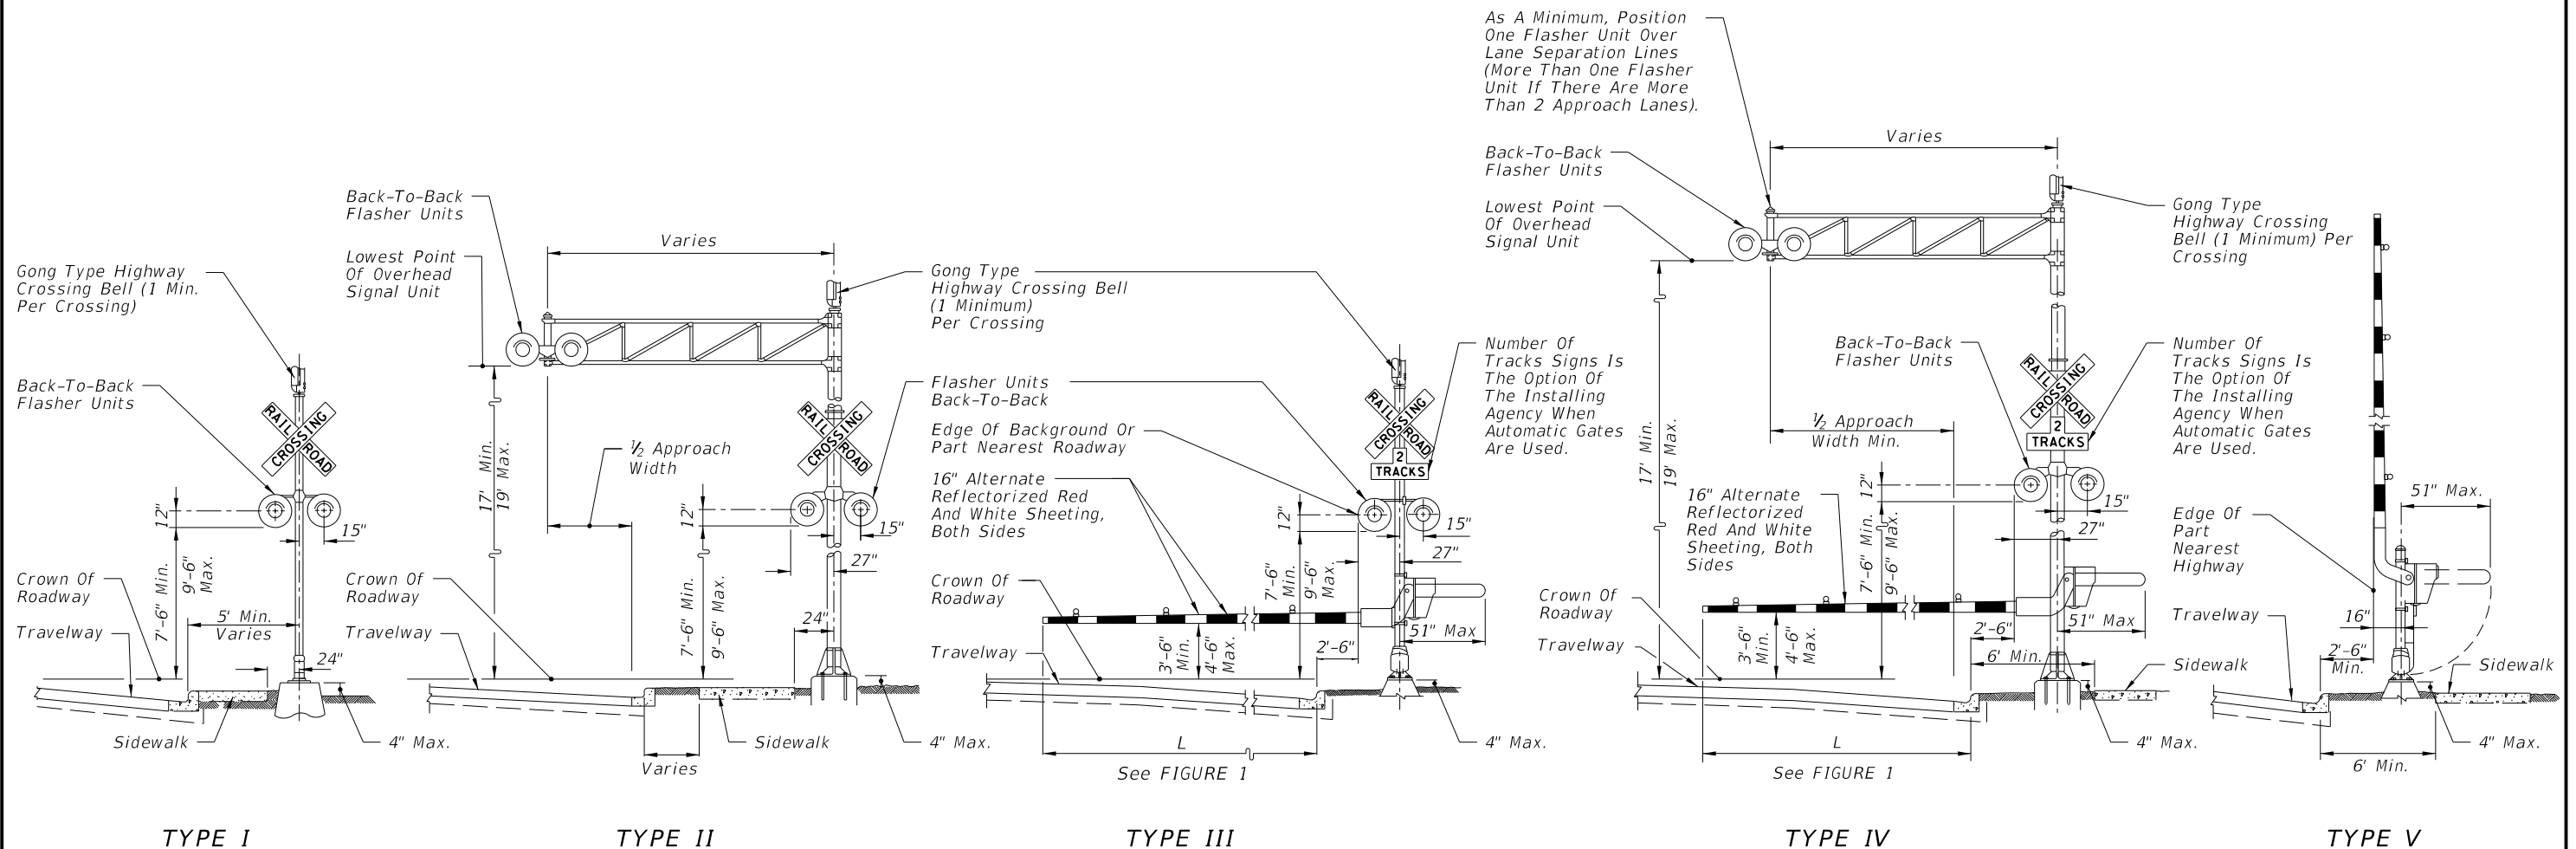

TYPE I


TYPE II

TYPE III

TYPE IV

TYPE V


C:\projects\standards\roadway\17800-s\17882-02.dgn
sm970re
4:10:37 PM
6/24/2013

LAST REVISION 01/01/11	REVISION	DESCRIPTION:	 FDOT 2014 DESIGN STANDARDS	RAILROAD GRADE CROSSING TRAFFIC CONTROL DEVICES	INDEX NO. 17882	SHEET NO. 2 of 4
---------------------------	----------	--------------	--	--	--------------------	---------------------




RAILROAD CROSSING AT TWO (2)-LANE ROADWAY

RAILROAD CROSSING AT MULTILANE ROADWAY

RELATIVE LOCATION OF CROSSING TRAFFIC CONTROL DEVICES

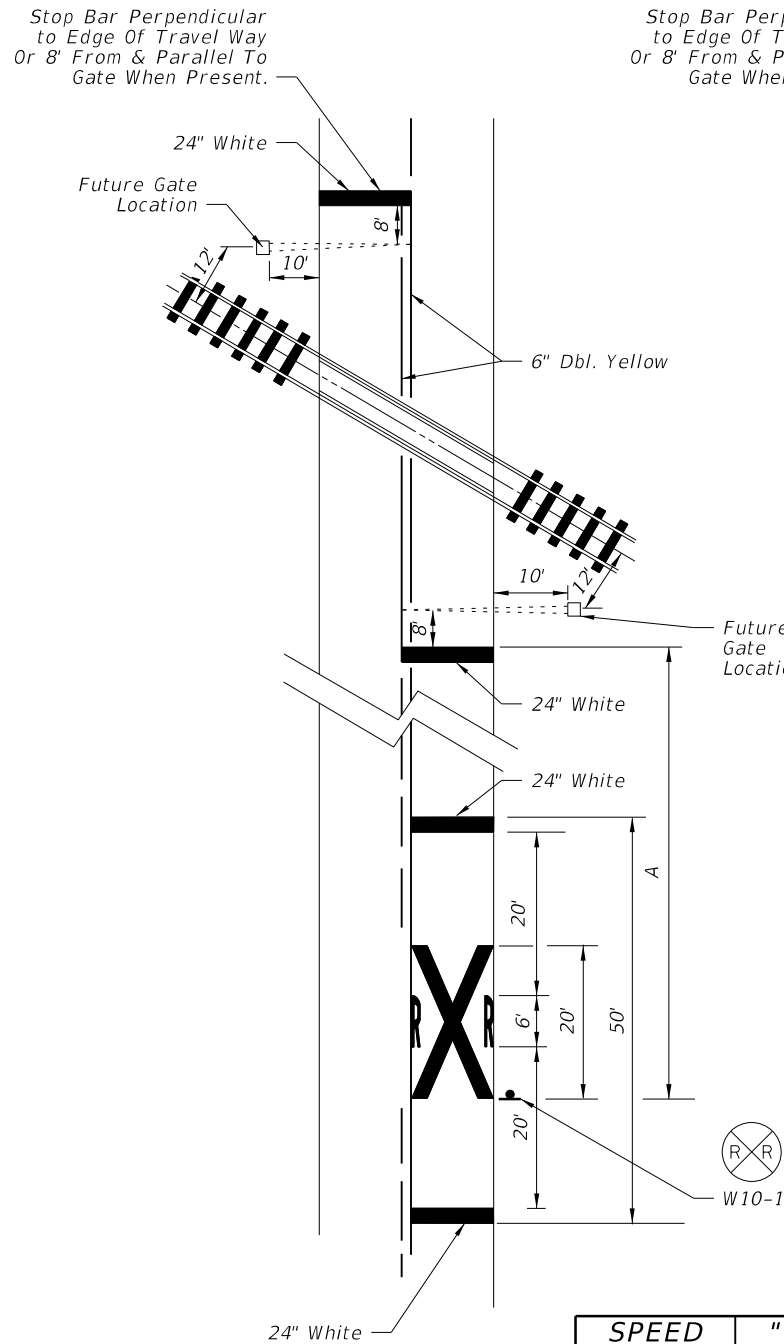


SPEED (mph)	" A " (ft)
60	400
55	325
50	250
45	175
40	125
35	100
URBAN	85 MIN.

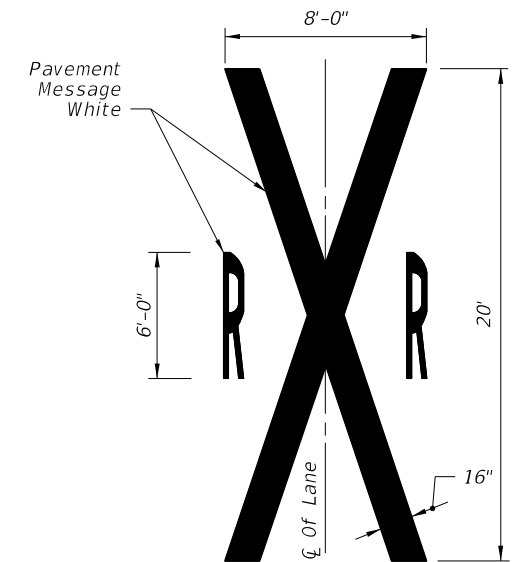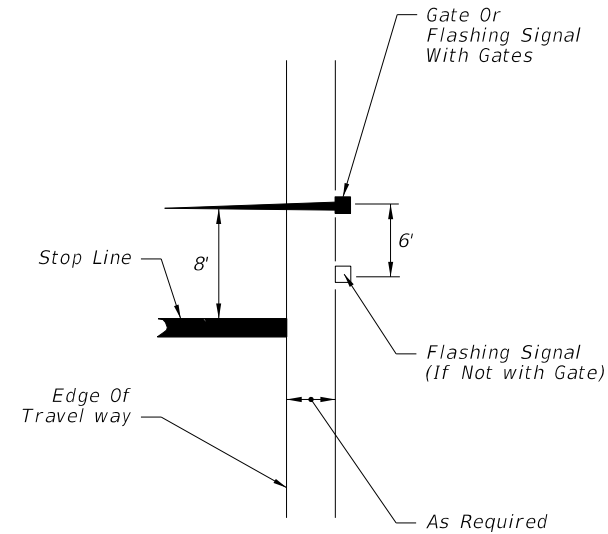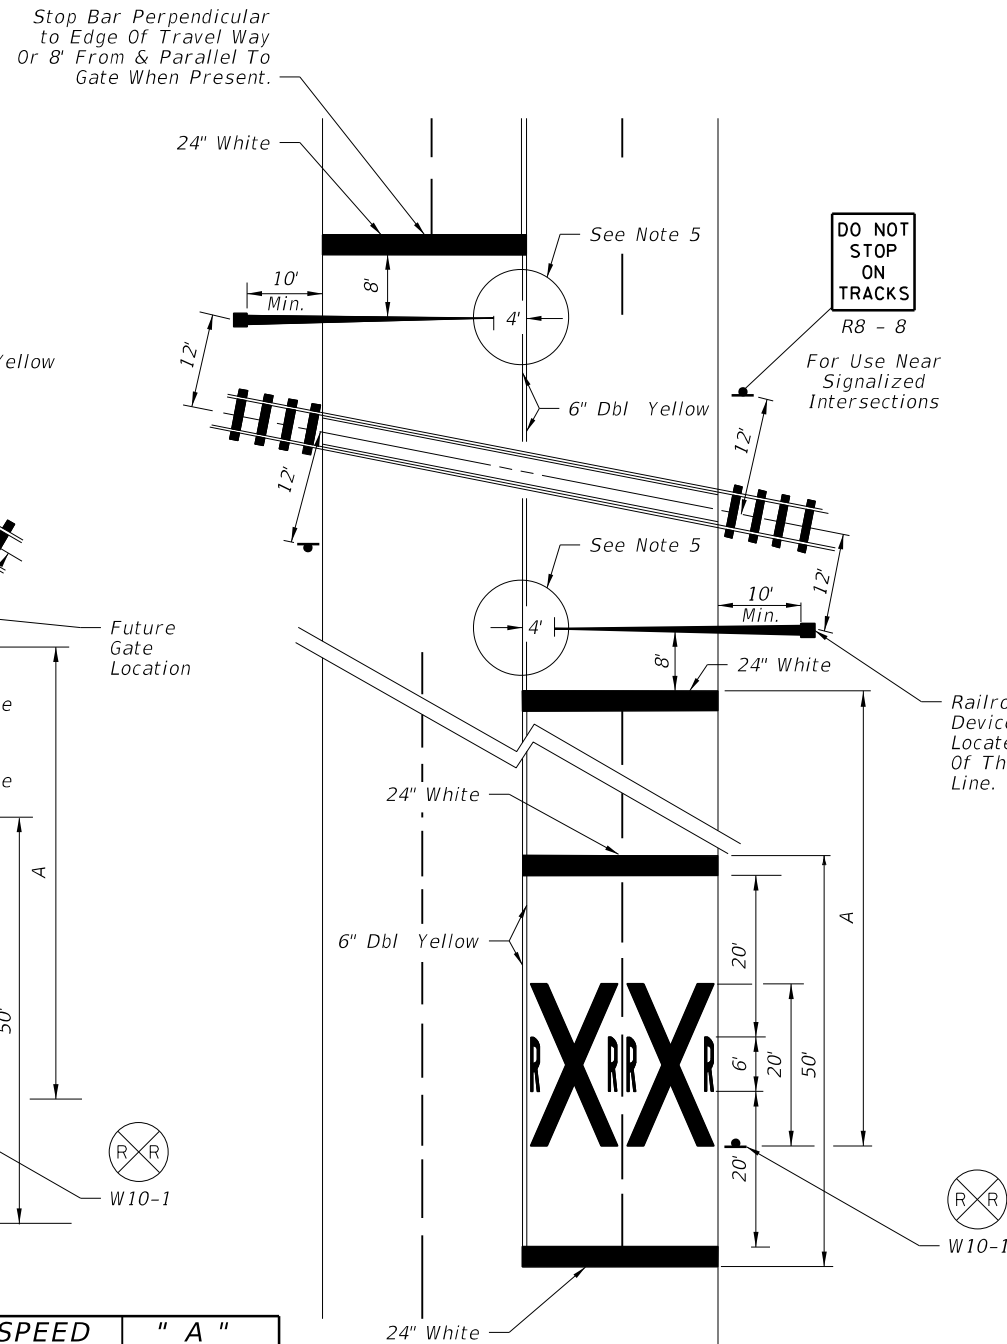



NOTES:

- When computing pavement message, quantities do not include traverse lines.
- Placement of sign W10-1 in a residential or business district, where low speeds are prevalent, the W10-1 sign may be placed a minimum distance of 100' from the crossing. Where street intersections occur between the RR pavement message and the tracks an additional W10-1 sign and additional pavement message should be used.
- A portion of the pavement markings symbol should be directly opposite the W10-1 sign.
- Recommended location for FTP-61-06 or FTP-62-06 signs, 100' urban and 300' rural. See Index 17355 for sign details.
- Gate Length Requirements:
For Two-way undivided sections:
The gate should extend to within 1' of the center line. On multiple approaches the maximum gate length may not reach to within 1' of the center line. For those cases, the distance from the gate to the center line shall be a maximum of 4'.
For one-way or divided sections:
The gate shall be of sufficient length such that the distance from the gate tip to the inside edge of pavement is a maximum of 4'.

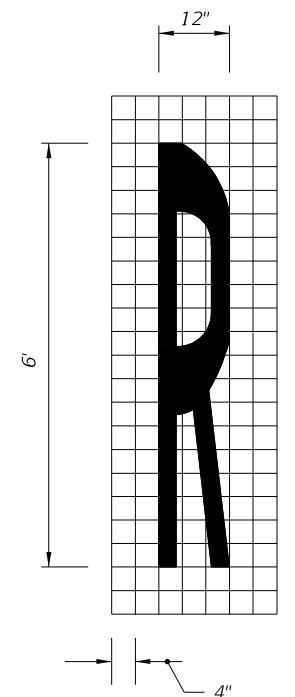


C:\projects\standards\roadway\17800-s\17882-03.dgn 4:10:39 PM sm970re 6/24/2013

C:\projects\standards\roadway\17800-s\17882-04.dgn
 sm970re
 4:10:41 PM
 6/24/2013

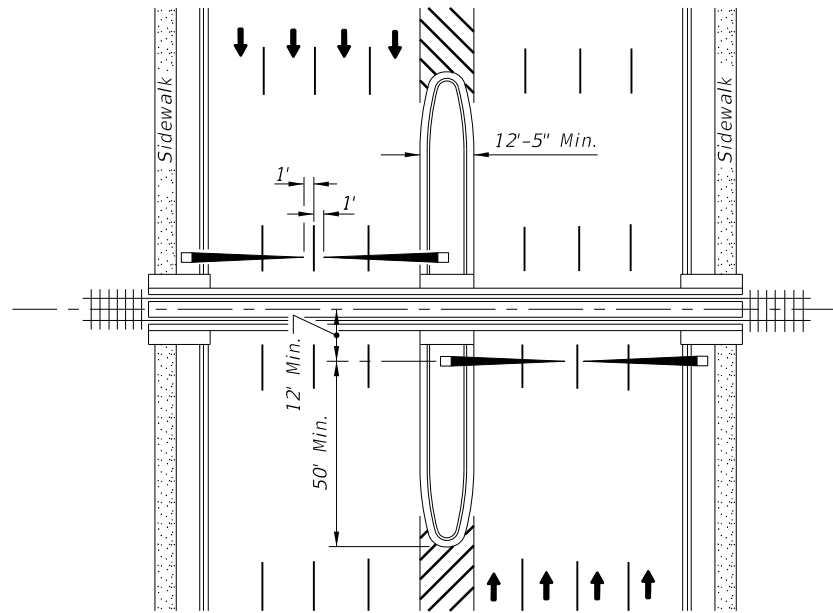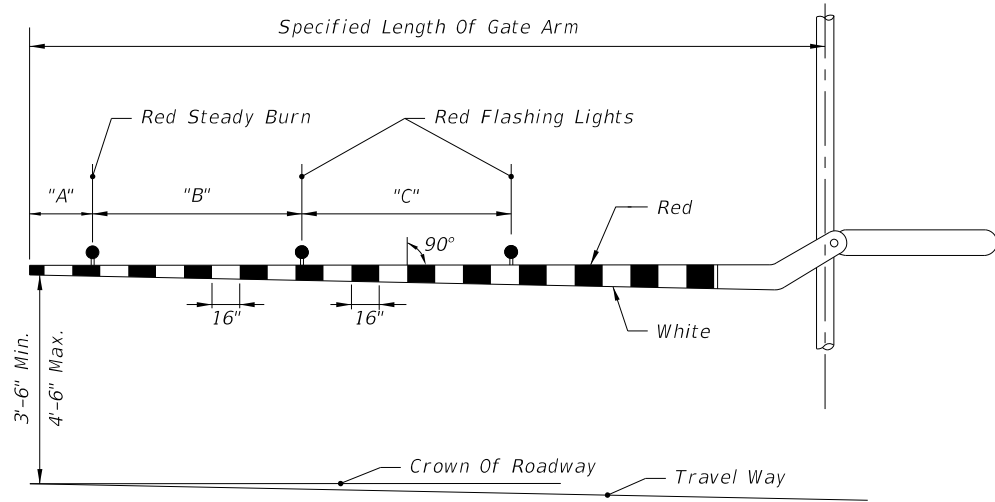

PLAN

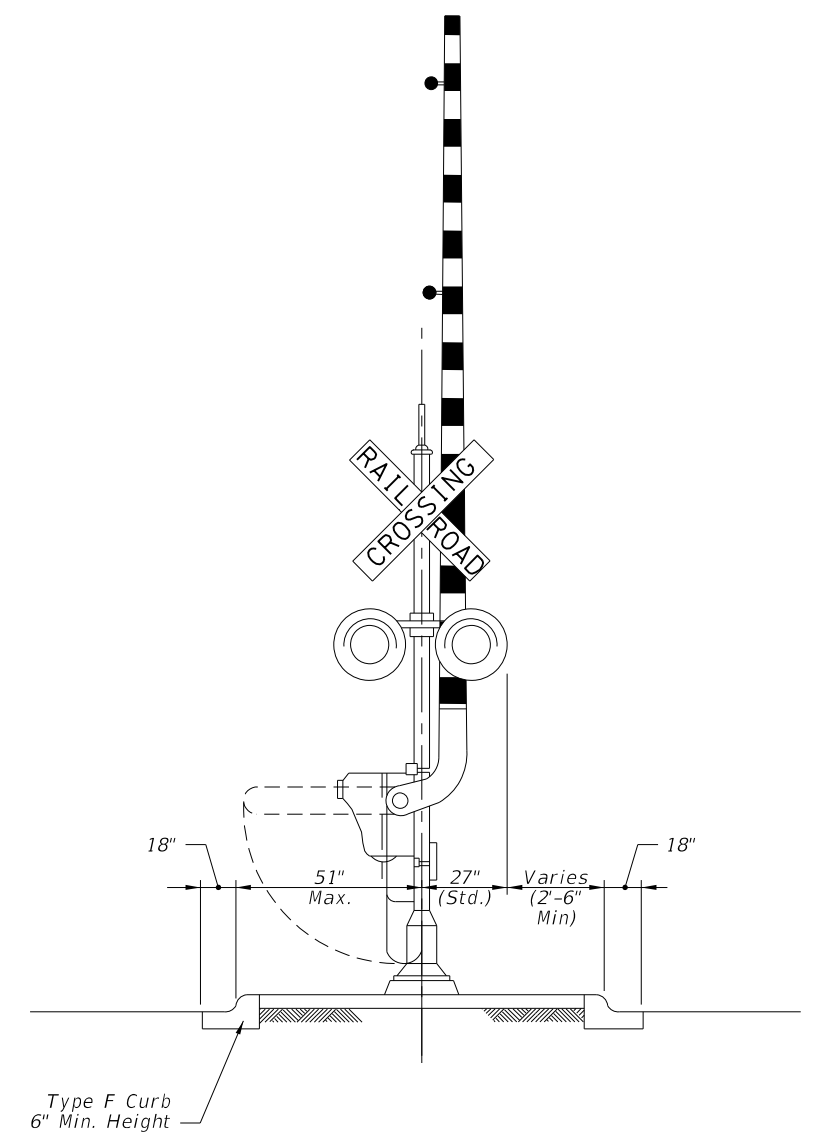

MEDIAN SECTION AT SIGNAL GATES


RAILROAD GATE ARM LIGHT SPACING

Specified Length Of Gate Arm	Dimension "A"	Dimension "B"	Dimension "C"
14 Ft.	6"	36"	5'
15 Ft.	18"	36"	5'
16-17 Ft.	24"	36"	5'
18-19 Ft.	28"	41"	5'
20-23 Ft.	28"	4'	5'
24-28 Ft.	28"	5'	5'
29-31 Ft.	36"	6'	6'
32-34 Ft.	36"	7'	7'
35-37 Ft.	36"	9'	9'
38 And Over	36"	10'	10'

NOTE:
 For additional information see the "Manual On Uniform Traffic Control Devices", Part 8; The "Traffic Control Handbook", Part VIII; and AASHTO "A Policy On Geometric Design Of Streets And Highways".


MEDIAN SIGNAL GATES FOR
 MULTILANE UNDIVIDED URBAN SECTIONS
 (THREE OR MORE DRIVING LANES IN ONE DIRECTION, 45 MPH OR LESS)

TYPICAL BRIDGE MOUNTS

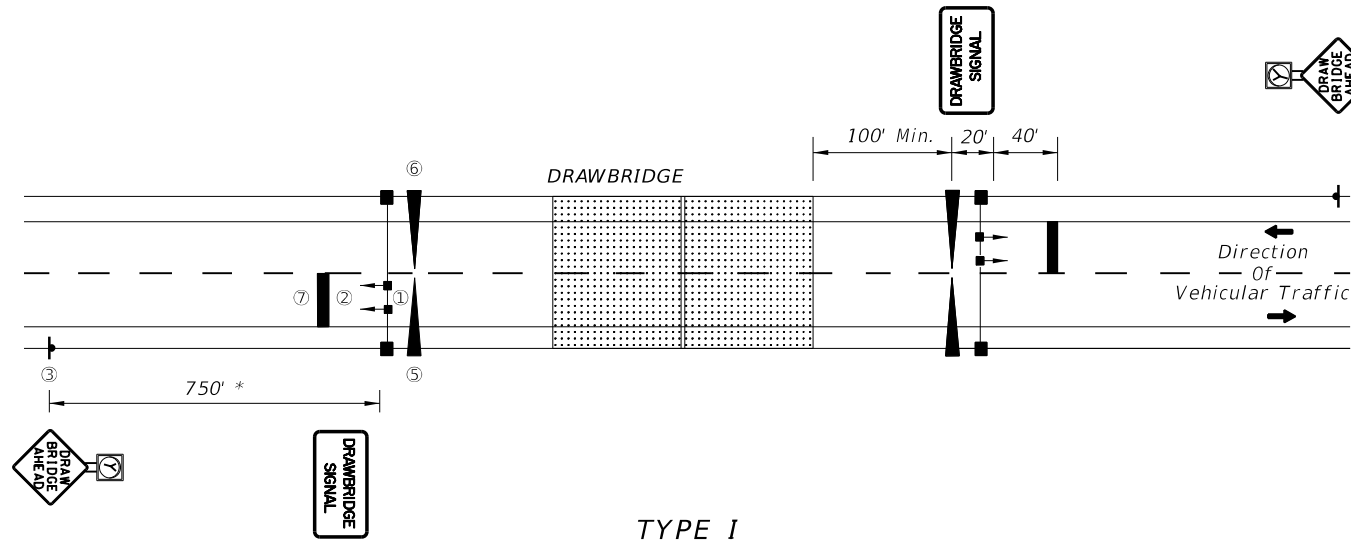

TYPE I

TO BE USED WHERE BRIDGE OPERATORS ARE FULL TIME OR A DAILY BASIS.

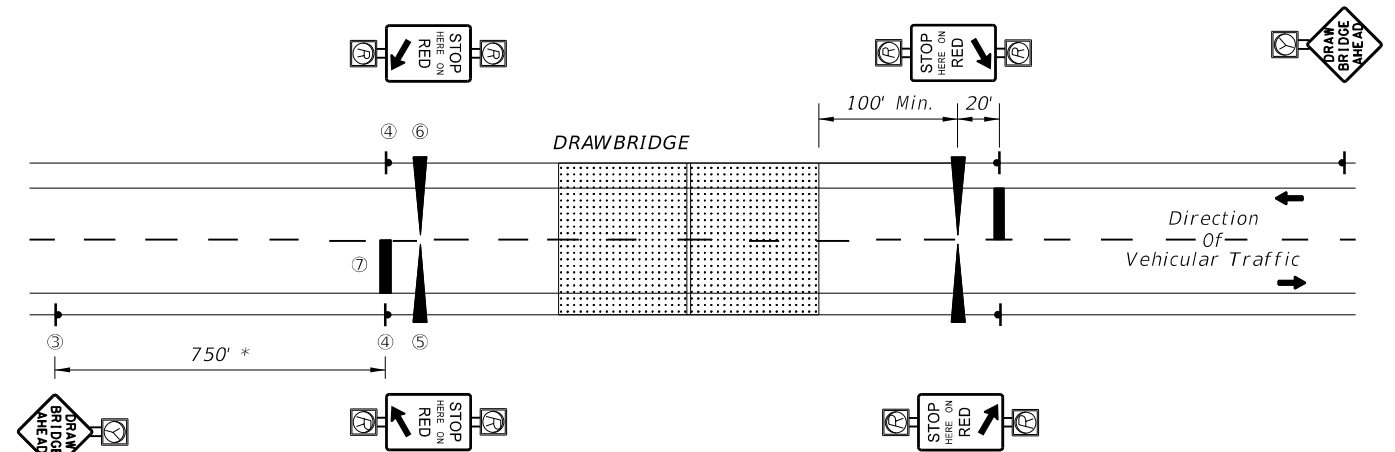

TYPE II

TO BE USED WHERE TYPE I IS NOT APPLICABLE (USUALLY WHEN THE BRIDGE OPERATOR IS "ON CALL").

LEGEND:

- ① TRAFFIC SIGNALS } Mast Arm Mounted (Off Bridge)
- ② DRAWBRIDGE SIGN } Monotube Support Mounted (On Bridge)
- ③ DRAWBRIDGE AHEAD SIGN WITH YELLOW FLASHING BEACON } Ground Mounted
- ④ STOP HERE ON RED SIGN WITH RED FLASHING BEACONS } Ground Mounted
- ⑤ ENTRANCE GATE
- ⑥ EXIT GATE
- ⑦ 24" THERMOPLASTIC STOP BAR

NOTES:

1. A bypass switch shall be installed to override each timing interval in case of a malfunction.
2. "STOP HERE ON RED" is omitted in Type I operation and "TRAFFIC SIGNALS" are omitted in Type II operation.
3. The time between beginning of flashing yellow on "Drawbridge Ahead" sign and the clearance of traffic signal to red, or beginning of flashing red should not be less than the travel time of a passenger car, from the sign location to the stop line, traveling at the 85 percentile approach speed.
4. Beginning of operation of drawbridge gates shall not be less than 15 seconds after steady red or 20 seconds after flashing red (Actual time may be determined by the bridge tender.)
5. Time of gate lowering and raising is dependent upon gate type.
6. Time of bridge opening is determined by the bridge tender.
7. Each gate shall be operated by a separate switch.
8. On each approach (Type II), all four red signals shall be on the same two circuit flashers, with the two top signals on one circuit, and the two bottom signals on the alternately flashing circuit.
9. A Drawbridge Ahead sign is required for both types of signal operation. However a flashing beacon shall be added to the sign when physical conditions prevent a driver traveling at the 85% approach speed from having continuous view of at least one signal indication for approximately 10 seconds.
10. Requirements on gate installation are contained in Section 41 of the "Manual on Uniform Traffic Control Devices".
11. "In accordance with Traffic Engineering Manual (Topic Number 750-000-005) Section 2.1, SLIPPERY WHEN WET SIGNS shall be placed in advance of all MOVABLE and NONMOVABLE STEEL DECK BRIDGES."



W8-5
SLIPPERY WHEN WET SIGN
See Note 11

SEQUENCE CHART

SIGNALS & SIGNS	SIGNAL SWITCH	OFF	ON	OFF
	FLASHING BEACON DRAWBRIDGE AHEAD SIGN (See Note 9)	BLANK	FLASHING YELLOW	BLANK
GATES	STOP HERE ON RED (Type II only)	BLANK	FLASHING RED	BLANK
	TRAFFIC SIGNALS (Type I only)	GREEN	YELLOW	RED
GATES	ENTRANCE GATES	RAISED	LOWERED	RAISED
	EXIT GATES	RAISED	LOWERED	RAISED
TIMING		Variable Time (See Note No.3)	5 Sec. 15 Sec. Min. Variable Time (See Note No.4)	Variable Time (See Note No. 5)
		Normal Operation	Operation During Bridge Preemption	

Per Note 7

* Field conditions may require adjustment of this standard distance.

C:\projects\standards\roadway\17800-s\17890-01.dgn smg970re 4:10:43 PM 6/24/2013

C:\projects\standards\roadway\17800-s\17890-02.dgn
 sm970re
 4:10:45 PM
 6/24/2013

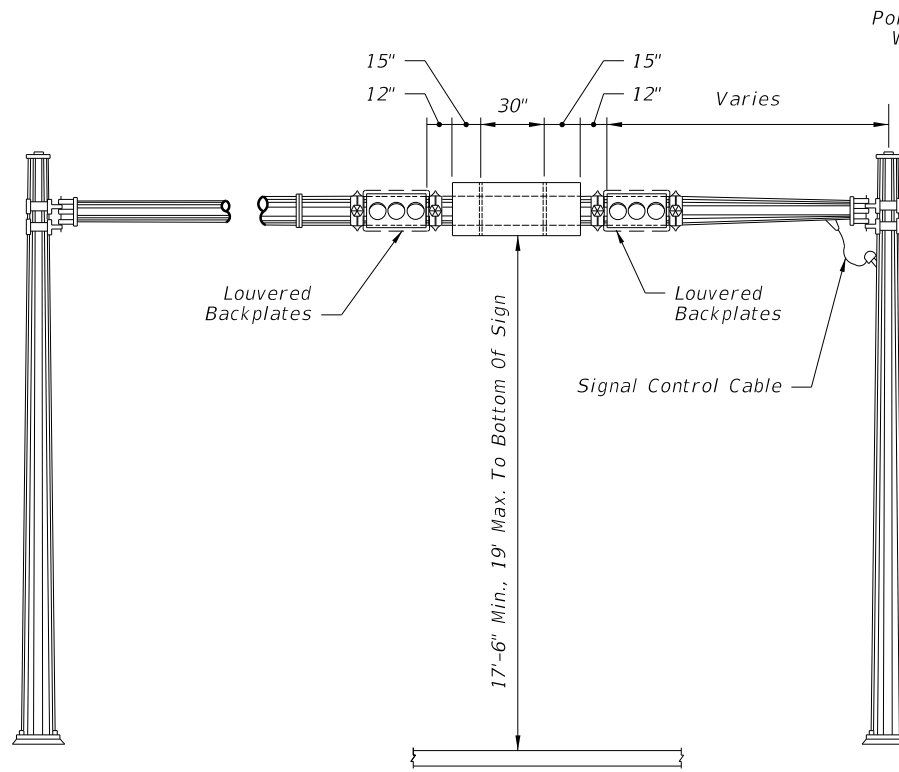


FIGURE - A
MONOTUBE SUPPORT MOUNTING

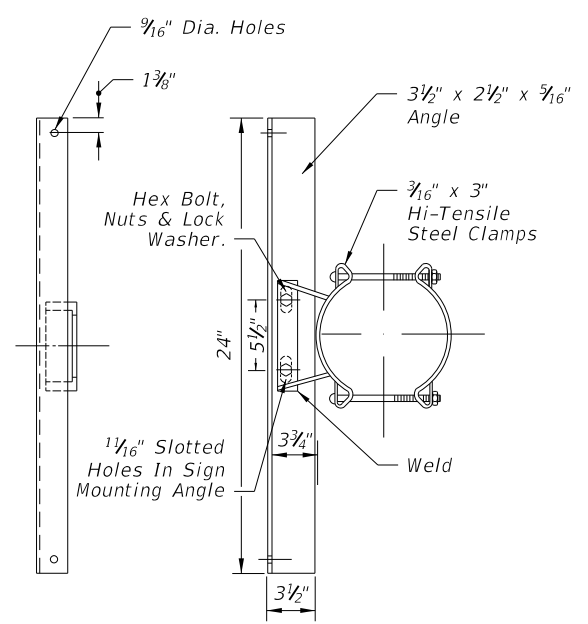


FIGURE - B
SIGN PANEL MOUNTING ASSEMBLY

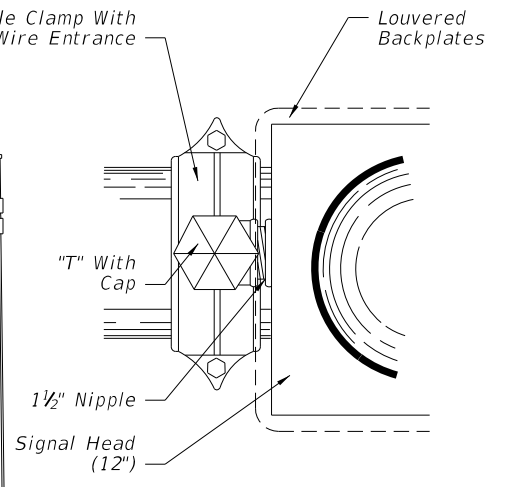


FIGURE - C

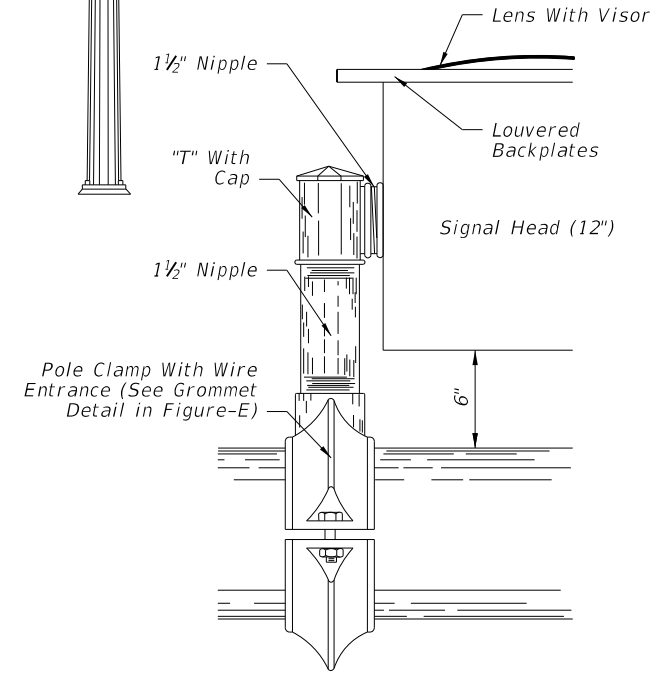


FIGURE - D

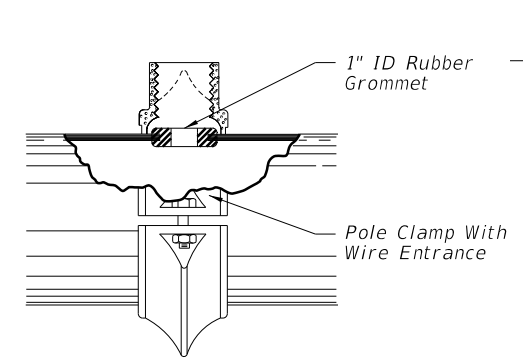


FIGURE - E

SIGNAL HEAD MOUNTING ASSEMBLY

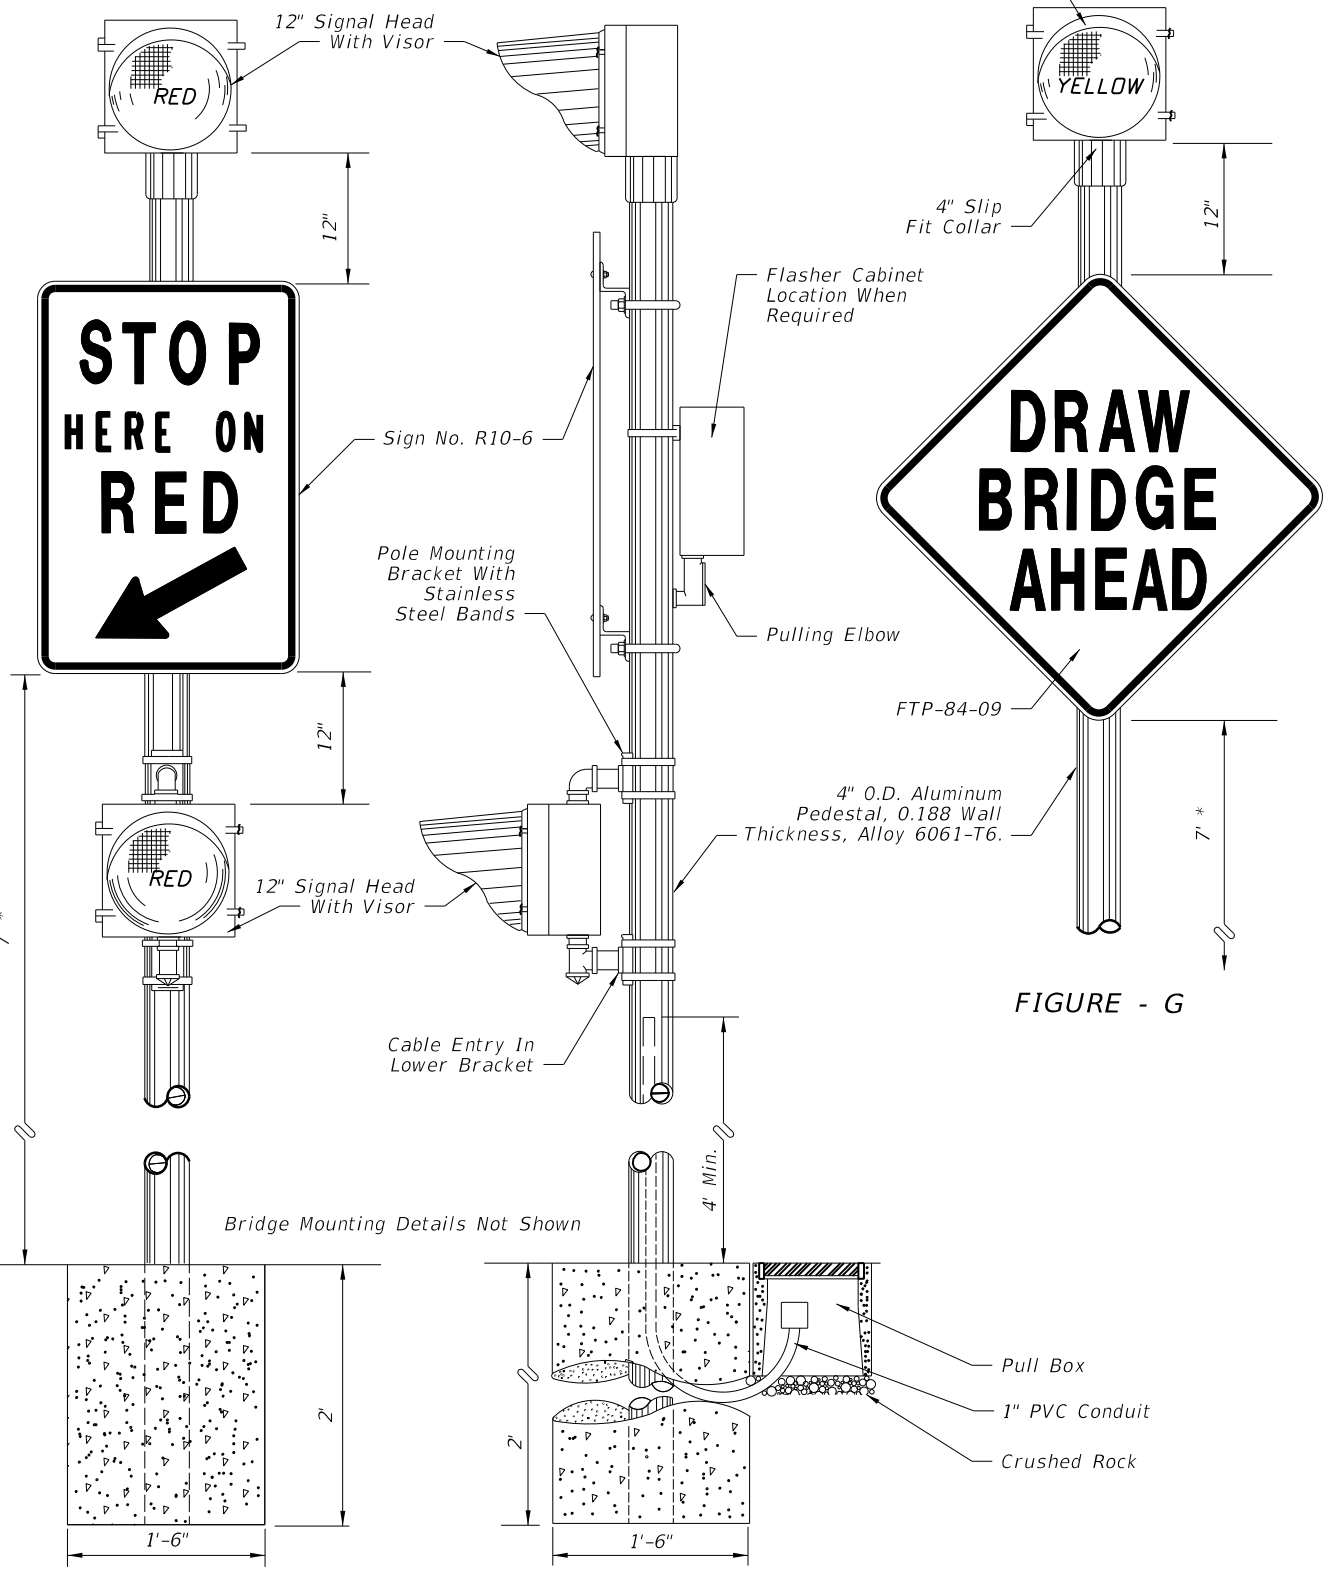

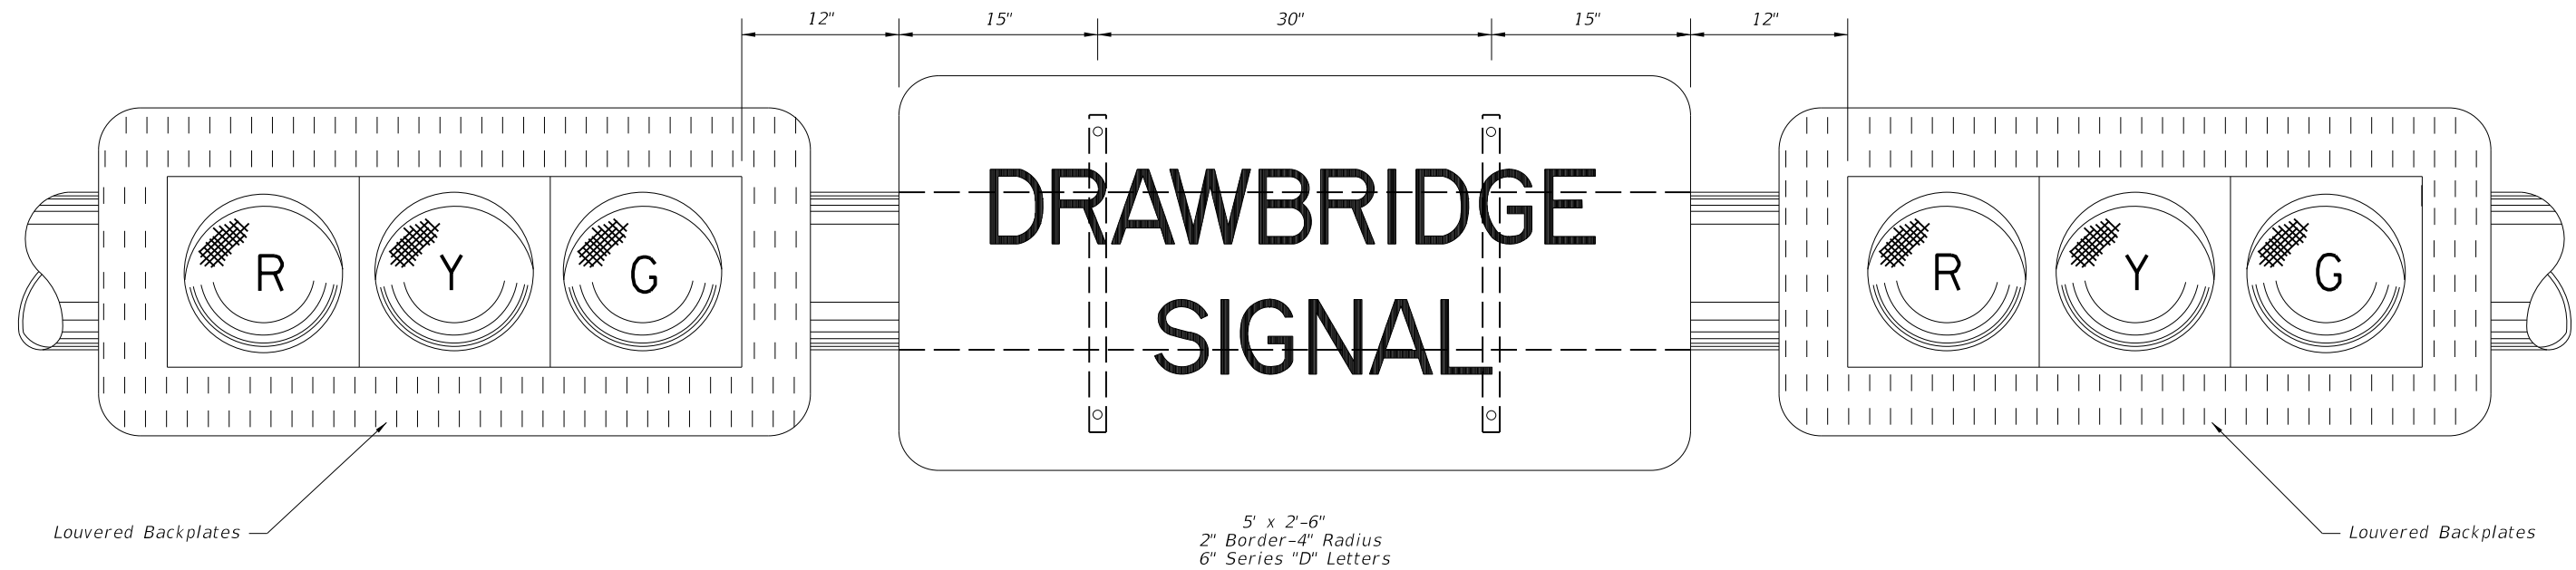



FIGURE - F

* Measured from the bottom of the sign to the near edge of the pavement. Horizontal distance between edge of the pavement and inside edge of sign will vary with condition at job site.



LAST REVISION 01/01/12	DESCRIPTION:	 FDOT 2014 DESIGN STANDARDS	TRAFFIC CONTROL DEVICES FOR MOVABLE SPAN BRIDGE SIGNALS	INDEX NO. 17890	SHEET NO. 2 of 3
---------------------------	--------------	--	--	---------------------------	----------------------------



BLACK OPAQUE LEGEND AND BORDER ON REFLECTORIZED YELLOW BACKGROUND
TO BE USED WITH TYPE I OPERATION, AS SHOWN ON PREVIOUS SHEET
MONOTUBE SUPPORT MOUNTING

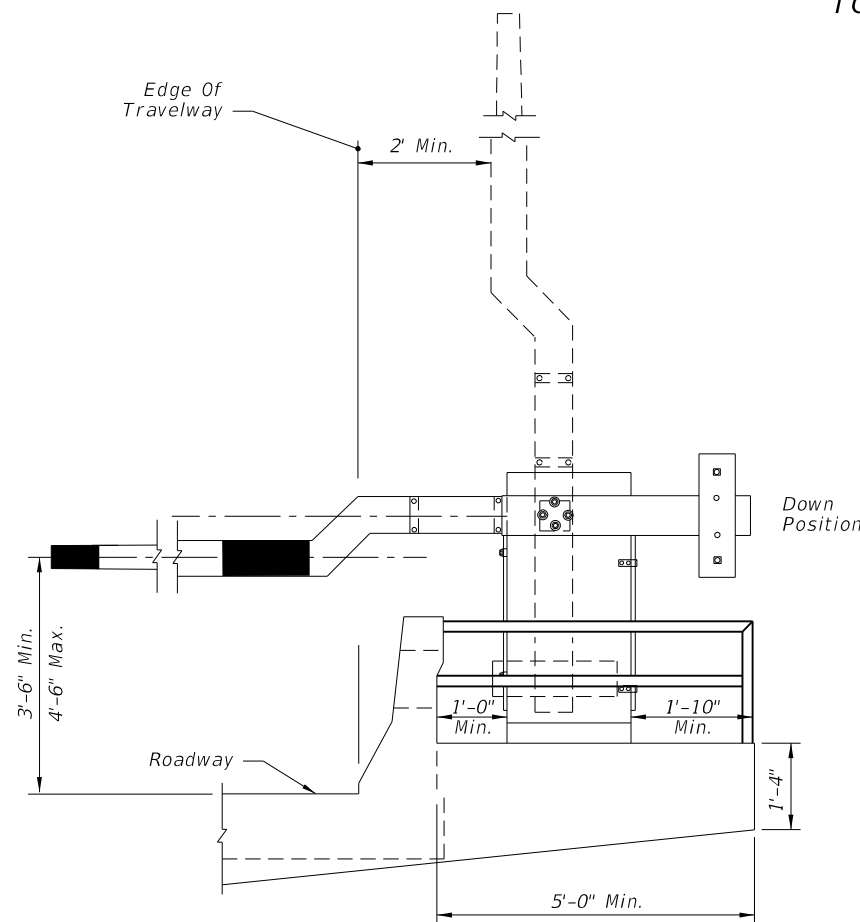

GATE & ARM DETAIL

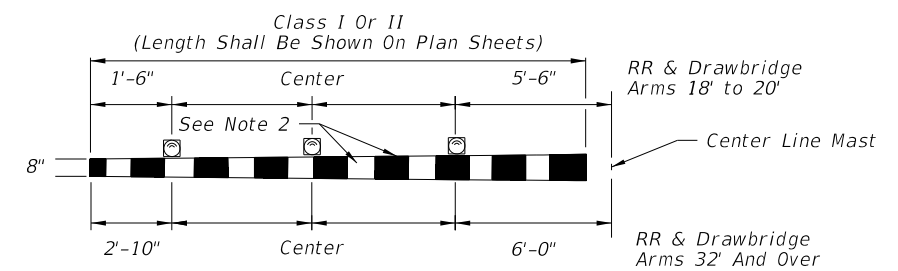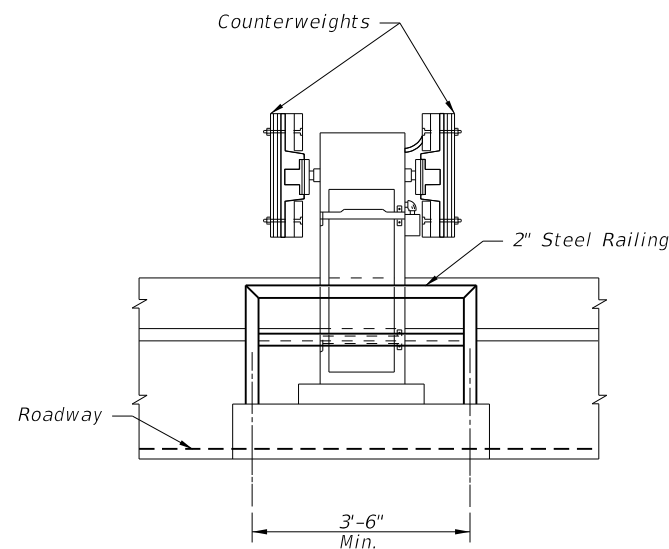


NOTES:

- 12 volt flashing red lights shall be mounted on gate arm and shall operate in the flashing mode only when gate arm is in the lower position or in the process of being lowered. The number of lights shall vary accordingly to length of the gate arm.
- 16" alternate diagonal fully reflectORIZED red and white stripes.

TYPICAL LAMP PLACEMENT

C:\projects\standards\roadway\17800-s\17890-03.dgn
sm970re
4:10:47 PM
6/24/2013

LAST REVISION 07/01/09	REVISION	DESCRIPTION:	 FDOT 2014 DESIGN STANDARDS	TRAFFIC CONTROL DEVICES FOR MOVABLE SPAN BRIDGE SIGNALS	INDEX NO. 17890	SHEET NO. 3 of 3
---------------------------	----------	--------------	--	--	--------------------	---------------------