

**SYMBOLS** 

Work Area

Work Zone Sign

Sign With 18" X 18" (Min.) Orange Flag And Type B Light

Channelizing Device (See Index No. 600)


DESCRIPTION:







LAST

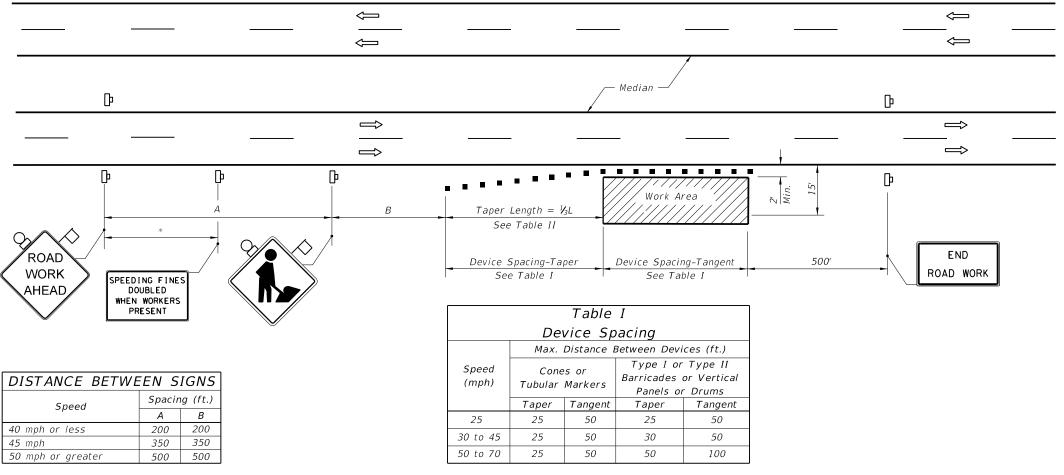

\*500' beyond the ROAD WORK AHEAD sign or midway between signs whichever is less.

## GENERAL NOTES

- 1. If the work operation encroaches on the through traffic lanes or when four or more work vehicles enter the through traffic lanes in a one hour period (excluding establishing and terminating the work area), a flagger shall be provided and a FLAGGER sign shall be substituted for the WORKERS sign. The flagger shall be positioned at the point of vehicle entry or departure from the work area.
- 2. This TCZ plan also applies to work performed in the median more than 2' but less than 15' from the edge of travelway.
- 3. When work is being performed on a multilane undivided roadway the signs normally mounted in the median (as shown) shall be omitted.
- 4. WORKERS signs to be removed or fully covered when no work is being performed.
- 5. SHOULDER WORK sign may be used as an alternate to the WORKER symbol sign.
- 6. When a side road intersects the highway within the TTC zone, additional TTC devices shall be placed in accordance with other applicable TCZ Indexes.
- 7. For general TCZ requirements and additional information, refer to Index No. 600.

## **DURATION NOTES**

- 1. Signs and channelizing devices may be omitted if all of the following conditions are met:
- a. Work operations are 60 minutes or less.
- b. Vehicles in the work area have high-intensity, rotating, flashing, oscillating, or strobe lights operating.

# Table II Taper Length - Shoulder

Speed	⅓L (ft.)			Notes
(mph)	8'	10'	12'	Notes
	Shldr.	Shldr.	Shldr.	
25	28	35	42	
30	40	50	60	$I = \frac{WS^2}{}$
35	55	68	82	60
40	72	90	107	
45	120	150	180	
50	133	167	200	
55	147	183	220	L=WS
60	160	200	240	L=WS
65	173	217	260	
70	187	233	280	

minimum shoulder width.

 $V_3L$  = Length of shoulder taper in feet

W = Width of total shoulder in feet (combined paved and unpaved width)

S = Posted speed limit (mph)

### CONDITIONS

WHERE ANY VEHICLE, EQUIPMENT, WORKERS OR THEIR ACTIVITIES THE EDGE OF TRAVEL WAY.

ENCROACH THE AREA CLOSER THAN 15' BUT NOT CLOSER THAN 2' TO

