

- with safety shaped traffic railing.
- (IDS-470 & IDS-480).
- provided on this index, refer to Index No. 400.

NOTES FOR GUARDRAIL TRANSITIONS CONNECTING TO TRAFFIC RAILING RETROFITS ON EXISTING BRIDGES

- curb blunt ends are not in place.

DESIGN NOTES FOR GUARDRAIL TRANSITIONS CONNECTING TO TRAFFIC RAILING RETROFITS ON EXISTING BRIDGES

- GUARDRAIL TRANSITION ALIGNMENTS FOR BRIDGE THRIE-BEAM AND VERTICAL FACE TRAFFIC RAILING RETROFIT

| LAST REVISION 07/01/13 | GUARDRAIL TRANSITIONS ANDINDEX NO.SHEE NO.CONNECTIONS FOR EXISTING BRIDGES4021 of | |
|---------------------------|---|--|
|---------------------------|---|--|

GENERAL NOTES

1. This index provides thrie-beam transition and connection details for approach end guardrail on existing bridges, and anchorage details for trailing end traffic railing retrofits and safety shapes on existing bridges. Sheets 1 through 23 apply to bridges with retrofitted traffic railings, (Sheet 23 shows the trailing end guardrail connections). Sheet 24 applies to bridges

2. The schemes identified by Arabic numerals in this index are complementary to the bridge traffic railing barrier retrofit schemes with like numeral identification in Index Nos. 470, 471 through 476, 480 through 483. The schemes in this index identified by Roman numerals are complementary to bridge safety shaped traffic railing barrier where determined to be in accordance with applications of criteria specified in the Instructions for Design Standards

3. For guardrail applications and details of related hardware and accessories that are not

1. The transition detail shown on this sheet shows (a) the standard post spacings within the typical thrie-beam approach transitions connecting to existing bridges with retrofit traffic railings, and (b) depict the typical alignments of the approach transitions.

2. The curb and gutter flare shown on this sheet is typical of flares that are to be constructed when approach slab curbs extend to the beginning of the slab, and where other treatment to

3. The special steel post for roadway thrie-beam transitions detailed on this sheet is specific to all transition applications on this index that require one or more steel posts.

The special steel post and base plate assembly shall be fabricated using ASTM A36 or ASTM A709 Grade 36 steel. Welding shall conform to ANSI/AASHTO/AWS D1.5. The assembly shall be hot-dip zinc coated in accordance with Section 536 of the Specifications.

Anchor studs shall be fully threaded rods in accordance with ASTM F1554 Grade 36 or ASTM A193 Grade B7. All nuts shall be heavy hex in accordance with ASTM A563 or ASTM A19


4. Anchor studs and nuts shall be hot-dip zinc coated in accordance with the Specifications. After the nuts have been snug tightened, the anchor stud threads shall be single punch distorted immediately above the top nuts to prevent loosening of the nuts. Distorted threads shall be coated with a galvanizing compound in accordance with the Specifications.

Adhesive bonding material systems for anchors shall comply with Specification Section 937 and be installed in accordance with Specification Section 416.4. Nested beam extensions and points for terminal connector attachments will vary for traffic railing barrier vertical face retrofits. The plan views for the vertical face retrofit barriers show the primary configurations for each particular scheme. The associated pictorial views show the variations.


5. For installing thrie-beam terminal connector to traffic railing vertical face retrofits, see notations on Sheets 12 through 15 and the flag notation on Sheet 23.


6. Payment for connections to traffic railing vertical face retrofits are to be made under the contract unit price for Bridge Anchorage Assembly, EA., and shall be full compensation for bolt hole construction, terminal connector, terminal connector plate and bolts, nuts and washers.


1. For selection of an appropriate transition scheme, see the Instructions for Design Standards (IDS-470 & IDS-480) for instructions to the Structures and Roadway engineers.

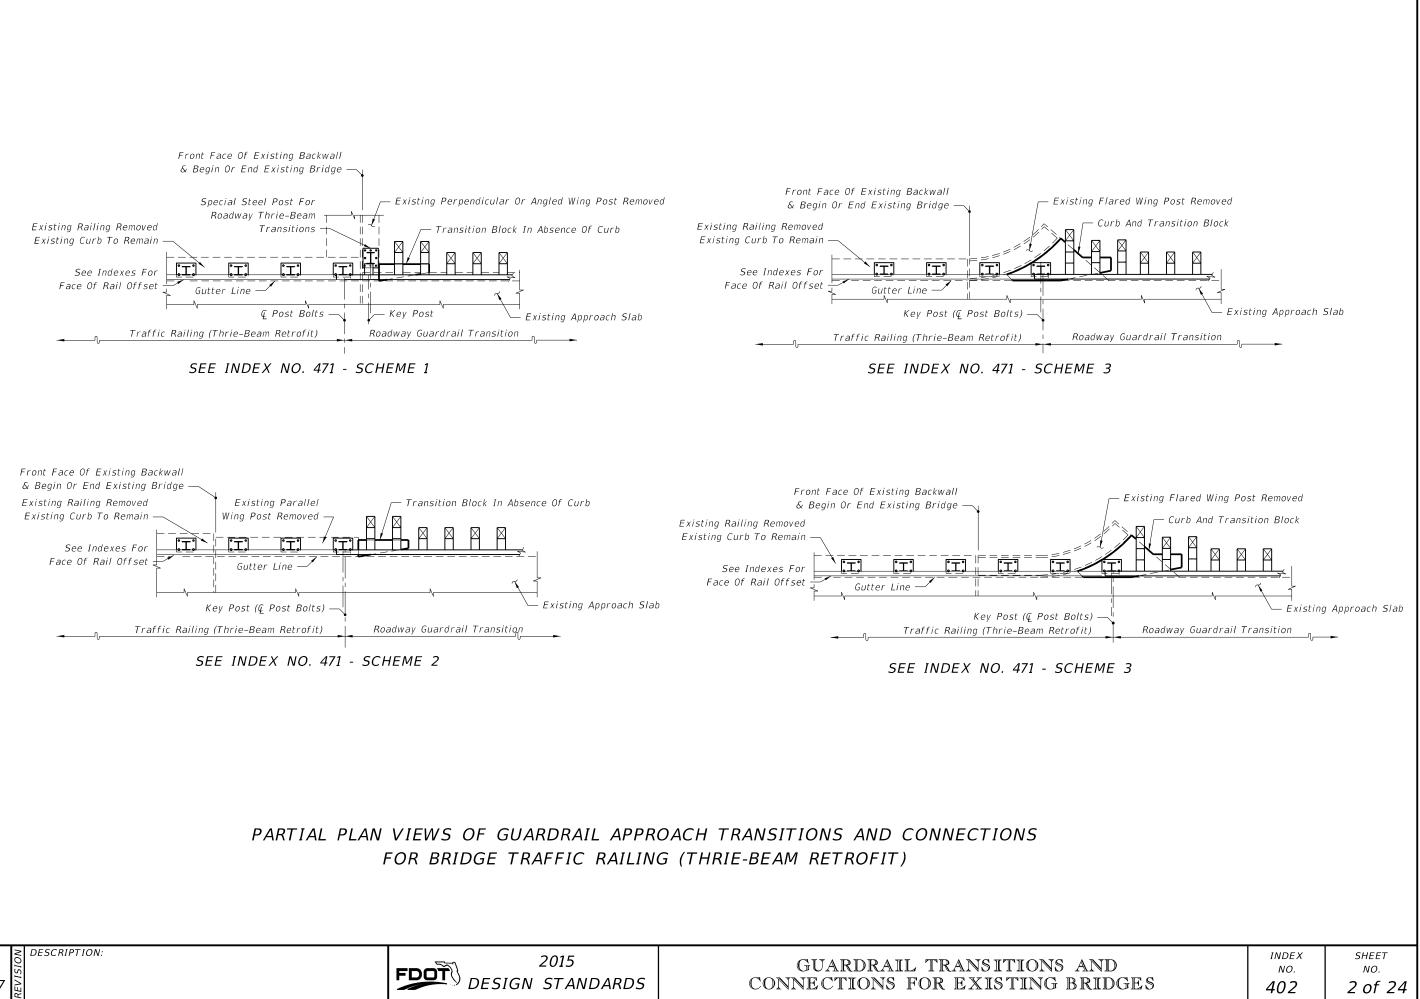


| LAST REVISION 07/01/07Operation201507/01/07GUARDRAIL TRANSITIONS DESIGN STANDARDSGUARDRAIL TRANSITIONS CONNECTIONS FOR EXISTING | | |
|---|------------|--|
| | REVISION G | |

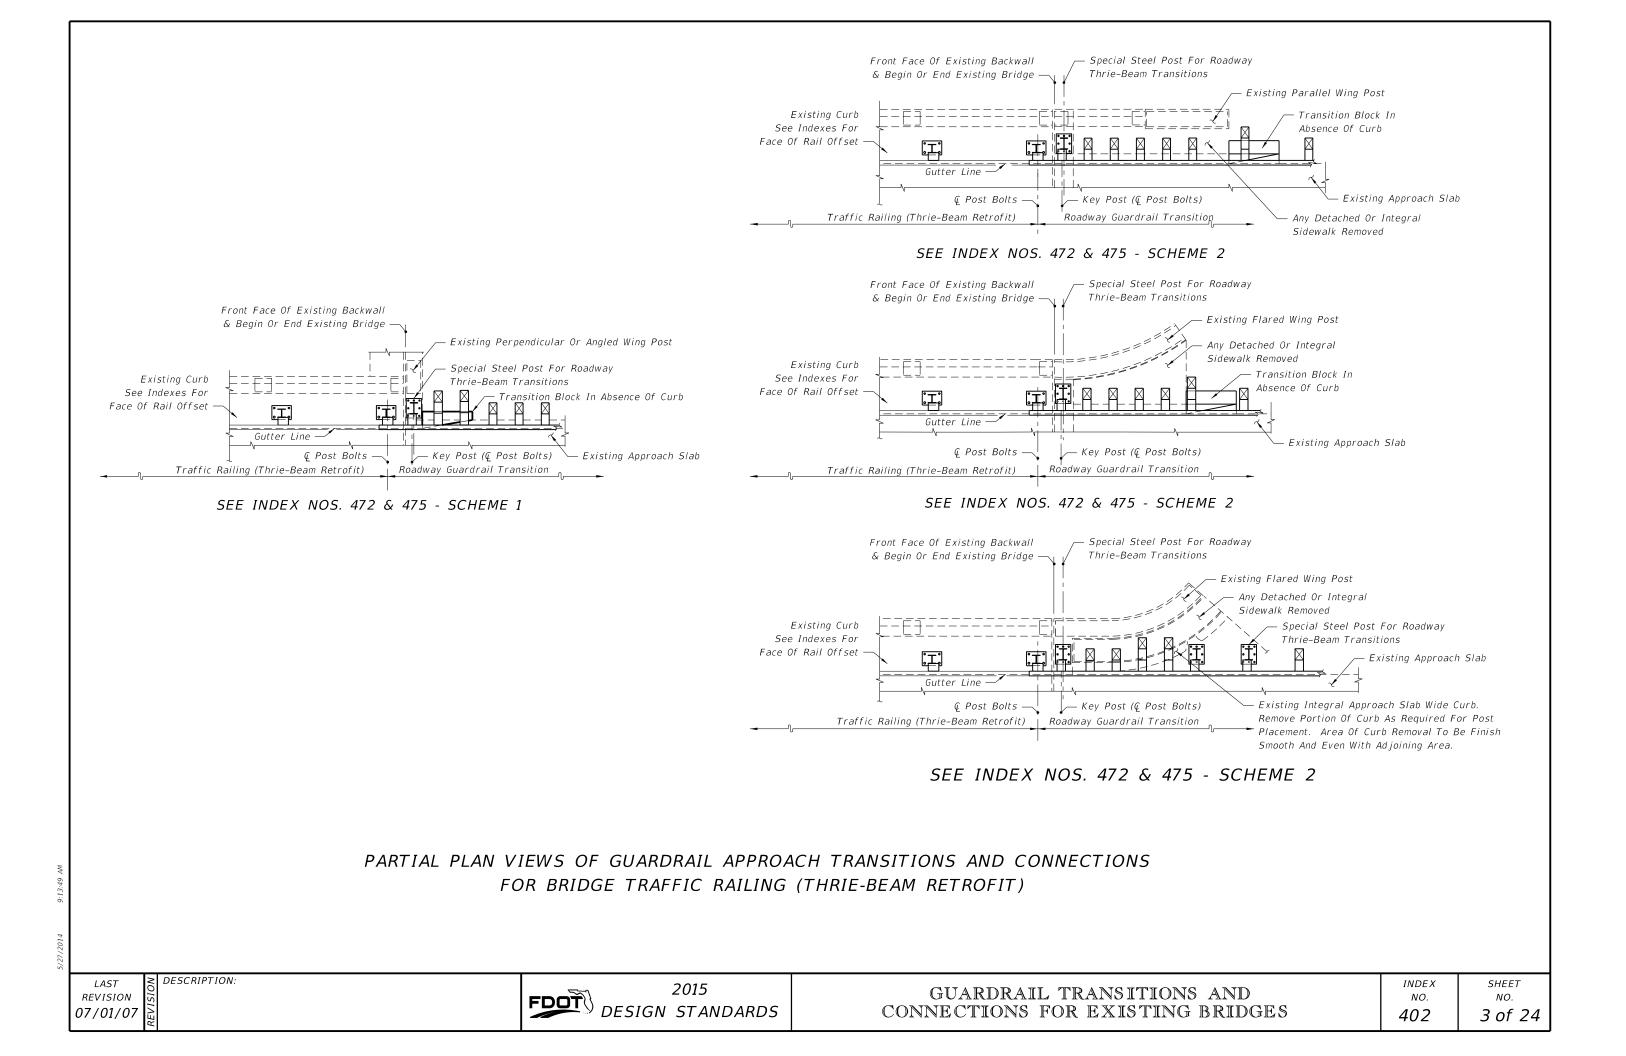

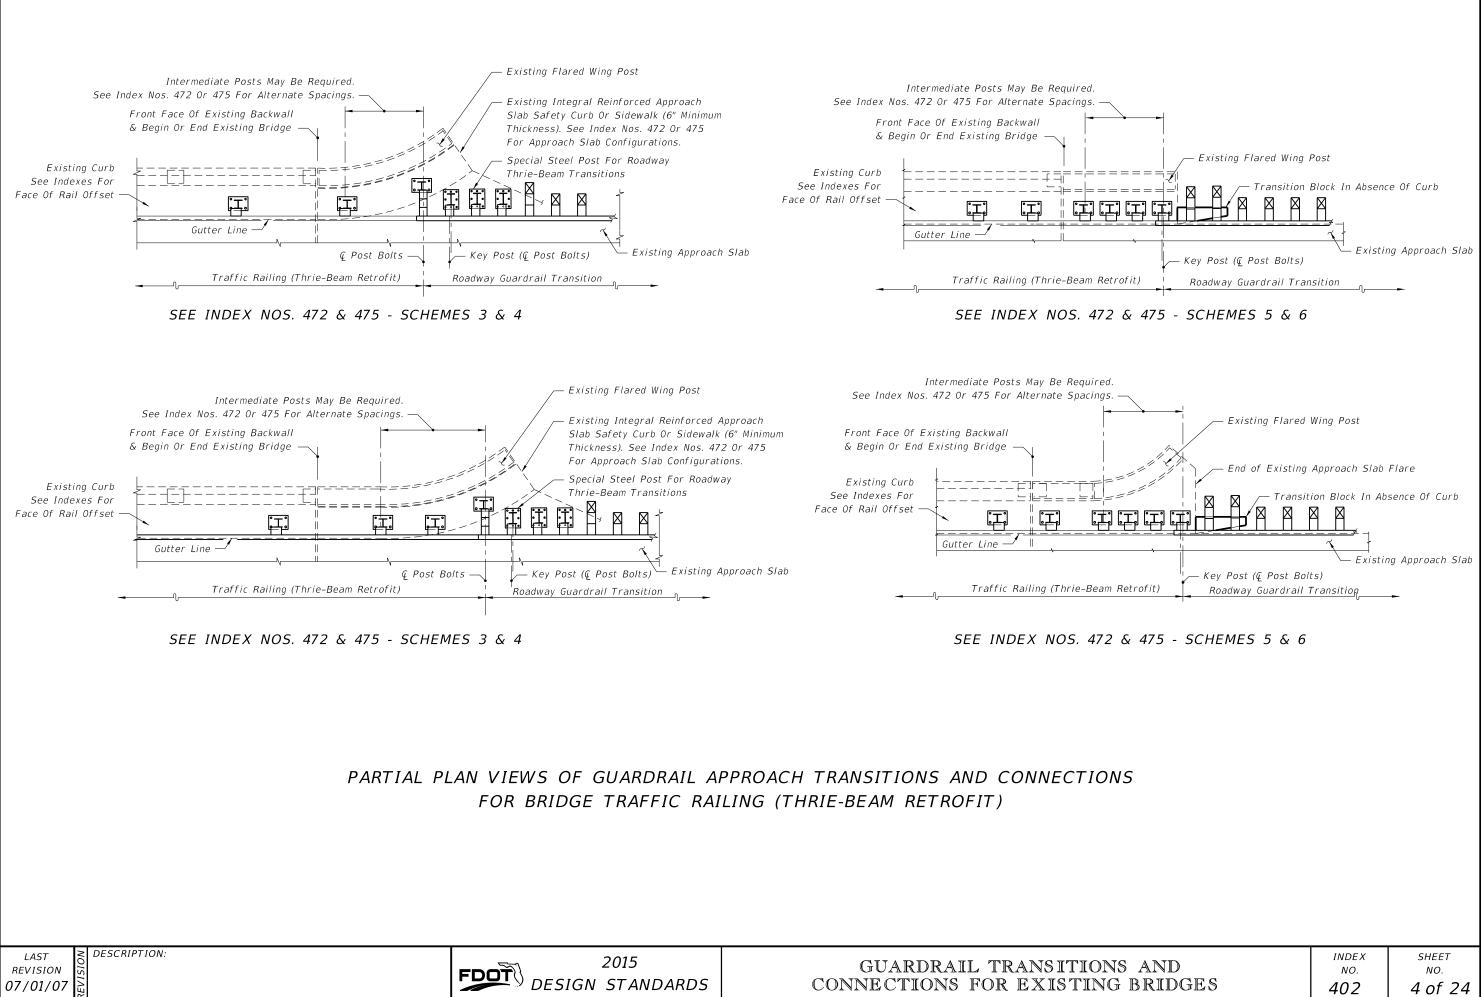


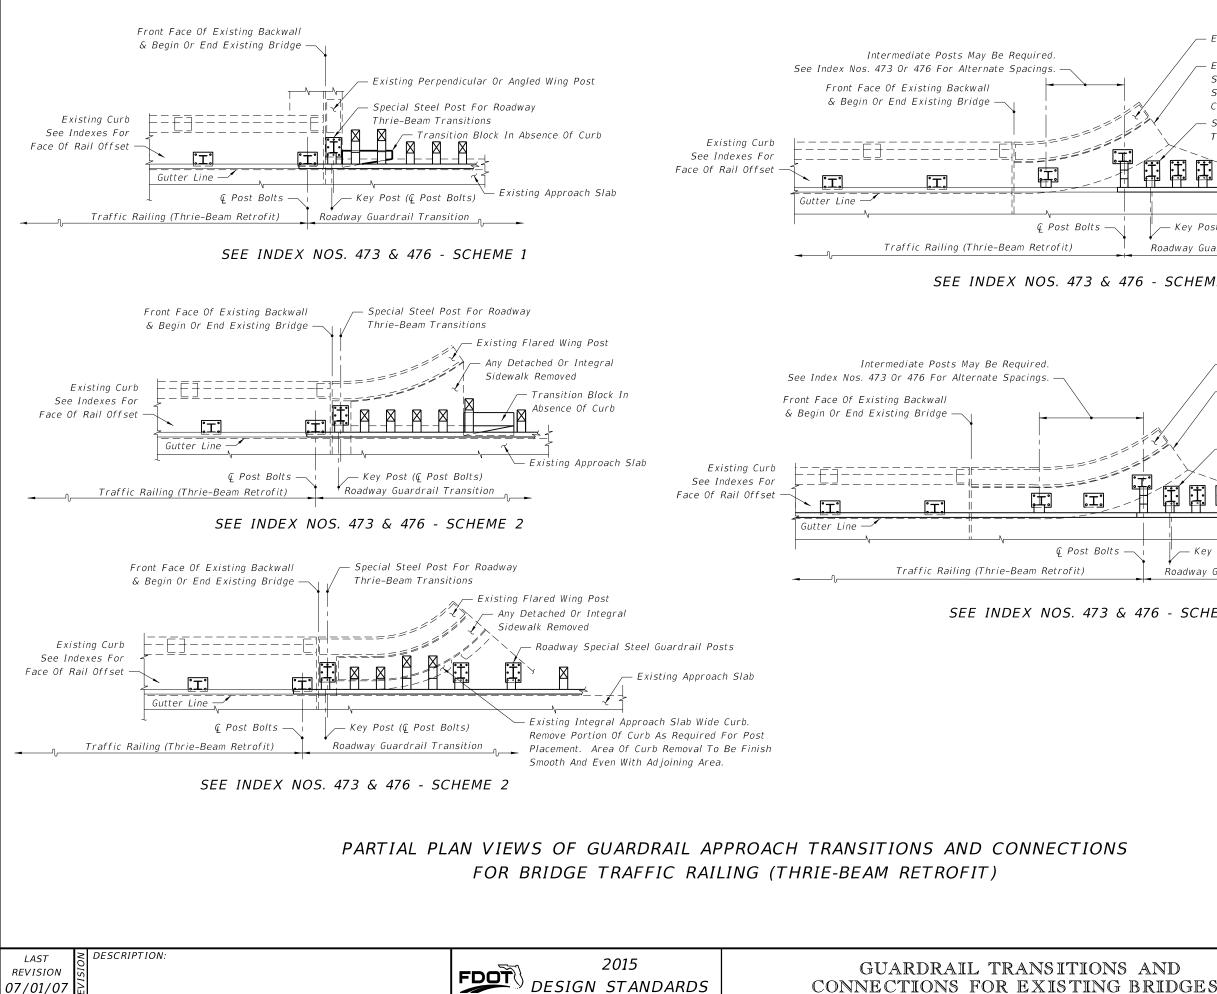

| Existing Flared Win | g Post | |
|--|-----------------|-------------------|
| Existing Integral Re Safety Curb Or Side See Index Nos. 473 Configurations. | ewalk (6" Minim | um Thickness). |
| Special Steel Post Thrie-Beam Transit | | |
| | 2 I | |
| Key Post (& Post Bolts) | Existing A | pproach Slab |
| Roadway Guardrail Transition | _ | |
| 476 - SCHEMES 3 & 4 | · | |
| | | |
| | | |
| — Existing Flared | Wing Post | |
| Existing Integra Safety Curb Or See Index Nos. Configurations. | Sidewalk (6" Mi | nimum Thickness). |
| Special Steel Po Thrie-Beam Tra | | У |
| | | |
| | × | |
| Key Post (@ Post Bolts | | pproach Slab |
| Roadway Guardrail Transitio | n | |
| x 476 - SCHEMES 3 & 4 | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| 5 | | |
| ί | | |
| | | |
| | | |
| S AND | INDEX NO. | SHEET NO. |
| BRIDGES | 402 | 5 of 24 |

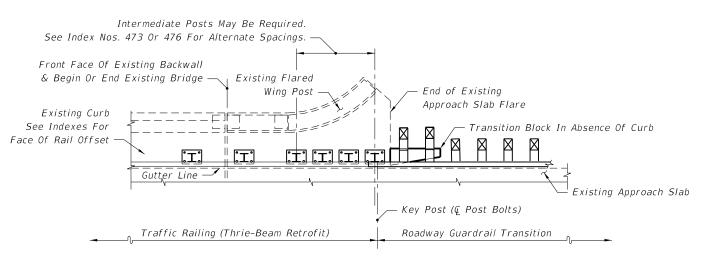

SEE INDEX NOS. 473 & 476 - SCHEMES 5 & 6

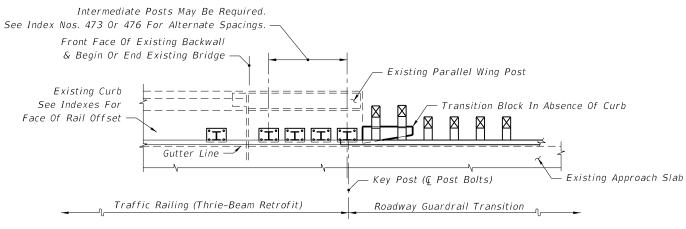


SEE INDEX NOS. 473 & 476 - SCHEMES 5 & 6

PARTIAL PLAN VIEWS OF GUARDRAIL APPROACH TRANSITIONS AND CONNECTIONS FOR BRIDGE TRAFFIC RAILING (THRIE-BEAM RETROFIT)

| 5/. | | | |
|-----|------------------------|--------------------------|---|
| | LAST REVISION 07/01/07 | 2015 DESIGN STANDARDS | GUARDRAIL TRANSITIONS CONNECTIONS FOR EXISTING |


| | INDEX | SHEET |
|------------------|------------|---------|
| S AND BRIDGES | NO. 402 | 6 of 24 |

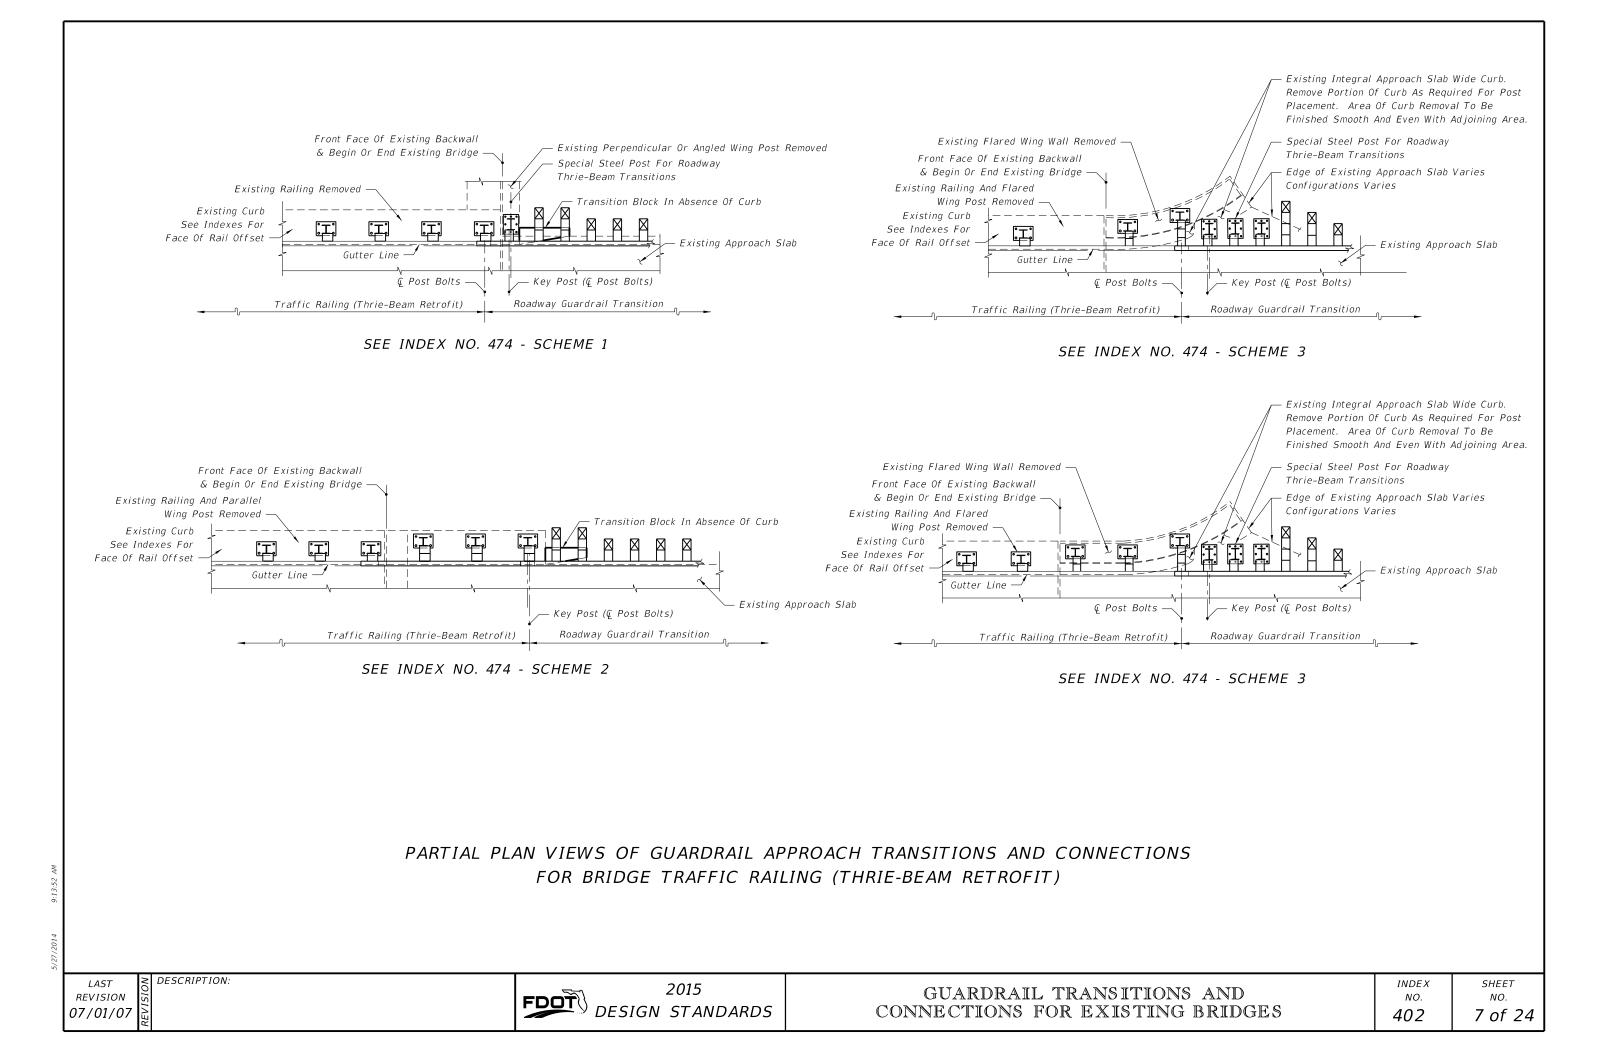


| Trarie Reinouch Train Reinouch SEE INDEX NO. 471 VIEW SCHEME 1 | | |
|---|--|---|
| | ARDRAIL APPROACH TRANSIT TRAFFIC RAILING (THRIE-BEA | TIONS AND CONNECTIONS FOR AM RETROFIT) |
| LAST DESCRIPTION: REVISION 15 07/01/14 | 2015 DESIGN STANDARDS | GUARDRAIL TRANSITIONS CONNECTIONS FOR EXISTING |


| 11:53:07 AM | |
|-------------|--|
| 5/28/2014 | |


| GUARDRAI | | ANSI | IIONS |) |
|-------------|-----|------|-------|---|
| CONNECTIONS | FOR | EXIS | TING | • |

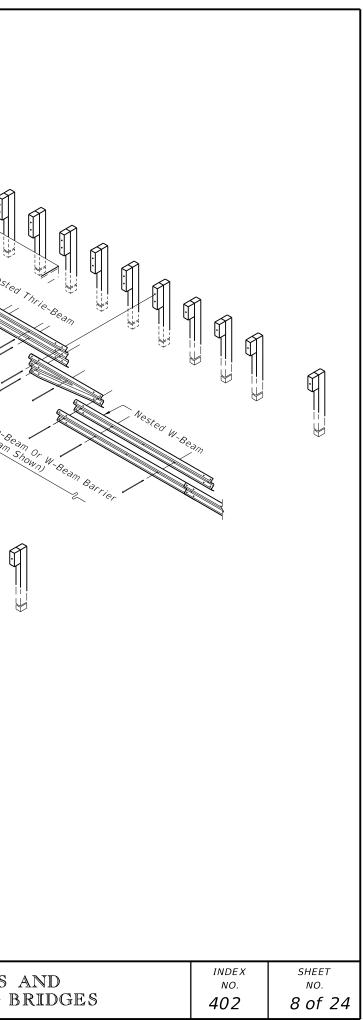

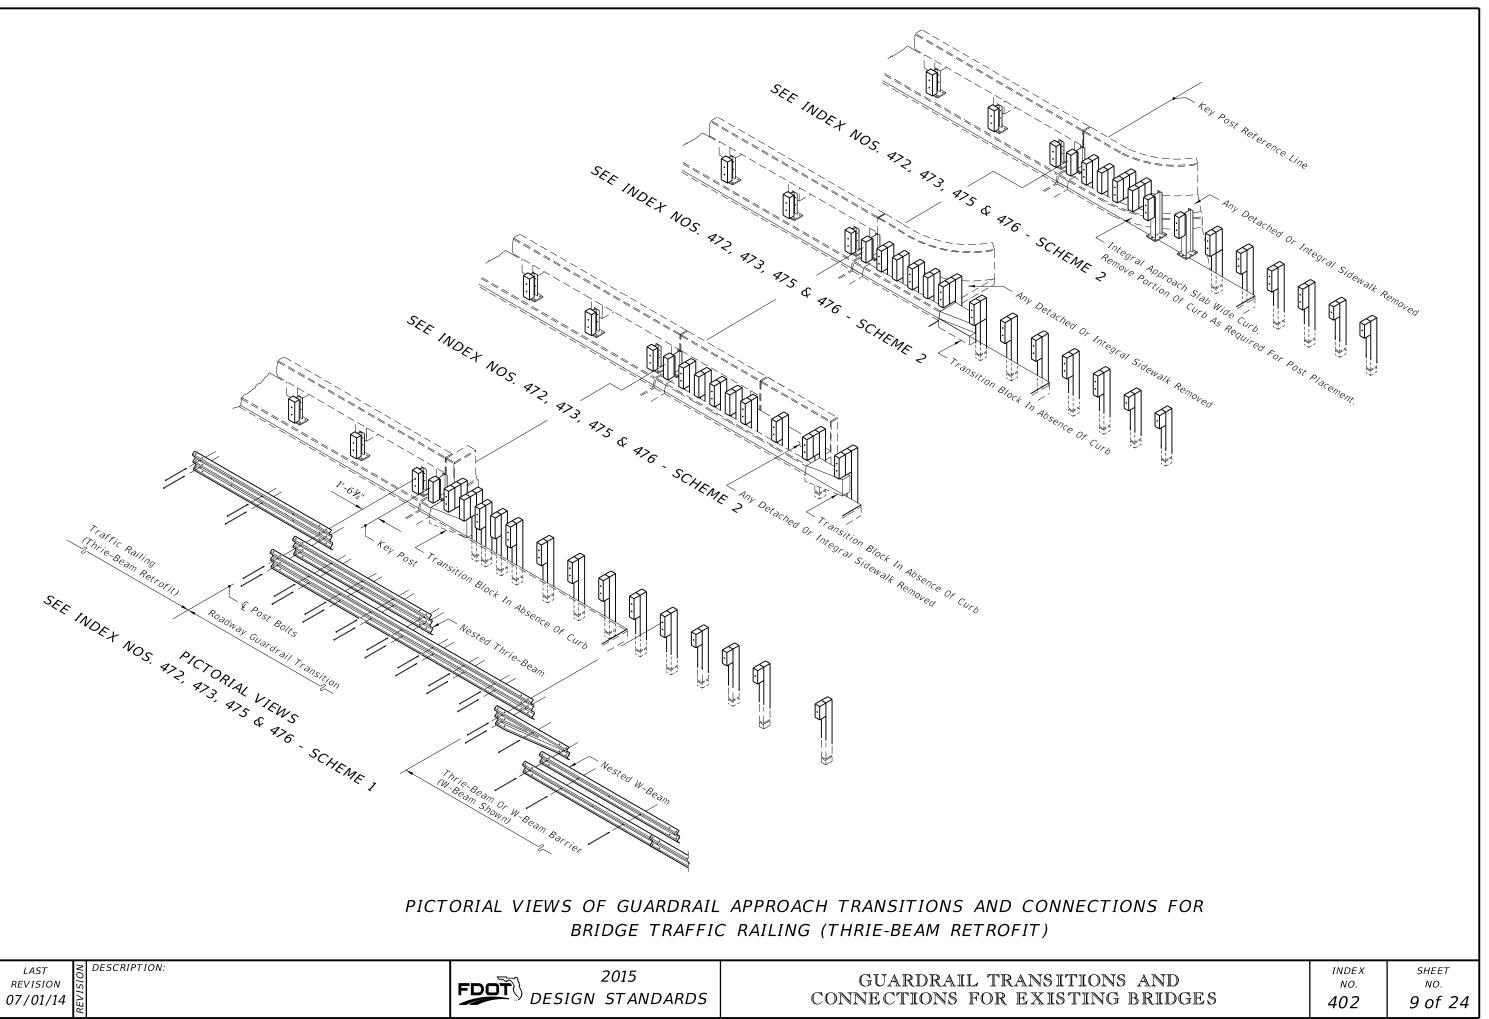



| LAST EVISION20152/01/1420152/01/1420152/01/1420152/01/1420152/01/1420152/01/142015 | GUARDRAIL TRANSITIONS CONNECTIONS FOR EXISTING |
|---|---|
|---|---|

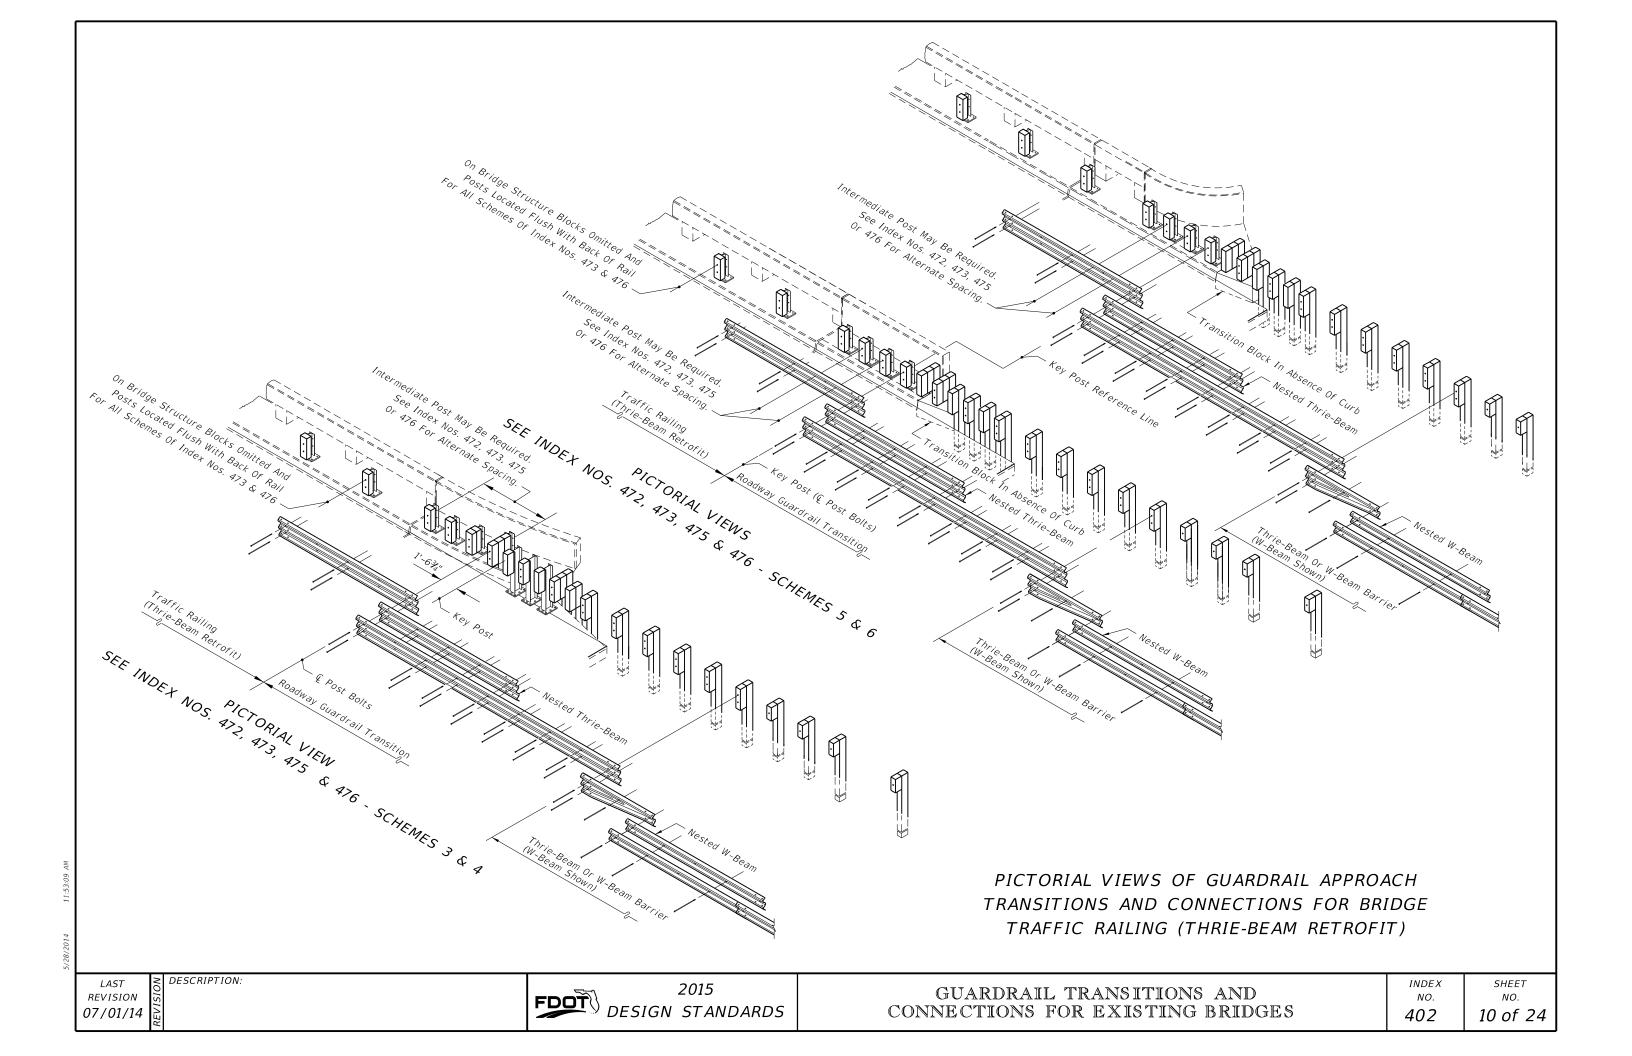


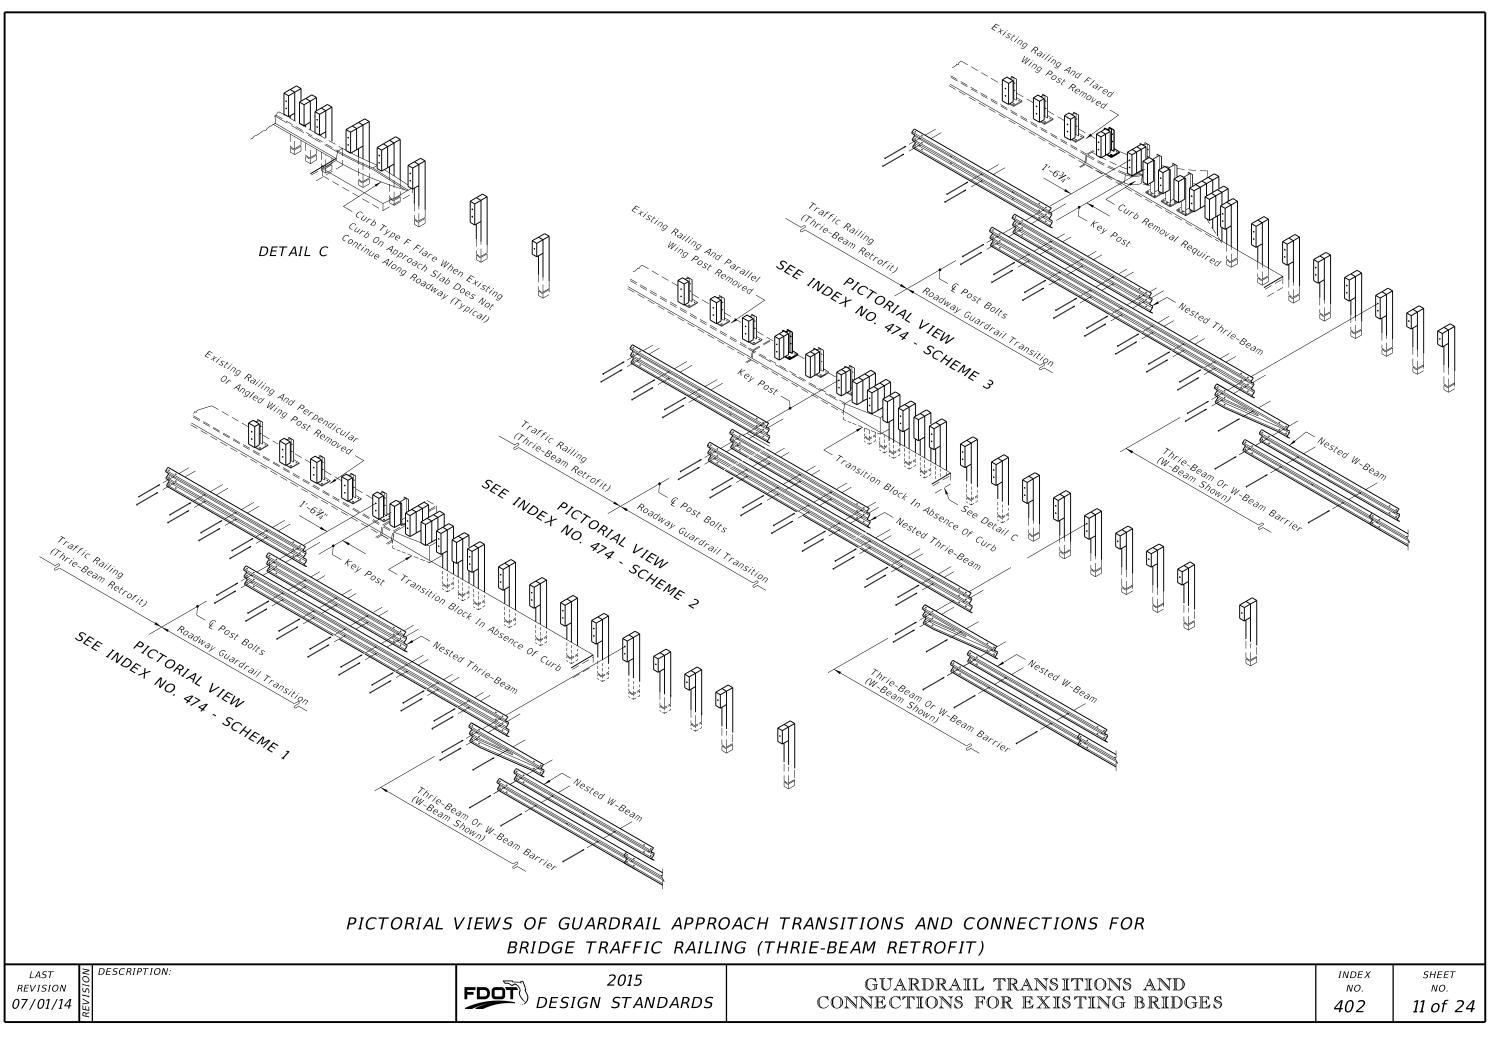


| 11:53:09 |
|----------|
| 28/2014 |

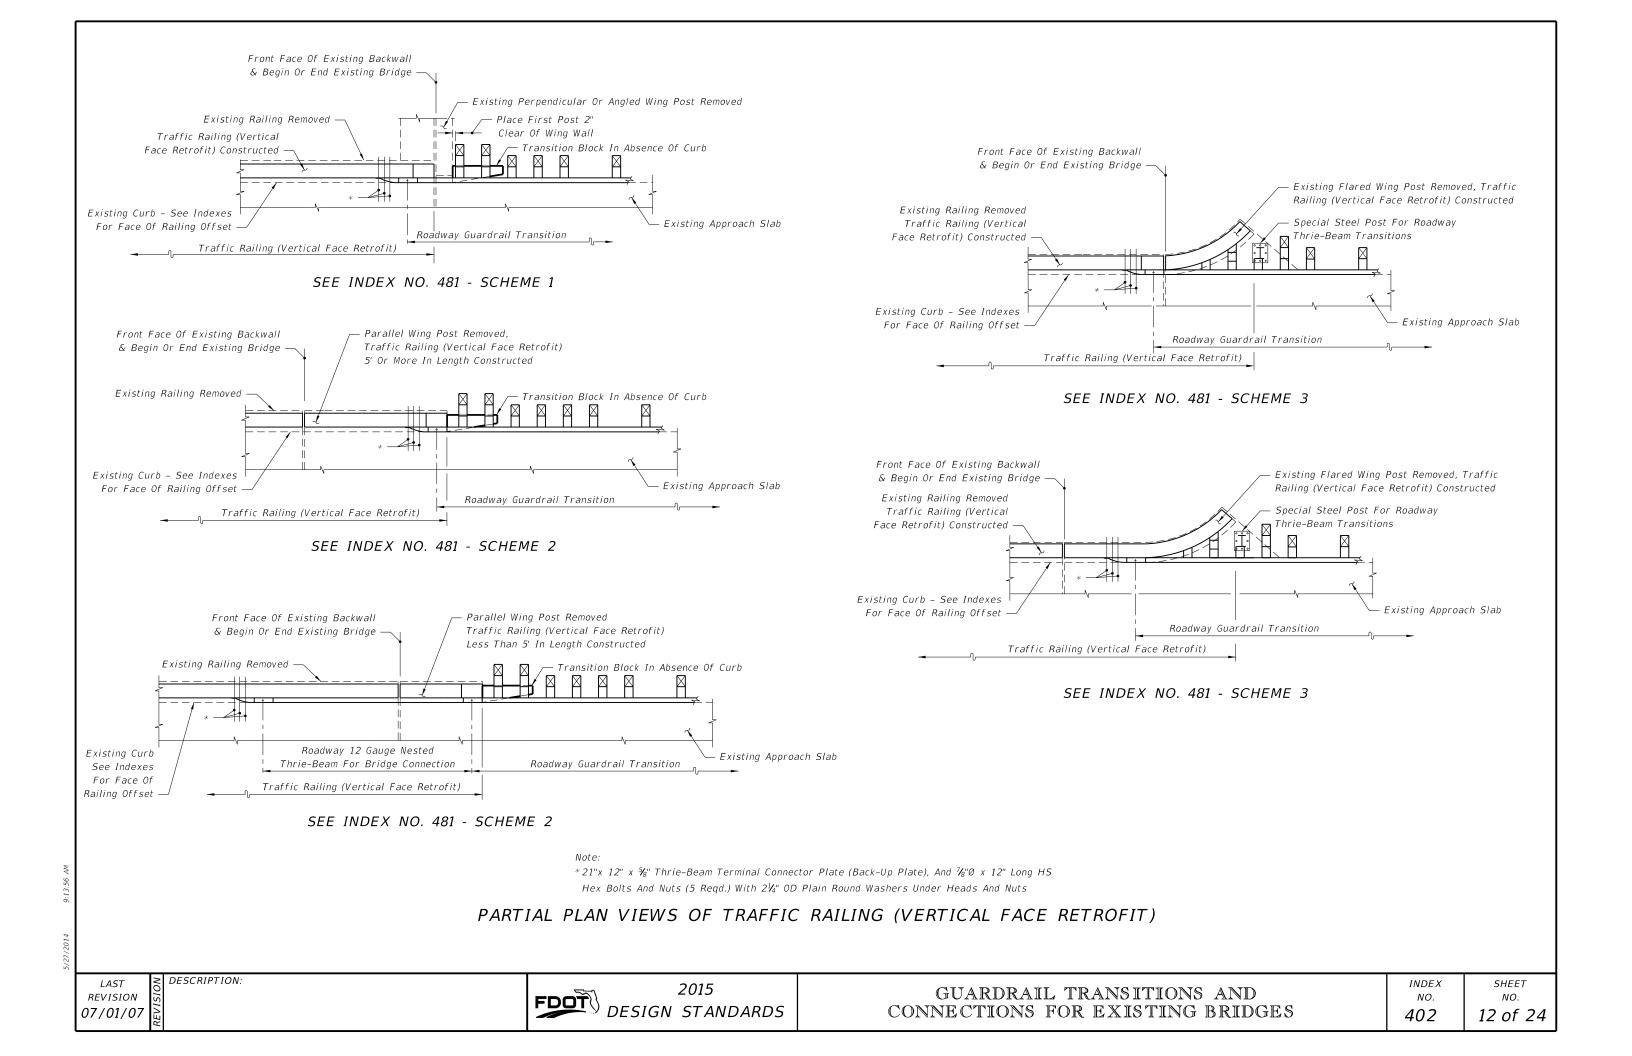


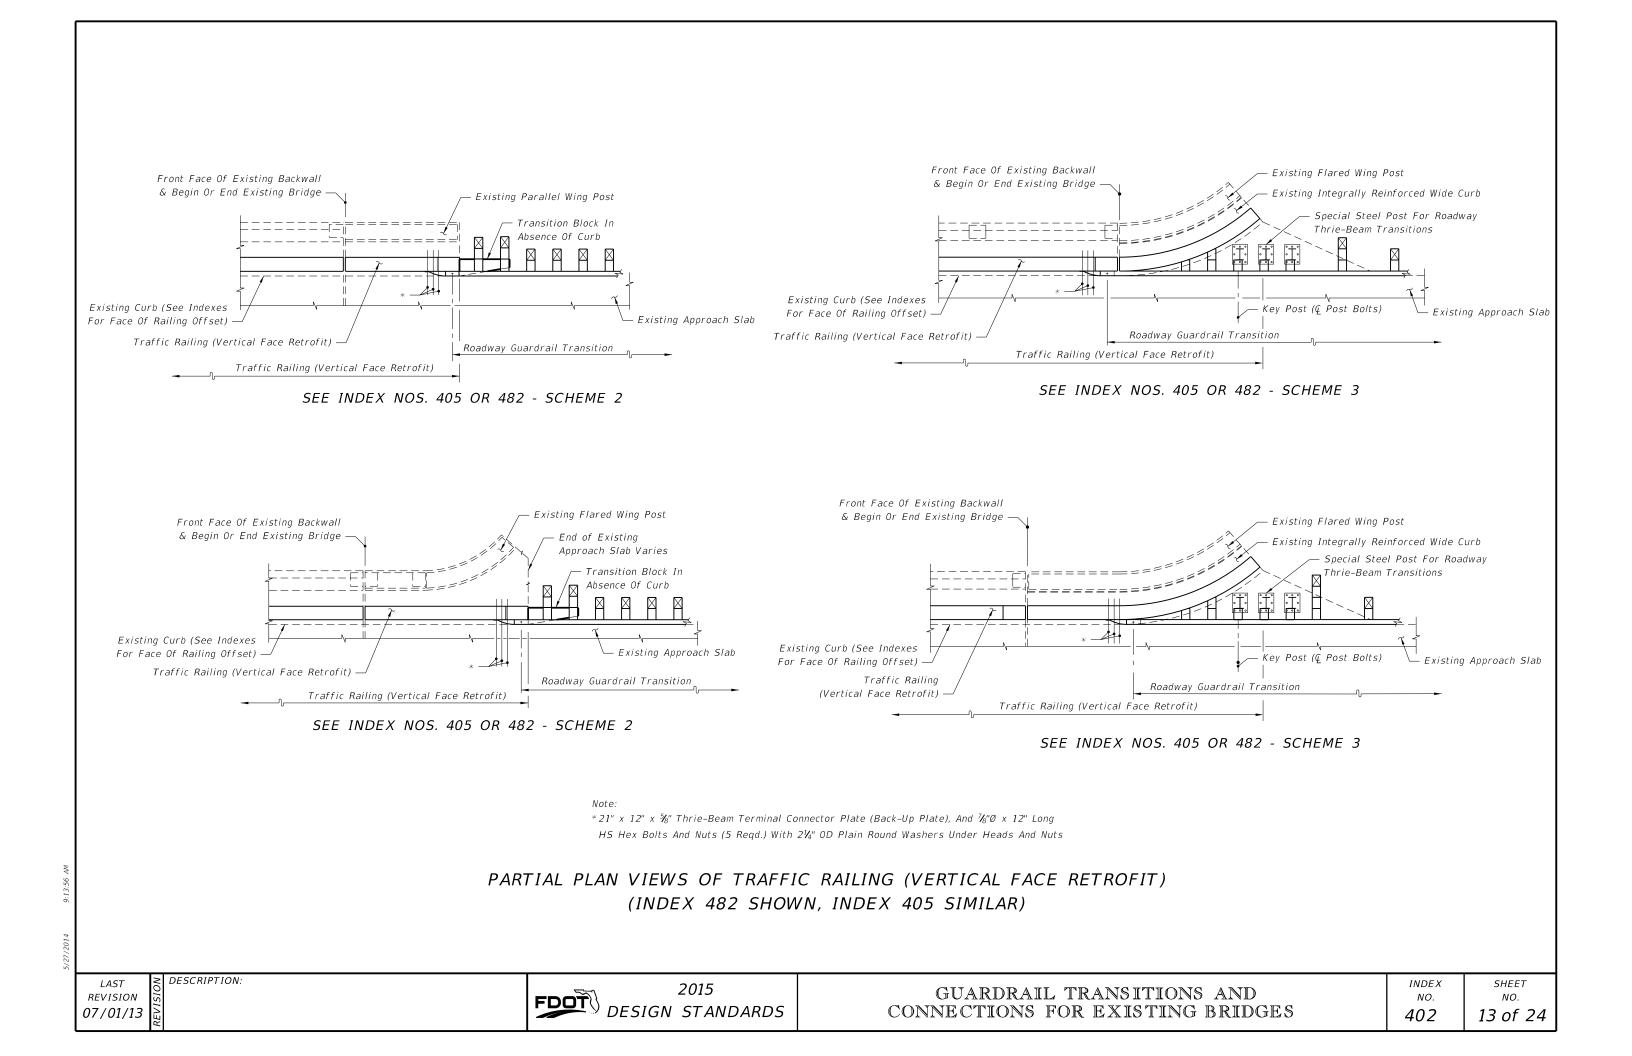


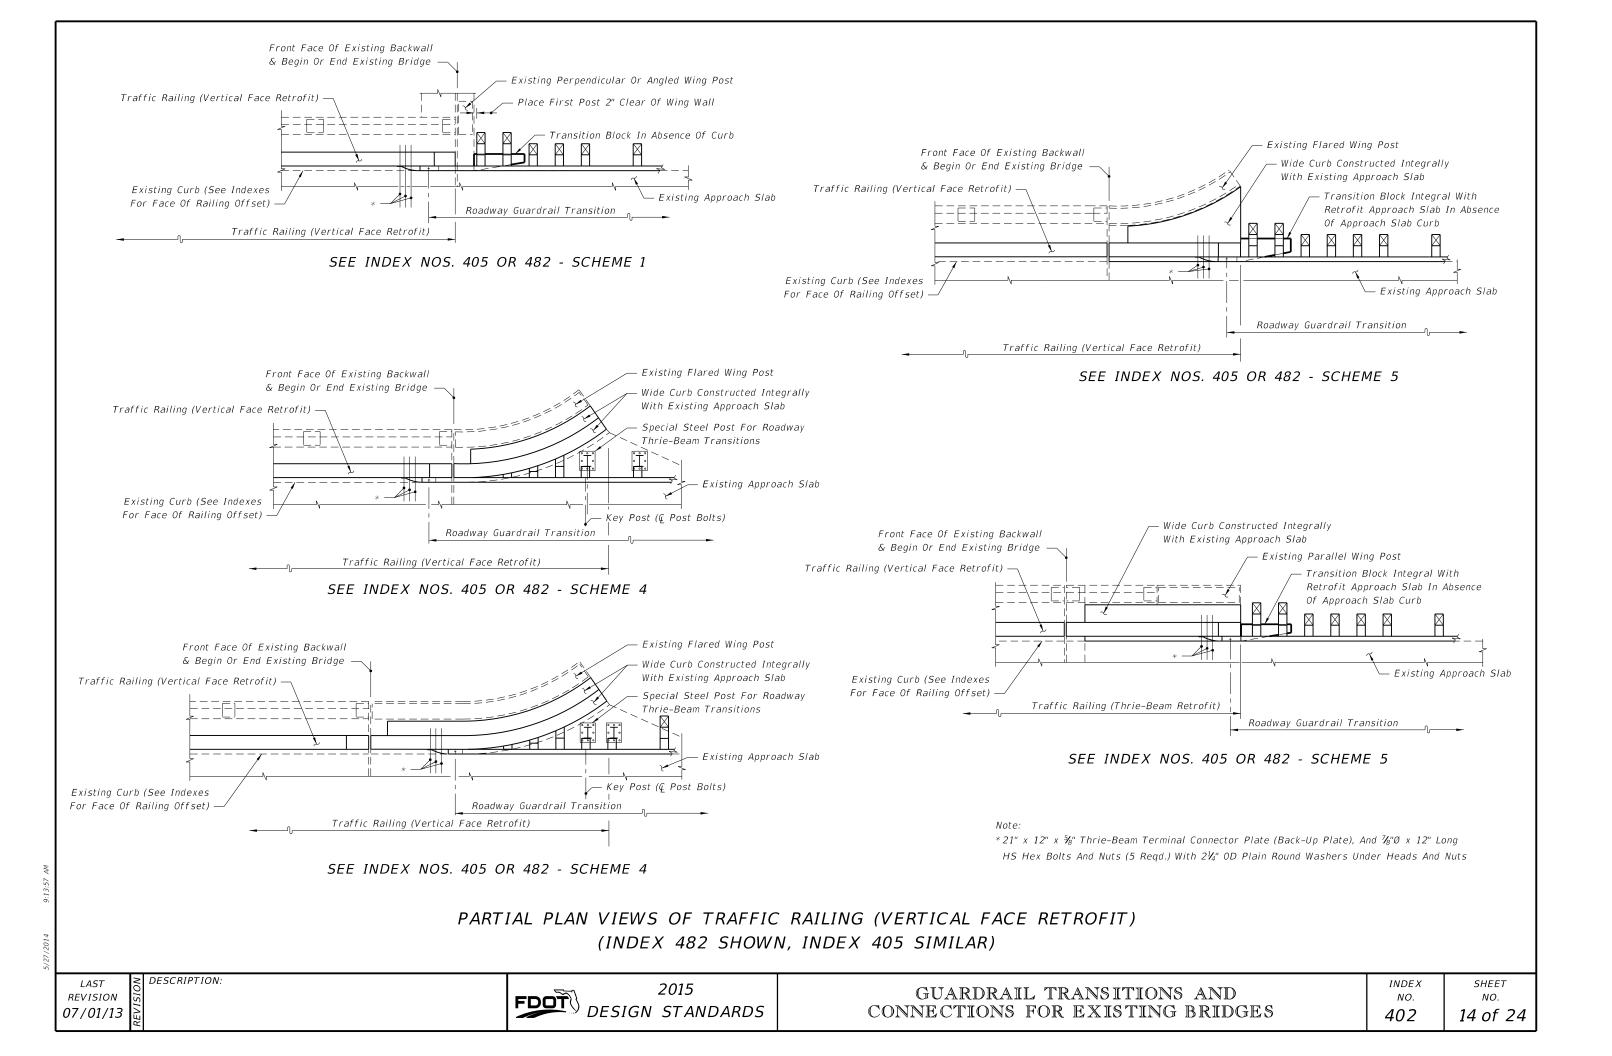


& Begin Or End Existing Bridge

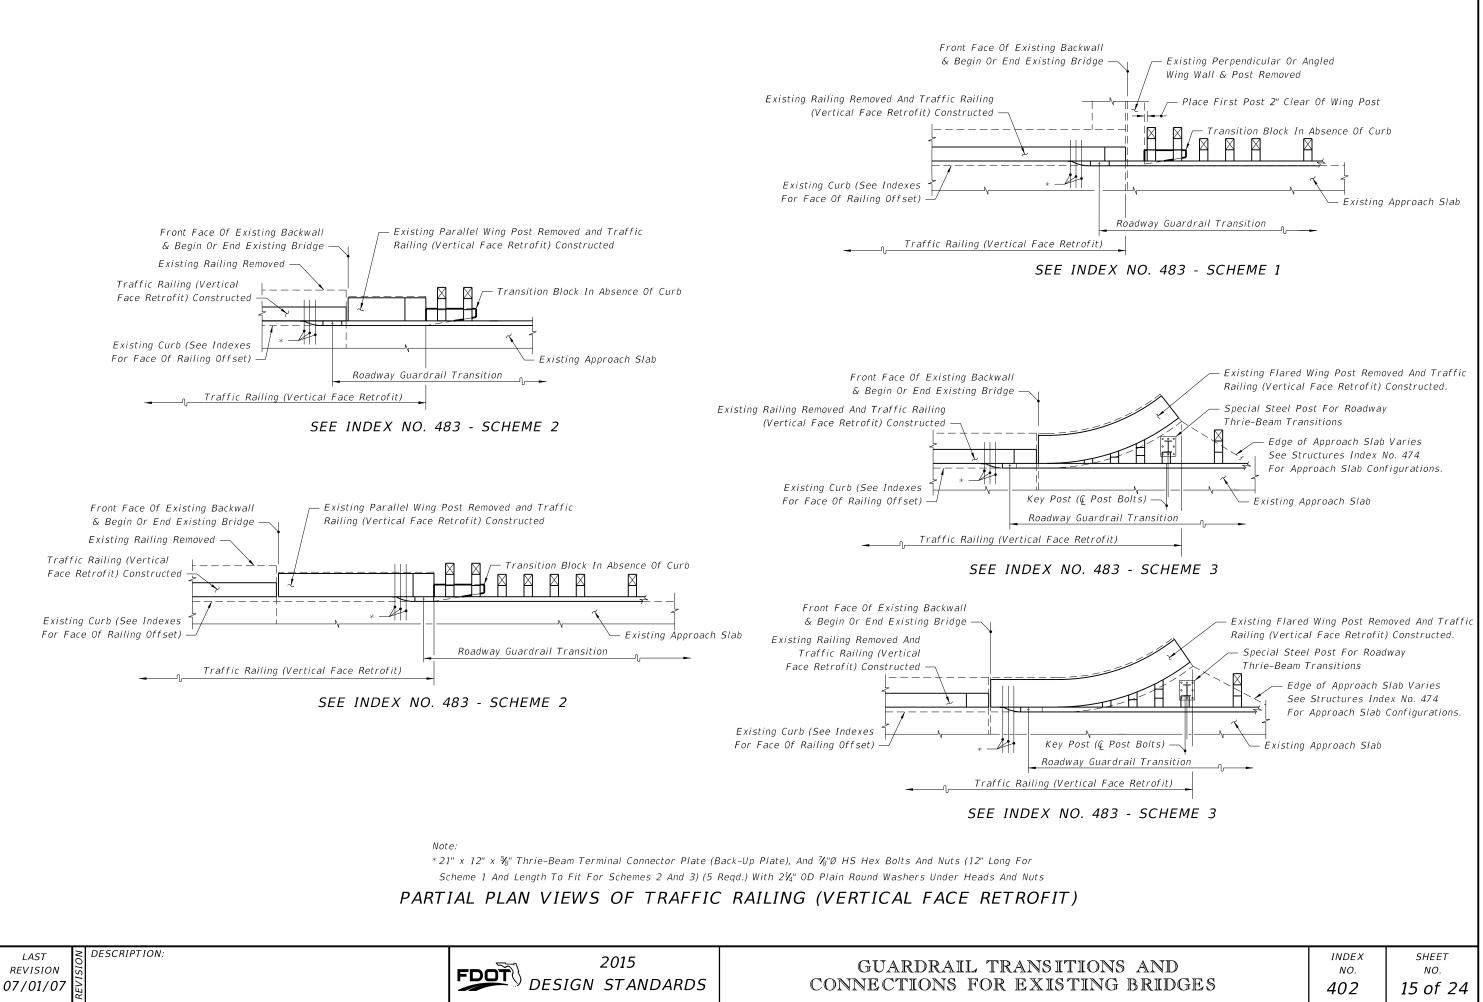


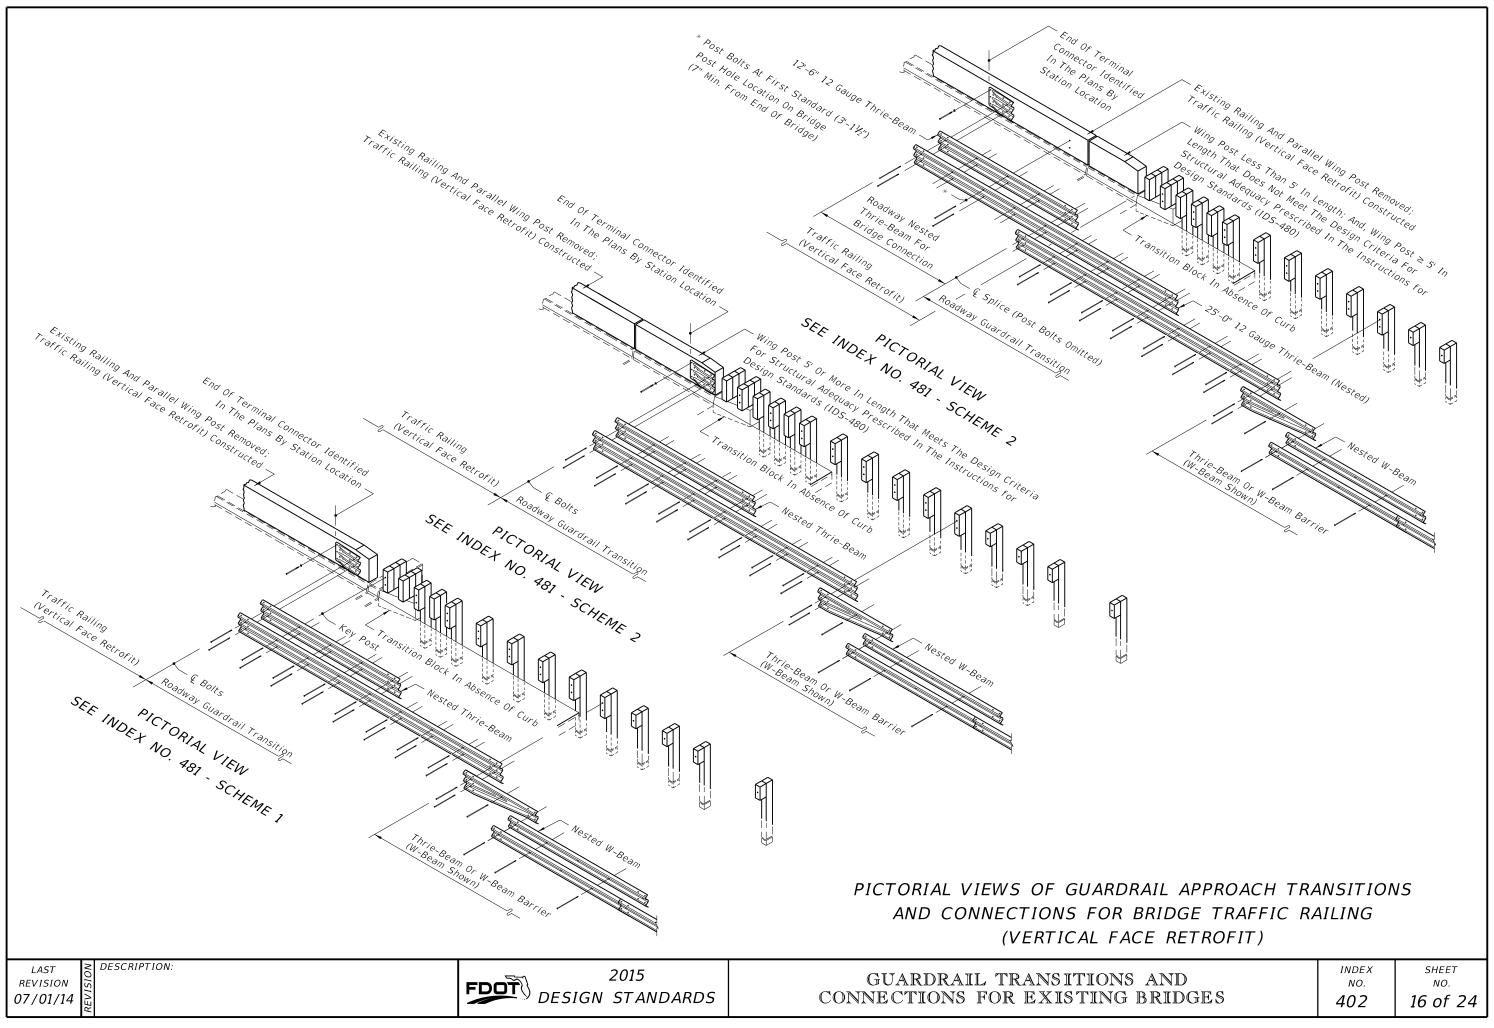


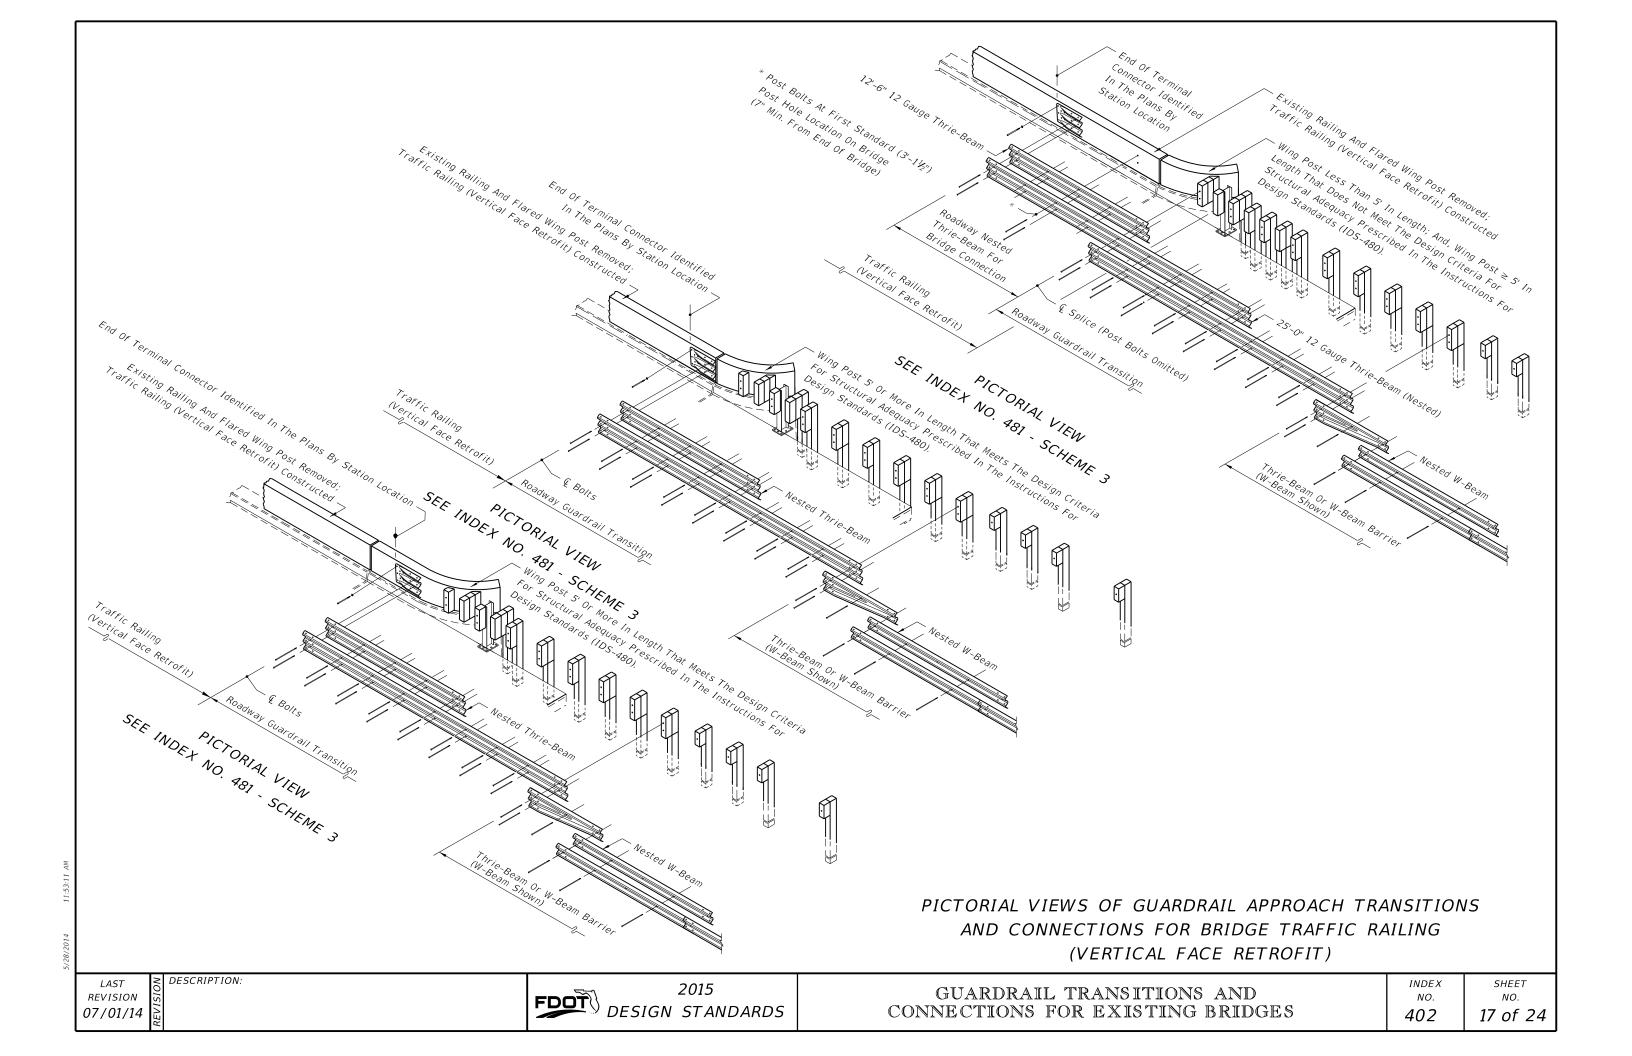

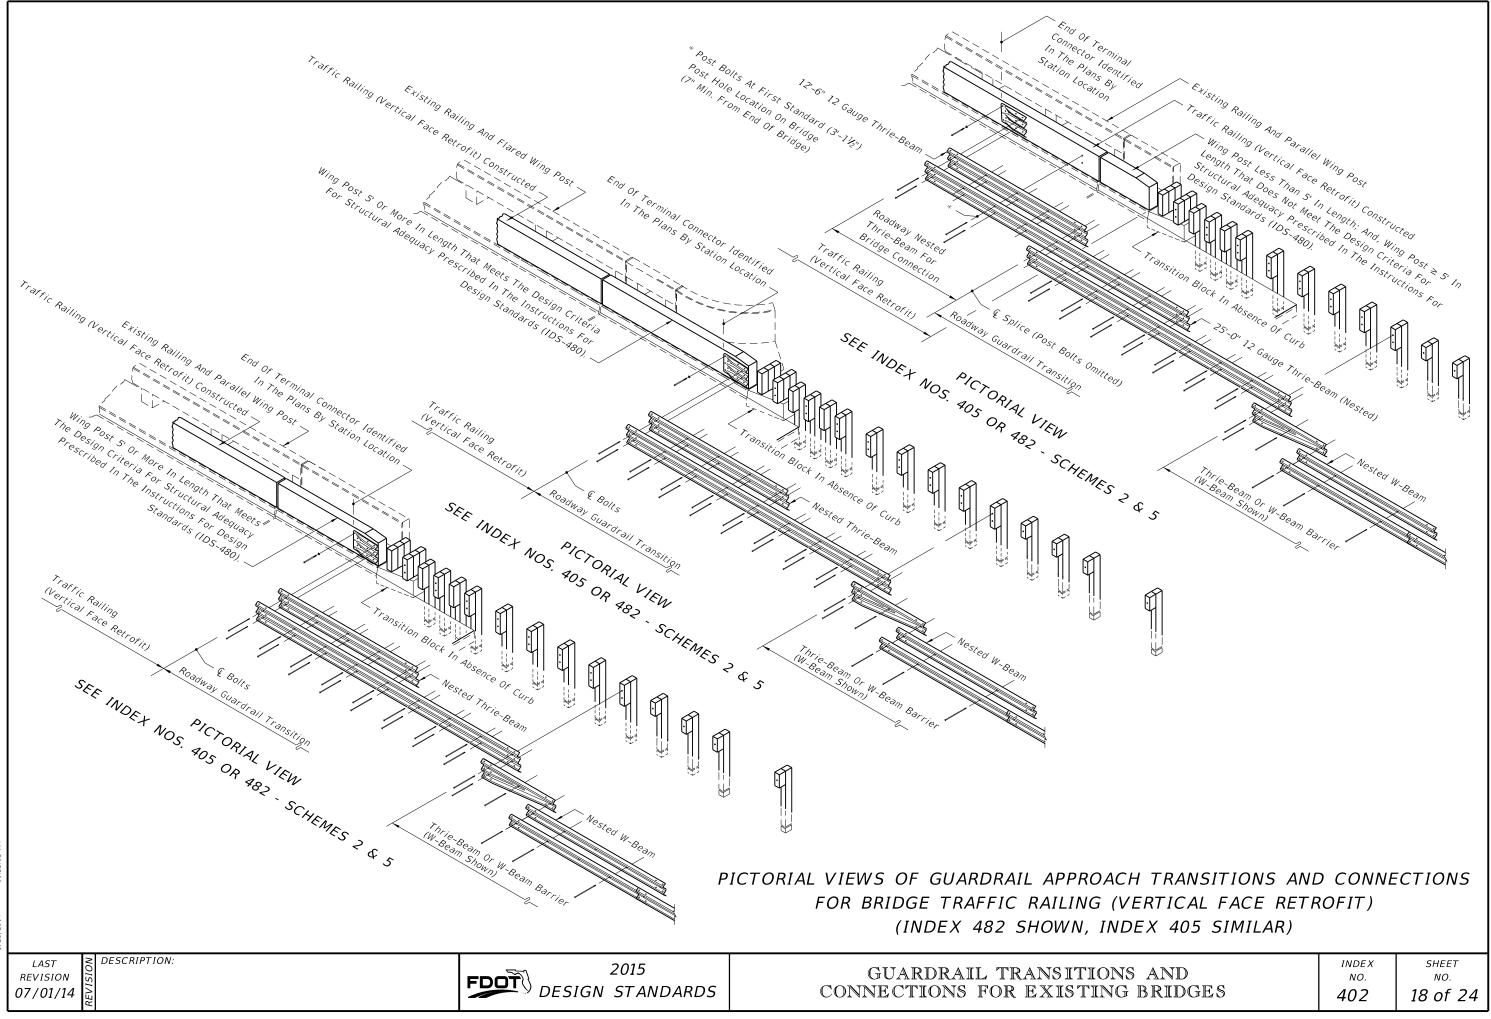

/28/2014 11:53:12 AM

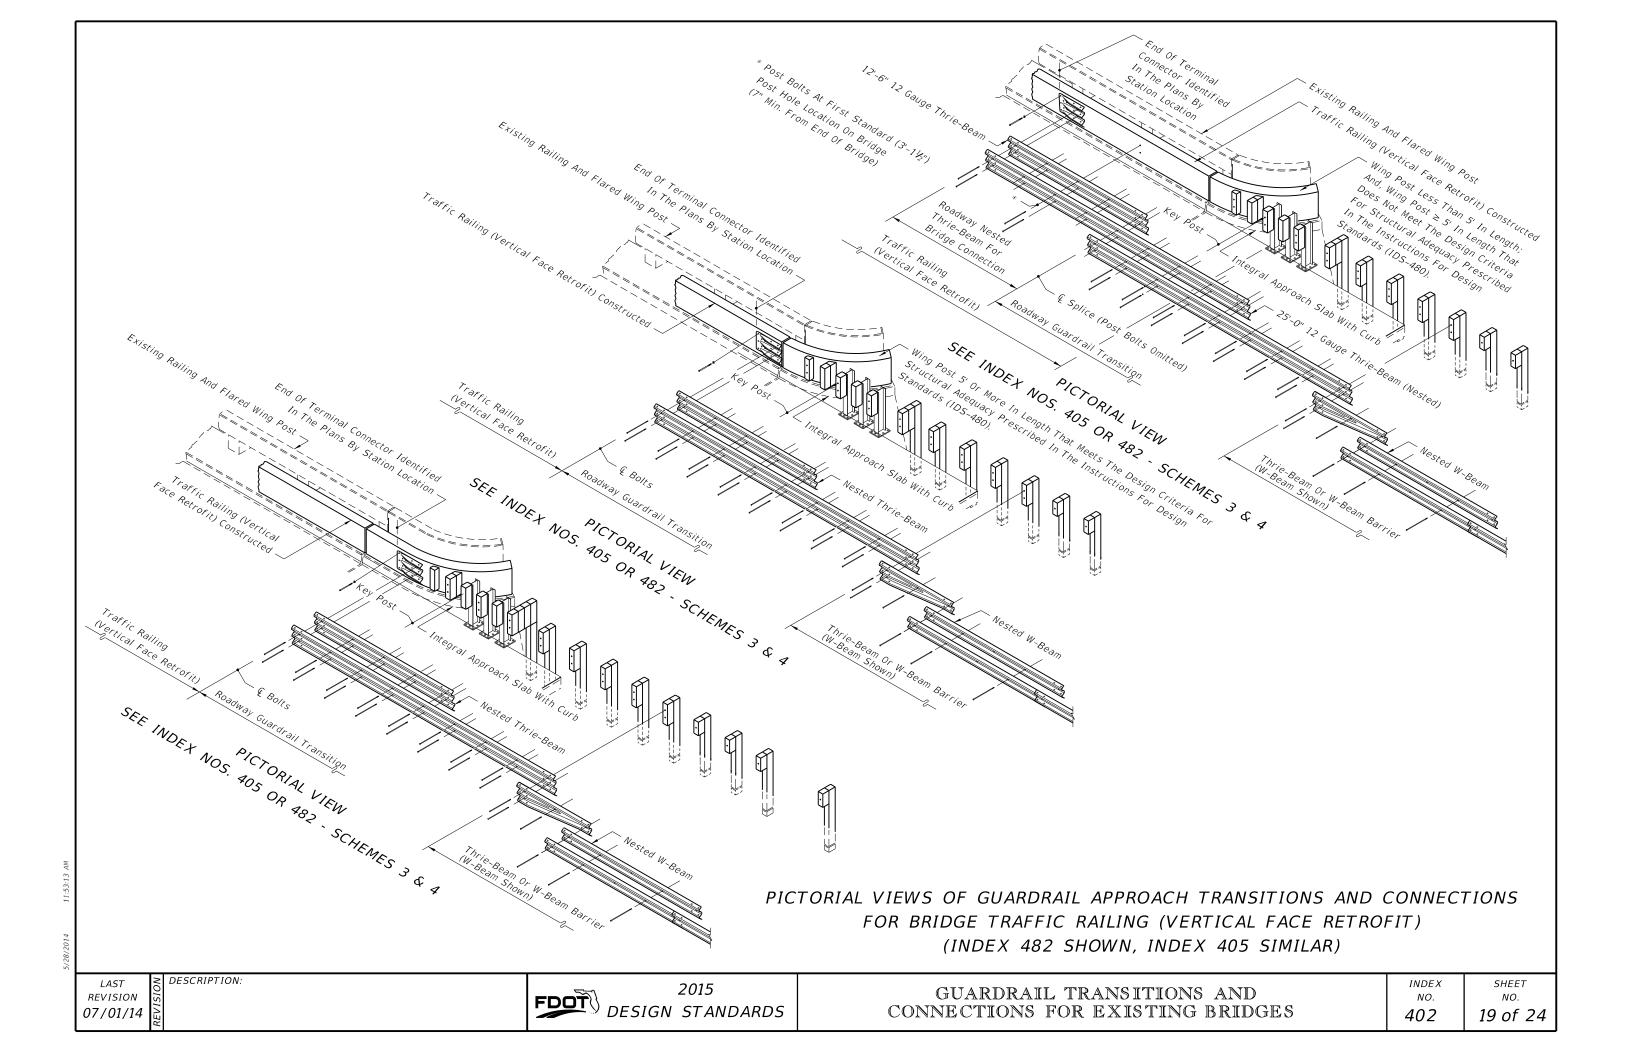

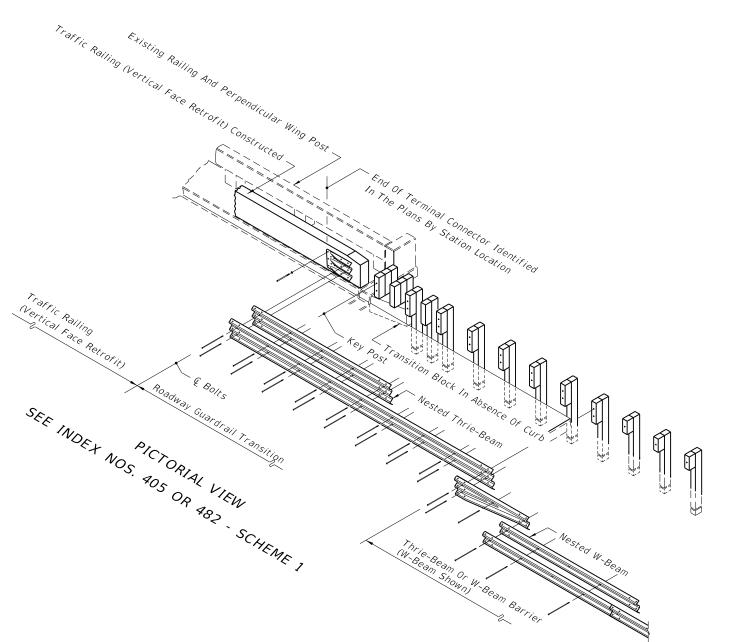


PICTORIAL VIEWS OF GUARDRAIL APPROACH TRANSITIONS AND CONNECTIONS FOR BRIDGE TRAFFIC RAILING (VERTICAL FACE RETROFIT) (INDEX 482 SHOWN, INDEX 405 SIMILAR)

| ^{wn,^w · Bean, Barrier} | | |
|--|----------------------------|---|
| OACH TRANSITIONS AND G (VERTICAL FACE RETROFIT) 405 SIMILAR) | | |
| GUARDRAIL TRANSITIONS AND CONNECTIONS FOR EXISTING BRIDGES | index no. 402 | ^{sнеет} ^{NO.} 20 of 24 |

| LAST | NΟ | DESCRIPTION |
|----------|-----|-------------|
| REVISION | SI | |
| 07/01/14 | EVI | |
| | R | |

| | 2015 | |
|--|--------|-----------|
| | DESIGN | STANDARDS |

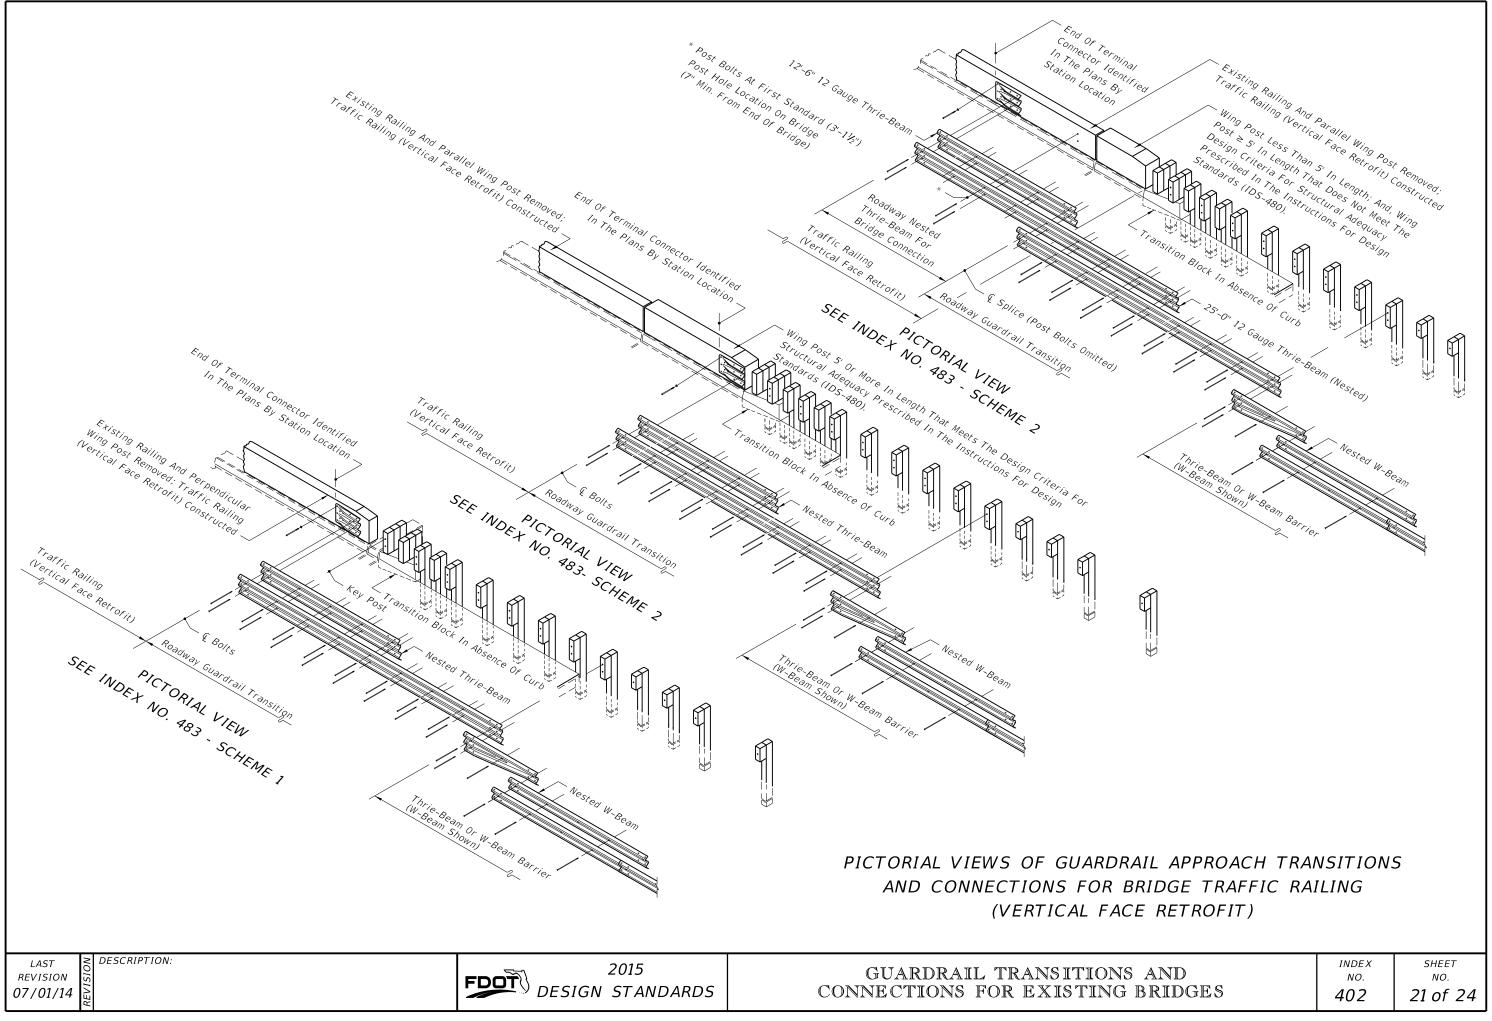

//28/2014 11:53:15 AM

