


GEOSYNTHETIC REINFORCED SOIL SLOPES

GENERAL NOTES


1. All Designs shall meet the requirements shown on this sheet and the contract documents.
2. $T_a = \frac{T_{ult}}{RF_c RF_d CRF}$
3. Intermediate reinforcement shall be rolled out parallel to slope face.

6/5/2014 10:04:14 AM

LAST REVISION 07/01/14	REVISION	DESCRIPTION:	 2015 DESIGN STANDARDS	GEOSYNTHETIC REINFORCED SOILS	INDEX NO. 501	SHEET NO. 1 of 2
------------------------------	----------	--------------	---	-------------------------------	---------------------	------------------------

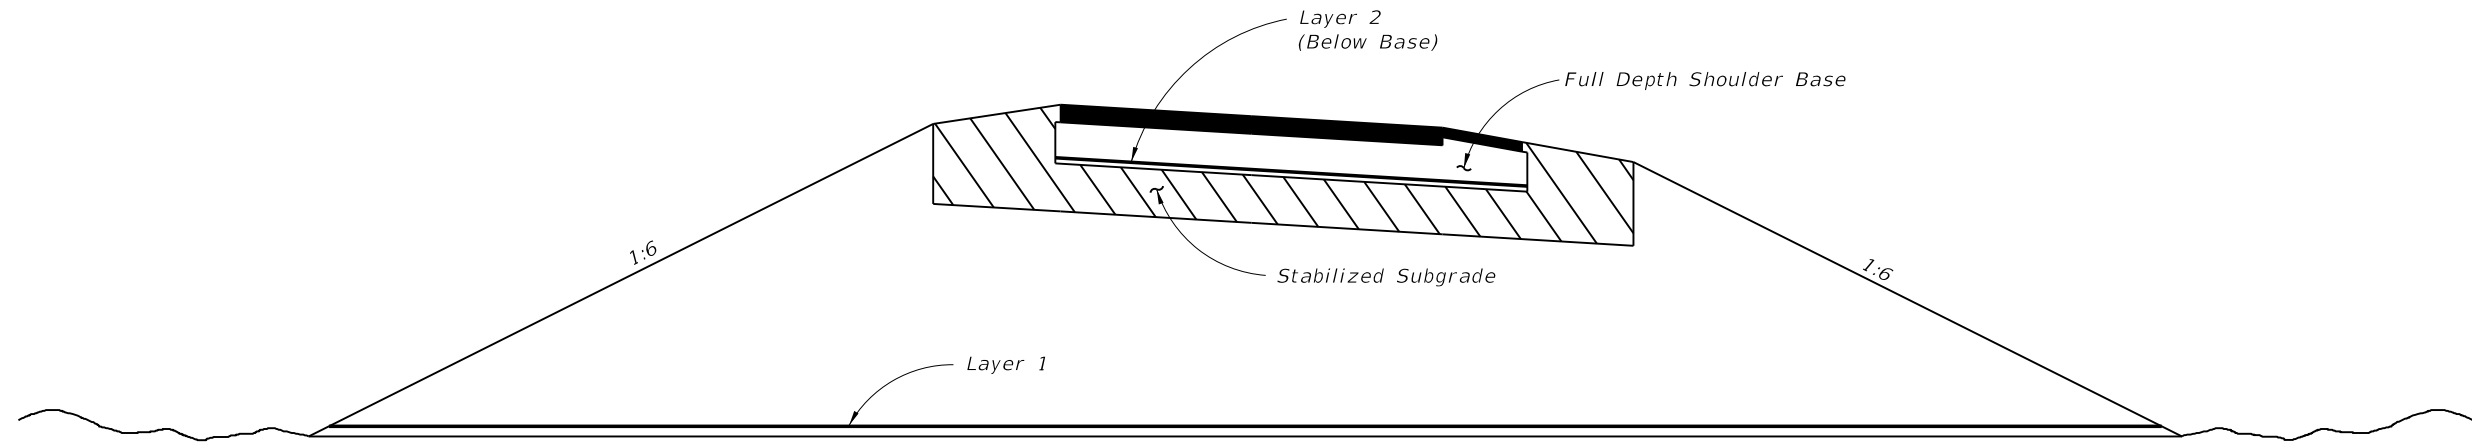


REINFORCED EMBANKMENT

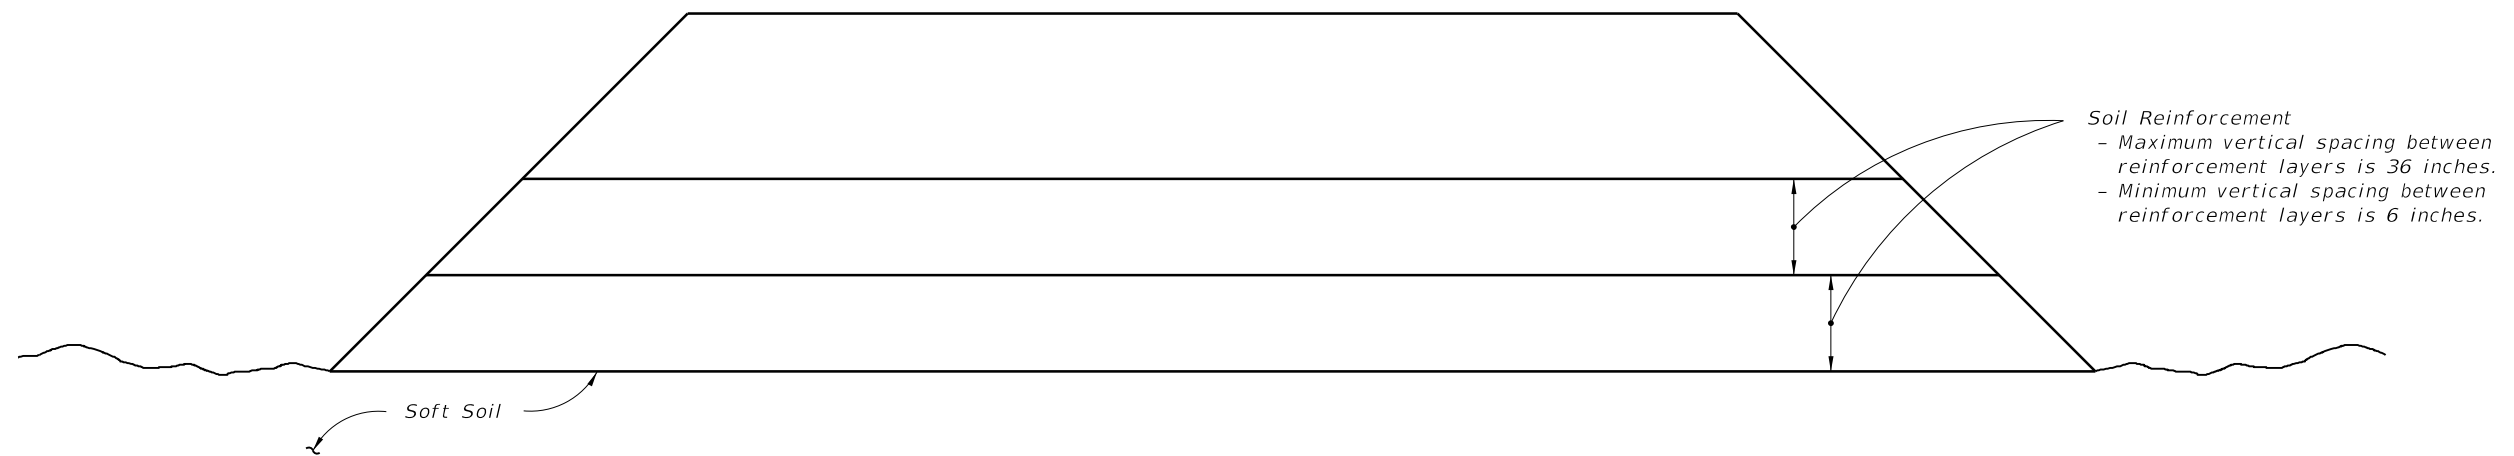

GEOSYNTHETIC REINFORCED FOUNDATIONS CONSTRUCTED ON SOFT SOILS

6/5/2014 10:04:14 AM

LAST REVISION 07/01/14	REVISION DESCRIPTION:	 2015 DESIGN STANDARDS	GEOSYNTHETIC REINFORCED SOILS	INDEX NO. 501	SHEET NO. 2 of 2
---------------------------	-----------------------	--	-------------------------------	------------------	---------------------