


c = 0' For Roadways With Paved Shoulders
 c = 1.5' For Roadways Without Paved Shoulders


INSET A

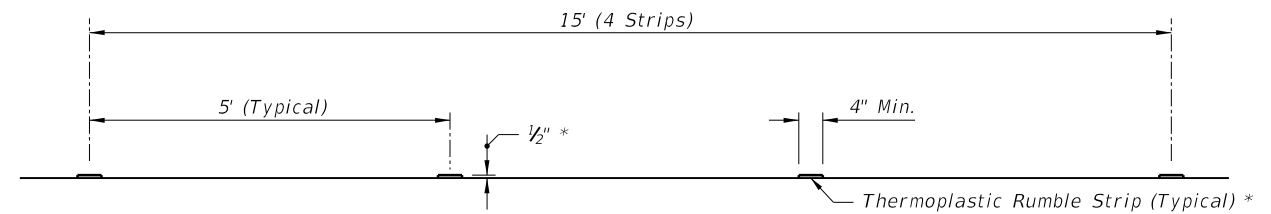

* Use multiple applications to achieve desired 1/2" thickness
 Note: Intersection thermoplastic rumble strip sets shall be white.


THERMOPLASTIC SET

Note: Rumble strips may be required for one or more legs of the intersection (one leg shown for spacing information). Rumble strips shall be constructed only on the legs identified in the plans.

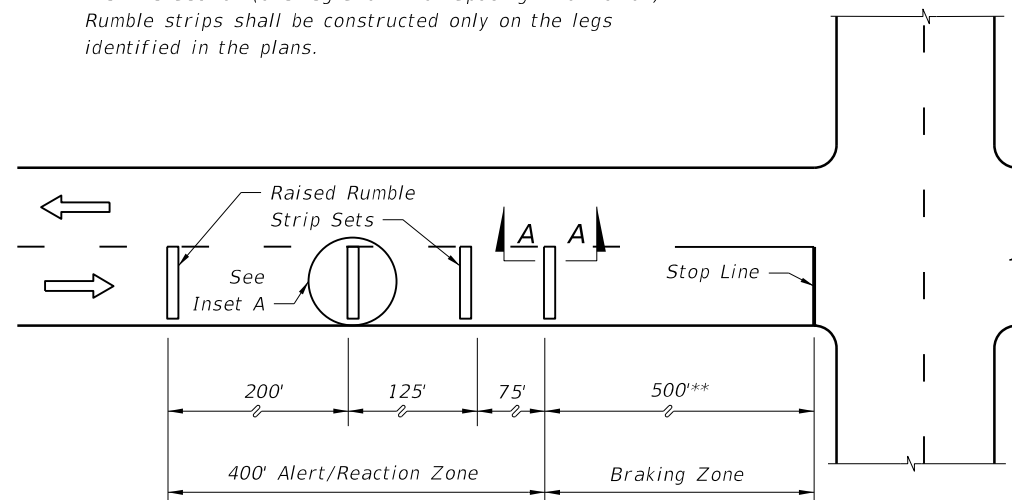

PLAN

** May be decreased in urban areas with low operating speeds.

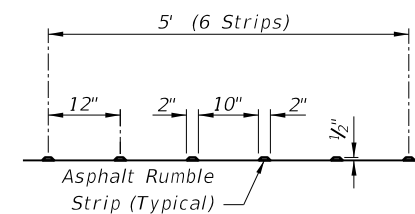

ASPHALT SET


SECTION AA FOR THERMOPLASTIC AND ASPHALT RUMBLE STRIP SETS

NOTE:

Raised rumble strips are to be constructed in accordance with Section 546 of the Specifications.

RAISED RUMBLE STRIPS AT INTERSECTIONS

6/25/2014 1:14:12 PM

LAST REVISION 07/01/14	REVISION	DESCRIPTION:	 2015 DESIGN STANDARDS	RAISED RUMBLE STRIPS	INDEX NO. 517	SHEET NO. 1 of 1
---------------------------	----------	--------------	---	----------------------	------------------	---------------------