

## CHAPTER 19

### TRADITIONAL NEIGHBORHOOD DEVELOPMENT

A	INTRODUCTION.....	19-1
B	APPLICATION.....	19-4
C	PLANNING CRITERIA .....	19-7
	Networks	19-11
E	DESIGN ELEMENTS .....	19-13
	THOROUGHFARE TYPES.....	19-13
H	DESIGN PRINCIPLES .....	19-21
	H.1 Introduction .....	19-21
	H.2 Design Process.....	19-21
I	<b>CROSS SECTION ELEMENTS</b> .....	19-22
	I.1 Introduction .....	19-22
J	TRAVELED WAY .....	19-23
	J.1 Introduction .....	19-23
	<b>J.4 On Street Parking</b> .....	19-24
	<b>J.5 Mid-Block Crossings</b> .....	19-25
	J.6 Access Management .....	19-25
K	INTERSECTIONS .....	19-26
	K.1 Introduction .....	19-26
<b>D</b>	DEFINITIONS.....	19-26

### TABLES

No table of contents entries found.

### FIGURES

Figure ???	Comparison of CSD and TND Communities .....	19-2
Figure ???	Transect Zone Descriptions .....	19-6

Figure 19-2    Transect Zone Descriptions ..... 19-9

## CHAPTER 19

### TRADITIONAL NEIGHBORHOOD DEVELOPMENT

#### A INTRODUCTION

This chapter is intended to provide best practices to facilitate proper design of TND communities. Consequently, the emphasis varies from the rest of the Greenbook where the focus is on establishing minimum standards. To provide a design that accomplishes the goals set out in this chapter, designers will be guided by the context of the built environment established or desired for a portion of the communities, as TND communities rely on a stronger integration of land use and transportation than seen in CSD communities. TND has clearly defined characteristics and design features necessary to achieve the goals for compact and livable development patterns reinforced by a context-sensitive transportation network.

This chapter provides guidance for planning and designing Greenfield (new), Brownfield or urban infill, and redevelopment projects. It also clearly differentiates between CSD and TND communities to maximize the possibility that proper design criteria is used to create well executed TND communities. This is important, as the street geometry, adjacent land use, and other elements must support a higher level of transit, pedestrian and bicycle activity than seen in a CSD.

Differences between Conventional and Traditional Neighborhood Development:

The characteristics of CSD typically include separated land uses, where housing, retail, office and industrial uses are isolated from one another in separate buildings, areas of a development or areas of a community. Housing is usually further separated into neighborhoods, such that apartments, condominiums and other higher density housing are separate from single family housing. Parks, schools, post offices, health facilities, and other community resources are at such a large scale and separated from other uses to the degree that they can only be reached by motor vehicle.

In CSD, the scale of big box retail, office parks and other commerce can only be sustained in an auto dominant environment since they must have a regional market to succeed. Their site design includes land parcels so large that walking to a given building from the adjacent thoroughfare or other buildings is not practical.

Finally, the roadway system is hierarchal and very much like a plumbing system, where "local" streets with lower traffic volumes feed into "collector" streets with higher levels of traffic, then finally onto the "arterial", where speeds and volumes are typically much higher. Block sizes are large to minimize the number of intersections. This type of

1 roadway network puts essentially all trips onto the arterial with little to no alternate  
2 routes for travelers.

3 Design speeds for roadways outside subdivisions are rarely less than 35 mph and may  
4 be as high as 50 mph. Thus, longer distance through traffic is mixed with shorter trip  
5 traffic accessing local services. Higher volume, high speed streets fronted by the walls  
6 of subdivisions or surface parking lots of commercial developments result in a built  
7 environment that is uncomfortable for and impedes pedestrian, transit and bicycle  
8 modes of transportation. See the top of **Figure 19-1** below for an illustration of  
9 Conventional Suburban Development.

10 | **Figure ??? Comparison of CSD and TND Communities**

11 | *(Source: DPZ and Treasure Coast Regional Planning Council)*

12 |  
13 |  
14 |



Formatted: Font: Bold

1 TND which is illustrated in the bottom of **Figure 19-1**, in contrast, is very supportive of  
2 pedestrian, bicycle and transit modes. Land uses are mixed, with retail, office, civic  
3 buildings and residential interwoven throughout the community, and often located in the  
4 same buildings. Block sizes are a smaller scale to improve walkability and to create a  
5 fine network of streets that accommodate bicyclists and pedestrians, providing a variety  
6 of routes for all users. Multi-family and single family housing are located in close  
7 proximity or adjacent to each other and housing of various sizes and prices are mixed  
8 into neighborhoods.

9 Due to the differences in the desired character of the community and the desired goal to  
10 create appropriate speeds for pedestrian and bicyclists, there are differences in the  
11 design philosophy for TND streets and CSD streets. In an infill or redevelopment site,  
12 designers needs to understand that they will have to “do the best they can.” In other  
13 words flexibility in the approach to design in what is a constrained environment is  
14 required.

15 Likewise, designers should recognize that where TND streets transition into CSD  
16 streets, the design criteria such as intersection sight distance, use of on street parking,  
17 and other features should be evaluated to ensure that safety for users is provided. This  
18 is due to the higher speeds on most CSD streets.

19

## 1 | **B**     APPLICATION

2 Context is the environment in which the roadway is built and includes the placement  
3 and frontage of buildings, adjacent land uses and open space, historic, cultural, and  
4 other characteristics that form the built and natural environments of a given place. The  
5 **Designing Walkable Urban Thoroughfares: A Context Sensitive Approach** is one of  
6 the documents included in the listing of reference material at the end of this chapter.  
7 While that document refers to the Transect Zones used in this document as “Context  
8 Zones” the zones are in fact the same.

9 It is essential to describe the urban context in a way that sufficiently informs  
10 transportation design. Transportation planners and designers should know the form  
11 and scale of urban development to best serve its traveling population. As noted below  
12 in the Planning Criteria section, a broader perspective is needed to move beyond the  
13 planning and zoning classification of land by use and the transportation classification of  
14 travel mode as motor vehicle dominant.

15 For application in walkable communities, the context through which the thoroughfare  
16 passes must be identified. For this document, context can be defined at three levels as  
17 defined in the Planning Criteria section:

- 18     • The Region – by Sector
- 19     • The Community – by Community Types
- 20     • The Block – by Transect Zones

### 21 Rural-Urban Transect

22 The transect zones within each community type define the human habitats ranging from  
23 the very rural to the very urban. All T-Zones allow some mix of uses, from home  
24 occupations and civic spaces/buildings allowed in otherwise residential T-3, to the most  
25 intense mixed use in T-5 and T-6. The mix of T-zones in a community offers a greater  
26 diversity of building types, thoroughfare types, and civic space types than conventional  
27 zoning allows, thus, greater walkability follows.







28 In the least-intensive transect zones of a community, T1 and T2, a rural road or highway  
29 is appropriate. Open space outside the community types, whether preserved or  
30 reserved, is guided by its regional sector designation, not by a transect zone. All  
31 T-Zone designations occur inside community units.

32 By definition, the urban transect zones T3 through T6 do not exist as standalone zones,  
33 but rather are organized in relation to each other within a community. Each transect  
34 zone is highly walkable and assumes the pedestrian mode as a viable and often

- 1 preferred travel mode, especially for the ¼ mile, five minute walk.
- 2 The T-3 Sub-urban zone defines the urban to rural edge. It is therefore potentially  
3 misunderstood. Of all the transect zones, T-3 appears most like conventional sprawl. It  
4 has single-family dwellings, a limited mix of uses and housing types, and tends to be  
5 more automobile-oriented than T4, T5 or T6. To earn its place as a walkable transect  
6 zone, it must be located within the same pedestrian shed as T4, T5 and/or T6. The 5  
7 minute test of walkable distance (¼ mile radius) limits the overall size, of a T-3 transect  
8 zone. The T3 zone often defines the edge of the more developed urban condition, so is  
9 sometimes called neighborhood edge.
- 10 Transect zones, T-4 through T-6, are relatively simple to recognize and assign properly.
- 11 Knowing that a particular area is a T-5, Town Center, immediately provides known  
12 thoroughfare design elements that are appropriate (and ones that are not). Buildings to  
13 the sidewalk with parking on street and behind, for instance, are appropriate in T-5 and  
14 T-6. Referring to a set of tables and design recommendations correlated to the transect  
15 helps the designer determine how a thoroughfare should function in each transect zone.
- 16 To further define the transect zones used throughout the document, the transect zones  
17 and their related characteristics are listed in [Figure 2](#) below.
- 18

1  
 2

**Figure ??? Transect Zone Descriptions**  
 (Source SmartCode 9.2)

	<p><b>T1 NATURAL</b>                      T-1 Natural Zone consists of lands approximating or reverting to a wilderness condition, including lands unsuitable for settlement due to topography, hydrology or vegetation.</p>	<p><b>General Character:</b> Natural landscape with some agricultural use  <b>Building Placement:</b> Not applicable  <b>Frontage Types:</b> Not applicable  <b>Typical Building Height:</b> Not applicable  <b>Type of Civic Space:</b> Parks, Greenways</p>
	<p><b>T2 RURAL</b>                      T-2 Rural Zone consists of sparsely settled lands in open or cultivated states. These include woodland, agricultural land, grassland, and irrigable desert. Typical buildings are farmhouses, agricultural buildings, cabins, and villas.</p>	<p><b>General Character:</b> Primarily agricultural with woodland &amp; wetland and scattered buildings  <b>Building Placement:</b> Variable Setbacks  <b>Frontage Types:</b> Not applicable  <b>Typical Building Height:</b> 1- to 2-Story  <b>Type of Civic Space:</b> Parks, Greenways</p>
	<p><b>T-3 SUB-URBAN</b>                      T-3 Sub-Urban Zone consists of low density residential areas, adjacent to higher zones that some mixed use. Home occupations and outbuildings are allowed. Planting is naturalistic and setbacks are relatively deep. Blocks may be large and the roads irregular to accommodate natural conditions.</p>	<p><b>General Character:</b> Lawns, and landscaped yards surrounding detached single-family houses; pedestrians occasionally  <b>Building Placement:</b> Large and variable front and side yard Setbacks  <b>Frontage Types:</b> Porches, fences, naturalistic tree planting  <b>Typical Building Height:</b> 1- to 2-Story with some 3-Story  <b>Type of Civic Space:</b> Parks, Greenways</p>
	<p><b>T-4 GENERAL URBAN</b>                      T-4 General Urban Zone consists of a mixed use but primarily residential urban fabric. It may have a wide range of building types: single, sideyard, and rowhouses. Setbacks and landscaping are variable. Streets with curbs and sidewalks define medium-sized blocks.</p>	<p><b>General Character:</b> Mix of Houses, Townhouses &amp; small Apartment buildings, with scattered Commercial activity; balance between landscape and buildings; presence of pedestrians  <b>Building Placement:</b> Shallow to medium front and side yard Setbacks  <b>Frontage Types:</b> Porches, fences, Dooryards  <b>Typical Building Height:</b> 2- to 3-Story with a few taller Mixed Use buildings  <b>Type of Civic Space:</b> Squares, Greens</p>
	<p><b>T-5 URBAN CENTER</b>                      T-5 Urban Center Zone consists of higher density mixed use building that accommodate retail, offices, rowhouses and apartments. It has a tight network of streets, with wide sidewalks, steady street tree planting and buildings set close to the sidewalks.</p>	<p><b>General Character:</b> Shops mixed with Townhouses, larger Apartment houses, Offices, workplace, and Civic buildings; predominantly attached buildings; trees within the public right-of-way; substantial pedestrian activity  <b>Building Placement:</b> Shallow Setbacks or none; buildings oriented to street defining a street wall  <b>Frontage Types:</b> Stoops, Shopfronts, Galleries  <b>Typical Building Height:</b> 3- to 5-Story with some variation  <b>Type of Civic Space:</b> Parks, Plazas and Squares, median landscaping</p>
	<p><b>T-6 URBAN CORE</b>                      T-6 Urban Core Zone consists of the highest density and height, with the greatest variety of uses, and civic buildings of regional importance. It may have larger blocks; streets have steady street tree planting and buildings are set close to wide sidewalks. Typically only large towns and cities have an Urban Core Zone.</p>	<p><b>General Character:</b> Medium to high-Density Mixed Use buildings, entertainment, Civic and cultural uses. Attached buildings forming a continuous street wall; trees within the public right-of-way; highest pedestrian and transit activity  <b>Building Placement:</b> Shallow Setbacks or none; buildings oriented to street, defining a street wall  <b>Frontage Types:</b> Stoops, Dooryards, Forecourts, Shopfronts, Galleries, and Arcades  <b>Typical Building Height:</b> 4-plus Story with a few shorter buildings  <b>Type of Civic Space:</b> Parks, Plazas and Squares; median landscaping</p>

3



## 1 **C** PLANNING CRITERIA

2 Planning for TND communities occurs at several levels, including the region, the  
3 city/town, the community, the block, and, finally, the street and building. Planning  
4 should be holistic, looking carefully at the relationship between land use, buildings and  
5 transportation in an integrated fashion. This approach and the use of form based codes  
6 can create development patterns that balance pedestrian, transit and bicycling with  
7 motor vehicle modes of transportation. The following sections help to define  
8 considerations for developing communities at different scales in order to increase the  
9 potential for creating TND patterns.

10 Planners should determine the applicable regional plans that guide their area. Plans  
11 can be generated for or coordinated with the Metropolitan Planning Organization  
12 planning process for urbanized areas. Sector planning and comprehensive planning at  
13 the city, county and regional level, i.e., any level above that of the individual community,  
14 also yield documented regional plans. Regional planning practice varies by jurisdiction;  
15 however most plans designate undeveloped land areas as either open space or areas  
16 for future growth.

17 Clear definitions of regional sectors or districts will identify where development is  
18 encouraged and discouraged by local and state policy. Only then can regional sectors  
19 guide the development and location of community types. Existing comprehensive plans  
20 should be reviewed to determine areas for planned future growth.

21 One example of regional sector definitions can be found in the SmartCode, a model  
22 form based code available for use in any region. SmartCode documents define the  
23 following regional sectors; also shown in the center of **Figure 19-2**.

24 **O-1 Preserved Open Sector** - Permanently set-aside open space, such as park or  
25 wilderness area, or lands set aside via easements or land grants. Communities do not  
26 occur in O-1.


27 **O-2 Reserved Open Sector** - Comprised of lands that are currently open but may be  
28 expected to develop at some point in the future, such as land for agriculture or  
29 silviculture. Communities do not occur in O-2. O-2 is a temporary designation

30 **G-1 Restricted Growth Sector** and **G2 Controlled Growth Sector** - These are  
31 undeveloped areas with little existing development at the beginning of the planning  
32 period, thus, any development will be new development. The less-intensive G1 Sector  
33 is intended for hamlets only and the more-intensive G2 sector, anticipates heavier  
34 development. These Sectors might be farmland, forests, or fields at the edge of existing  
35 urban development.

- 1 **G-3 Intended Growth Sector** and **G-4 Infill Growth Sector** - G-4 is developed, G-3 is  
2 not. Locations for G-1, G-2, and G-3 depend on terrain, thoroughfares and rail lines.
- 3 Regardless of the regional comprehensive plan terms and definitions, once the regional  
4 sectors/areas are mapped then refined planning is possible at the community level with  
5 the designation of community types.
- 6 Each community type is made up of transect zones to further define its character. The  
7 jurisdiction's existing comprehensive plan should again be reviewed to identify available  
8 community type definitions. If none are adopted, the SmartCode offers a set of  
9 definitions. As an example, **Figure 19-3**, describes the community types, in order from  
10 least to most intensive:
- 11 **CLD – Clustered Land Development** – an incomplete neighborhood standing alone in  
12 the countryside. (Syn: hamlet)
- 13 **TND – Traditional Neighborhood Development** –a village or small town composed of  
14 one or more neighborhoods (Infill TND occurs in the G-4 Sector)
- 15 **RCD – Regional Center Development** – a large town or part of a city with regionally  
16 significant development. (Infill RCD occurs in the G-4 Sector.)
- 17

1  
2

**Figure 19-2 Transect Zone Descriptions**  
 (Source SmartCode 9.2)

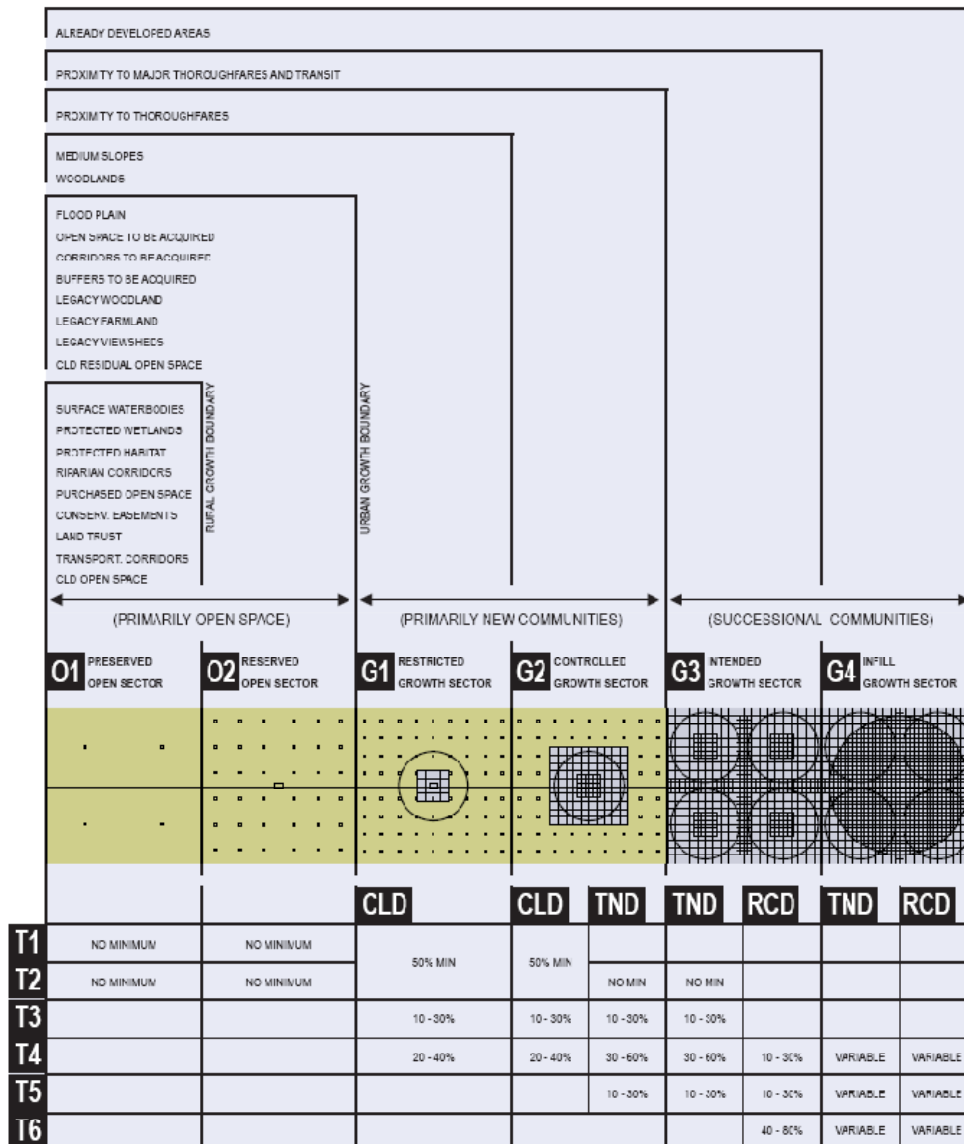

3  
4

1 As noted in the following Community Guiding Principles section, planning for a specific  
2 community type focuses the scale of land pattern and the transportation facilities.

3 The principles for defining or creating the context should be considered based on the  
4 scale of the area that is being evaluated, developed, or redeveloped. Regional scale  
5 considerations yield the recommended locations of cities and towns in areas where  
6 growth is encouraged. Then cities and towns can be planned.

### 7 **The City/Town – Guiding Principles**

- 8 • The city should retain its natural infrastructure and visual character derived from its  
9 location and climate, including topography, landscape and coastline.
- 10 • Growth strategies should encourage infill and redevelopment.
- 11 • New development should be structured to reinforce a pattern of neighborhoods and  
12 urban centers, with growth and higher density focused at transit nodes rather than  
13 along corridors.
- 14 • Transportation corridors should be planned and reserved in coordination with land  
15 use.
- 16 • Green corridors should be encouraged to enhance and connect the urbanized areas.
- 17 • The city should include a framework of transit, pedestrian, and bicycle systems that  
18 provide alternatives to automobile use.
- 19 • A diversity of land use should be distributed throughout the city to enable a variety of  
20 economic activity, workplace, residence, recreation and civic activity.
- 21 • Affordable and workforce housing should be distributed throughout the city to match  
22 job opportunities and to avoid concentrations of poverty.

### 23 **The Community - Guiding Principles**

- 24 • Neighborhoods and urban centers with a mix of uses should be the preferred pattern  
25 of development; single-use area should be the exception.
- 26 • Neighborhoods and urban centers should be compact, bicycle and pedestrian-  
27 oriented and mixed-use. Density and intensity of use should relate to the degree of  
28 existing or planned transit service.
- 29 • The ordinary activities of daily living should occur within walking or bicycling distance  
30 within a half mile of most dwellings, allowing independence to those who do not drive.
- 31 • Interconnected networks of thoroughfares should be designed to disperse and  
32 reduce the length of automobile trips and to encourage transit use, walking and  
33 bicycling. A range of open space, including parks, squares and playgrounds, should  
34 be distributed within neighborhoods and urban centers.

- 1 • Appropriate building densities and land uses should occur within walking or bicycling  
2 distance of transit stops.
- 3 • Civic, institutional and commercial activity should be embedded in mixed-use urban  
4 centers, not isolated in remote single-use complexes.
- 5 • Schools should be located to enable children to walk or bicycle to them. Programs  
6 such as Florida's Safe Routes to Schools may be referenced for additional  
7 information. Note that this program is intended for retrofitting CSD communities and  
8 many of the recommendations may not apply to properly designed TND  
9 communities.
- 10 • Within neighborhoods, a range of housing types and price levels should  
11 accommodate diverse ages and incomes.

## 12 **The Block and the Building - Guiding Principles**

- 13 • Buildings and landscaping should contribute to the physical definition of  
14 thoroughfares as civic places.
- 15 • Development should adequately accommodate automobiles, while respecting the  
16 pedestrian, bicyclist and transit user in the spatial form of public space.
- 17 • The design of streets and buildings should reinforce safe environments, while  
18 ensuring access is provided in a way that walking and bicycling are encouraged and  
19 that neighborhoods have multiple access points either through streets or pathways.
- 20 • Architecture and landscape design should grow from local climate, topography,  
21 history, culture and building practice.
- 22 • Civic buildings and public gathering places should be located to reinforce community  
23 identity and support self-government.

## 24 **Networks**

25 The Connectivity Index (Reid Ewing, 1996) can be used to quantify how well a roadway  
26 network connects destinations. Links are the segments between intersections and  
27 intersections are considered to be nodes. Cul-de-sac heads are treated as a node. A  
28 higher index means that travelers have increased route choice, providing more  
29 connections available for travel between any two locations. The Connectivity Index is  
30 calculated by dividing the number of links by the number of nodes. A score of 1.4 is the  
31 minimum needed for a walkable community.

32 An example illustration on how to calculate a Connectivity Index is included below:


33 To establish a Connectivity Index, using a map of the network under consideration, first  
34 establish the area to be evaluated. Identify and count the number of intersections, cul-

1 de-sacs and street segments between intersections/cul-de-sacs within the study area.

2 The Starkey Ranch project, a portion of which is shown below, illustrates the  
3 identification of nodes and links. For the entire community, there were a total of 242  
4 road segments, or links, and 146 intersections/cul-de-sacs or nodes identified. The  
5 calculation for this community yielded a Connectivity Index of 1.66, which is greater than  
6 1.4, therefore, based on the Connectivity Index, the Starkey Ranch should be  
7 considered walkable.

8 Connectivity Index =  $242 \text{ Links} / 146 \text{ Nodes} = 1.66$

9

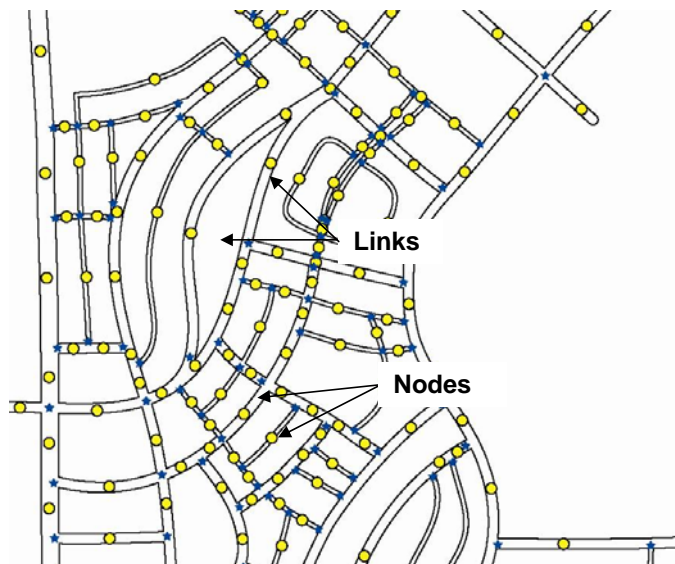

**Connectivity Index, Odessa, FL**  
(Source: Glatting Jackson Project: Starkey Ranch)

10  
11  
12  
13  
14 |

## 1 **E DESIGN ELEMENTS**

### 2 **THOROUGHFARE TYPES**

3 Section C, Highway Function and Classification in Planning Chapter 1 contains the  
4 conventional classification system that is commonly accepted to define the function and  
5 operational requirements for roadways. These classifications are also used as the  
6 primary basis for geometric design criteria.

7 Traffic volume, trip characteristics, speed and level of service, and other factors in the  
8 functional classification system relate to the mobility of motor vehicles, not bicyclists or  
9 pedestrians, and do not consider the context or land use of the surrounding  
10 environment. This approach, while appropriate for high speed rural and suburban  
11 roadways, does not provide designers with guidance on how to design for a Traditional  
12 Neighborhood Development or in a context sensitive manner.

13 The thoroughfare types described here provide mobility for all modes of transportation  
14 with a greater focus on the pedestrian. The functional classification system can be  
15 generally applied to the thoroughfare types in this chapter. What designers should  
16 recognize is the need for greater flexibility in applying design criteria based more heavily  
17 on context and the need to create a safe environment for pedestrians, rather than  
18 strictly following the conventional application of functional classification in determining  
19 geometric criteria.

#### 20 **General Principles**

- 21 • The thoroughfares are intended for use by vehicular, transit, bicycle, and  
22 pedestrian traffic and to provide access to lots and open spaces.
- 23 • The thoroughfares consist of vehicular lanes and public frontages. The lanes  
24 provide the traffic and parking capacity. Thoroughfares consist of vehicular lanes  
25 in a variety of widths for parked and for moving vehicles. The public frontages  
26 contribute to the character of the transect zone. They may include swales,  
27 sidewalks, curbing, planters, bicycle paths and street trees.
- 28 • Thoroughfares should be designed in context with the urban form and desired  
29 design speed of the transect zones through which they pass. The public  
30 frontages that pass from one transect zone to another should be adjusted  
31 accordingly.

32 The terms for thoroughfare types that are used in Traditional Neighborhood  
33 Development include:

34

1 **RD-Road**

2 A road is a local, slow-movement thoroughfare suitable for more rural transect zones.  
3 Roads provide frontage for low-density buildings with a substantial setback. Roads  
4 have narrow pavement and open swales drained by percolation, with or without  
5 sidewalks. The landscaping may be informal with multiple species arrayed in  
6 naturalistic clusters.



7  
8  
9 **Road, Santa Rosa Beach, FL**

10 *(Source: Cooper, Robertson & Partners Project: Watercolor, Photo - Billy Hattaway)*

11  
12 Since roads are located in more rural transect zones where larger setbacks are created,  
13 on street parking is not provided for. Lot size and driveways should be provided to  
14 allow for parking on site and should allow for unobstructed sidewalks to allow for  
15 pedestrian activity.

16



1 **ST-Street**

2 A street is a local, multi-movement thoroughfare suitable for all urbanized transect  
3 zones and all frontages and uses. A street is urban in character, with raised curbs,  
4 drainage inlets, wide sidewalks, parallel parking, and trees in individual or continuous  
5 planters aligned in an alley. Character may vary somewhat, however, responding to the  
6 commercial or residential uses lining the street.

7 It is important to note that many municipalities use the terms, "avenue" and "street" in  
8 combination with the thoroughfare name as a way to differentiate streets running north  
9 and south from those running east and west. (e.g. 1<sup>st</sup> Street, 1<sup>st</sup> Avenue)



10  
11  
12 **Street, Sanford, FL**

13 *(Source: Glatting Jackson Project, Photo - Billy Hattaway)*  
14  
15

1 **DR-Drive**

2 A drive is located along the boundary between an urbanized and a natural condition,  
3 usually along a waterfront or park. One side has the urban character of a thoroughfare,  
4 with sidewalk and buildings, while the other has the qualities of a road or parkway, with  
5 naturalistic planting and rural details.



**Drive, Franklin, TN**

*(Source: DPZ Project: Westhaven, Photo - Billy Hattaway)*

6  
7  
8  
9  
10  
11

1 **AV-Avenue**

2 An avenue is a thoroughfare of high vehicular capacity and low to moderate speed,  
3 acting as a short distance connector between urban centers, and usually equipped with  
4 a landscaped median.

5 It is important to note that many municipalities use the terms, "avenue" and "street" in  
6 combination with the thoroughfare name as a way to differentiate streets running north  
7 and south from those running east and west. (e.g. 1<sup>st</sup> Street, 1<sup>st</sup> Avenue)



8  
9  
10 **Avenue, Albany, NY**  
11 (Source: Photo – Dan Burden)  
12  
13

1 **BV-Boulevard**

2 A boulevard is a thoroughfare designed for high vehicular capacity and moderate  
3 speed, traversing an urbanized area. Boulevards are usually equipped with side  
4 access lanes buffering sidewalks and buildings.  
5



6 **Octavia Boulevard, San Francisco, CA**  
7  
8 (Source: Alan Jacobs & Elizabeth McDonald Project, Photo – sfcityscape)  
9  
10  
11

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22

**PP-Pedestrian Passage**

A pedestrian passage is a narrow connector restricted to pedestrian use and limited vehicular use that passes between buildings or between a building and a public open space. Passages provide shortcuts through long blocks and connect rear parking areas with frontages. In T3, Pedestrian Passages may be unpaved and informally landscaped. In T4, T5 and T6, they should be paved and landscaped and may provide limited vehicular access. When in civic zones, passages should correspond with their context and abutting transect zones.



**Pedestrian Passage, Rosemary Beach, FL**

*(Source: DPZ Project: Rosemary Beach, Photo – Billy Hattaway)*



**Pedestrian Passage, Franklin, TN**

*(Source: DPZ Project: Westhaven, Photo – Billy Hattaway)*

23  
24  
25  
26  
27

1 **AL-Alley**  
2 An Alley is a narrow vehicular access-way at the rear or side of buildings providing  
3 service and parking access, and utility easements. Alleys have no sidewalks,  
4 landscaping, or building frontage requirements. They accommodate trucks and  
5 dumpsters and may be paved from building face to building face, with drainage by an  
6 inverted crown using impervious or pervious pavement. In older residential  
7 neighborhoods alleys may be unpaved.

8  
9



**Alley, Franklin, TN**

*(Source: DPZ Project: Westhaven, Photo – Billy Hattaway)*

10  
11  
12  
13  
14  
15  
16

## 1 H DESIGN PRINCIPLES

### 2 H.1 Introduction

3 The principles for designing streets in TND communities are similar in many  
4 respects to designing streets for conventional transportation.

- 5 • Providing mobility for users
- 6 • Creating a safe roadway for users
- 7 • Movement of goods
- 8 • Providing access to emergency services, transit, waste management ,  
9 delivery trucks
- 10 • Providing access to property
- 11 • TND street design principles have a different emphasis in the following manner.
- 12 • The basis for selecting criteria and features used in designing TND  
13 communities is the transect zone.
- 14 • Streets that are created in context with the desired public realm or other  
15 contextual elements
- 16 • A focus on reducing speed to create a safer and more comfortable  
17 environment for pedestrians and bicyclists

18 **When designing features and streets for TND communities** in an infill or  
19 redevelopment site, designers need to understand that they will have to “do the  
20 best they can.” In other words flexibility in the approach to design in what is a  
21 constrained environment is required. **Creativity and careful attention to safety for  
22 pedestrians and bicyclists must be balanced with the operational needs for motor  
23 vehicles.**

24 Likewise, designers should recognize that where TND streets transition into CSD  
25 streets, the design criteria such as intersection sight distance, use of on street  
26 parking, and other features should be evaluated to ensure that safety for users is  
27 provided. This is due to the higher speeds on most CSD streets

### 28 H.2 Design Process

29 The design process for TND communities treats streets as an important part of  
30 the public realm, which is the totality of spaces used freely on a day-to-day basis  
31 by the general public, such as streets, plazas, parks and other public

1 infrastructure. TND balances the mobility of all users, and pays a great deal of  
2 attention to the context or transect zone in which the street is located. The  
3 process also pays attention to creating a high degree of connectivity and an  
4 extensive network of streets.

## 5 **I CROSS SECTION ELEMENTS**

### 6 **I.1 Introduction**


7 As discussed earlier in the document, TND street design places importance on  
8 how the streets are treated since they are part of the public realm. The street  
9 portion of the public realm is shaped by the features and cross section elements  
10 used in creating the street. For this reason more attention to what features are  
11 included; where they are placed and how the cross section elements are  
12 assembled is necessary.

13  
14



## 1 J TRAVELED WAY

- 2 The traveled way is the central part of the thoroughfare between the curb faces where  
3 vehicle movement and on street parking occurs.

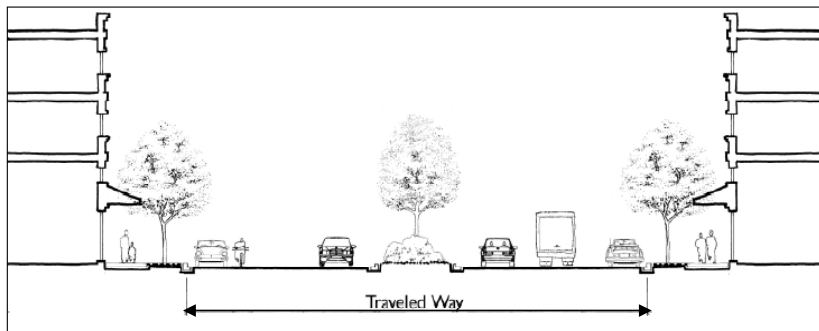

### Traveled Way

(Source: Image - Community, Design + Architecture)

4  
5  
6

### J.1 Introduction

7 Since every community has different equipment in service for transit, waste  
8 collection and emergency services, coordination with operators should occur  
9 early in the planning process to ensure that those service providers can operate  
10 their equipment on the streets. The frequency of access by these vehicles  
11 should be considered when setting lane widths. The use of narrower lane widths  
12 requires that designers recognize the impacts on turning at intersections and u-  
13 turns for multi-lane roads.

14

1 **J.4 On Street Parking**

2 When angle parking is proposed for on street parking, designers should consider  
3 the use of back in angle parking in lieu of front in angle parking. Back in angle  
4 parking has the following advantages:

- 5 • Loading and unloading of passengers naturally encourages passenger  
6 movement towards the sidewalk.
- 7 • Loading and unloading from the trunk or tailgate occurs at the sidewalk.



8 **Back in Angle Parking, Columbus, OH**  
9  
10 (Source: Photo - Dan Burden)  
11

- 12 • When the vehicle leaves, the driver has a better view of oncoming traffic,  
13 therefore reducing the risk of crashes.



14 **Back in Angle Parking, Seattle, WA**  
15  
16 (Source: Photo - Dan Burden)  
17

1 When designated bike lanes are needed in conjunction with on street parking,  
2 designers should consider increasing the bike lane to 6 feet in lieu of increasing  
3 parallel parking width from 7 to 8 feet. This helps encourage vehicles to park  
4 closer to the curb, and provides more room for door swing, potentially reducing  
5 conflict with cyclists.

6 Since roads are located in more rural transect zones where larger setbacks are  
7 created, on street parking is not provided for. Lot size and driveways should be  
8 provided to allow for parking on site and should provide unobstructed sidewalks  
9 to allow for pedestrian activity.

## 10 **J.5 Mid-Block Crossings**

11 Properly designed TND communities will not normally require mid-block  
12 crossings due to the use of shorter block size. When mid-block crossings are  
13 necessary, the use of curb extensions or bulbouts should be considered to  
14 reduce the crossing distance for pedestrians.



**Mid-Block Crossing, Sanford, FL**

*(Source: Glatting Jackson project, Photo - Billy Hattaway)*

15  
16  
17  
18

## 19 **J.6 Access Management**

20 The philosophy of short block lengths in TND communities is intended to reduce  
21 travel speeds, increase access to property, and improve circulation for all users.  
22 This is in contrast to the use of access management in CSD which has the goal

1 of keeping vehicles moving at higher speeds.

2 Since parking is usually located within blocks in mixed use blocks and in alleys in  
3 residential neighborhoods, access along streets is provided primarily through  
4 side streets and alleys. This greatly reduces driveway access along corridors,  
5 improving safety for bicyclists, pedestrians and vehicles due to the reduction in  
6 conflict points.

7

## 8 **K INTERSECTIONS**

### 9 **K.1 Introduction**

10 The proper design of intersections is very important to the safety of all users.  
11 Research reveals that intersections are disproportionately responsible for  
12 crashes and injuries, especially for pedestrians. This is due to the number of  
13 conflict points that occur.

14 The goal should be to keep intersections compact to keep vehicle speeds down,  
15 and reduce pedestrian crossing distance. The benefits of compact intersections  
16 are reduced exposure of pedestrians to vehicles and shorter cycle times for the  
17 pedestrian phase of signals.

18 The TND approach to street design with more narrow streets and compact  
19 intersections requires designers to pay close attention to the operational needs of  
20 transit, fire and rescue, waste collection and delivery trucks. For this reason,  
21 early coordination with transit, fire and rescue, waste collection and other  
22 stakeholder groups is essential.


23 More regular encroachment of turning vehicles into opposing lanes will occur at  
24 intersections. Therefore, frequency of transit service, traffic volumes and the  
25 speeds at those intersections must be considered when designing intersections.  
26 For fire and rescue, determination of the importance of that corridor for  
27 community access should be determined, e.g. primary or secondary access.

## 28 **D DEFINITIONS.**

- 29
- 30 • **Alley** - a narrow street, especially one through the middle of a block giving  
access to the rear of lots or buildings.
  - 31 • **Avenue (AV)** – an avenue is a thoroughfare of high vehicular capacity and low to  
32 moderate speed, acting as a short distance connector between urban centers,

- 1 and usually equipped with a landscaped median.
- 2 It is important to note that many municipalities use the terms, “avenue” and  
3 “street” in combination with the thoroughfare name as a way to differentiate  
4 streets running north and south from those running east and west. (e.g. 1<sup>st</sup>  
5 Street, 1<sup>st</sup> Avenue). These are street names, however, not to be confused with  
6 thoroughfare types.
- 7 • **Border** - the area between the curb of the thoroughfare and the right of way line.  
8 Elements of the public frontage include the type of curb, sidewalk, planter, street  
9 tree and streetlights.
  - 10 • **Boulevard** – a boulevard is a thoroughfare designed for high vehicular capacity  
11 and moderate speed, traversing an urbanized area. Boulevards are usually  
12 equipped with slip roads buffering sidewalks and buildings.
  - 13 • **Context** – the financial, environmental, historical, cultural, land use types,  
14 activities and built environment which help to establish the configuration of  
15 thoroughfares.
  - 16 • **Context sensitive solutions (CSS)** - a collaborative, interdisciplinary approach  
17 that involves all stakeholders to develop a transportation facility that fits its physical  
18 setting and preserves scenic, aesthetic, historic and environmental resources,  
19 while maintaining safety and mobility. CSS is an approach that considers the total  
20 context within which a transportation improvement project will exist.
  - 21 • **Design speed** - A selected rate of travel used to determine the various  
22 geometric features of the roadway.
  - 23 • **Drive** - A drive is located along the boundary between an urbanized and a  
24 natural condition, usually along a waterfront or park. One side has the urban  
25 character of a thoroughfare, with sidewalk and buildings, while the other has the  
26 qualities of a road or parkway, with naturalistic planting and rural details.
  - 27 • **Human scale** - describes buildings, block structure and other aspects of the built  
28 environment which are designed in consideration for pedestrians and bicyclists,  
29 their rate of travel and other physical needs
  - 30 • **Liner building** - a building specifically designed to mask a parking lot or a  
31 parking garage from the frontage.
  - 32 • **Live-work** - a dwelling unit that contains a commercial component in the unit.
  - 33 • **Mixed use development** - the practice of allowing more than one type of use in  
34 a building or set of buildings. This can mean some combination of residential,  
35 commercial, industrial, office, institutional, or other land uses.
  - 36 • **Modern roundabout** - a circular intersection with specific design and traffic  
37 control features. These features include yield control of all entering traffic,  
38 channelized approaches, and appropriate geometric curvature to ensure that

1 travel speeds on the circulatory roadway are typically less than 30 mph.

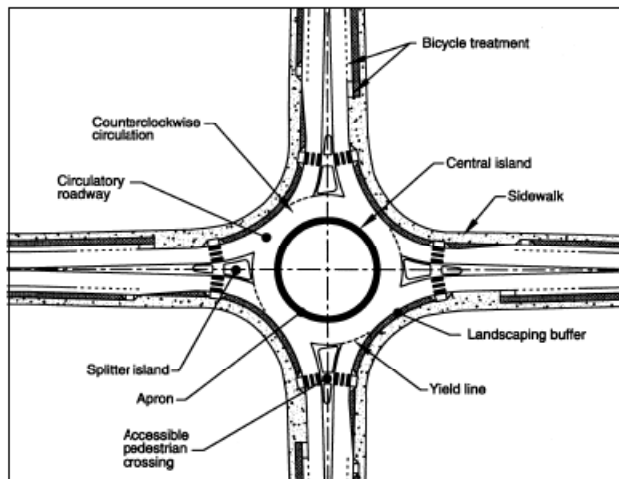

### Modern Roundabout

(Source: FHWA Roundabouts: An Informational Guide)

2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21

- **Neighborhood** - an urbanized area at least 40 acres that is primarily residential. A neighborhood shall be based upon a partial or entire standard pedestrian shed.
- **New Urbanism** - a development philosophy based on the principles of traditional neighborhood development designed for the pedestrian, bicyclist and transit, as well as the car; cities and towns should be shaped by physically defined and universally accessible public spaces and community institutions; urban places should be framed by architecture and landscape design that celebrate local history, climate, ecology, and building practice. See the Charter of the New Urbanism for more information. <http://www.cnu.org/charter>
- **Passage** - a pedestrian connector passing between buildings, providing shortcuts through long blocks and connecting rear parking areas to frontages.
- **Path** - a pedestrian way traversing a park or rural area.
- **Pedestrian shed** - an area, approximately circular, that is centered on a common destination. A pedestrian shed is applied to determine the approximate size of a neighborhood. A standard pedestrian shed is 1/4 mile radius or 1320 feet, about the distance of a five-minute walk at a leisurely pace.



### Pedestrian Shed

- 1
- 2
- 3 • **Rear alley/Lane** - a vehicular way located to the rear of lots providing access to
- 4 service areas, parking, and outbuildings and containing utility easements. Rear
- 5 Lanes may be paved lightly to driveway standards. The streetscape consists of
- 6 gravel or landscaped edges, has no raised curb, and is drained by percolation.
- 7
- 8 • **Retail** - premises available for the sale of merchandise and food service.
- 9 • **Smart Growth** - an urban planning and transportation theory that concentrates
- 10 growth in the center of a city to avoid urban sprawl and advocates compact,
- 11 transit-oriented, walkable, bicycle friendly land use, including mixed use
- 12 development with a range of housing choices.
- 13 • **Road** - a local, slow-movement thoroughfare suitable for more rural transect
- 14 zones. Roads provide frontage for low-density buildings with a substantial
- 15 setback. Roads have narrow pavement and open swales drained by percolation,
- 16 with or without sidewalks. The landscaping may be informal with multiple
- 17 species arrayed in naturalistic clusters.
- 18 • **Setback** - the area of a lot measured from the right of way line to a building
- 19 facade or elevation.
- 20 • **Street** – a local, multi-movement thoroughfare suitable for all urbanized transect
- 21 zones and all frontages and uses. A street is urban in character, with raised curbs,
- 22 drainage inlets, wide sidewalks, parallel parking, and trees in individual or
- 23 continuous planters aligned in an allee. Character may vary somewhat, however,
- 24 responding to the commercial or residential uses lining the street.
- 25 It is important to note that many municipalities use the terms, “avenue” and “street”
- 26 in combination with the thoroughfare name as a way to differentiate streets running
- 27 north and south from those running east and west (e.g. 1<sup>st</sup> Street, 1<sup>st</sup> Avenue).
- 28 These are street names, however, not to be confused with thoroughfare types.
- **Terminated vista** - a building or feature located at the end of a thoroughfare in a

1 position of prominence.



2  
3  
4 **Terminated Vista, Monticello, FL**

(Source: Billy Hattaway)

- 5 • **Thoroughfare** - a corridor incorporating sidewalks, travel lanes and parking  
6 lanes within a right of way.
- 7 • **Traditional Neighborhood Development (TND)**- a community unit type structured  
8 by a standard Pedestrian Shed oriented towards a common destination consisting of a  
9 mixed use center or corridor.
- 10 • **Transit-Oriented Development (TOD)**- a regional center development with  
11 transit available or proposed. TODs are developments that are moderate to high  
12 density, mixed-use, and walkable development designed to facilitate transit and  
13 accommodate multiple modes of transportation. TODs generally encompass a  
14 radius of ¼ or ½ miles of a transit station, a distance most pedestrians are willing  
15 to walk. It incorporates features such as interconnected street networks, bicycle  
16 and pedestrian facilities, and street-oriented site design, to encourage transit  
17 ridership. This form of development optimizes use of the transit network and  
18 maximizes pedestrian accessibility. Successful TOD provides a mix of land uses  
19 and densities that create a convenient, interesting and vibrant community.
- 20 • **Town center** - the mixed-use center or main commercial corridor of a  
21 community. A Town Center in a hamlet or small TND may consist of little more  
22 than a meeting hall, corner store, and main civic space.
- 23 • **Transect** - a system of ordering human habitats in a range from the most natural  
24 to the most urban. The SmartCode is based upon six Transect Zones which  
25 describe the physical character of place at any scale, according to the density  
26 and intensity of land use and urbanism.



- 1       • **Transect Zone (T-Zone)** - Transect Zones are administratively similar to the land  
2       use zones in conventional codes, except that in addition to the usual building  
3       use, density, height, and setback requirements, other elements of the intended  
4       habitat are integrated, including those of the private lot and building and the  
5       adjacent public streetscape. The elements are determined by their location on  
6       the Transect scale. The T-Zones are: T1 Natural, T2 Rural, T3 Sub-Urban, T4  
7       General Urban, T5 Urban Center, and T6 Urban Core.
- 8       • **Yield street** - a thoroughfare that has two-way traffic but only one effective travel  
9       lane because of parked cars, necessitating slow movement and driver  
10      negotiation.

11