


THE NEED FOR STABILIZATION IN THE SHOULDER AREA ON RRR PROJECTS IS SITE SPECIFIC AND NOT ALWAYS REQUIRED. THE USE OF STABILIZING IN NARROW TRENCH WIDENING STRIPS IS NOT RECOMMENDED GENERALLY. SEE THE FLEXIBLE PAVEMENT DESIGN MANUAL FOR FURTHER CRITERIA. * NOTE: ACTUAL WIDTH OF BASE WIDENING MAY VARY DUE TO ACTUAL PAVEMENT WIDTH. CONTRACTOR MAY ELECT TO PLACE UNIFORM BASE WIDENING AT NO ADDITIONAL COST. TYPE B STABILIZATION LBR 40 XS**= CROSS SLOPE (i.e. 0.025+/-) 1. NO CROSS SLOPE CORRECTION REQUIRED IF EXISTING CONDITIONS ARE WITHIN THE RANGES OF PPM VOLUME 1. CHAPTER 25 CRITERIA. WHEN CROSS SLOPE CORRECTION IS NECESSARY, SPECIAL MILLING, OVERBUILD, AND LAYERING DETAILS MUST BE PROVIDED TO SUPPLEMENT TYPICAL SECTION. THE NEED FOR AND LOCATION OF PROFILE GRADE POINTS WILL DEPEND ON SITE SPECIFIC CONDITIONS. EXHIBIT TYP-8A FRICTION COURSE FC-12.5 (TRAFFIC C) (1 ½") (RUBBER) Date: 1/1/12

TYPICAL SECTION

SHEET

NO.

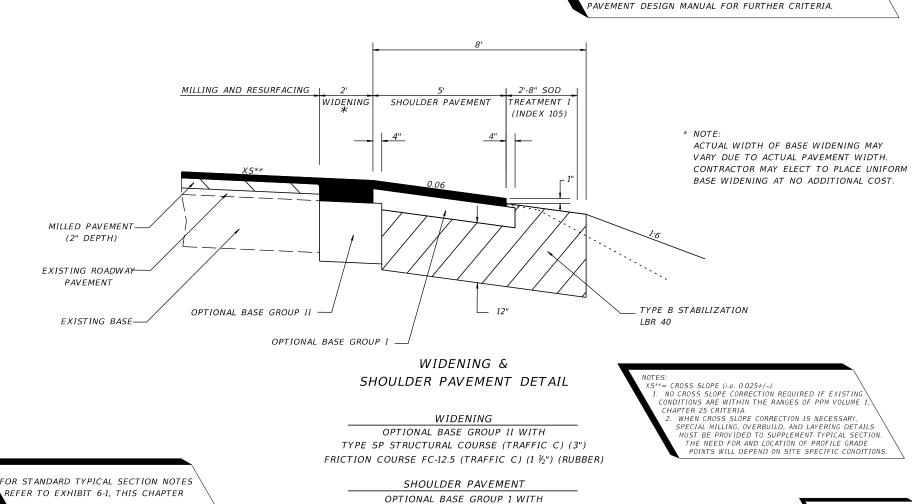

STATE OF FLORIDA

FINANCIAL PROJECT ID


123456-1-52-01

DEPARTMENT OF TRANSPORTATION


COUNTY

LEON

ROAD NO.

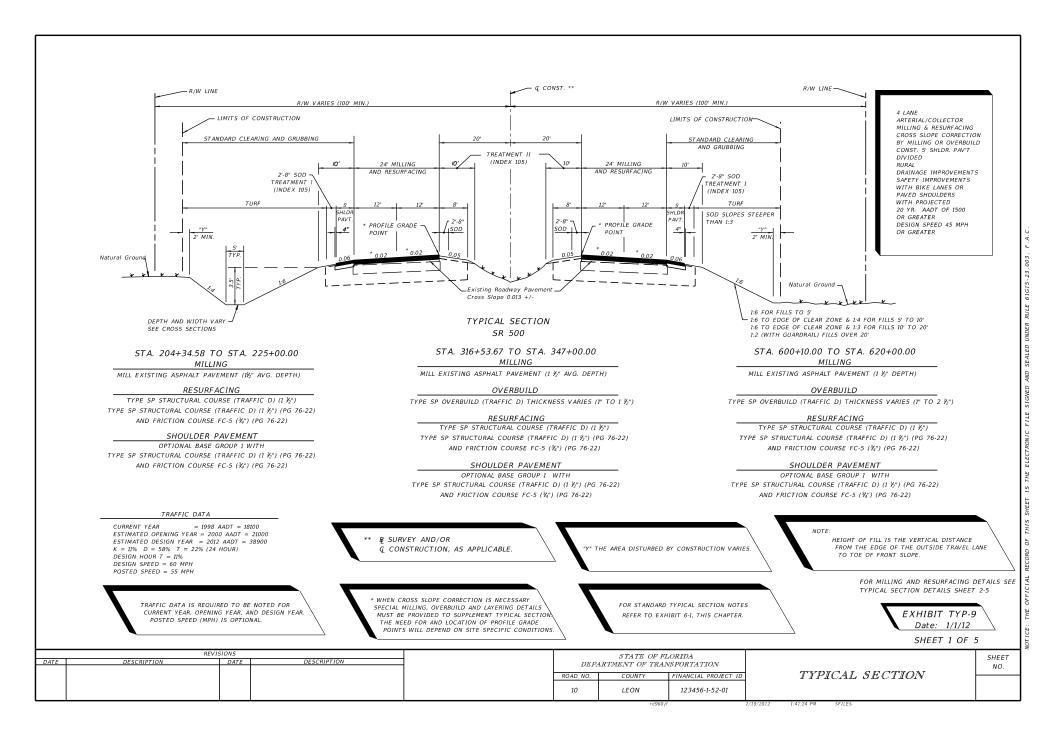



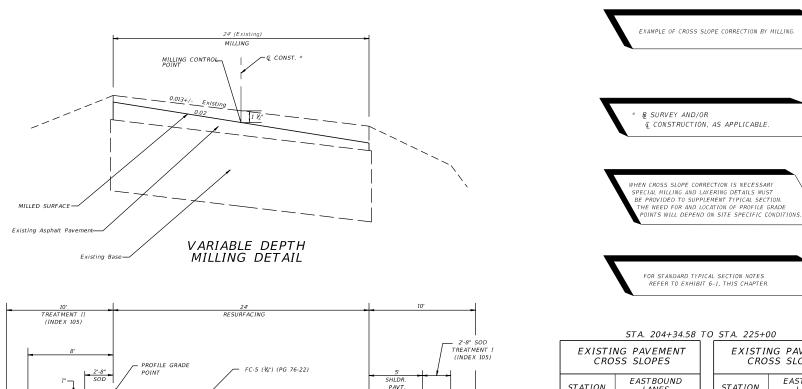

EXISTING PAVEMENT CROSS SLOPES *EASTBOUND* STATION LANES INSIDE OUTSIDE 205+00 0.014 0.013 206+00 0.012 0.012 207+00 0.013 0.013 208+00 0.011 0.012 209+00 0.013 0.014 210+00 0.013 0.015 211+00 0.014 0.015 212+00 0.013 0.013 213+00 0.012 0.012 214+00

0.012

0.013

0.014

0.015

215+00

216+00

217+00

TYPE SP (1½") (PG 76-22)

OPTIONAL BASE (BASE GROUP 1)

0.011

0.011

0.012

EXISTING PAVEMENT CROSS SLOPES EASTBOUND LANES STATION INSIDE OUTSIDE 218+00 0.015 0.013 219+00 0.014 0.014 220+00 0.013 0.016 221+00 0.012 0.015 222+00 0.013 0.014 223+00 0.013 0.013 224+00 0.014 0.013 225+00 0.016

> EXHIBIT TYP-9A Date: 1/1/12

SHEET 2 OF 5

	REVIS	SIONS		STATE OF FLORIDA			
DATE	DESCRIPTION	DATE	DESCRIPTION		DEP.	DEPARTMENT OF TRANSPORTATION	
l							
l					ROAD NO.	COUNTY	FINANCIAL PROJECT ID
					10	LEON	123456-1-52-01
						rd060 ii	-

RESURFACING DETAIL

TYPE SP (1½") (PG 76-22)


Existing Asphalt Pavement

TYPE SP (11/2")

Existing Base

TYPICAL SECTION DETAILS



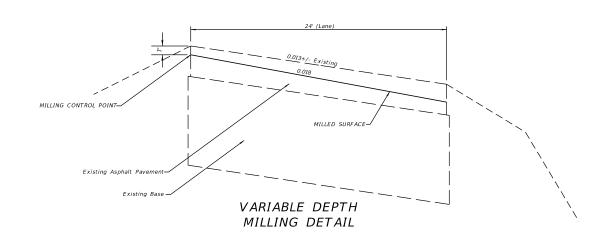

RESURFACING

FC-5 (¾") (PG 76-22)

- PROFILE GRADE POINT

Existing Base -

SHOULDER

SHLDR. PAVT

– 2'-8" SOD TREATMENT I (INDEX 105)

LTYPE SP (11/2") (PG 76-22)

OPTIONAL BASE (BASE GROUP 1)

TREATMENT II (INDEX 105)

TYPE SP (11/2") (PG 76-22)

TYPE SP (11/2")

TYPE SP OVERBUILD

Existing Asphalt Pavement

SOD

EXAMPLE OF CROSS SLOPE CORRECTION BY VARIABLE MILLING AND OVERBUILD.

WHEN CROSS SLOPE CORRECTION IS NECESSARY
SPECIAL MILLING, OVERBUILD AND LAYERING DETAILS
MUST BE PROVIDED TO SUPPLEMENT TYPICAL SECTION.
THE NEED FOR AND LOCATION OF PROFILE GRADES
POINTS WILL DEPEND ON SITE SPECIFIC CONDITIONS.

SUGGESTED CONSTRUCTION SEQUENCES SHOWN.
OTHER SEQUENCES THAT MEET SPECIFICATIONS,
THICKNESS AND CROSS SLOPE REQUIREMENTS MAY
BE CONSIDERED BY THE ENGINEER.

FOR STANDARD TYPICAL SECTION NOTES
REFER TO EXHIBIT 6-1, THIS CHAPTER.

STA. 316+53.67 TO STA. 347+00.00

EXISTING PAVEMENT CROSS SLOPES **EASTBOUND** STATION LANES INSIDE OUTSIDE 317+00 0.014 0.013 318+00 0.012 0.012 319+00 0.013 0.013 320+00 0.011 0.012 321+00 0.013 0.014 322+00 0.013 0.015 323+00 0.014 0.015 324+00 0.013 0.013 325+00 0.012 0.012 326+00 0.012 0.011 327+00 0.013 0.011 328+00 0.014 0.012 329+00 0.015 0.013 330+00 0.015 0.013 331+00 0.014 0.014 332+00 0.013 0.016

CROSS SLOPES						
STATION	EASTBOUND LANES					
	INSIDE	OUTSIDE				
333+00	0.012	0.015				
334+00	0.013	0.014				
335+00	0.013	0.013				
336+00	0.014	0.012				
337+00	0.016	0.015				
338+00	0.015	0.015				
339+00	0.012	0.014				
340+00	0.013	0.013				
341+00	0.014	0.013				
342+00	0.016	0.014				
343+00	0.013	0.014				
344+00	0.013	0.012				
345+00	0.014	0.013				
346+00	0.016	0.015				
347+00	0.016	0.016				

EXISTING PAVEMENT

EXHIBIT TYP-9B Date: 1/1/12

SHEET 3 OF 5

REVISIONS

DATE DESCRIPTION DATE DESCRIPTION

DESCRIPTION

DESCRIPTION

TO LEON 123456-1-52-01


OVERBUILD AND RESURFACING DETAIL

TYPICAL SECTION DETAILS


SHEET NO.

d960jf 1/19/2012 1:42:52 PM SF.

* TYPE SP OVERBUILD THICKNESSES (PER FDOT SPECIFICATION 334)



NO.

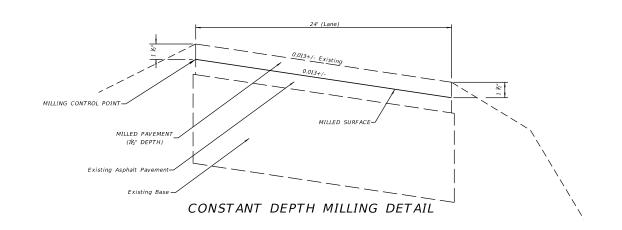

RESURFACING

FC-5 (¾") (PG 76-22)

- PROFILE GRADE POINT

Existing Base _

SHOULDER

SHLDR. PAVT

2'-8" SOD TREATMENT I (INDEX 105)

LTYPE SP (11/2") (PG 76-22)

* TYPE SP OVERBUILD THICKNESSES

(PER FDOT SPECIFICATION 334)

OPTIONAL BASE

(BASE GROUP 1)

TREATMENT II (INDEX 105)

TYPE SP (11/2") (PG 76-22)

TYPE SP (11/2")

TYPE SP OVERBUILD -

Existing Asphalt Pavement

SOD

BY CONSTANT DEPTH MILLING AND OVERBUILD.

EXAMPLE OF CROSS SLOPE CORRECTION

WHEN CROSS SLOPE CORRECTION IS NECESSARY SPECIAL MILLING, OVERBUILD AND LAYERING DETAILS MUST BE PROVIDED TO SUPPLEMENT TYPICAL SECTION. THE NEED FOR AND LOCATION OF PROFILE GRADES POINTS WILL DEPEND ON SITE SPECIFIC CONDITIONS.

> FOR STANDARD TYPICAL SECTION NOTES REFER TO EXHIBIT 6-1, THIS CHAPTER.

SUGGESTED CONSTRUCTION SEQUENCES SHOWN. OTHER SEQUENCES THAT MEET SPECIFICATIONS, THICKNESS AND CROSS SLOPE REQUIREMENTS MAY BE CONSIDERED BY THE ENGINEER.

STA. 600+10.00 TO STA. 620+00.00

EXISTING PAVEMENT CROSS SLOPES *EAST BOUND* STATION LANES INSIDE OUTSIDE 600+00 0.015 0.015 601+00 0.014 0.014 602+00 0.013 0.013 603+00 0.013 0.012 604+00 0.013 0.013 605+00 0.013 0.015 606+00 0.012 0.015 607+00 0.012 0.015 608+00 0.013 0.014 609+00 0.012 0.013 610+00 0.013 0.011

EXISTING PAVEMENT CROSS SLOPES						
STATION	EASTBOUND LANES					
	INSIDE	OUTSIDE				
611+00	0.014	0.011				
612+00	0.015	0.012				
613+00	0.015	0.013				
614+00	0.014	0.014				
615+00	0.013	0.016				
616+00	0.012	0.015				
617+00	0.013	0.014				
618+00	0.013	0.013				
619+00	0.014	0.013				
620+00	0.016	0.016				

EXHIBIT TYP-9C Date: 1/1/12 SHEET 4 OF 5

	REVIS	SIONS			STATE OF FL	ORIDA
DATE	DESCRIPTION	DATE	DESCRIPTION	DEPARTMENT OF TRANSPORTATION		
l						
l				ROAD NO.	COUNTY	FINANCIAL PROJECT IL
				10	LEON	123456-1-52-01

OVERBUILD AND RESURFACING DETAIL

TYPICAL SECTION DETAILS

EXISTING PAVEMENT SUPERELEVATION							
STATION		BOUND NES	EASTBOUND LANES				
	INSIDE	OUTSIDE	INSIDE	OUTSIDE			
400+10	0.018	0.020	0.015	0.018			
P.C. STA 400+60	0.023	0.024	0.025	0.026			
401+10	0.036	0.038	0.038	0.040			
404+00	0.035	0.036	0.036	0.041			
407+00	0.036	0.034	0.036	0.039			
409+50	0.033	0.034	0.034	0.036			
P.T. STA. 412+00	0.024	0.023	0.026	0.024			
STA 412+50	0.021	0.020	0.018	0.021			

EXISTING PAVEMENT SUPERELEVATION WESTBOUND EASTBOUND STATION LANES LANES INSIDE OUTSIDE INSIDE OUTSIDE 699+50 0.015 0.018 0.018 0.019 PC STA 700+00 0.018 0.021 0.022 0.023 700+50 0.031 0.033 0.038 0.032 704+00 0.032 0.034 0.032 0.031 707+00 0.033 0.036 0.029 0.033 709+50 0.030 0.031 0.030 0.033 PT STA 710+00 0.020 0.021 0.023 0.021 STA 710+50 0.017 0.018 0.020 0.019

THIS TABLE CAN BE USED TO TABULATE EXISTING PAVEMENT SUPERELEVATION IN THE PLANS FOR AREAS NEEDING SUPERELEVATION CORRECTION.

WHEN CROSS SLOPE CORRECTION IS NECESSARY
SPECIAL MILLING AND LAYERING DETAILS MUST
BE PROVIDED TO SUPPLEMENT TYPICAL SECTION.
THE NEED FOR AND LOCATION OF PROFILE GRADE
POINTS WILL DEPEND ON SITE SPECIFIC CONDITIONS.

FOR OTHER STANDARD TYPICAL SECTION NOTES REFER TO EXHIBIT 6-1, THIS CHAPTER.

EXHIBIT TYP-9D Date: 1/1/12

SHEET 5 OF 5

REVISIONS			STATE OF FLORIDA		ORIDA		SHEET	
DATE	DESCRIPTION	DATE	DESCRIPTION	DEPARTMENT OF TRANSPORTATION			TYPICAL SECTION DETAILS	NO.
				ROAD NO.	COUNTY	FINANCIAL PROJECT ID	TYPICAL SECTION DETAILS	
				10	LEON	123456-1-52-01		

rd960jf 1/19/2012 1:44:00 PM SFILE\$

