


\*\* See Note No. 4 on Index No. 20601

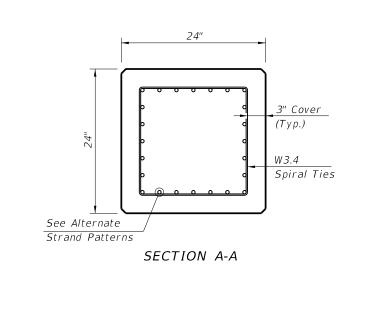

## ALTERNATE STRAND PATTERNS

16 ~ 0.6" Ø, Grade 270 LRS, at 44 kips

20 ~  $\frac{1}{2}$ " Ø (Special), Grade 270 LRS, at 34 kips

24 ~  $\frac{1}{2}$ " Ø, Grade 270 LRS, at 31 kips

## NOTES:

1. Work this Index with Index No. 20600 - Notes and Details for Square Prestressed Concrete Piles and Index No. 20601 - Square Prestressed Concrete Pile Splices.

2. Any of the given Alternate Strand Patterns may be utilized. The strands shall be located as follows: Place one strand at each corner and place the remaining

strands equally spaced between the corner strands. The total strand pattern shall be concentric with the nominal concrete section of the pile.

NC	DESCRIPTION
SI	
REVI	
	REVISION



24" SQUARE PRESTRESSED CONCRETE PILE

