#### COMPONENTS OF CONTRACT PLANS SET

ROADWAY PLANS
SIGNING AND PAVEMENT MARKING PLANS
SIGNALIZATION PLANS
INTELLIGENT TRANSPORTATION SYSTEMS PLANS
LIGHTING PLANS
LANDSCAPE PLANS
ARCHITECTURAL PLANS
STRUCTURE PLANS

EXAMPLE ONLY: CONTRACT PLANS SET
MAY NOT CONTAIN ALL OF THE
LISTED COMPONENTS/SHEETS.

BEGIN PROJECT

STA. 125+87.16


MP 3.592

A DETAILED INDEX APPEARS ON THE KEY SHEET OF EACH COMPONENT

# STATE OF FLORIDA DEPARTMENT OF TRANSPORTATION

## CONTRACT PLANS

FINANCIAL PROJECT ID 000001-1-52-01 (FEDERAL FUNDS) BAY COUNTY (46001) STATE ROAD NO. 220

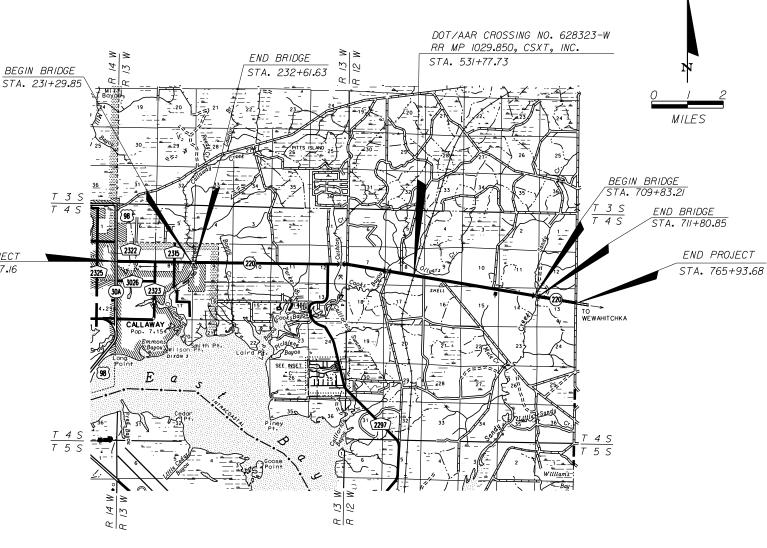

ROADWAY SHOP DRAWINGS TO BE SUBMITTED TO:

LOCATION OF PROJECT

KEY SHEET REVISIONS

contract plans.

DATE BY

3-05

DESCRIPTION

Revised sequence of

NAME(S) AND ADDRESS(ES) OF ENGINEER(S) RESPONSIBLE FOR REVIEW OF SHOP DRAWINGS, WHEN REQUIRED.

PLANS PREPARED BY:

NAME, ADDRESS, CONTRACT NUMBER, VENDOR NUMBER
AND CERTIFICATE OF AUTHORIZATION NUMBER OF
THE CONSULTANT FIRM WHEN THE PLANS ARE
PREPARED BY A CONSULTANT.

NOTE: THIS PROJECT TO BE LET TO CONTRACT
WITH FINANCIAL PROJECT ID 000002-1-52-02.

NOTE: THE SCALE OF THESE PLANS MAY HAVE CHANGED DUE TO REPRODUCTION.

EXHIBIT KS-I \
Date: 1/1/06

ROADWAY PLANS ENGINEER OF RECORD:

P.E. NO. : \_

FISCAL YEAR	SHEET NO.

T LAUDERDALE

### SHEET NO. SHEET DESCRIPTION

INDEX OF ROADWAY PLANS

KEY SHEET SUMMARY OF PAY ITEMS 2-2A DRAINAGE MAP TYPICAL SECTIONS 4-5 TYPICAL SECTION DETAILS SUMMARY OF QUANTITIES BOX CULVERT DATA SHEETS 8-14 SUMMARY OF DRAINAGE STRUCTURES 15-16 PROJECT LAYOUT ROADWAY PLAN-PROFILES 18-22 SPECIAL PROFILES 23-24 INTERSECTION LAYOUT/DETAIL 25 26-32 DRAINAGE STRUCTURES LATERAL DITCH PLAN-PROFILES 33 34 LATERAL DITCH CROSS SECTIONS 35 SPECIAL DETAILS 36 ROADWAY SOIL SURVEY 37-47 CROSS SECTIONS STORMWATER POLLUTION PREVENTION PLAN 48 49-52 TRAFFIC CONTROL PLANS 53-57 UTILITY ADJUSTMENTS

SELECTIVE CLEARING AND GRUBBING

GOVERNING STANDARDS AND SPECIFICATIONS: FLORIDA DEPARTMENT OF TRANSPORTATION, DESIGN STANDARDS DATED 2006, AND STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION DATED 2004, AS AMENDED BY CONTRACT DOCUMENTS.

58-62

APPLICABLE DESIGN STANDARDS MODIFICATIONS: 7-1-06

For Design Standards Modifications click on "Design Standards" at the following web site: http://www.dot.state.fl.us/rddesign/

#### REVISIONS

FINANCIAL PROJECT ID 000001-1-52-01
Roadway Sheets I, 6, 7 & 13 (Revised 03-10-05)
Signing & Pavement Marking Sheets S-2 & S-3 (Revised 3-10-05)
Signalization Sheets T-1 & T-2 (Revised II-30-04)
Roadway Sheets I4 & 33 (Revised 3-31-05)
Summary Of Pay Items (Revised 3-31-05)
FINANCIAL PROJECT ID 000001-1-52-04
Roadway Sheets I, 8 & 10 (Revised 3-31-05)

Structure Sheets B-I & C-I thru C-IO (Revised II-30-04)

LENGTH OF PROJECT LINEAR FEET MILES ROADWAY 63,677.10 12.060 BRIDGES 329.42 0.062 NET LENGTH OF PROJ. 64,006.52 12.122 EXCEPTIONS GROSS LENGTH OF PROJ. 64,006.52 12.122

FDOT PROJECT MANAGER :