

PARTIAL ELEVATION OF INSIDE FACE OF RAILING

===== TYPICAL TREATMENT OF RAILING ALONG BRIDGE =======

NOTES:

- 1. On approach end provide Index 536-002 (as shown) or other site specific treatment, see Roadway Plans. For treatment of trailing end see Roadway Plans.
- 2. Actual joint dimension and orientation vary. For Intermediate Deck Joints use the Modified Post Spacing at Intermediate Deck Joints Detail, Index 460-470, Sheet 2, as required.
- 3. Areas where existing structure has been removed shall match adjoining areas and shall be finished flat by grouting or grinding as required. Exposed existing reinforcing steel shall be burned off 1" below existing concrete and grouted over.

CROSS REFERENCES: For Match Line see Sheets 3 & 4. For Section A-A see Sheet 2. For Traffic Railing Notes and Details see Index 460-470.

REVISION 01/01/08

DESCRIPTION:

FDOT


FY 2018-19 STANDARD PLANS

TRAFFIC RAILING - (THRIE-BEAM RETROFIT)


INDEX


SHEET

460-474 1 of 4

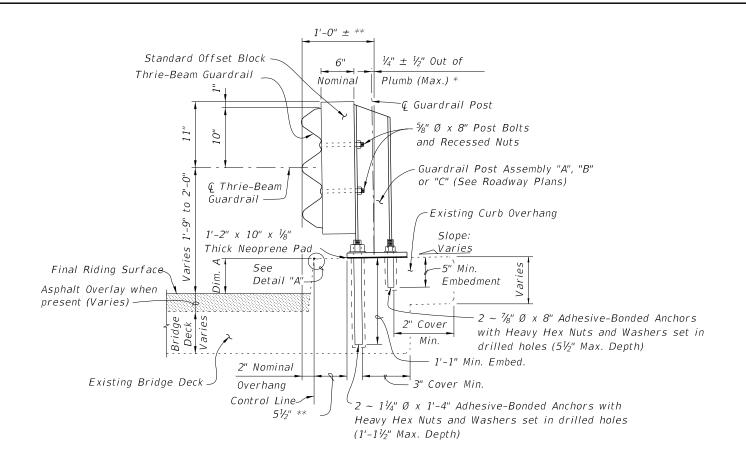


SECTION A-A TYPICAL SECTION THRU RAILING ON BRIDGE DECK






TYPICAL SECTION THRU EXISTING TRAFFIC RAILING SHOWING LIMITS OF REMOVAL (BRIDGE DECK SHOWN, WING WALL SIMILAR)

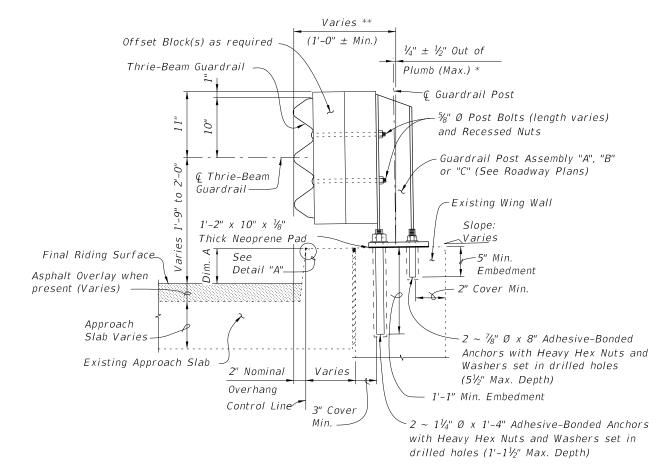

SECTION B-B (SCHEME 2) TYPICAL SECTION THRU RAILING ALONG APPROACH SLAB

 st Shim with washers around Anchor Bolts and Anchors as required to maintain tolerance.

 ** Offset may vary \pm 1" for Adhesive-Bonded Anchors to clear existing curb reinforcing and provide minimum edge clearance. Offset shall be consistent along length of bridge.



DETAIL "A"

CROSS REFERENCES:

For location of Section A-A see Sheet 1 and 3. For location of Section B-B see Sheet 3 For application of Dim. A see Post Dimension Table on Index 460-470, Sheet 3.

07/01/08

DESCRIPTION:


FDOT


FY 2018-19 STANDARD PLANS

TRAFFIC RAILING - (THRIE-BEAM RETROFIT) INTERMEDIATE CURB

INDEX

SHEET 2 of 4

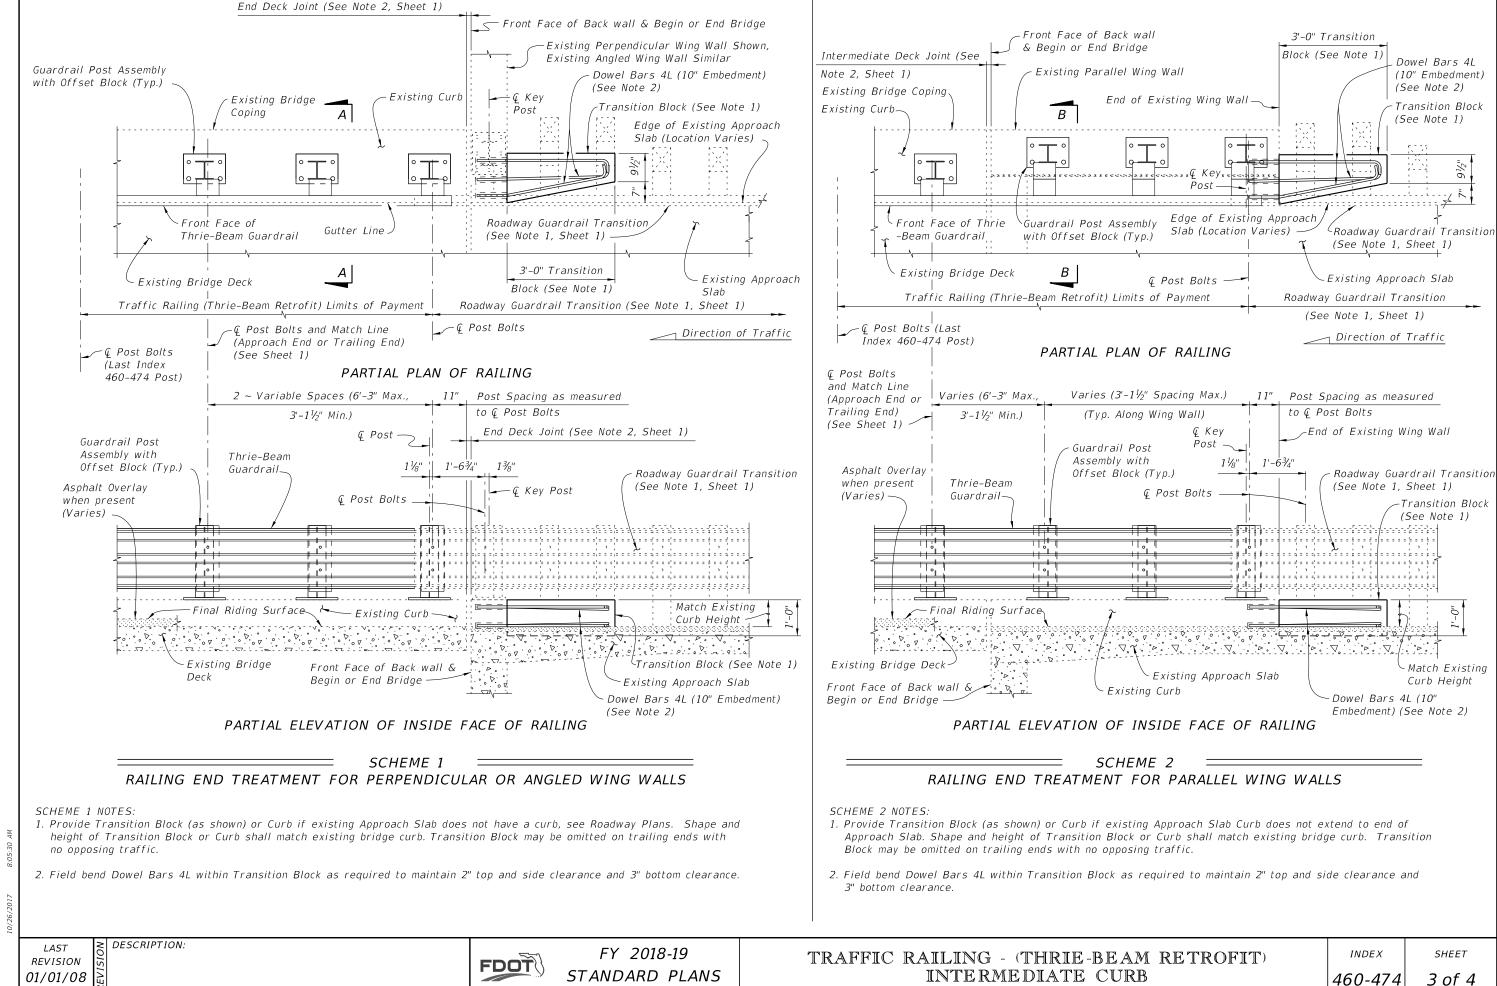

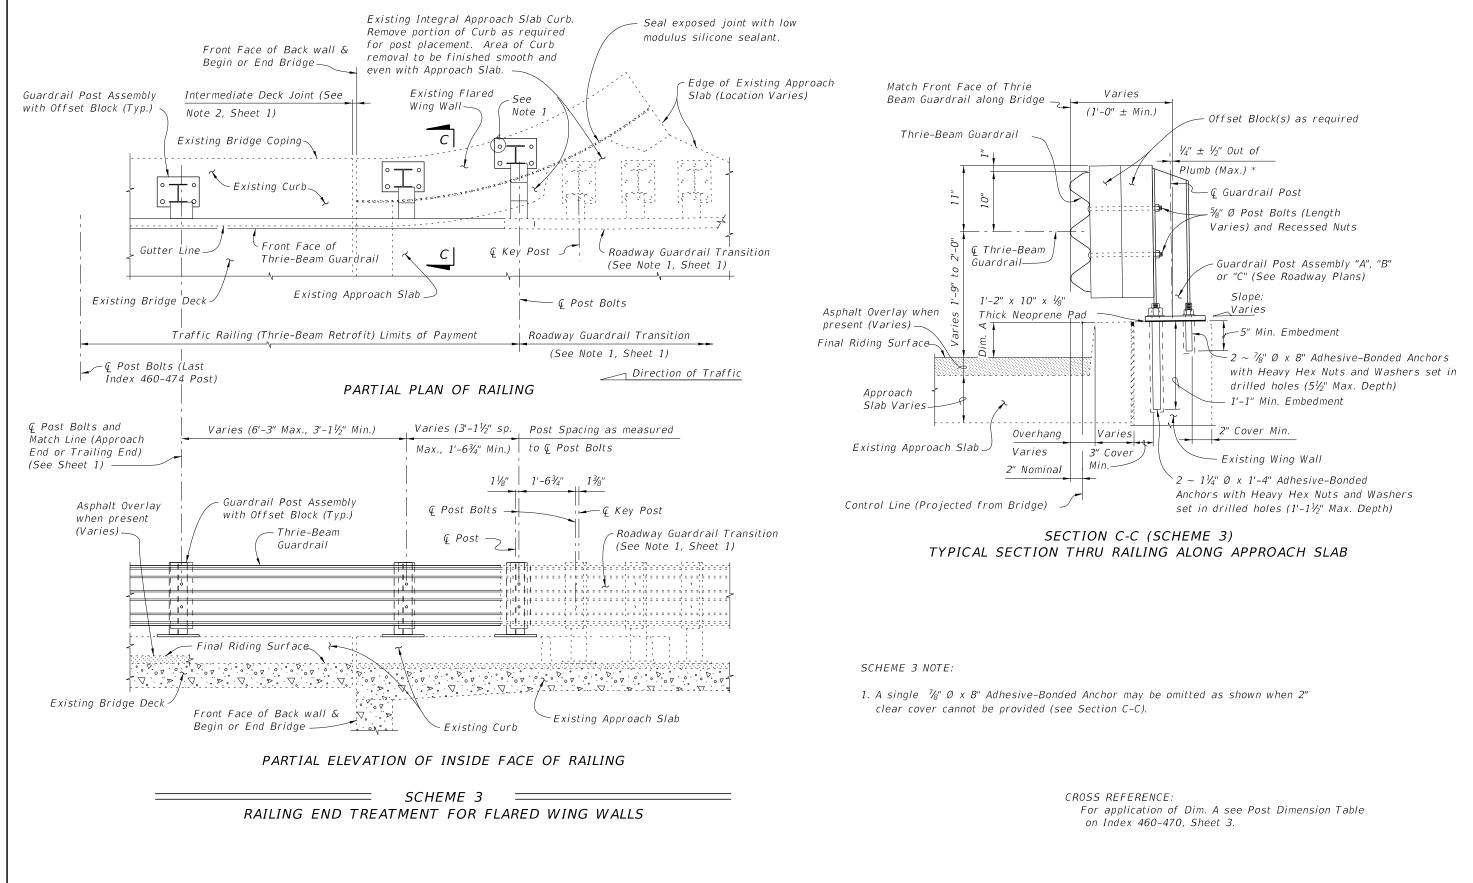

10/26/2017

LAST REVISION 07/01/09 DESCRIPTION:

FDOT