


**STEP 1:** Calculate the area and the centroid for an individual sign or a sign cluster. Note that the centroid and areas have been calculated for frequently used signs. These are shown on Sheets 6, 7, 8 and 9.

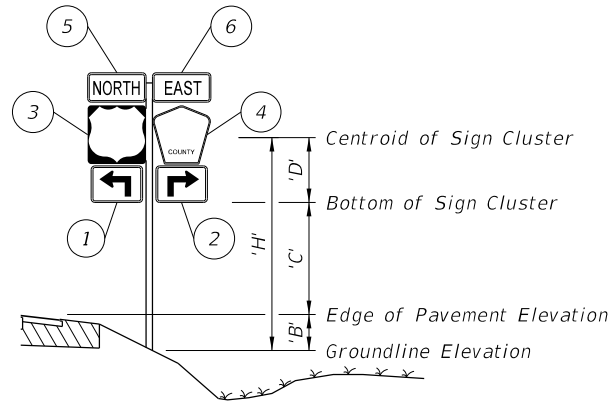

Size H x V	Centroid			'A <sub>n</sub> ' (in. <sup>2</sup> )	'X <sub>n</sub> ' x 'A <sub>n</sub> ' (in. <sup>3</sup> )	'Y <sub>n</sub> ' x 'A <sub>n</sub> ' (in. <sup>3</sup> )
	Local 'Y <sub>n</sub> ' (in.)	Global 'X <sub>n</sub> ' (in.)	Global 'Y <sub>n</sub> ' (in.)			
(1) 21 x 15	7.5	-10.5-1.5-1.5 = -13.5	7.5	315	-4,252.5	2,362.5
(2) 21 x 15	7.5	10.5+1.5+1.5 = 13.5	7.5	315	+4,252.5	2,362.5
(3) 24 x 24	12	-12-1.5 = -13.5	15+1+12 = 28	576	-7,776	16,128
(4) 24 x 24	12	12+1.5 = 13.5	15+1+12 = 28	436	5,886	12,208
(5) 24 x 12	6	-12-1.5 = -13.5	15+1+24+1+6 = 47	288	-3,888	13,536
(6) 24 x 12	6	12+1.5 = 13.5	15+1+24+1+6 = 47	288	3,888	13,536
<b>TOTALS</b>				<b>2,218</b>	<b>-1,890</b>	<b>60,133</b>

$$\Sigma ('A'_n) = 2,218 \text{ in.}^2 = 15.4 \text{ ft.}^2 \quad \Sigma ('X'_n \times 'A'_n) = -1,890 \text{ in.}^3 = -1.09 \text{ ft.}^3 \quad \Sigma ('Y'_n \times 'A'_n) = 60,133 \text{ in.}^3 = 34.8 \text{ ft.}^3$$

$$'X'_c = \frac{\Sigma ('X'_n \times 'A'_n)}{\Sigma 'A'_n} = -0.1 \text{ ft.} \quad 'Y'_c = \frac{\Sigma ('Y'_n \times 'A'_n)}{\Sigma 'A'_n} = 2.26 \text{ ft.}$$

**STEP 2:** Determine the height 'H' from groundline to the centroid of the individual sign or sign cluster.

Assume: 'B' = 1 ft., 'C' = 7 ft.  
 Calculated: X<sub>c</sub> = -0.1 ft., Y<sub>c</sub> = 'D' 2.26 ft.  
 Since X<sub>c</sub> = -0.1 < 6", it is not a cantilever sign, only dark-bold lines in the table will be referenced to.

'H' = 'B' + 'C' + 'D' = 10.26 ft. ==> **USE 11 ft.**    Σ ('A<sub>n</sub>') = 15.4 ft.<sup>2</sup> ==> **USE 16 ft.<sup>2</sup>**

**STEP 3:** Refer to the Aluminum Column (Post) Selection Tables and find the intersection point. See Sheet 3.

TOTAL PANEL AREA (SF)	'H' (FT)												
	8 ft	9 ft	10 ft	11 ft	12 ft	13 ft	14 ft	15 ft	16 ft	17 ft	18 ft	19 ft	20 ft
3 sf	2	2.5	2.5	2.5	3	3	3	3	3.5	3.5	3.5	3.5	3.5
4 sf	2.5	2.5	3	3	3	3	3.5	3.5	3.5	3.5	3.5	3.5	3.5
5 sf	2.5	3	3	3	3.5	3.5	3.5	3.5	3.5	3.5	3.5	4	4
6 sf	3	3	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	4	4	4
7 sf	3	3.5	3.5	3.5	3.5	3.5	3.5	3.5	4	4	4	4	4
8 sf	3.5	3.5	3.5	3.5	3.5	3.5	3.5	4	4	4	4	4	4
9 sf	3.5	3.5	3.5	3.5	3.5	3.5	4	4	4	4	4	4	4
10 sf	3.5	3.5	3.5	3.5	3.5	4	4	4	4	4	4	4.5	4.5
11 sf	3.5	3.5	3.5	3.5	4	4	4	4	4	4	4	4.5	4.5
12 sf	3.5	3.5	3.5	4	4	4	4	4	4	4	4	4.5	4.5
13 sf	3.5	3.5	4	4	4	4	4	4	4	4	4	4.5	4.5
14 sf	3.5	3.5	4	4	4	4	4	4	4	4	4	4.5	4.5
15 sf	3.5	4	4	4	4	4	4	4	4.5	4.5	4.5	5	5
16 sf	3.5	4	4	4	4	4	4	4	4.5	4.5	5	5	5
17 sf	4	4	4	4	4	4	4	4	4.5	4.5	5	5	5
18 sf	4	4	4	4	4	4	4	4	4.5	4.5	5	5	5
19 sf	4	4	4	4	4	4	4	4	4.5	4.5	5	5	5
20 sf	4	4	4	4	4	4	4	4	4.5	4.5	5	5	5
21 sf	4	4	4	4	4	4	4	4	4.5	4.5	5	5	5
22 sf	4	4	4	4	4	4	4	4	4.5	4.5	5	5	5
23 sf	4	4	4	4	4	4	4	4	4.5	4.5	5	5	5
24 sf	4	4	4	4	4	4	4	4	4.5	4.5	5	5	5
25 sf	4	4	4	4	4	4	4	4	4.5	4.5	5	5	5
26 sf	4	4	4	4	4	4	4	4	4.5	4.5	5	5	5
27 sf	4	4	4	4	4	4	4	4	4.5	4.5	5	5	5
28 sf	4	4	4	4	4	4	4	4	4.5	4.5	5	5	5
29 sf	4	4	4	4	4	4	4	4	4.5	4.5	5	5	5
30 sf	4	4	4	4	4	4	4	4	4.5	4.5	5	5	5

For 'H' = 11 ft., Area = 16 ft.<sup>2</sup>

- Refer to the Aluminum Column (Post) Selection Table, as copied from Sheet 3 and shown here.

- To determine the required post size, find the intersection of the row labeled "16 SF" and the column labeled "11 FT". For the example the intersection value is "4" (4" OD).

- In the Column (Post) and Foundation Table, the value "4" concludes that the design requires a 4.0" diameter and 1/4" thick Aluminum Column (Post) and a 2.0' diameter and 3.5' deep Concrete Foundation and 3.0' Stub.

**STEP 4:** For sign assemblies with signs oriented in two directions, only the sign with the largest area should be analyzed to determine the Column (Post) requirements.

SHEET NO.	CONTENTS
1	General Notes and Example
2	Centroid and Height
3	Column and Foundation Tables
4	Slip Base and Foundation Details
5	Driven Post and Soil Plate Details
6	Connection and Wind Beam
7, 8 & 9	Frequently Used Sign Clusters

**GENERAL NOTES:**


- Shop Drawings:  
This Index is considered fully detailed. Submit Shop Drawings for minor modifications not detailed in the Plans.
- Aluminum Sign, Wind Beams and Column (Post) Materials:
  - Aluminum Plates: ASTM B209, Alloy 6061-T6
  - Aluminum Bars and Extruded Shapes: ASTM B221, Alloy 6061-T6
  - Aluminum Structural Shapes: ASTM B308 Alloy 6061-T6
  - Cast Aluminum: ASTM B26 Alloy A356-T6
  - Aluminum Weld Material: ER 5556 or 5356
- Sign Mounting Bolts, Nuts and Washers:
  - Aluminum Button Head and Flat Head Bolts: ASTM F468 Alloy 2024-T4
  - Aluminum Hex Nuts: ASTM F467 Alloy 6061-T6 or 6262-T9
  - Aluminum Washers: ASTM B221, Alloy 7075-T6
- Stainless Steel Bolts, Nuts and Washers may be used in lieu of the Aluminum button head and flat head bolts as follows:
  - Stainless Steel Bolts: ASTM F 593 Alloy Group 2, Condition A, CW1 or SH1
  - Stainless Steel Nuts: ASTM F594
- Sign Column (Post) Bolts, Nuts and Washers:
  - Galvanized U-Bolt (Column): ASTM A449 or ASTM A193 B7 according to ASTM F2329 with nuts and washers
  - Aluminum Bolts (Sleeve): ASTM F468, Alloy 6061-T6 or 2024-T4 with Hex Nuts F467 6061-T6 or 6262-T9 and Washers B221, Alclad 2024-T4
  - Galvanized High Strength Hex Head Bolts (BaseBolts): ASTM F3125, Grade A325, Type 1
  - Galvanized Hex Nuts: ASTM A563 Grade DH
  - Galvanized Washers: ASTM F436
  - Galvanized Bolts (Sleeve): ASTM A307 with Galvanized Hex Nuts and Washers
- Coatings:
  - Aluminum Fasteners: Anodic coating (0.0002 inches min.) and chromate sealed
  - High Strength Steel Bolts Nuts and Washers: ASTM F2329
  - All other steel items (excluding stainless steel): Hot-dip Galvanize - ASTM A123
  - Repair damaged galvanizing in accordance with Specification 562
- BREAKAWAY SUPPORTS REQUIREMENTS: Install non-frangible aluminum column (post) (larger than 3 1/2") with breakaway supports as shown on Sheet 4. Signs shielded by barrier wall or guardrail do not require breakaway support.

**GUIDE TO USE THIS INDEX**

**NOTES AND EXAMPLE**

7/31/2018 6:51:47 AM

LAST REVISION 11/01/17	DESCRIPTION:	FY 2018-19 STANDARD PLANS	SINGLE COLUMN GROUND SIGNS	INDEX 700-010	SHEET 1 of 9
---------------------------	--------------	------------------------------	----------------------------	------------------	-----------------

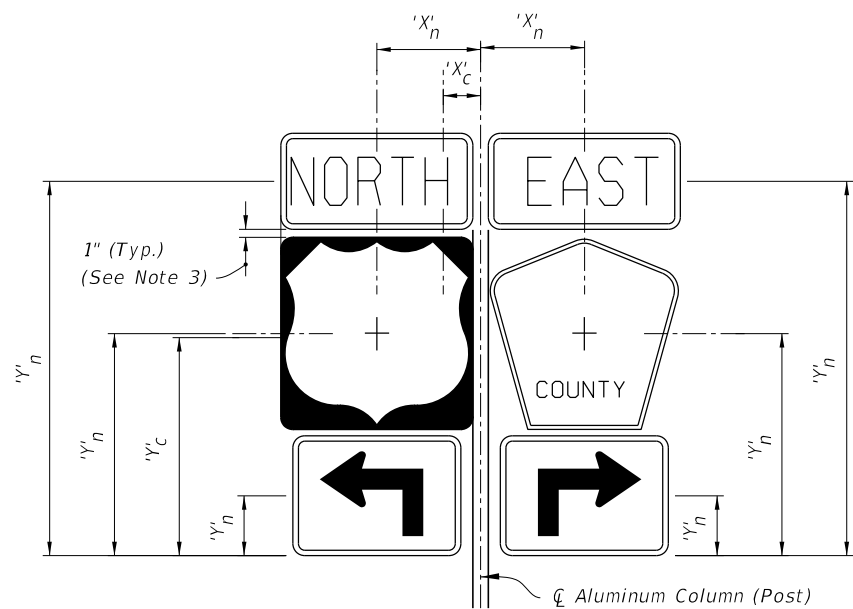

**SIGN CLUSTER**


$$'X'_c = \frac{\sum ('X'_n \times 'A'_n)}{\sum 'A'_n} \quad 'C' = 'Y'_c = \frac{\sum ('Y'_n \times 'A'_n)}{\sum 'A'_n}$$

- 'A'<sub>n</sub> = Area of individual sign
- 'B' = Height of the edge of pavement from the mounting elevation
- 'C' = Height of the the bottom of the sign or cluster from the edge of pavement elevation
- 'D' = Height of the centroid of the sign or cluster from the bottom of the sign or cluster
- h = Individual sign height
- 'H' = Height of sign or cluster centroid from groundline
- a = Individual sign width
- 'X'<sub>c</sub> = Centroid horizontal location of sign or cluster from  $\phi$  Aluminum Column (Post)
- 'Y'<sub>c</sub> = Centroid height of sign or cluster from bottom of sign cluster
- 'X'<sub>n</sub> = Individual sign centroid horizontal location from  $\phi$  Aluminum Column (Post)
- 'Y'<sub>n</sub> = Individual Sign centroid height from bottom of sign cluster


**NOTES:**

1. For 'B' & 'C' see Index 700-101 and Roadway Plans.
2. Do not exceed an area of 30 SF or a width of 60 inches for a sign or a sign cluster, including rotated sign panels.
3. Vertical sign spacing (1" shown on Sign Cluster detail) also applies to rotated signs.


**CALCULATION OF SIGN CLUSTER CENTROID**

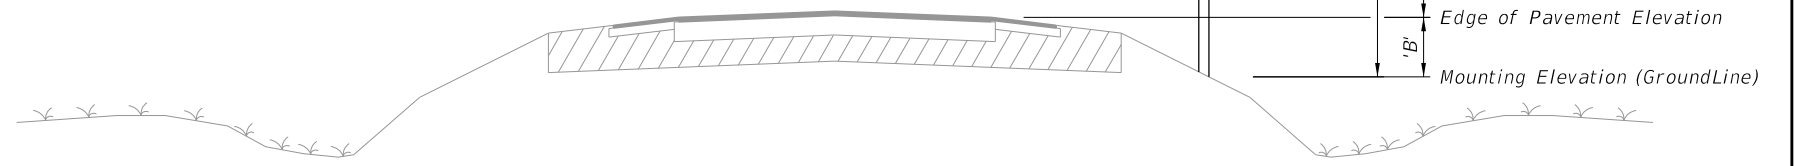


**TYPICAL SECTION**

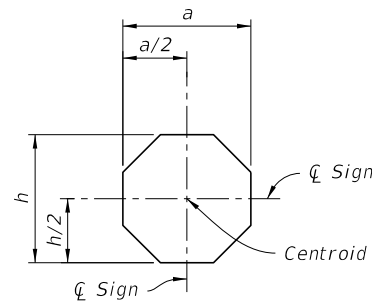


**STOP**

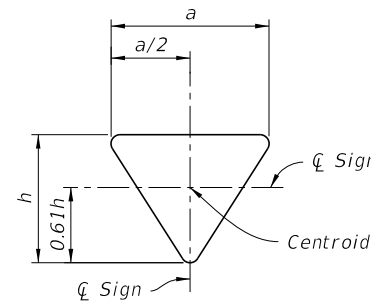


**YIELD**

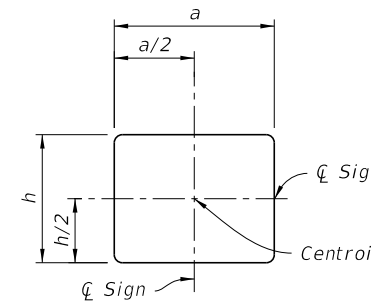


**RECTANGLE**

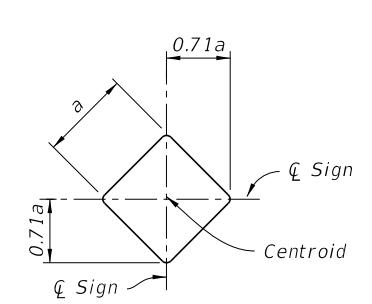


**DIAMOND**

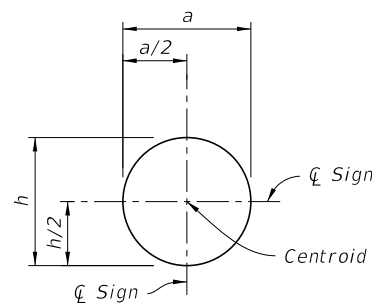


**RAILROAD**

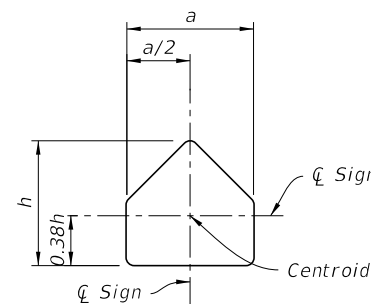

**SCHOOL**

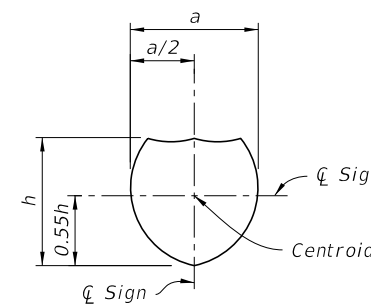

**SHIELD**

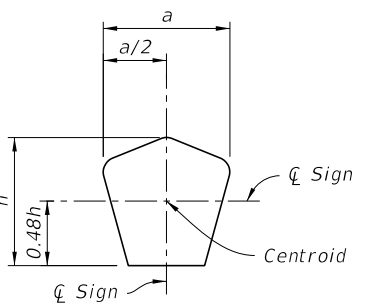

**COUNTY**

**CENTROID AND HEIGHT**

10/27/2017 10:03:05 AM


LAST REVISION 11/01/17	REVISION	DESCRIPTION:		<b>FY 2018-19 STANDARD PLANS</b>	<b>SINGLE COLUMN GROUND SIGNS</b>	INDEX <b>700-010</b>	SHEET <b>2 of 9</b>
---------------------------	----------	--------------	--	--------------------------------------	-----------------------------------	-------------------------	------------------------

ALUMINUM COLUMN (POST) SELECTION TABLE (O.D. in.)

		'H' (FT)																																																																																																																																																																																																																																																																																																																																																																																																																														
		8 ft	9 ft	10 ft	11 ft	12 ft	13 ft	14 ft	15 ft	16 ft	17 ft	18 ft	19 ft	20 ft																																																																																																																																																																																																																																																																																																																																																																																																																		
		TOTAL PANEL AREA (SF)	3 sf	2	2.5	2.5	2.5	3	3	3	3	3.5	3.5	3.5	3.5	3.5	4 sf	2.5	2.5	3	3	3	3	3.5	3.5	3.5	3.5	3.5	3.5	5 sf	2.5	3	3	3	3.5	3.5	3.5	3.5	3.5	3.5	3.5	4	4	6 sf	3	3	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	4	4	4	7 sf	3	3.5	3.5	3.5	3.5	3.5	3.5	3.5	4	4	4	4	4	4	8 sf	3.5	3.5	3.5	3.5	3.5	3.5	3.5	4	4	4	4	4	4	4	9 sf	3.5	3.5	3.5	3.5	3.5	3.5	4	4	4	4	4	4	4	4	10 sf	3.5	3.5	3.5	3.5	3.5	4	4	4	4	4	4	4	4.5	4.5	11 sf	3.5	3.5	3.5	3.5	4	4	4	4	4	4	4	4.5	4.5	4.5	12 sf	3.5	3.5	3.5	4	4	4	4	4	4	4	4	4.5	4.5	4.5	13 sf	3.5	3.5	4	4	4	4	4	4	4	4	4.5	4.5	4.5	5	14 sf	3.5	3.5	4	4	4	4	4	4	4	4.5	4.5	4.5	5	5	15 sf	3.5	4	4	4	4	4	4	4	4.5	4.5	4.5	5	5	5	16 sf	3.5	4	4	4	4	4	4	4	4.5	4.5	5	5	5	6	17 sf	4	4	4	4	4	4	4.5	4.5	4.5	5	5	6	6	6	18 sf	4	4	4	4	4	4.5	4.5	4.5	5	5	5	6	6	6	19 sf	4	4	4	4	4	4.5	4.5	4.5	5	5	6	6	6	6	20 sf	4	4	4	4	4.5	4.5	4.5	5	5	5	6	6	6	6	21 sf	4	4	4	4	4.5	4.5	5	5	5	6	6	6	6	6	22 sf	4	4	4	4.5	4.5	4.5	5	5	6	6	6	6	6	6	23 sf	4	4	4	4.5	4.5	5	5	5	6	6	6	6	6	6	24 sf	4	4	4.5	4.5	4.5	5	5	6	6	6	6	6	6	6	25 sf	4	4	4.5	4.5	5	5	5	6	6	6	6	6	6	8	26 sf	4	4.5	4.5	4.5	5	5	5	6	6	6	6	6	8	8	27 sf	4	4.5	4.5	4.5	5	5	6	6	6	6	6	6	8	8	28 sf	4	4.5	4.5	5	5	5	6	6	6	6	6	6	8	8	29 sf	4.5	4.5	4.5	5	5	6	6	6	6	6	6	8	8	8	30 sf	4.5	4.5	5	5	5	6	6	6	6	6	6	8

COLUMN (POST) AND FOUNDATION TABLE						
Column (Post) Size		Foundation Alternatives				
		Driven Post *		Concrete (Class I)		
Outside Diameter (in)	Wall Thk. (in)	Embedment Depth (ft)		Diameter (ft)	Embedment Depth (ft)	Stub Length (ft)
		without Soil Plate	with Soil Plate			
2.0	1/8	4.5	2.5	---	---	---
2.5	1/8	5.0	3.0	---	---	---
3.0	1/8	5.0	3.5	---	---	---
3.5	3/16	6.0	4.5	---	---	---
4.0	1/4	---	---	2.0	3.5	3.0
4.5	1/4	---	---	2.0	4.0	3.0
5.0	1/4	---	---	2.0	4.5	3.0
6.0	1/4	---	---	2.0	5.0	3.0
8.0	5/16	---	---	2.0	5.5	3.0

\* INSTALLING FRANGIBLE COLUMN SUPPORTS:  
 Columns (posts) 3 1/2" O.D. and less are frangible. Frangible columns may be installed by driving the post or the posts may be set in preformed holes. Backfill preformed holes with suitable material tamped in layers not thicker than 6" (to provide adequate compaction) or filled with flowable fill or bagged concrete.


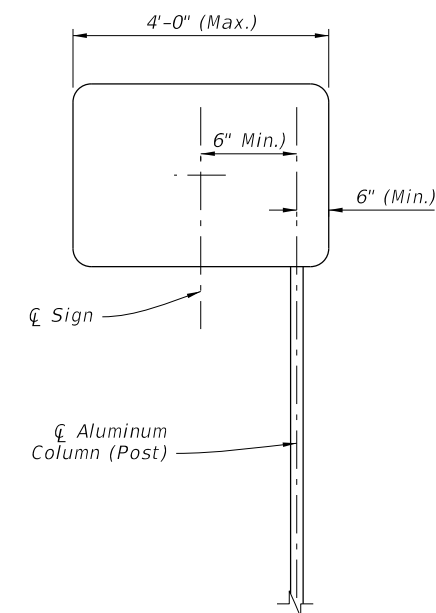


CANTILEVER SIGN


- NOTE:
1. For cantilever sign installations see Index 700-101.
  2. For cantilever signs with widths greater than 4' see Index 700-011.
  3. Use of driven post for cantilever sign in not permitted.

COLUMN AND FOUNDATION TABLES


10/27/2017 10:03:06 AM

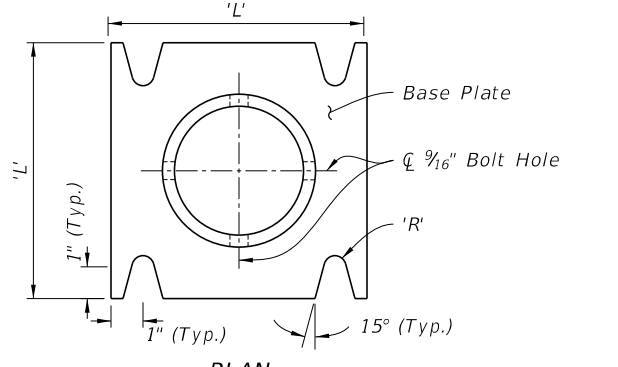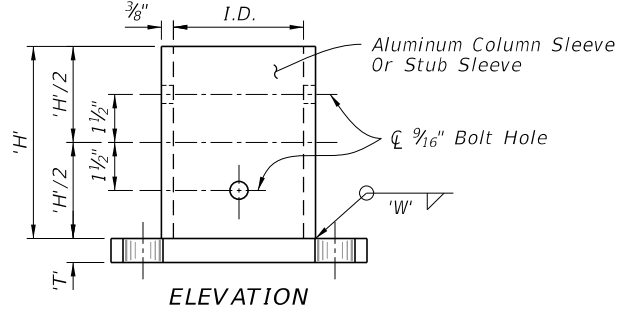


**STUB/SLEEVE & BASE PLATE DETAILS**  
(Welded Or Sandcast)

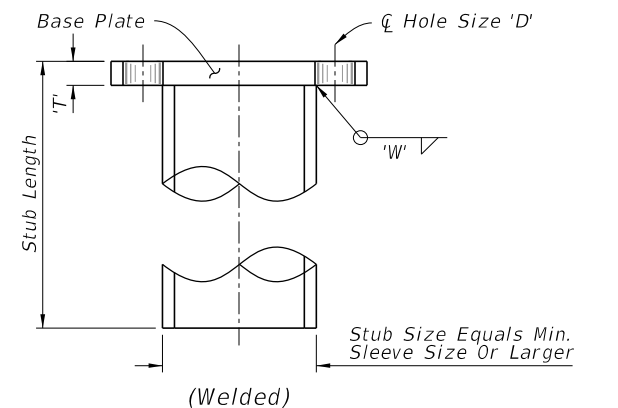

**STUB DETAIL**

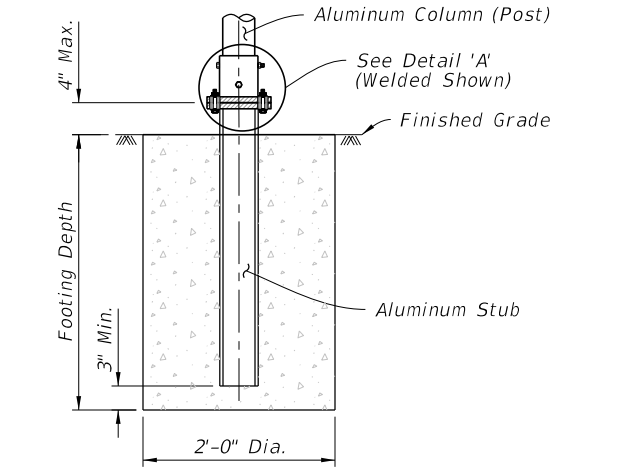


**SLIP BASE AND FOUNDATION DETAIL**  
(Non-Frangible Column, Typ.)

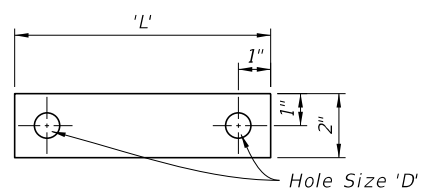


**BOLT KEEPER PLATE DETAIL**

28 Ga. Thick Aluminum Strip  
2 Req. Per Base

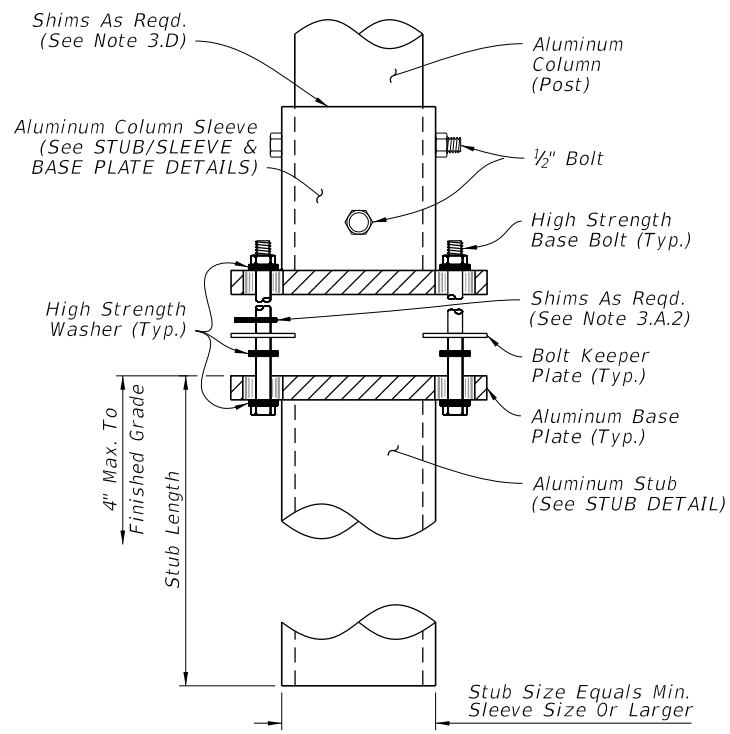


**WELDED STUB BASE**

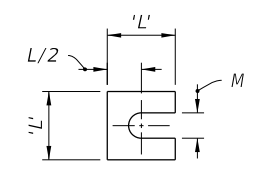


**SHIM DETAIL**

Provide 2~0.0149" Thick (28 gauge)  
and 2~0.0329" Thick (21 gauge)  
Brass Shims Per Post

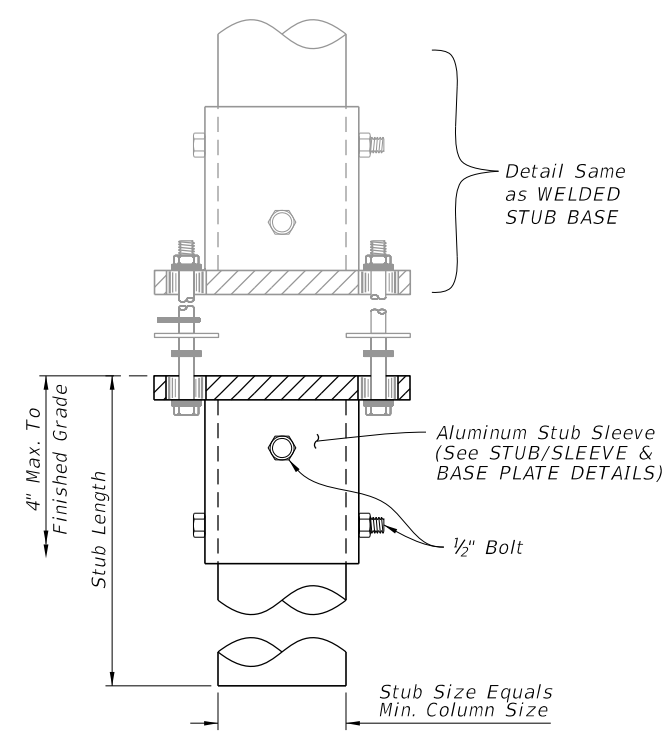

**BOLTED STUB/SLEEVE BASE**

**DETAIL 'A'**

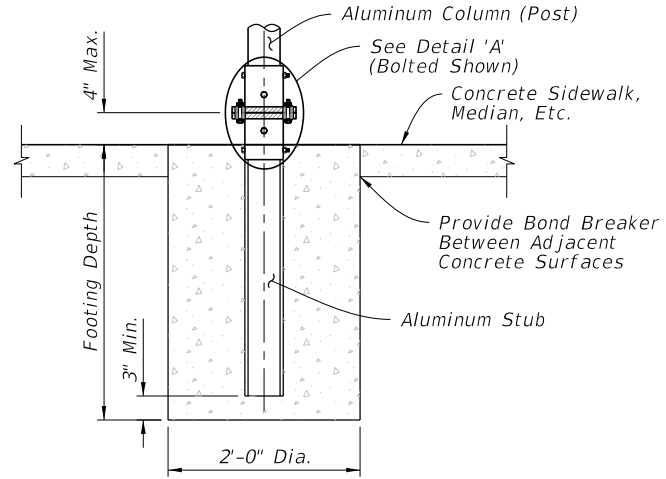

**SLIP BASE AND FOUNDATION DETAIL IN CONCRETE**  
(Non-Frangible Column In Crossovers, Medians & Sidewalks)

**NOTES:**

- Foundation Notes for Frangible Slip Base:**
  - Place Stub into concrete to diameter and depth shown in POST AND FOUNDATION TABLE using Class 1 Concrete.
- Slip Base Fabrication Notes:**
  - The difference between the O.D. of the post and I.D. of the Sleeve must be 1/16" or less.
  - Either a Welded Stub Base or Bolted Stub/Sleeve Base may be used to fabricate the Slip Base.
  - For cast base plates bolted to foundation stubs, use a foundation stub the same size as the sign column (Post).
- Slip-Base Assembly Instructions:**
  - Assemble Slip Base connections in the following manner:
    - Insert Post into Sleeve and connect using 2 ~ 1/2" diameter Sleeve Bolts.
    - Assemble top base plate to bottom Base Plate using Base Bolts (High strength) with 3 washers per bolt. (See Detail 'A'):
      - Place one washer on each Base Bolt between the bottom Base Plate and the Base Bolt head.
      - Place the next washer between the Bottom Base Plate and the Bolt Keeper Plate.
      - Use brass shims to plumb the post.
      - Add the top base plate section.
      - Place the third washer between the Top Base Plate and the Nut.
  - Orient the Bolt Keeper Plates in the Direction of Traffic.
  - Tighten Base Bolts as follows:
    - Tighten Base Bolts to the maximum possible with a 12" to 15" wrench (this will bed the washers and shims and clear the bolt threads).
    - Loosen each Base Bolt one turn.
    - Under the supervision of the Engineer, use a calibrated wrench to tighten bolts to the torque prescribed in the SLIP BASE DETAILS Table. Over tightened Base Bolts are not permitted.
    - Distort bolt threads at the junction with nuts to prevent loosening. Repair damaged galvanizing.
  - Obtain a tight sleeve connection by placing 4 galvanized steel shims between the column (post) and sleeve. Space the shims evenly around the perimeter of the column (1 between each bolt hole, 4 total). Use shims that are 1" shorter than the height of the sleeve.

Column (Post) Size		SLIP BASE DETAILS												
Outside Dia.	Wall Thickness	Sleeve I.D. (Max.)	Sleeve Height 'H'	Weld 'W'	Base Plate		Radius 'R'	Base Bolt		Base Plate Torque		Hole Size 'D'	SHIM	
					'L'	'T'		Size	Length	ft.-lbs	in.-lbs		L	M
4"	1/4"	4 1/16"	6"	5/8"	8"	3/4"	1 1/32"	5/8"	3"	29	345	1 1/16"	1 3/8"	1 1/16"
4 1/2"	1/4"	4 7/16"	6"	5/8"	8"	7/8"	1 1/32"	5/8"	3 1/4"	29	345	1 1/16"	1 3/8"	1 1/16"
5"	1/4"	5 1/16"	7"	5/8"	8"	7/8"	1 1/32"	5/8"	3 1/4"	29	345	1 1/16"	1 3/8"	1 1/16"
6"	1/4"	6 1/16"	8"	3/4"	9"	1"	1 3/32"	3/4"	3 1/2"	46	554	1 3/16"	1 3/4"	1 3/16"
8"	5/16"	8 1/16"	10"	3/4"	11"	1"	1 5/32"	7/8"	3 3/4"	53	640	1 5/16"	2 3/8"	1 1/16"

**SLIP BASE AND FOUNDATION DETAILS**


10/27/2017 10:03:08 AM

LAST REVISION	DESCRIPTION:
11/01/17	

**FY 2018-19**  
**STANDARD PLANS**


**SINGLE COLUMN GROUND SIGNS**

INDEX	SHEET
700-010	4 of 9




Optional Slotted Holes


DETAIL "B"

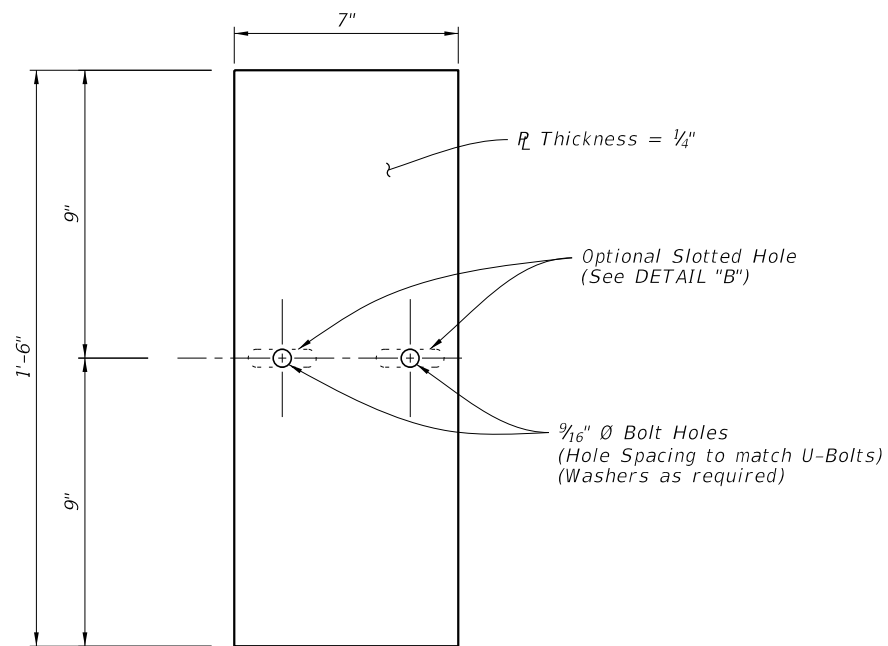

ALUMINUM SOIL PLATE DETAIL

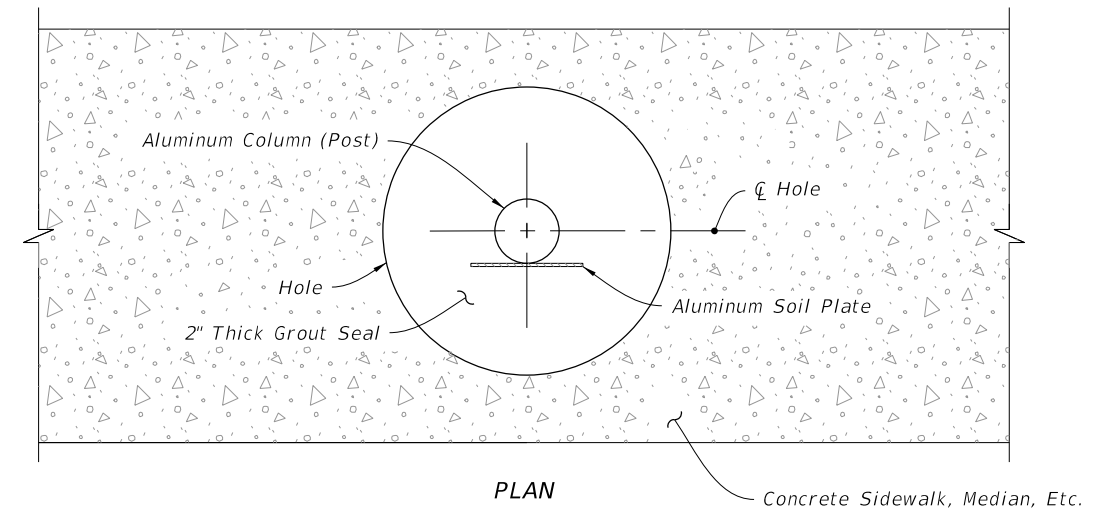

PLAN

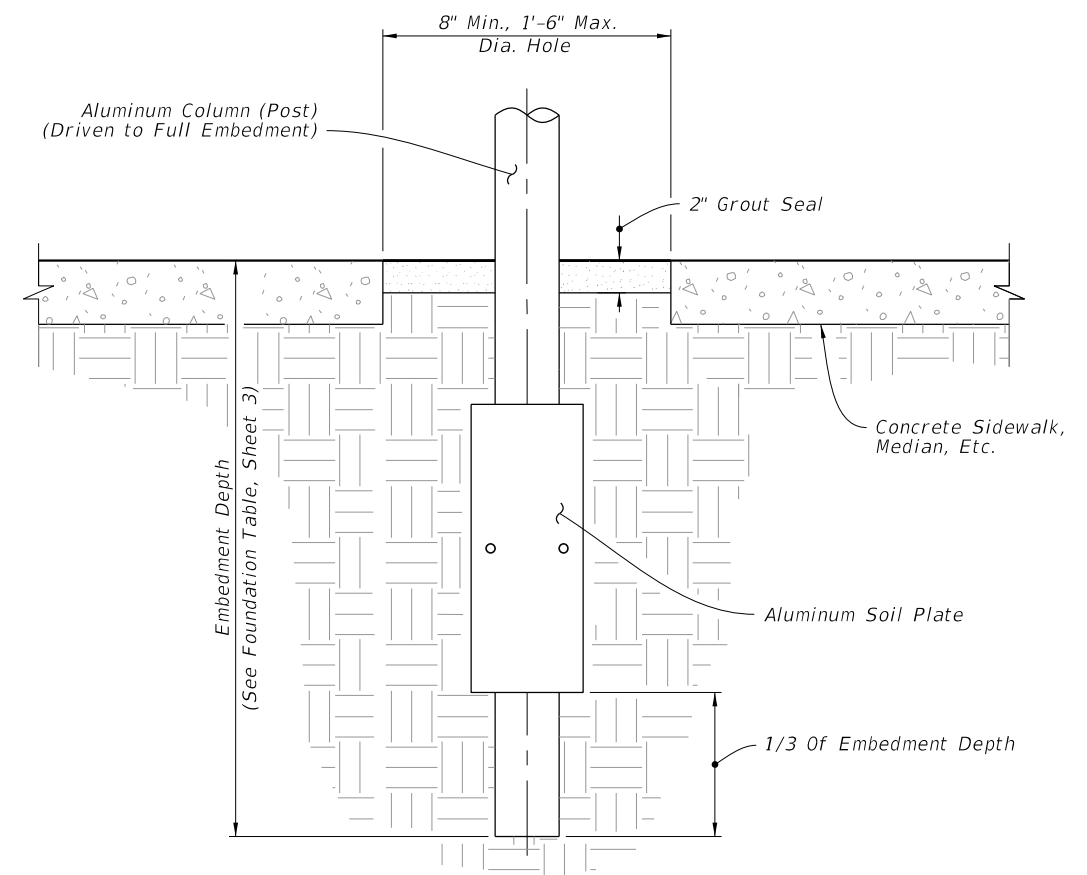

ELEVATION

DRIVEN POST DETAIL

(Frangible Post In Crossovers, Medians & Sidewalks)

DRIVEN POST AND SOIL PLATE DETAIL

10/27/2017 10:03:09 AM

LAST REVISION 11/01/17	REVISION	DESCRIPTION:
---------------------------	----------	--------------




FY 2018-19  
STANDARD PLANS

SINGLE COLUMN GROUND SIGNS

INDEX  
700-010

SHEET  
5 of 9

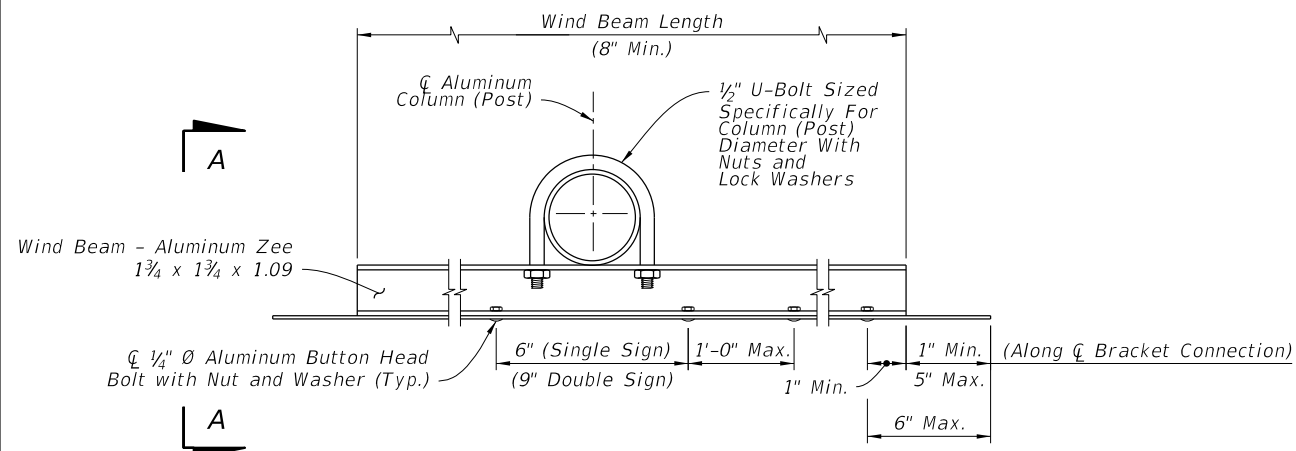



**WIND BEAM CONNECTION NOTES:**

1. 5/16" Ø Stainless Steel Hex Head Bolts with Flat Washer under Head and Lockwasher under Nut may be used in lieu of 1/4" Ø Aluminum Button Head Bolts.
2. Use Nylon washers (provided by the sheeting supplier) under the button bolt heads to protect sign sheeting.
3. Slots up to 2" long are allowed in wind beams to accommodate U-Bolts for varying Column (Post) diameters.
4. Wind beams may be oriented in either direction.

BRACKET DETAIL

WIND BEAM CONNECTIONS DETAILS


SECTION A-A

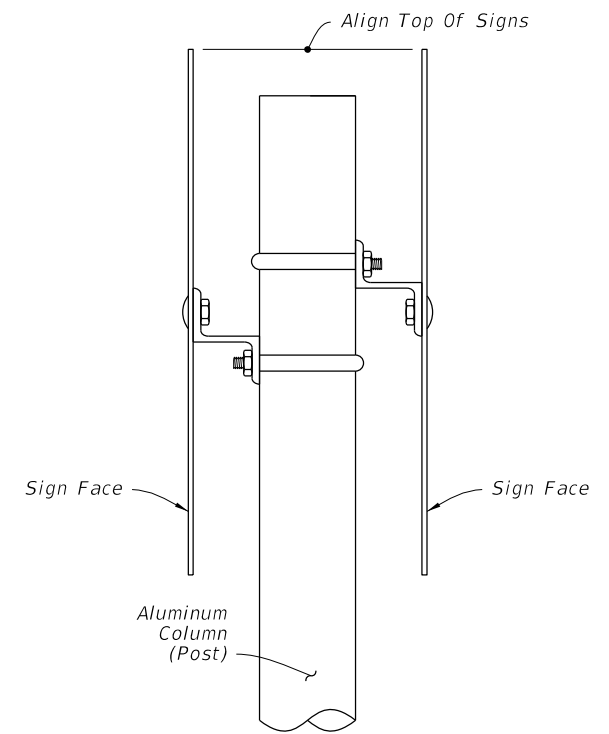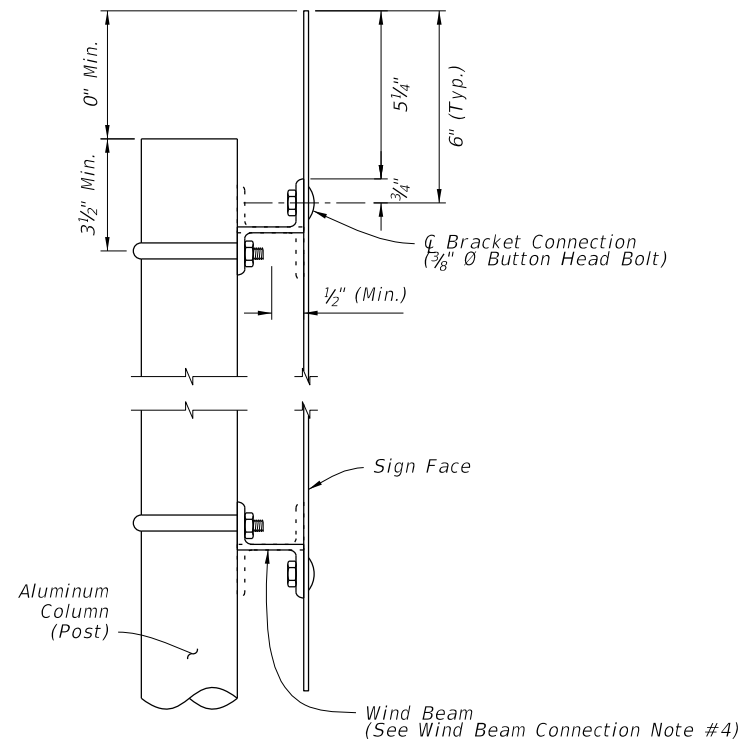


**BACK-TO-BACK SIGN NOTE:**

Use the area and the centroid location of the largest sign to determine aluminum column (post) size.


BACK-TO-BACK SIGN DETAIL

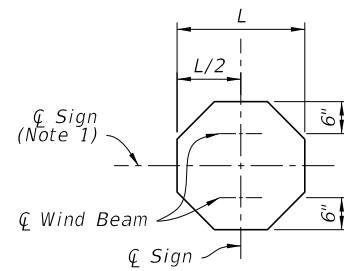


STOP

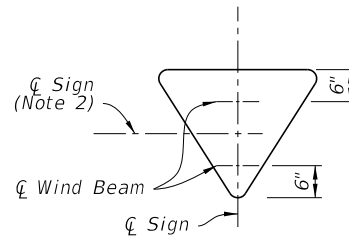


YIELD

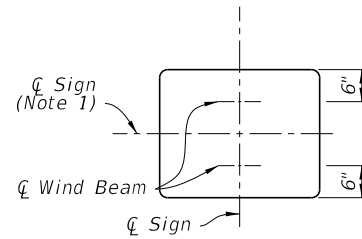


RECTANGLE

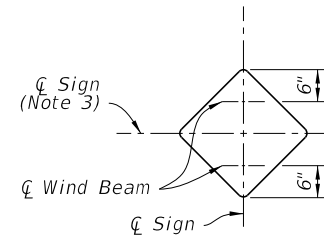


DIAMOND

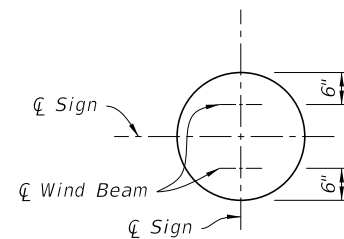


RAILROAD

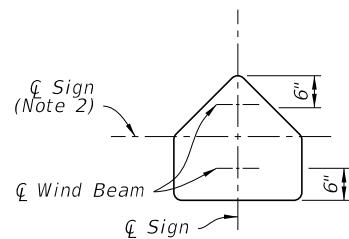

SCHOOL

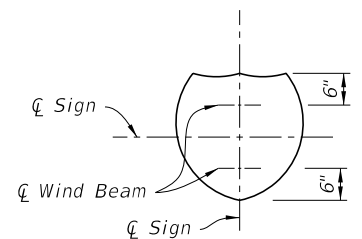

SHIELD

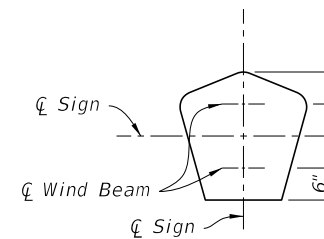

COUNTY

WIND BEAM PLACEMENT DETAILS

**WIND BEAM PLACEMENT NOTES:**

1. Install an additional third wind beam along the centerline for signs with heights greater than 30" and less than 72". For rectangular signs greater than 72" maintain a maximum wind beam spacing of 2'-6", with the additional wind beams spaced evenly between the top and bottom wind beams. For rectangular signs up to 12" in height, use only one wind beam at centerline.
2. Install an additional third wind beam along the centerline for Yield and School signs greater than 36".
3. Install an additional third wind beam along the centerline for Diamond signs 30" or greater.

CONNECTION AND WIND BEAMS

10:03:09 AM  
10/27/2017

LAST REVISION 11/01/17	DESCRIPTION:
---------------------------	--------------

















FY 2018-19  
STANDARD PLANS




















SINGLE COLUMN GROUND SIGNS
























INDEX  
700-010

SHEET  
6 of 9

10/27/2017 10:03:10 AM

	Size	Area	Total Area	Centroid
 	36x12	3.00 SF	6.31 SF	1.75 Ft.
	24x24	3.31 SF		
	Size	Area	Total Area	Centroid
 	36x12	3.00 SF	8.18 SF	1.92 Ft.
	30x30	5.18 SF		
	Size	Area	Total Area	Centroid
 	36x12	3.00 SF	10.46 SF	2.10 Ft.
	36x36	7.46 SF		
	Size	Area	Total Area	Centroid
 	36x12	3.00 SF	16.25 SF	2.48 Ft.
	48x48	13.25 SF		
	Size	Area	Total Area	Centroid
 	24x24	3.31 SF	6.31 SF	1.71 Ft.
	24x18	3.00 SF		
	Size	Area	Total Area	Centroid
 	30x30	5.18 SF	10.18 SF	2.19 Ft.
	30x24	5.00 SF		
	Size	Area	Total Area	Centroid
 	36x36	7.46 SF	12.46 SF	2.55 Ft.
	30x24	5.00 SF		

	Size	Area	Total Area	Centroid
  	36x12	3.00 SF	13.18 SF	2.87 Ft.
	30x30	5.18 SF		
	30x24	5.00 SF		
	Size	Area	Total Area	Centroid
  	36x12	3.00 SF	15.46 SF	3.15 Ft.
	36x36	7.46 SF		
	30x24	5.00 SF		
	Size	Area	Total Area	Centroid
 	21x15	2.19 SF	6.19 SF	1.60 Ft.
	24x24	4.00 SF		
	Size	Area	Total Area	Centroid
 	21x15	2.19 SF	7.19 SF	1.52 Ft.
	30x24	5.00 SF		
	Size	Area	Total Area	Centroid
  	24x12	2.00 SF	6.00 SF	1.53 Ft.
	24x24	4.00 SF		
	Size	Area	Total Area	Centroid
  	24x12	2.00 SF	7.00 SF	1.45 Ft.
	30x24	5.00 SF		
	Size	Area	Total Area	Centroid
  	30x15	3.13 SF	8.13 SF	1.66 Ft.
	30x24	5.00 SF		

	Size	Area	Total Area	Centroid
 	24x24	4.00 SF	6.19 SF	1.73 Ft.
	21x15	2.19 SF		
	Size	Area	Total Area	Centroid
 	30x24	5.00 SF	7.19 SF	1.81 Ft.
	21x15	2.19 SF		
	Size	Area	Total Area	Centroid
    	24x12	2.00 SF	8.19 SF	2.26 Ft.
	24x24	4.00 SF		
	Size	Area	Total Area	Centroid
    	24x12	2.00 SF	9.19 SF	2.27 Ft.
	30x24	5.00 SF		
	Size	Area	Total Area	Centroid
    	30x15	3.13 SF	10.32 SF	2.49 Ft.
	30x24	5.00 SF		
	Size	Area	Total Area	Centroid
   	24x12	2.00 SF	10.19 SF	2.80 Ft.
	24x12	2.00 SF		
	24x24	4.00 SF		
	21x15	2.19 SF		

LAST REVISION 11/01/17

DESCRIPTION:








FY 2018-19 STANDARD PLANS






SINGLE COLUMN GROUND SIGNS








INDEX 700-010

SHEET 7 of 9

10/27/2017 10:03:10 AM

	Size	Area	Total Area	Centroid
	24x12	2.00 SF	11.19 SF	2.76 Ft.
	24x12	2.00 SF		
	30x24	5.00 SF		
	21x15	2.19 SF		
Size	Area	Total Area	Centroid	
	30x15	3.13 SF	13.45 SF	3.16 Ft.
	30x15	3.13 SF		
	30x24	5.00 SF		
	21x15	2.19 SF		
Size	Area	Total Area	Centroid	
	21x15	2.19 SF	3.90 SF	1.57 Ft.
	18x18	1.71 SF		
	Size	Area		
	21x15	2.19 SF	5.22 SF	1.72 Ft.
	24x24	3.03 SF		
	Size	Area		
	21x15	2.19 SF	6.95 SF	1.87 Ft.
	30x30	4.76 SF		

	Size	Area	Total Area	Centroid
	18x18	1.71 SF	3.90 SF	1.26 Ft.
	21x15	2.19 SF		
	Size	Area		
	24x24	3.03 SF	5.22 SF	1.62 Ft.
	21x15	2.19 SF		
	Size	Area		
	30x30	4.76 SF	6.95 SF	1.97 Ft.
	21x15	2.19 SF		
	Size	Area		
	24x12	2.00 SF	9.39 SF	2.87 Ft.
	24x12	2.00 SF		
	24x24	3.20 SF		
	21x15	2.19 SF		
	Size	Area		
	24x12	2.00 SF	10.18 SF	2.84 Ft.
	24x12	2.00 SF		
	30x24	3.99 SF		
	21x15	2.19 SF		

	Size	Area	Total Area	Centroid
	30x15	3.13 SF	12.44 SF	3.26 Ft.
	30x15	3.13 SF		
	30x24	3.99 SF		
	21x15	2.19 SF		
Size	Area	Total Area	Centroid	
	21x15	2.19 SF	5.39 SF	1.75 Ft.
	24x24	3.20 SF		
	Size	Area		
	21x15	2.19 SF	6.18 SF	1.67 Ft.
	30x24	3.99 SF		
	Size	Area		
	24x12	2.00 SF	5.20 SF	1.67 Ft.
	24x24	3.20 SF		
	Size	Area		
	24x12	2.00 SF	5.99 SF	1.60 Ft.
	30x24	3.99 SF		
	Size	Area		
	30x15	3.13 SF	7.12 SF	1.81 Ft.
	30x24	3.99 SF		
	Size	Area		
	30x15	3.13 SF	10.33 SF	2.27 Ft.
	36x36	7.20 SF		

LAST REVISION 11/01/17

REVISION DESCRIPTION:



FY 2018-19 STANDARD PLANS

SINGLE COLUMN GROUND SIGNS

INDEX 700-010

SHEET 8 of 9



10/27/2017 10:03:11 AM

Size	Area	Total Area	Centroid
30x15	3.13 SF	12.12 SF	2.18 Ft.
45x36	8.99 SF		
Size	Area	Total Area	Centroid
24x12	2.00 SF	7.39 SF	2.30 Ft.
24x24	3.20 SF		
21x15	2.19 SF		
Size	Area	Total Area	Centroid
24x12	2.00 SF	8.18 SF	2.31 Ft.
30x24	3.99 SF		
21x15	2.19 SF		
Size	Area	Total Area	Centroid
30x15	3.13 SF	9.31 SF	2.55 Ft.
30x24	3.99 SF		
21x15	2.19 SF		
Size	Area	Total Area	Centroid
30x30	4.69 SF	6.69 SF	1.61 Ft.
24x12	2.00 SF		
Size	Area	Total Area	Centroid
30x30	4.69 SF	8.44 SF	1.77 Ft.
30x18	3.75 SF		
Size	Area	Total Area	Centroid
36x36	6.75 SF	10.50 SF	2.06 Ft.
30x18	3.75 SF		
Size	Area	Total Area	Centroid
30x30	6.25 SF	8.25 SF	2.28 Ft.
24x12	2.00 SF		
Size	Area	Total Area	Centroid
36x36	9.00 SF	12.75 SF	2.84 Ft.
30x18	3.75 SF		
Size	Area	Total Area	Centroid
30x30	6.25 SF	10.25 SF	2.74 Ft.
24x24	4.00 SF		
Size	Area	Total Area	Centroid
36x36	9.00 SF	15.25 SF	3.29 Ft.
30x30	6.25 SF		

Size	Area	Total Area	Centroid
30X30	4.69 SF	6.69 SF	1.61 Ft.
24X12	2.00 SF		
Size	Area	Total Area	Centroid
30X30	4.69 SF	8.44 SF	1.77 Ft.
30X18	3.75 SF		
Size	Area	Total Area	Centroid
36X36	6.75 SF	10.50 SF	2.06 Ft.
30X18	3.75 SF		
Size	Area	Total Area	Centroid
30X30	6.25 SF	8.25 SF	2.28 Ft.
24X12	2.00 SF		
Size	Area	Total Area	Centroid
36X36	9.00 SF	12.75 SF	2.84 Ft.
30X18	3.75 SF		
Size	Area	Total Area	Centroid
30X30	6.25 SF	10.25 SF	2.74 Ft.
24X24	4.00 SF		
Size	Area	Total Area	Centroid
36X36	9.00 SF	15.25 SF	3.29 Ft.
30X30	6.25 SF		

Size	Area	Total Area	Centroid
30X30	6.25 SF	9.25 SF	2.51 Ft.
24X18	3.00 SF		
Size	Area	Total Area	Centroid
36X36	9.00 SF	14.00 SF	3.06 Ft.
30X24	5.00 SF		

LAST REVISION 11/01/17	DESCRIPTION:
---------------------------	--------------