

COMPONENTS OF CONTRACT PLANS SET

- ROADWAY PLANS
- SIGNING AND PAVEMENT MARKING PLANS
- SIGNALIZATION PLANS
- INTELLIGENT TRANSPORTATION SYSTEMS PLANS
- LIGHTING PLANS
- LANDSCAPE PLANS
- ARCHITECTURAL PLANS
- STRUCTURE PLANS

A DETAILED INDEX APPEARS ON THE KEY SHEET OF EACH COMPONENT

INDEX OF ROADWAY PLANS

SHEET NO.	SHEET DESCRIPTION
1	KEY SHEET
2-2A	SUMMARY OF PAY ITEMS
3	DRAINAGE MAP
4-5	TYPICAL SECTIONS
6	TYPICAL SECTION DETAILS
7	SUMMARY OF QUANTITIES
8-9	SUMMARY OF DRAINAGE STRUCTURES
10	PROJECT LAYOUT
11-15	ROADWAY PLAN-PROFILES
16-17	SPECIAL PROFILES
18	INTERSECTION LAYOUT/DETAIL
19-25	DRAINAGE STRUCTURES
26-32	BOX CULVERT DETAILS
33	LATERAL DITCH PLAN-PROFILES
34	LATERAL DITCH CROSS SECTIONS
35	SPECIAL DETAILS
36	ROADWAY SOIL SURVEY
37-47	CROSS SECTIONS
48	STORMWATER POLLUTION PREVENTION PLAN
49-52	TRAFFIC CONTROL PLANS
53-57	UTILITY ADJUSTMENTS
58-62	SELECTIVE CLEARING AND GRUBBING

GOVERNING STANDARDS AND SPECIFICATIONS:
FLORIDA DEPARTMENT OF TRANSPORTATION,
DESIGN STANDARDS DATED 2008,
AND STANDARD SPECIFICATIONS FOR ROAD AND
BRIDGE CONSTRUCTION DATED 2010,
AS AMENDED BY CONTRACT DOCUMENTS.

APPLICABLE DESIGN STANDARDS MODIFICATIONS: I-I-II

For Design Standards Modifications click on
"Design Standards" at the following web sites:
<http://www.dot.state.fl.us/rddesign/>


REVISIONS

- FINANCIAL PROJECT ID 000001-I-52-01
- ▲ Roadway Sheets 1, 6, 7 & 13 (Revised 01-10-09)
 - ▲ Signing & Pavement Marking Sheets S-2 & S-3 (Revised 3-10-09)
 - ▲ Signalization Sheets T-1 & T-2 (Revised 3-10-09)
 - ▲ Roadway Sheets 14 & 33 (Revised 3-31-09)
 - Summary Of Pay Items (Revised 3-31-09)
- FINANCIAL PROJECT ID 000002-I-52-02
- ▲ Roadway Sheets 1, 8 & 10 (Revised 1-30-09)
 - Structure Sheets B-1 & C-1 thru C-10 (Revised 1-30-09)


**STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION**

CONTRACT PLANS

FINANCIAL PROJECT ID 000001-I-52-01
(FEDERAL FUNDS)
BAY COUNTY (46001)
STATE ROAD NO. 220

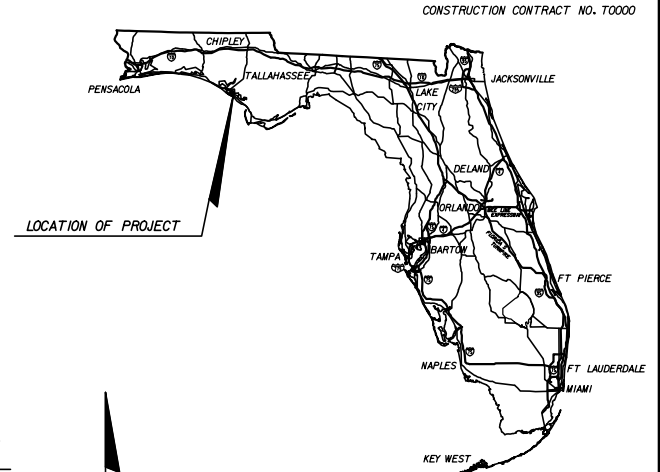

LOCATION OF PROJECT

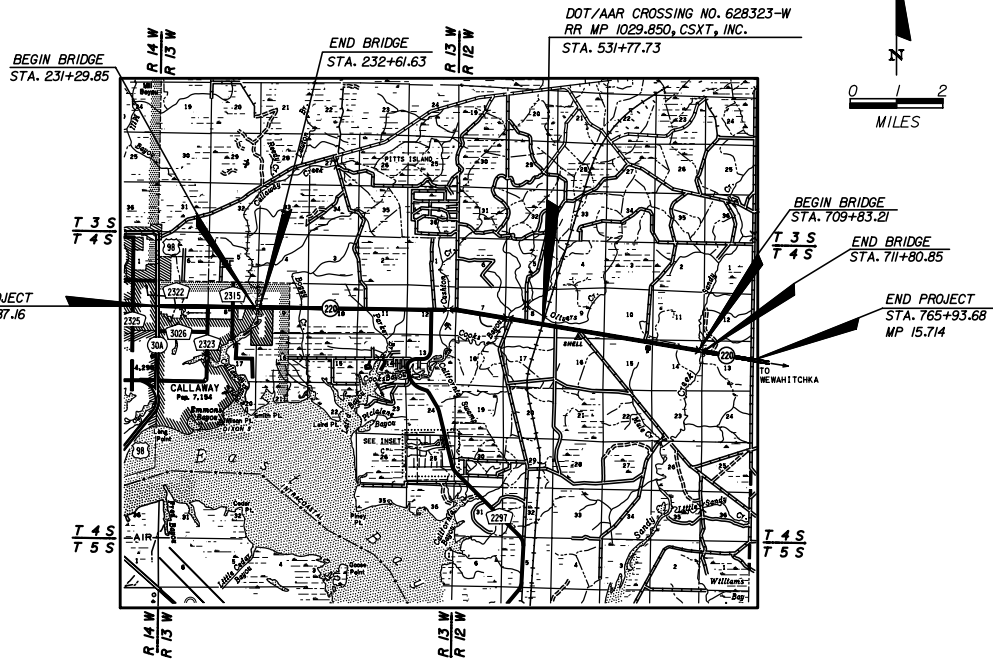

ROADWAY SHOP DRAWINGS
TO BE SUBMITTED TO:

NAME(S) AND ADDRESS(ES) OF
ENGINEER(S) RESPONSIBLE FOR REVIEW
OF SHOP DRAWINGS, WHEN REQUIRED.

PLANS PREPARED BY:

NAME, ADDRESS, CONSULTANT CONTRACT NUMBER,
VENDOR NUMBER, AND CERTIFICATE OF
AUTHORIZATION NUMBER OF THE CONSULTANT FIRM
WHEN THE PLANS ARE PREPARED BY A CONSULTANT.

NOTE: THIS PROJECT TO BE LET TO CONTRACT
WITH FINANCIAL PROJECT ID 000002-I-52-02.

NOTE: THE SCALE OF THESE PLANS MAY
HAVE CHANGED DUE TO REPRODUCTION.

EXHIBIT KS-1
Date: 1/1/11

LENGTH OF PROJECT		
	LINEAR FEET	MILES
ROADWAY	63,677.10	12.060
BRIDGES	329.42	0.062
NET LENGTH OF PROJ.	64,006.52	12.122
EXCEPTIONS		
GROSS LENGTH OF PROJ.	64,006.52	12.122

KEY SHEET REVISIONS	
DATE	DESCRIPTION
1-10-09	Revised sequence of contract plans.

ROADWAY PLANS
ENGINEER OF RECORD: _____

P.E. NO. : _____

FISCAL YEAR	SHEET NO.

FDOT PROJECT MANAGER :

ELECTRONIC SIGNATURE NOTE WHEN SHEET IS ELECTRONICALLY SIGNED AND SEALED

