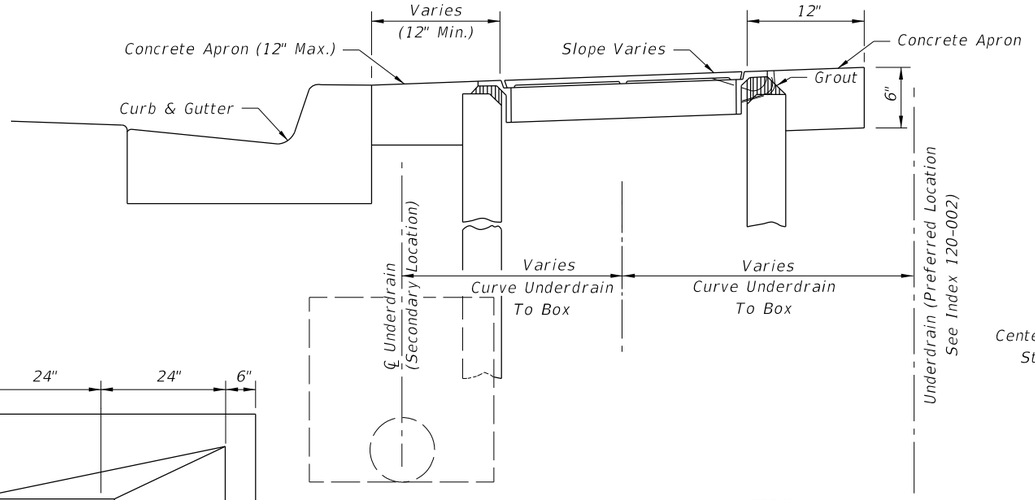

TYPICAL URBAN INSTALLATION

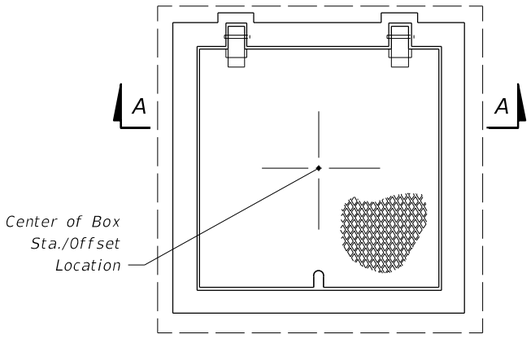

TOP VIEW



BACK VIEW

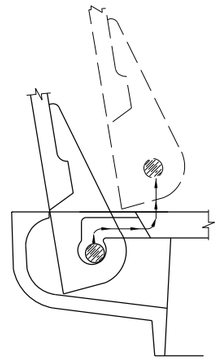

COVER REMOVAL



SECTION CC



SECTION BB

HINGE DETAIL

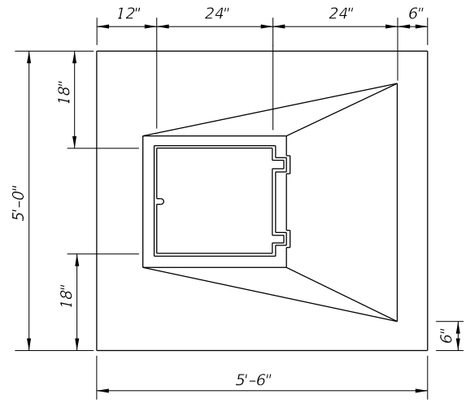

TOP VIEW

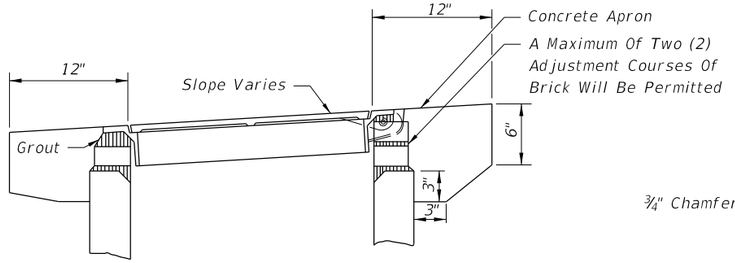

PERMISSIBLE TOP ADJUSTMENT

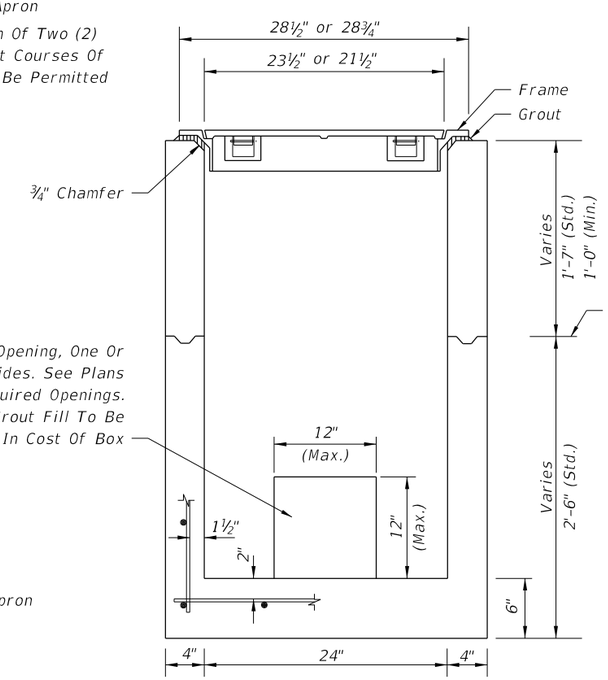

SECTION AA

BOX AND TOP

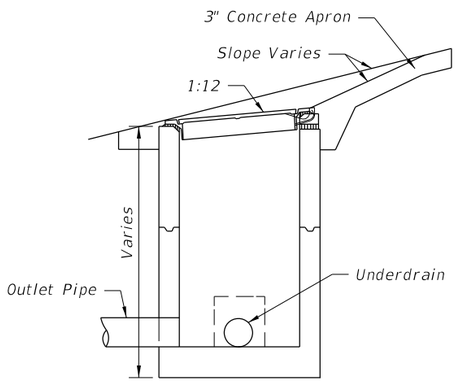

SECTION

TYPICAL INSTALLATION ON SLOPES

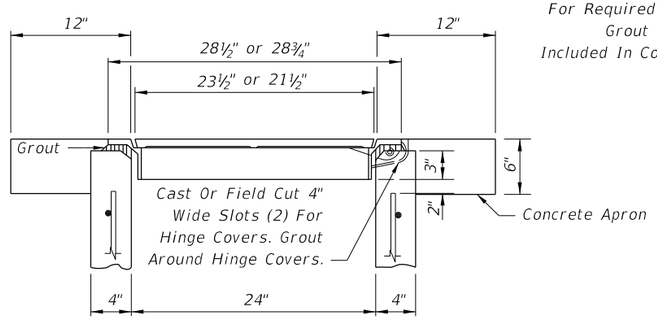

TYPICAL TOP AND APRON

GENERAL NOTES

1. Light duty cast iron cover and frame, see Specifications Section 962.
2. Concrete shall be Class I, except ASTM C478 (4000 psi) concrete may be substituted for precast items manufactured in plants meeting the requirements of Section 449 of the Specifications. Box shall be reinforced with No. 3 bars (Grade 60) on 8" centers both ways, sides and bottom.
3. Concrete apron to be included in the contract unit price for Underdrain Inspection Box.
4. All covers shall be furnished with pick holes. Fitted lifts or handles are not permitted.
5. Manhole Type P Alternate A, Index 425-010, with Type I Frame and Cover, Index 425-001, may be used in lieu of the box detailed on this sheet, and is recommended when high ADT increases chance of the repeated vehicle loadings.

10:56:50 AM
10/18/2018

LAST REVISION	REVISION	DESCRIPTION:				
11/01/17			FDOT FY 2019-20 STANDARD PLANS	UNDERDRAIN INSPECTION BOX	INDEX 440-002	SHEET 1 of 1