


LOW SIDE SUPERELEVATION PAVEMENT WARP FOR SHOULDERS IN SUPERELEVATION
HIGH SIDE TRANSITION PAVEMENT WARP FOR SHOULDERS IN SUPERELEVATION


Joint And Bond Breaker:
Cast-In-Place Inlets:
One layer ASTM D6380 Class S, Type III
Organic Felt bond breaker between inlet and
barrier, including footings.
Precast Inlets:
Joint width 1" max. Seal with backer rod and
Department-approved pavement joint sealant.
See Section BB For Other Barrier Shape.

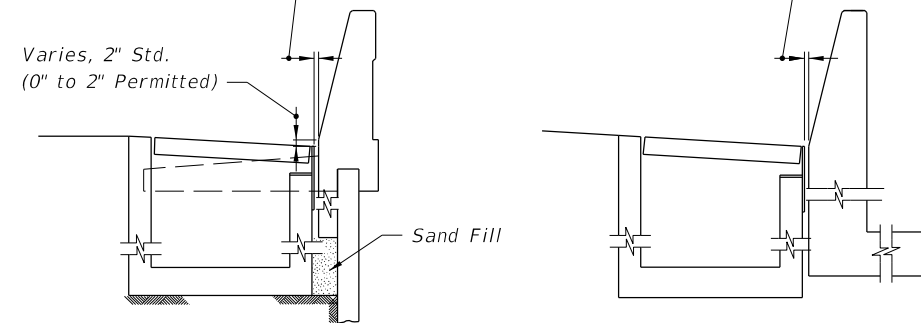

BARRIER WITH JUNCTION SLAB AND WALL COPING


BARRIER WITH STEM AND FOOTING

INLET SECTIONS -
EXAMPLE BARRIER TYPES

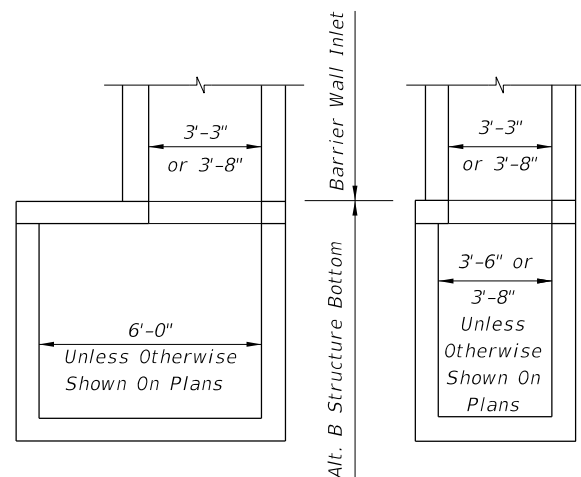


Note: Alt. B Structure Bottom Only. See Index 425-010

INLET WITH STRUCTURE BOTTOM

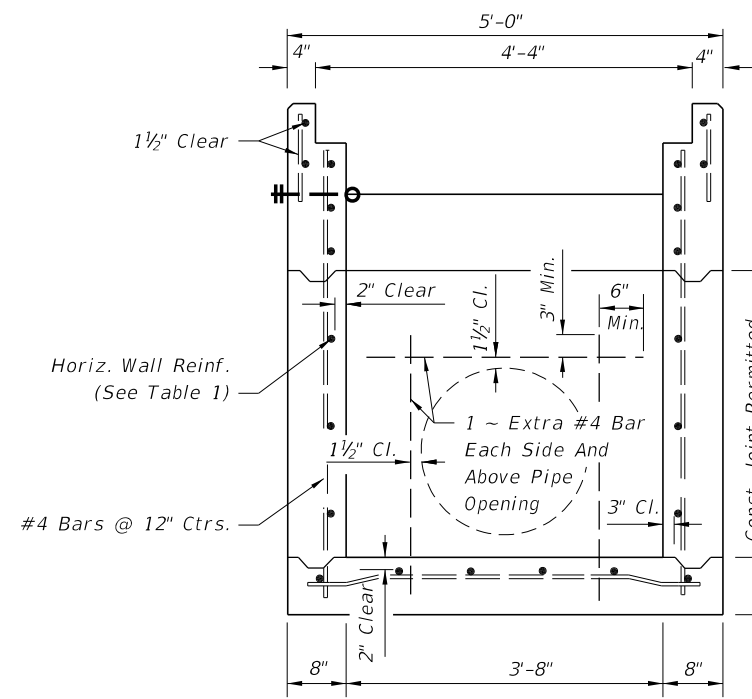


SECTION A-A (WITHOUT GRATE)
(Pipe Opening Shown)

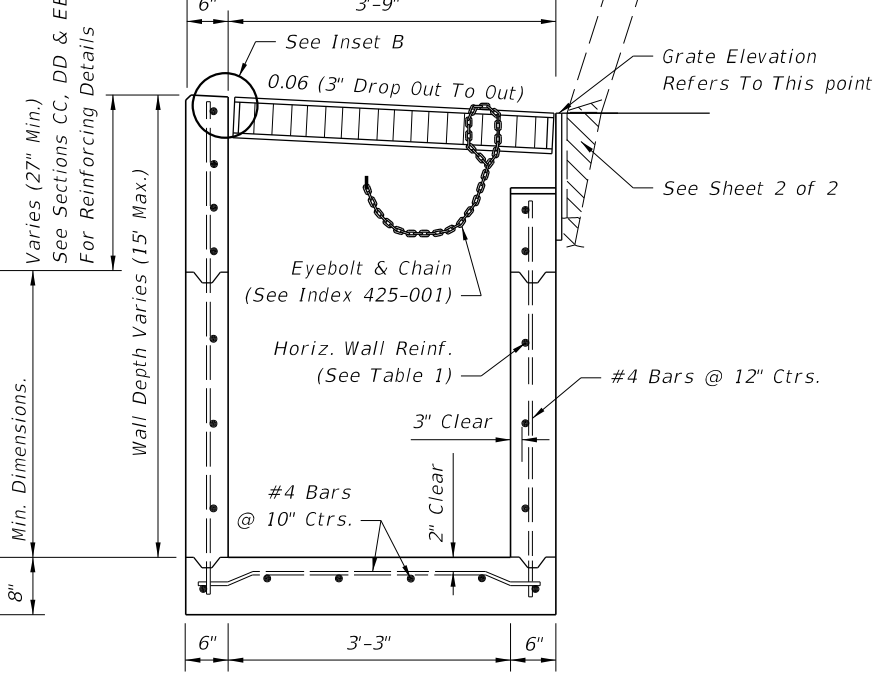

SECTION B-B
(Pipe Opening Not Shown)

GENERAL NOTES:

- Where called for in the Plans, use this inlet in conjunction with median or shoulder barrier per Index 521-001 or a barrier with junction slab and wall coping per Index 521-610. The inlet is suitable for bicycle and occasional pedestrian traffic, with roller bar installation (see INSET B), but should not be placed in a designated pedestrian travel way.
- Inlets located in embankments constructed with earth anchored retaining wall shall be designed with minimum depths to reduce adverse impact on the anchorage system. Runs of pipe parallel to and near anchored wall shall be avoided wherever practical. Special coordination must be exercised during the design and construction of storm water systems within anchored wall systems.
- Inlet bottoms and/or tops may be either precast or cast-in-place. Whether cast as a single unit or as multiple segments, and whether precast or cast-in-place, the upper 2'-3" of the inlet shall be reinforced in accordance with sections CC, DD and EE.
- All exposed edges and corners shall be 3/4" chamfer or tooled to 1/4" radius.
- When Alternate G grate is specified in the plans, the grate is to be hot-dip galvanized after fabrication. Field installation of the filler bar called for in Inset B will not be permitted, thereby requiring tolerance adjustment during fabrication and/or casting, or, matching grate to structure prior to galvanizing.
- All reinforcing is Grade 60 bars. See Index 425-001 for equivalent area of welded wire fabric.
- All dimensions are for both precast and cast-in-place inlets unless otherwise noted.
- For supplemental details see Indexes 425-001 and 425-010.
- Inlets to be paid for under the contract unit for Inlets (Concrete Barrier), Ea.

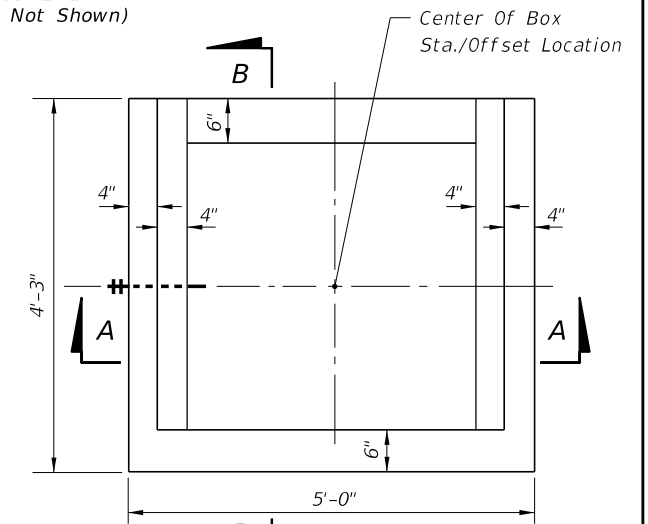

TOP VIEW (WITHOUT GRATE)

TABLE 1: HORIZONTAL
WALL REINFORCING SCHEDULE

WALL DEPTH	SCHEDULE	AREA (in. ² /ft.)	MAX. SPACING	
			BARS	WWR
0'-5'	A12	0.20	12"	8"
5'-10'	A6	0.20	6"	5"
10'-15'	A4	0.20	4"	3"
10'-15'	B5.5	0.24	5 1/2"	5"

10/14/2019 9:10:14 AM

LAST REVISION	DESCRIPTION:
11/01/19	




FY 2020-21
STANDARD PLANS


ADJACENT BARRIER INLET

INDEX
425-031


SHEET
1 of 2

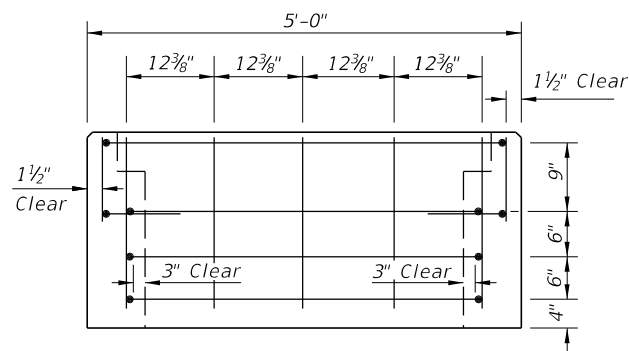


SECTION C-C

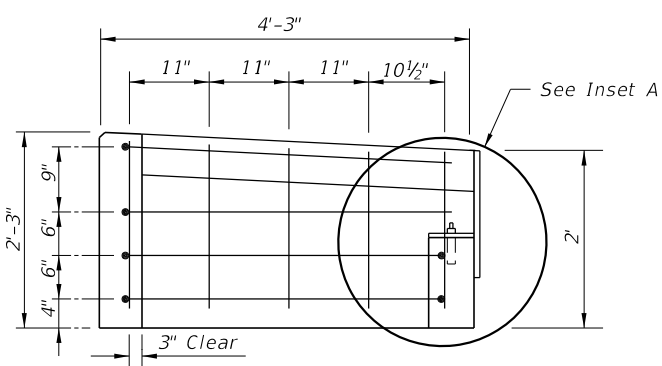


SECTION D-D

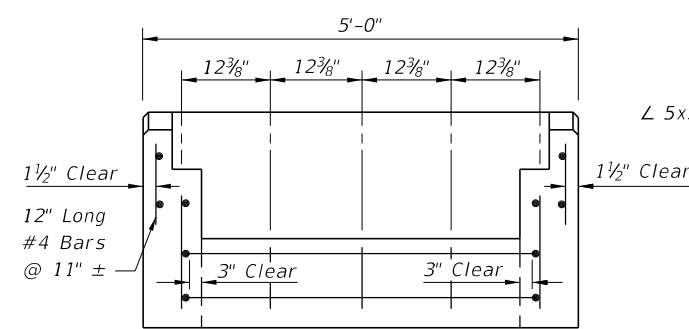

SECTION E-E

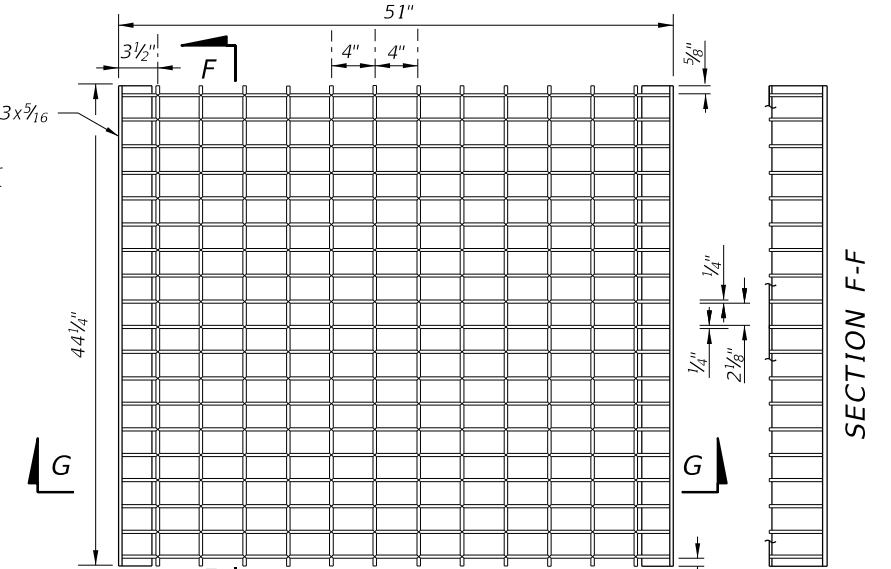


SECTION F-F

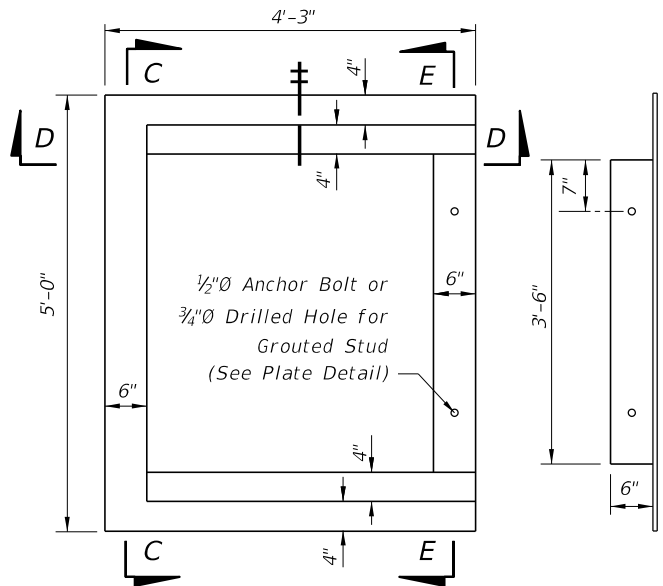


TOP VIEW OF INLET WITHOUT GRATE

TOP VIEW OF METAL PLATE

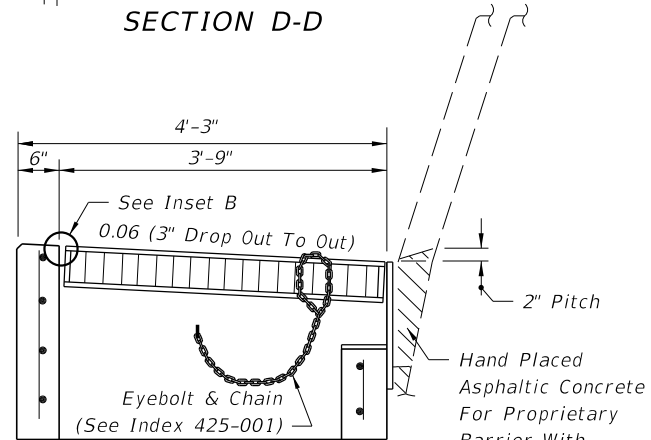


TRANSVERSE SECTION WITH GRATE & PLATE

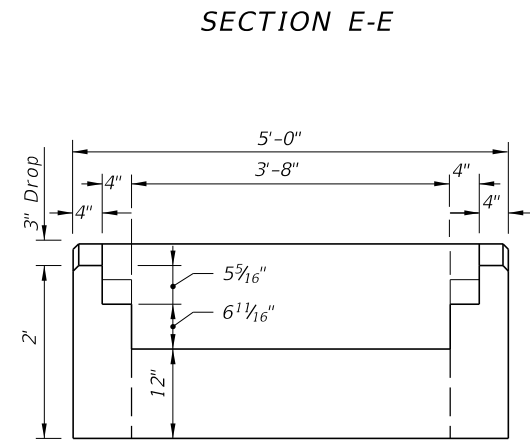

BACK VIEW WITHOUT BACK PLATE

Main Bars: 5"x1/4"
Cross Bars: Either 3/8"Ø Electroforged or 1/2"Ø Welded

TOP VIEW

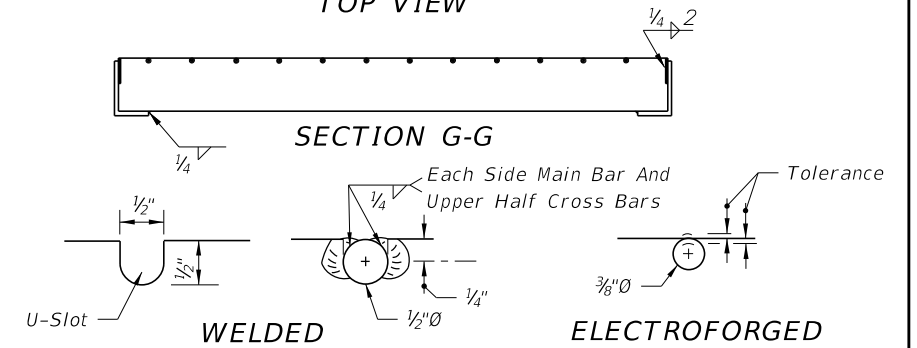


SECTION G-G


WELDED

ELECTROFORGED

CROSS BAR OPTIONS STEEL GRATE

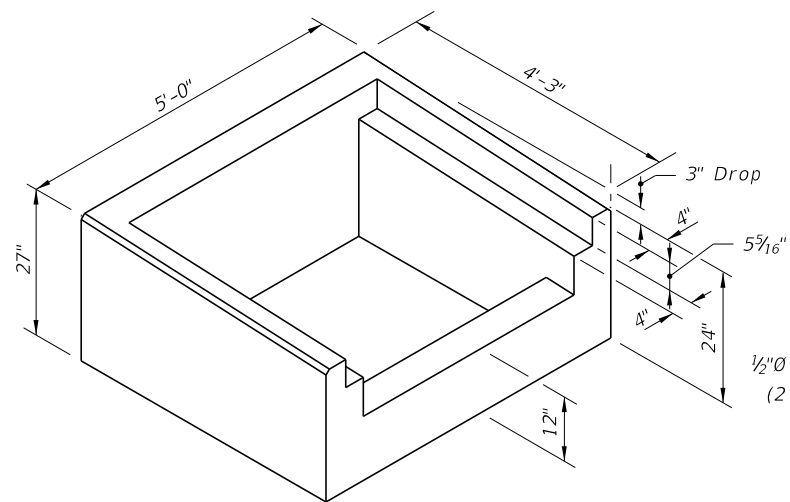


PICTORIAL VIEW OF INLET COLLAR

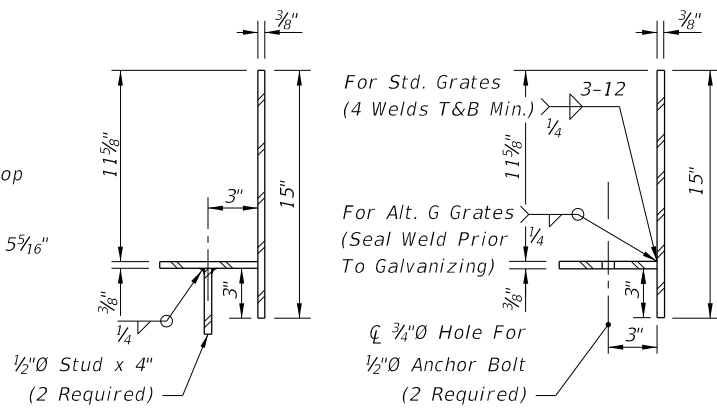


OPTION FOR GROUT STUD

OPTION FOR ANCHOR BOLT

TRANSVERSE SECTIONS THRU BACKWALL PLATE

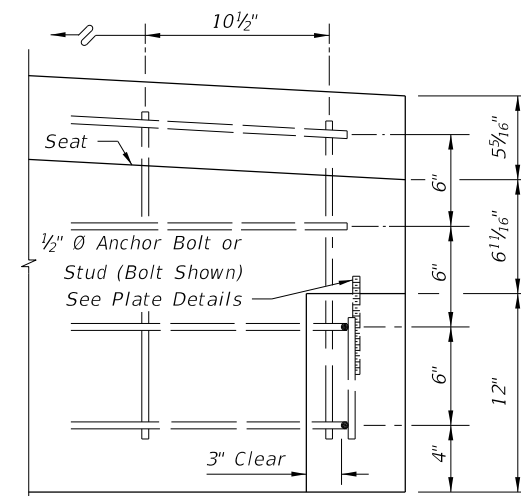

INSET A

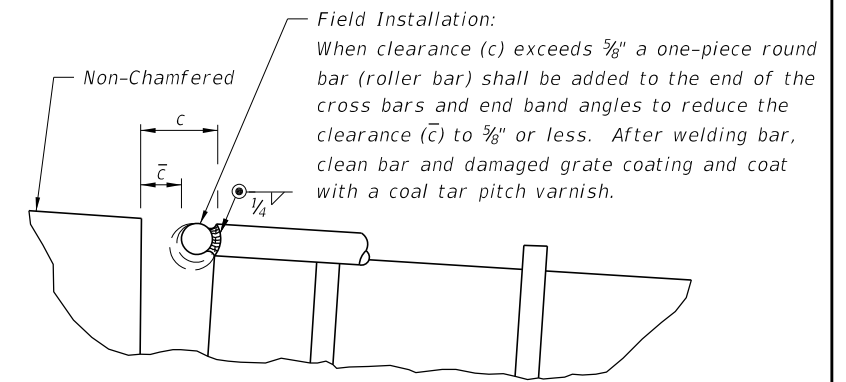


INSET B (See Sheet 1, General Note 1)

NOTES

- All reinforcing steel bars shown are #4 bars.
- Anchor bolts shall be either ASTM A307 hex head bolts cast-in-place, or ASTM A36 or F1554 (Grade 36) galvanized fully threaded rod, adhesive bonded anchors installed in accordance with Specification Section 416. Bolts or rods shall be 6" long (4" min. embedment) with one heavy hex head nut (ASTM 194 or A563) and one flat washer (ASTM F436) each. All anchor bolts, nuts and washers shall be hot-dip galvanized.

10/14/2019 9:10:14 AM

LAST REVISION 11/01/19	REVISION	DESCRIPTION:	 FY 2020-21 STANDARD PLANS	ADJACENT BARRIER INLET	INDEX 425-031	SHEET 2 of 2
---------------------------	----------	--------------	---	------------------------	------------------	-----------------