

adjoining areas and finish flat by grouting or grinding as required. Exposed existing

reinforcing steel not encased in new concrete shall be burned off 1" below existing

TYPICAL SECTION THRU EXISTING TRAFFIC RAILING SHOWING LIMITS OF REMOVAL (BRIDGE DECK SHOWN, WING WALL SIMILAR)

Non skewed deck joint shown, actual joint dimensions and orientation vary. For treatment at skewed deck joints see Varies Skew Detail, Index 521-480. Provide open Railing Joints at Deck Expansion Joint locations matching the dimension of Varies Varies (3" max. and Preferred, 10" | (1" Min.) 1" Min., constant for full ** Provide 3/4" Intermediate Open Joints at: length of Retrofit) ← Thrie-Beam
 ← Thrie-Be (1) - Superstructure supports where slab is continuous. Guardrail Bolts *** Curb heights vary from 5" Min. to 1'-2" Max. 2" Cover (Typ.)Bars 55 (Typ.)Dowel Bars 6D -Existing Asphalt Overlay Curb when present 6" Min. Embed Min. (Varies) _ Final Riding Surface Bridg


SECTION A-A TYPICAL SECTION THRU RAILING ON CURB WITH CORBELS

Existing Bridge Deck

CROSS REFERENCE:

the Deck Joint.

For General Notes, Estimated Quantities, Dowel Detail, Expansion Dowel Detail, Reinforcing Steel Notes & Bending Diagrams see Index 521-480.

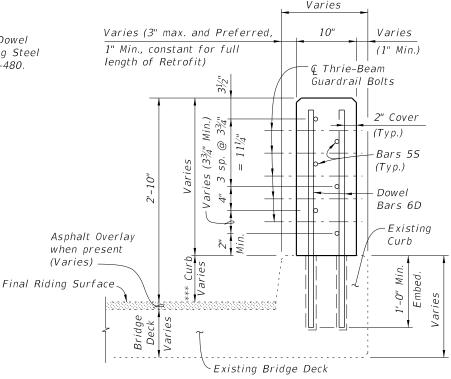

SECTION A-A TYPICAL SECTION THRU RAILING ON FULL DEPTH CURB (BRIDGE SHOWN, WING WALL SIMILAR)

REVISION 07/01/13

concrete and grouted over.

DESCRIPTION:

FDOT

FY 2020-21 STANDARD PLANS


TRAFFIC RAILING - (VERTICAL FACE RETROFIT) NARROW CURB

INDEX

SHEET 1 of 3

521-481



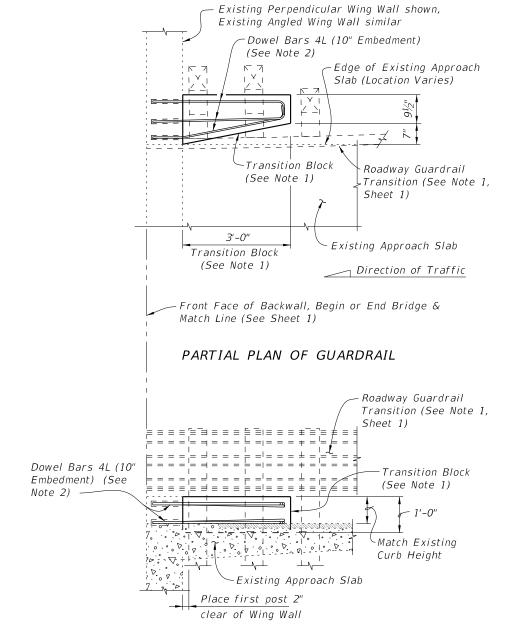


PARTIAL ELEVATION OF INSIDE FACE OF GUARDRAIL

RAILING END TREATMENT FOR PERPENDICULAR OR ANGLED WING WALLS

SCHEME 1 NOTES:

- 1. Provide Transition Block (as shown) or Curb if existing Approach Slab does not have a curb, see Roadway Plans. Shape and height of Transition Block or Curb shall match existing bridge curb. Railing End Transition and Transition Block may be omitted on trailing ends with no opposing traffic.
- 2. Field bend Dowel Bars 4L within Transition Block as required to maintain 2" top and side clearance and 3" bottom clearance.

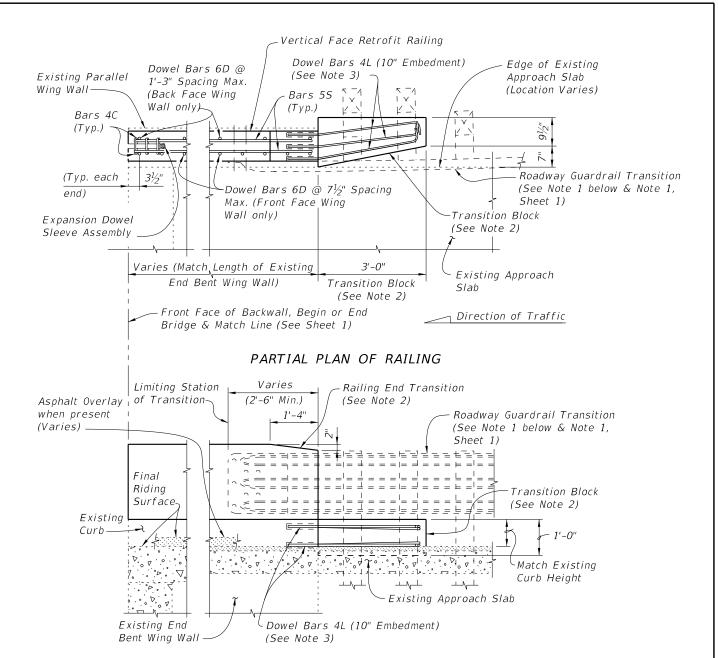

PARTIAL ELEVATION OF INSIDE FACE OF RAILING (Railing Reinforcing and Expansion Dowel Assemblies not shown for clarity)


RAILING END TREATMENT FOR PARALLEL WING WALLS

SCHEME 2 NOTES:

- 1. See Roadway Plans for limiting station of Roadway Guardrail Transition or other site specific treatment. If limiting station of Roadway Guardrail Transition is along the Wing Wall, attach Thrie-Beam Terminal Connector to railing as shown above. If limiting station of Roadway Guardrail Transition is on the bridge, see Index 521-481, Sheet 1. On skewed bridges, if the skew along the deck joint extends across the width of the railing, the 2'-6" minimum dimension shall apply to both the front and back face of the railing.
- 2. Provide Transition Block (as shown) or Curb if existing Approach Slab does not have a curb, see Roadway Plans.

 Shape and height of Transition Block or Curb shall match existing bridge curb. Railing End Transition and Transition Block may be omitted on trailing ends with no opposing traffic.
- 3. Field bend Dowel Bars 4L within Transition Block as required to maintain 2" top and side clearance and 3" bottom clearance.

07/01/07

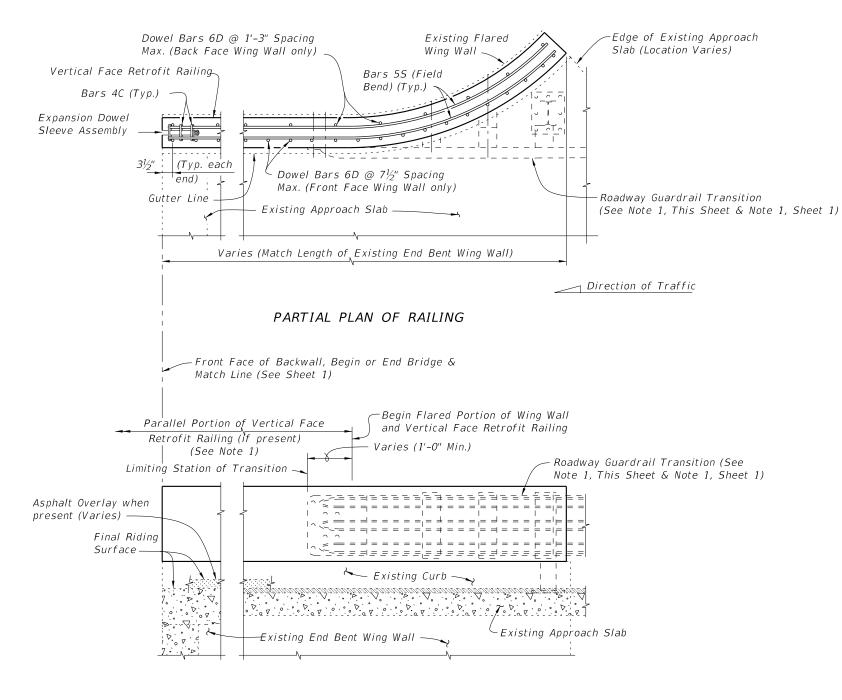

PARTIAL ELEVATION OF INSIDE FACE OF RAILING (Railing Reinforcing and Expansion Dowel Assemblies not shown for clarity)

> _____ SCHEME 3 _____ RAILING END TREATMENT FOR FLARED WING WALLS

SCHEME 3 NOTE:

1. See Roadway Plans for limiting station of Roadway Guardrail Transition or other site specific treatment. If limiting station of Roadway Guardrail Transition is along the Wing Wall, attach Thrie-Beam Terminal Connector to railing as shown above. If limiting station of Roadway Guardrail Transition is on the bridge, see

REVISION 07/01/07

DESCRIPTION:

FDOT

3 of 3