


TYPICAL SECTION THRU EXISTING TRAFFIC RAILING SHOWING LIMITS OF REMOVAL (BRIDGE DECK SHOWN, WING WALL SIMILAR)

Non skewed deck joint shown, actual joint dimensions and orientation vary. For treatment at skewed deck joints see Skew Detail, Index 521-480. Provide open Railing Joints at Deck Expansion Joint locations matching the dimension of the Deck Joint.

** Provide 3/4" Intermediate Open Joints at: (1) - Superstructure supports where slab is continuous.


*** Curb heights vary from 5" Min. to 1'-2" Max.

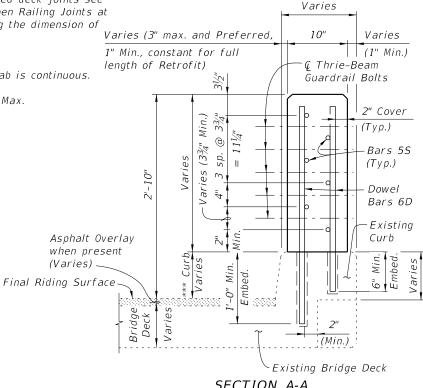

SECTION A-A TYPICAL SECTION THRU RAILING ON CURB WITH CORBELS

CROSS REFERENCE:

For General Notes, Estimated Quantities, Dowel Detail, Expansion Dowel Detail, Reinforcing Steel Notes & Bending Diagrams see Index 521-480.

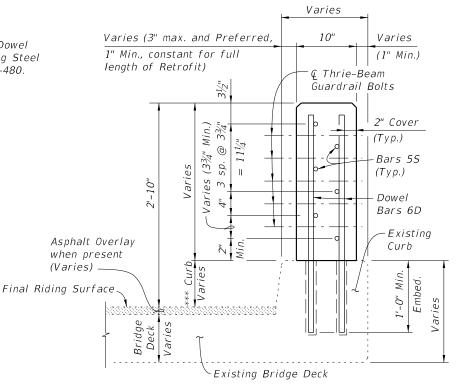

SECTION A-A TYPICAL SECTION THRU RAILING ON FULL DEPTH CURB (BRIDGE SHOWN, WING WALL SIMILAR)

3. Where existing structure has been removed and not encased in new concrete; match adjoining areas and finish flat by grouting or grinding as required. Exposed existing reinforcing steel not encased in new concrete shall be burned off 1" below existing concrete and grouted over.

REVISION 07/01/13

DESCRIPTION:

FDOT

FY 2021-22 STANDARD PLANS

TRAFFIC RAILING - (VERTICAL FACE RETROFIT)

INDEX

SHEET 1 of 3

521-481

Existing Perpendicular Wing Wall shown,

Dowel Bars 4L (10" Embedment)

Edge of Existing Approach

Slab (Location Varies)

Existing Angled Wing Wall similar

(See Note 2)


PARTIAL ELEVATION OF INSIDE FACE OF GUARDRAIL

== SCHEME 1 ====== RAILING END TREATMENT FOR PERPENDICULAR OR ANGLED WING WALLS

SCHEME 1 NOTES:

DESCRIPTION:

- 1. Provide Transition Block (as shown) or Curb if existing Approach Slab does not have a curb, see Roadway Plans. Shape and height of Transition Block or Curb shall match existing bridge curb. Railing End Transition and Transition Block may be omitted on trailing ends with no opposing traffic.
- 2. Field bend Dowel Bars 4L within Transition Block as required to maintain 2" top and side clearance and 3" bottom clearance.

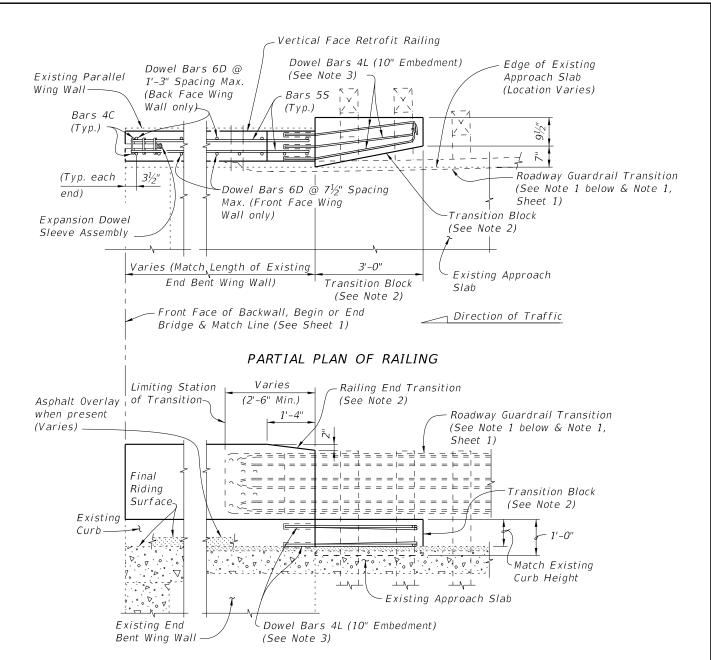


PARTIAL ELEVATION OF INSIDE FACE OF RAILING (Railing Reinforcing and Expansion Dowel Assemblies not shown for clarity)

____ SCHEME 2 _____ RAILING END TREATMENT FOR PARALLEL WING WALLS

SCHEME 2 NOTES:

- 1. See Roadway Plans for limiting station of Roadway Guardrail Transition or other site specific treatment. If limiting station of Roadway Guardrail Transition is along the Wing Wall, attach Thrie-Beam Terminal Connector to railing as shown above. If limiting station of Roadway Guardrail Transition is on the bridge, see Index 521-481, Sheet 1. On skewed bridges, if the skew along the deck joint extends across the width of the railing, the 2'-6" minimum dimension shall apply to both the front and back face of the railing.
- 2. Provide Transition Block (as shown) or Curb if existing Approach Slab does not have a curb, see Roadway Plans. Shape and height of Transition Block or Curb shall match existing bridge curb. Railing End Transition and Transition Block may be omitted on trailing ends with no opposing traffic.
- 3. Field bend Dowel Bars 4L within Transition Block as required to maintain 2" top and side clearance and 3" bottom clearance.

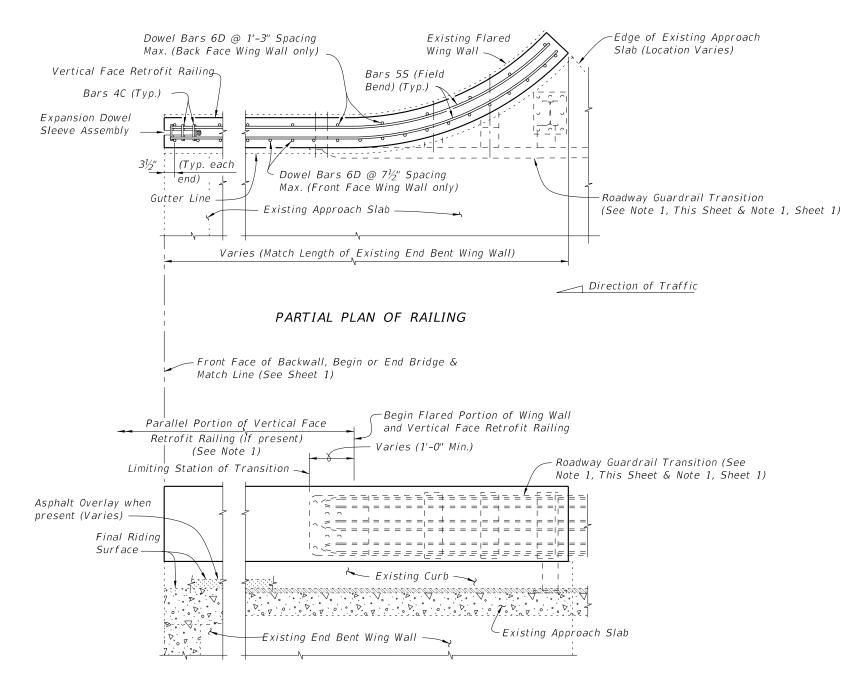

PARTIAL ELEVATION OF INSIDE FACE OF RAILING (Railing Reinforcing and Expansion Dowel Assemblies not shown for clarity)

> _____ SCHEME 3 _____ RAILING END TREATMENT FOR FLARED WING WALLS

SCHEME 3 NOTE:

1. See Roadway Plans for limiting station of Roadway Guardrail Transition or other site specific treatment. If limiting station of Roadway Guardrail Transition is along the Wing Wall, attach Thrie-Beam Terminal Connector to railing as shown above. If limiting station of Roadway Guardrail Transition is on the bridge, see

REVISION 07/01/07

DESCRIPTION:

FDOT