



## Florida Department of Transportation

RON DESANTIS  
GOVERNOR

1074 Hwy 90  
Chipley, Florida 32428

KEVIN J. THIBAUT, P.E.  
SECRETARY

July 16, 2021

### ADDENDUM NO. 1

**To: ALL PROPOSAL HOLDERS**  
**FINANCIAL ITEM NUMBER: 44365815201, 44365815202**  
**CONTRACT NUMBER: E3U35**  
**DESCRIPTION: The work consists of milling and resurfacing, curb ramp and sidewalk improvements on SR 750 in Escambia County.**

---

**BIDS TO BE RECEIVED: Thursday, August 12, 2021**

If you are a PROPOSAL HOLDER, this is your authorization to make the following changes to the plans and specification packages you now have for the subject project:

- **Supplemental Specifications package Number One has been added.**
- **Excavation and Embankment, (Rev 6-30-21) (FA 7-6-21) (7-21)**
- **SUBARTICLE 120-6.1 is deleted and replaced with 120-6 Borrow.**
  - o **120-6.1 Materials for Borrow (attached)**

Please use this revision when preparing your bid.

Sealed bids will be received until 2:00 p.m. local time on August 12, 2021 in the District Three Procurement Services Conference Room, Room 230, Administration Building, 1074 Highway 90, Chipley, Florida.

### AMENDMENT NOTIFICATION

If you are a PROPOSAL HOLDER, please go to the District Three Contracts Administration Addenda Website at <https://www.fdot.gov/contracts/d3/lettings/dist-letting-project-info.shtm> to download Amendment No. 1, file E3U35.001.

Also, all PROPOSAL HOLDERS please acknowledge receipt of the addendum under the Acknowledgement of Amendments tab on your electronic bid.

If you have any further questions, please contact Roland Ybarra by phone at (850) 330-1364 or by email at [roland.ybarra@dot.state.fl.us](mailto:roland.ybarra@dot.state.fl.us).

Sincerely,

Ranae Dodson  
District Procurement Manager

RD:ry

c.c. Josh Riley, Interim District Construction Engineer, Heath Riley, Jared Kirkland, file

July 14, 2021  
PREPARED BY: Christopher Wence & Timothy Linder



SUPPLEMENTAL SPECIFICATIONS PACKAGE NUMBER ONE

Contract Number: E3U35

FINANCIAL PROJECT ID(S): 443658-1-52-01 and 443658-1-52-02


DISTRICT THREE  
ESCAMBIA COUNTY

The July 2021 Edition of the Florida Department of Transportation Standard Specifications, the Specifications Package for this project, dated June 15, 2021, attached thereto, are revised as follows:

*I hereby certify that this specifications package has been properly prepared by me, or under my responsible charge, in accordance with procedures adopted by the Florida Department of Transportation.*

This item has been digitally signed and sealed by Christopher Ryan Wence, P.E. on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Date: July 14, 2021  
State of Florida,  
Professional Engineer, License No.: 77587  
Firm/Agency Name: Comprehensive Engineering Services, Inc.  
Firm/Agency Address: 201 S. Orange Avenue, Suite 1300  
City, State, Zip Code: Orlando, FL 32801  
Page(s): 1-4

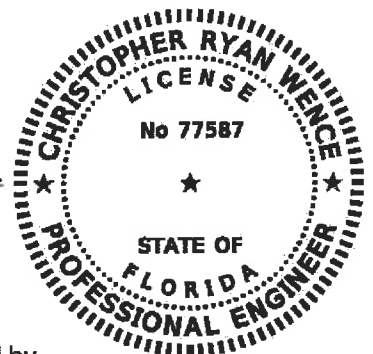

Christophe  
r Wence

Digitally signed by  
Christopher Wence  
Date: 2021.07.14  
08:52:01 -04'00'

# **SUPPLEMENTAL SPECIFICATIONS**

**EXCAVATION AND EMBANKMENT  
(REV 6-30-21) (FA 7-6-21) (7-21)**

SUBARTICLE 120-6.1 is deleted and the following substituted:

**120-6 Borrow.**

**120-6.1 Materials for Borrow:** Do not open borrow pits until the Engineer has approved their location.

Prior to the purchase or use of any borrow pit materials, provide the Engineer with a written certification of borrow pit compliance meeting the requirements of Section 337.0262, Florida Statutes.

Do not provide borrow materials that are polluted as defined in Chapter 376 of the Florida Statutes (oil of any kind and in any form, gasoline, pesticides, ammonia, chlorine, and derivatives thereof, excluding liquefied petroleum gas) in concentrations above any local, State, or Federal standards.

Prior to placing any borrow material that is the product of soil incineration, provide the Engineer with a copy of the Certificate of Materials Recycling and Post Burn Analysis showing that the material is below all allowable pollutant concentrations.

**THIS COMPLETES  
THIS  
SUPPLEMENTAL  
SPECIFICATIONS  
PACKAGE**