


RPM PLACEMENT DETAIL ${\cal N}$ ORIENTATION

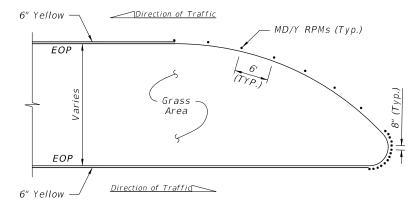

DETAIL "A"

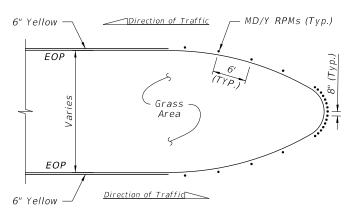

DETAIL "B'



DETAIL "C"

— MD/Y RPMs On Top Of Curb (Typ.) 6" Yellow ____Direction of Traffic Durable Paint-Yellow (Median Nose) B/C TYP.) Grass Area Direction of Traffic 6" Yellow

DETAIL "D"



"Y" FEET
10
20
20
30
40

6" Yellow MD/Y RPMs On Top Of Curb (Typ.) B/CGrass B/C Durable Paint-Yellow (Median Nose) Direction of Traffic 6" Yellow

DETAIL "E"

MD/Y RPMs On Top 6" Yellow ____Direction of Traffic Of Curb (Typ.) Grass Area - Durable Paint-Yellow (Median Nose) Direction of Traffic

DETAIL "F"

TYPE "D" OR "F" CURB

FLUSH MEDIAN OPENINGS (Type "E" Curb Similar, See Note 1)

> RPM PLACEMENT AT MEDIAN OPENINGS = (When called for in the Plans)

LEGEND:

B/C = BACK OF CURB

EOP = EDGE OF PAVEMENT

RPM = RAISED PAVEMENT MARKER

W/R = WHITE/RED RPM

Y/Y = YELLOW/YELLOW RPM

Y/R = YELLOW/RED RPM

MD/Y = MONO-DIRECTIONALYELLOW RPM

NOTES:

- 1. For Type "E" Curb, install RPMs along the pavement edge marking using the same spacing shown.
- 2. Orient traffic faces of RPMs in curb median radii to be parallel to direction of travel lanes.
- 3. Use epoxy adhesive to install RPMs on concrete median nose curbs.
- 4. Install RPMs on clean, unpainted surface. Do not paint curb surface where RPMs will be placed.

REVISION 11/01/21

FDOT


FY 2022-23 STANDARD PLANS

TYPICAL PLACEMENT OF RAISED PAVEMENT MARKERS INDEX

706-001

SHEET

3 of 6

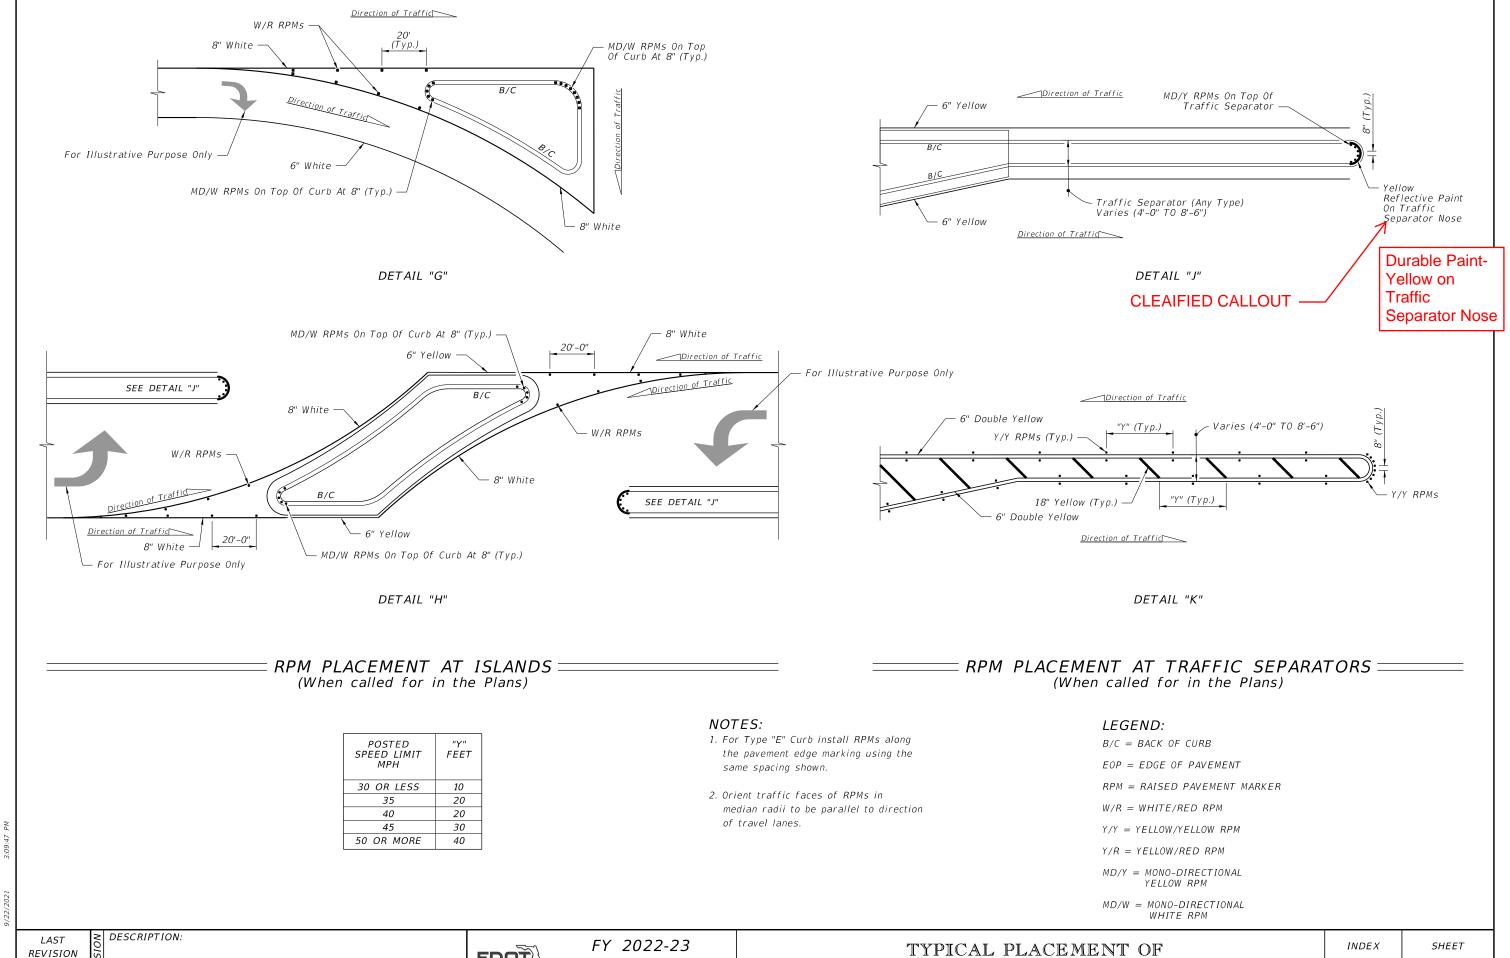

11/01/21

FDOT

STANDARD PLANS

RAISED PAVEMENT MARKERS

706-001

4 of 6