

## Index 455-101 Series Square CFRP & SS Prestressed Concrete Piles

### Design Criteria

***AASHTO LRFD Bridge Design Specifications; Structures Detailing Manual (SDM); Structures Design Guidelines (SDG); Fiber Reinforced Polymer Guidelines (FRPG)***

### Design Assumptions and Limitations

Index 455-101 is the lead standard for the Square CFRP & SS Prestressed Concrete Pile standard series which includes Indexes 455-101 through 455-130. Use this standard with Indexes 455-102, 455-003, 455-112, 455-114, 455-118, 455-124 and 455-130.

Standard piles are designed to have 1000 psi uniform compression after prestress losses without any applied loads to offset tensile stresses that occur during typical driving.

The piles are designed to have 0.0 psi tension using a load factor of 1.5 times the pile self-weight during pick-up, storage and transportation as shown in the "Table of Maximum Pile Pick-Up and Support Lengths" on the standard.

### Plan Content Requirements

In the Structures Plans:

Show and label the piles on the Foundation Layout, End Bent, Intermediate Bent, Pier, Footing, Typical Section and other sheets as required.

Complete the following "Data Table" in accordance with **SDG 3.5** and **SDM 11.4** and include it in the contract plans with the "Foundation Layout" sheets. Modify table and notes as required to accommodate the required number of piles, piers and/or bents, use of Test Piles and instrumentation. When not enough space is available on one plan sheet, continuations of the Data Table and/or separate pile cut-off elevation tables are acceptable. See **FDM 115** for more information regarding use of Data Tables.


For projects without Test Piles change data table column heading "TEST PILE LENGTH (ft.)" to "PILE ORDER LENGTH (ft.)".



**Payment**


<b>Item number</b>	<b>Item Description</b>	<b>Unit Measure</b>
455-34-ABB	Prestressed Concrete Piling (CFRP or SS)	LF

## Design Aids

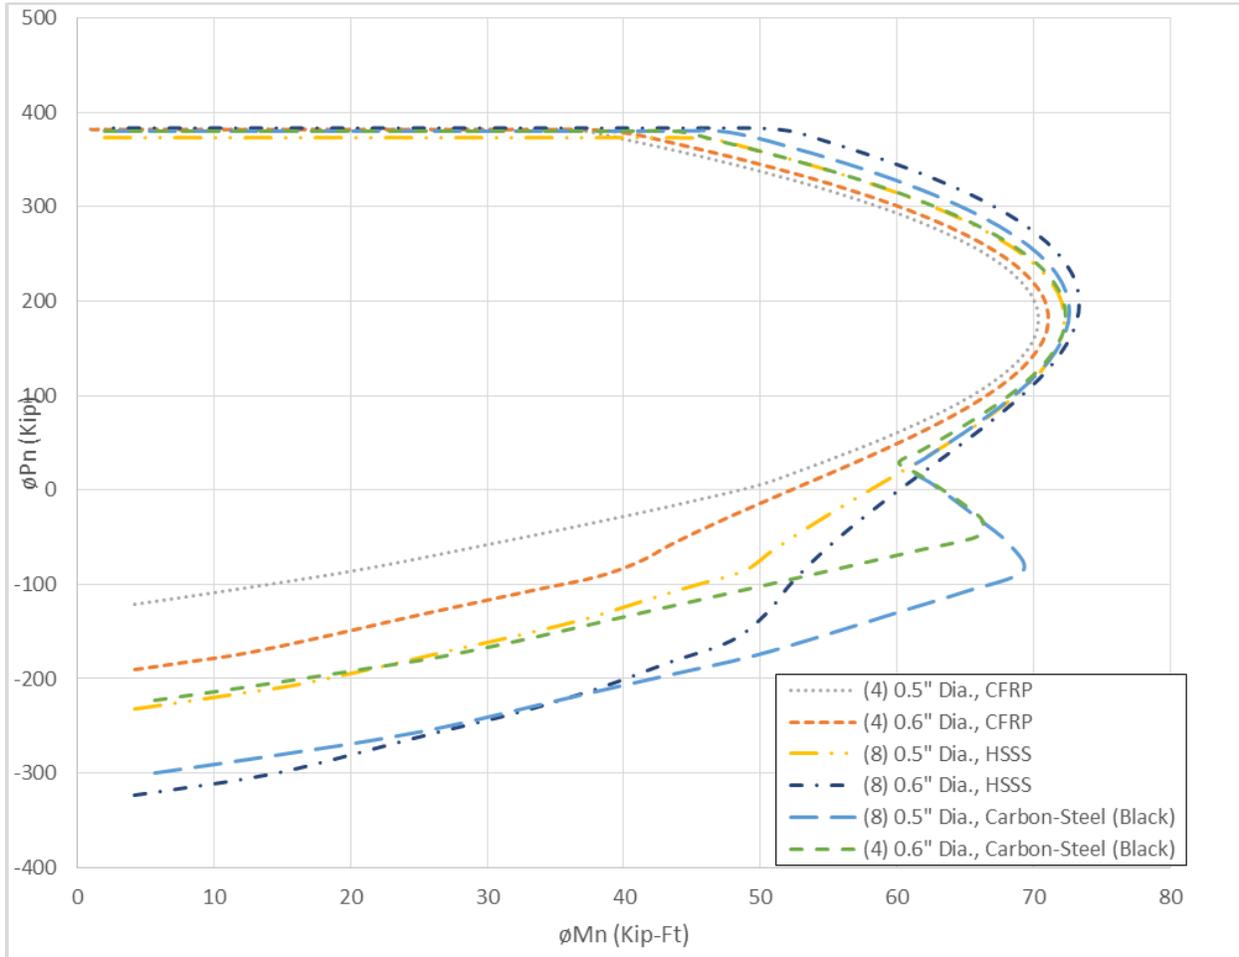


### Design Assumptions:

- Concrete compressive strength ( $f'_c$ ) = 6 ksi.
- Modulus of elasticity of prestressing strands,  $E_p$  = 18,000 ksi (1/2" CFRP), 22,480 ksi (0.6" CFRP) 23,500 ksi (HSSS) and 28,500 ksi (Carbon Steel).
- Resistance Factors ( $\phi$ ) based on ACI 440.4R for CFRP strands, (0.75 compression controlled, 0.75 tension controlled); AASHTO LRFD 5.5.4.2.1 for Carbon Steel strands (0.75 compression controlled, 1.0 tension controlled); and SDG guidelines for HSSS strands (0.75 compression and 0.75 tension controlled).
- All piles assumed to have spiral ties.
- Strand sizes and strand patterns used to create interaction curves correspond to those indicated in Index 455-112 for CFRP and HSSS and Index 455-012 for Carbon Steel.

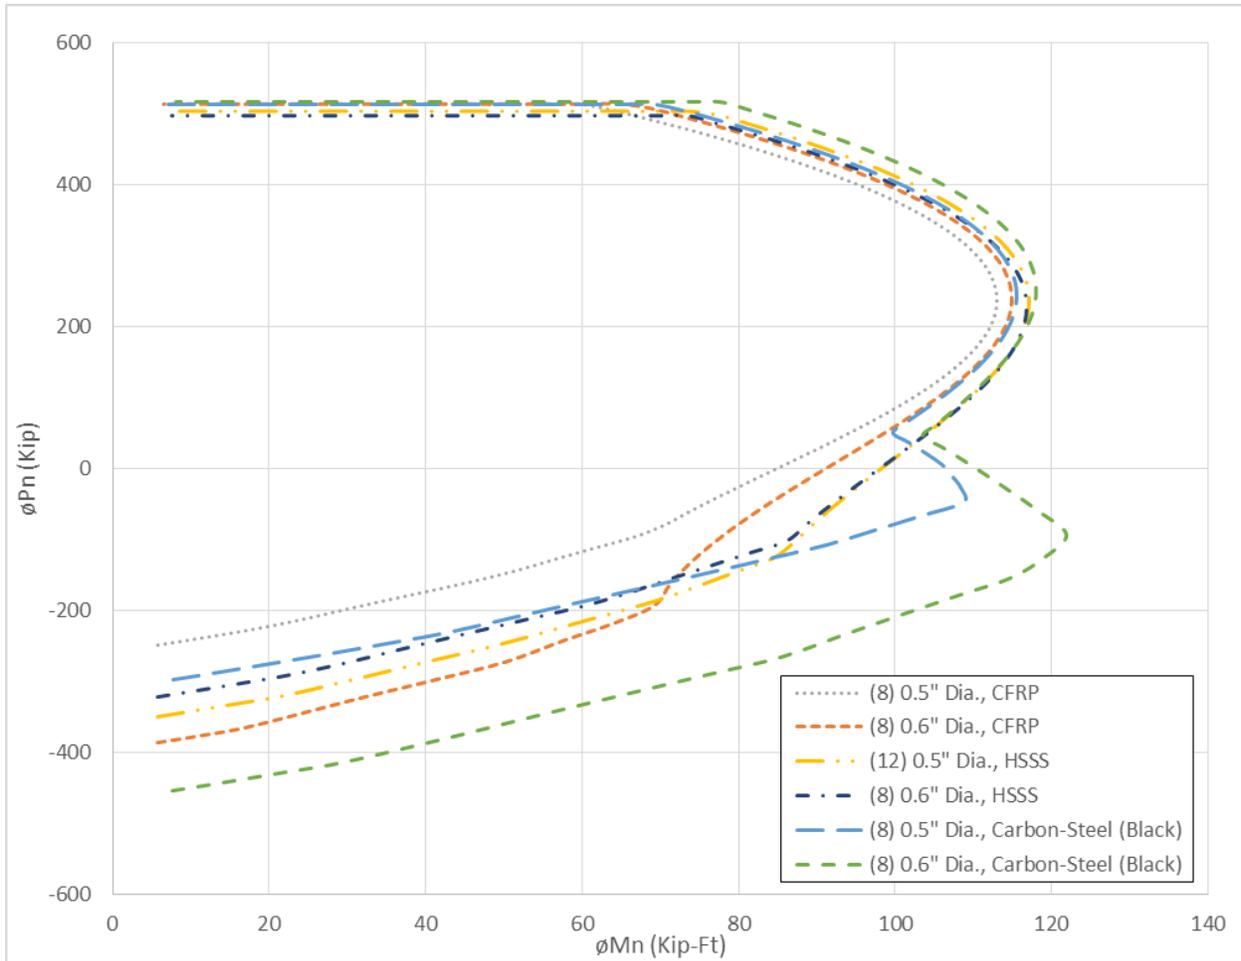


**Design Assumptions:**

- Concrete compressive strength ( $f'_c$ ) = 6 ksi.
- Modulus of elasticity of prestressing strands,  $E_p$  = 18,000 ksi (1/2" CFRP), 22,480 ksi (0.6" CFRP) 23,500 ksi (HSSS) and 28,500 ksi (Carbon Steel).
- Resistance Factors ( $\phi$ ) based on ACI 440.4R for CFRP strands, (0.75 compression controlled, 0.75 tension controlled); AASHTO LRFD 5.5.4.2.1 for Carbon Steel strands (0.75 compression controlled, 1.0 tension controlled); and SDG guidelines for HSSS strands (0.75 compression and 0.75 tension controlled).
- All piles assumed to have spiral ties.
- Strand sizes and strand patterns used to create interaction curves correspond to those indicated in Index 455-114 for CFRP and HSSS and Index 455-014 for Carbon Steel.

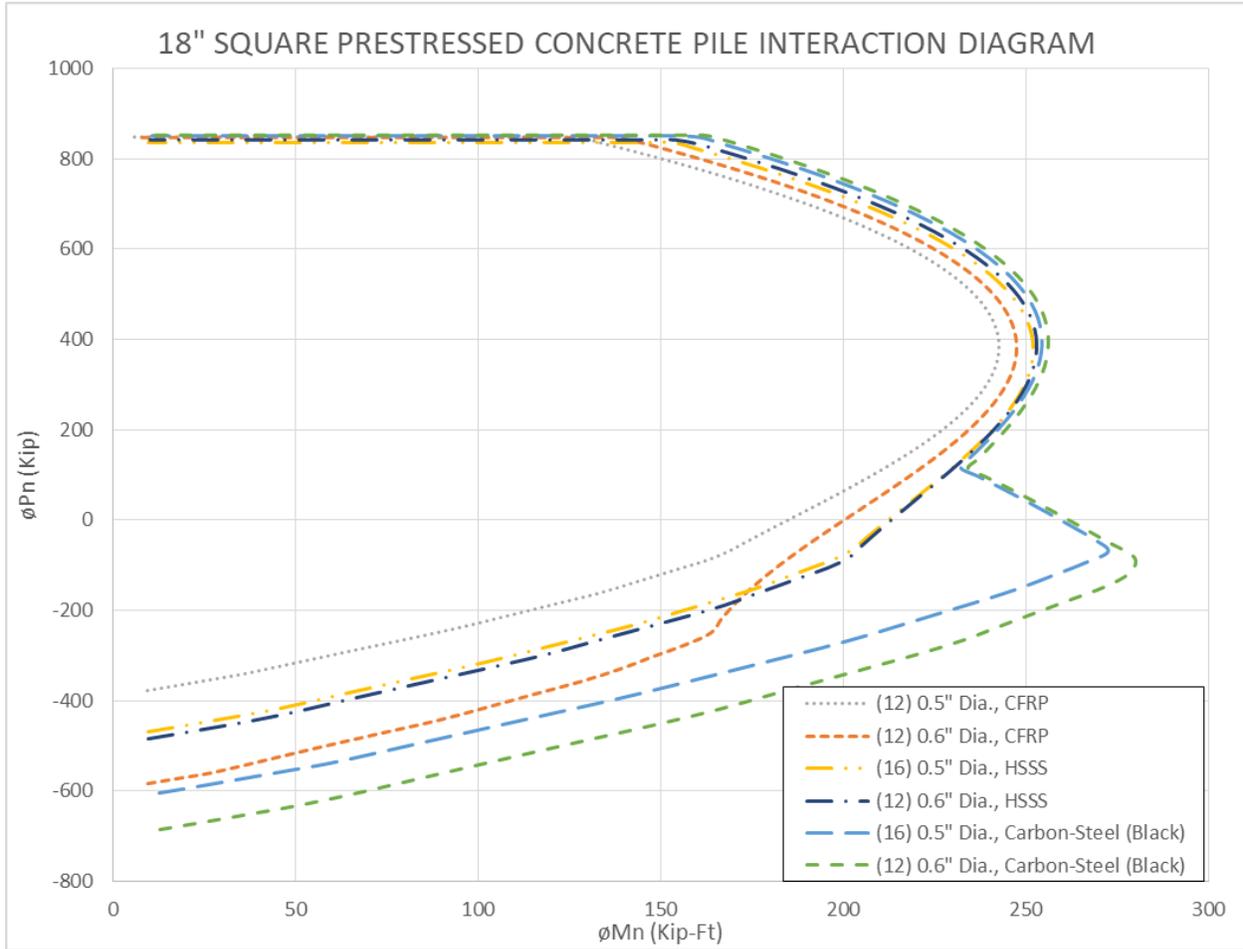


**Design Assumptions:**

- Concrete compressive strength ( $f'_c$ ) = 6 ksi.
- Modulus of elasticity of prestressing strands,  $E_p$  = 18,000 ksi (1/2\" CFRP), 22,480 ksi (0.6\" CFRP) 23,500 ksi (HSSS) and 28,500 ksi (Carbon Steel).
- Resistance Factors ( $\phi$ ) based on ACI 440.4R for CFRP strands, (0.75 compression controlled, 0.75 tension controlled); AASHTO LRFD 5.5.4.2.1 for Carbon Steel strands (0.75 compression 0.75 controlled, 1.0 tension controlled); and SDG guidelines for HSSS strands (0.75 compression and tension controlled).
- All piles assumed to have spiral ties.
- Strand sizes and strand patterns used to create interaction curves correspond to those indicated in Index 455-118 for CFRP and HSSS and Index 455-018 for Carbon Steel.

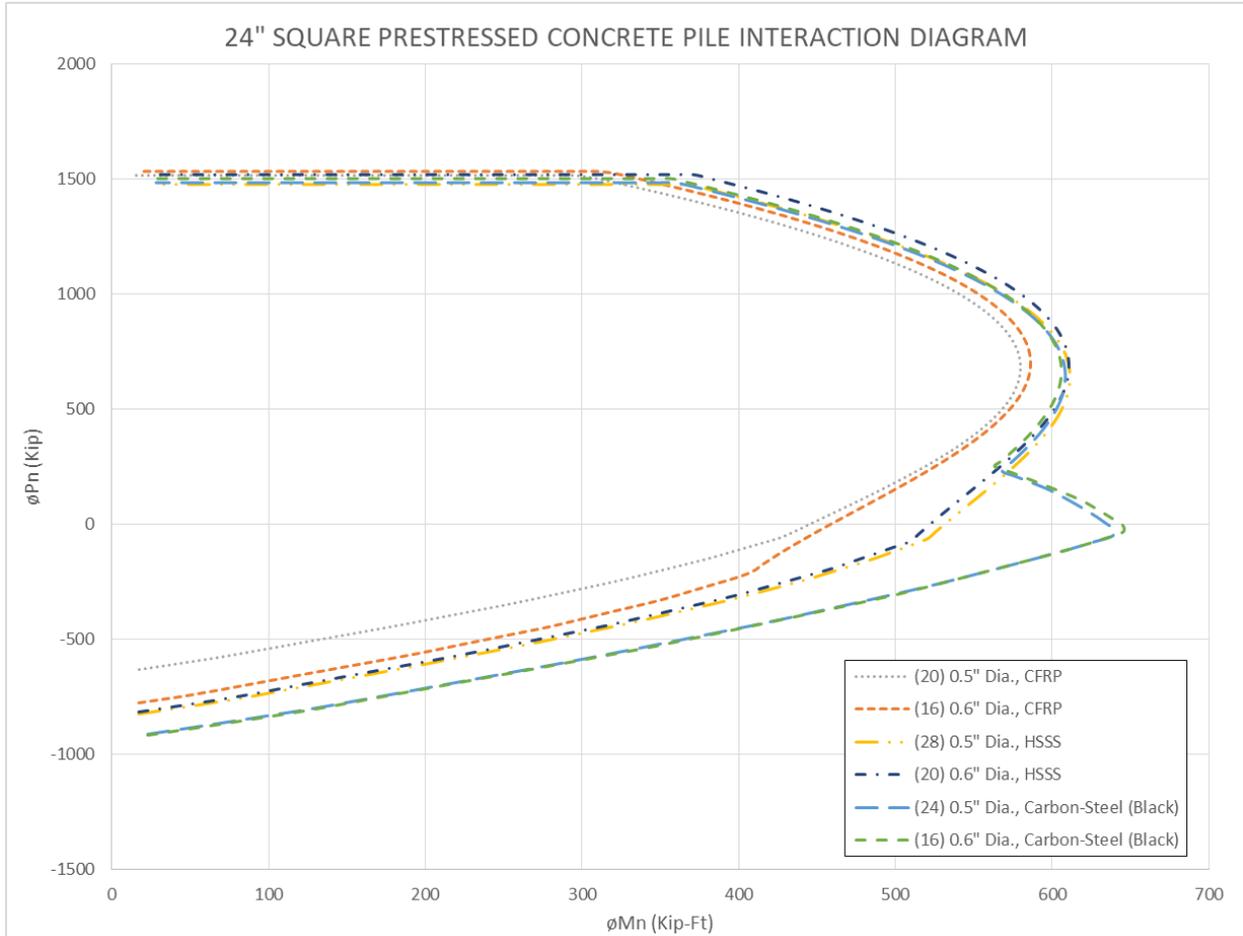

**Design Assumptions:**

- Concrete compressive strength ( $f'_c$ ) = 6 ksi.
- Modulus of elasticity of prestressing strands,  $E_p$ = 18,000 ksi (1/2\"/>

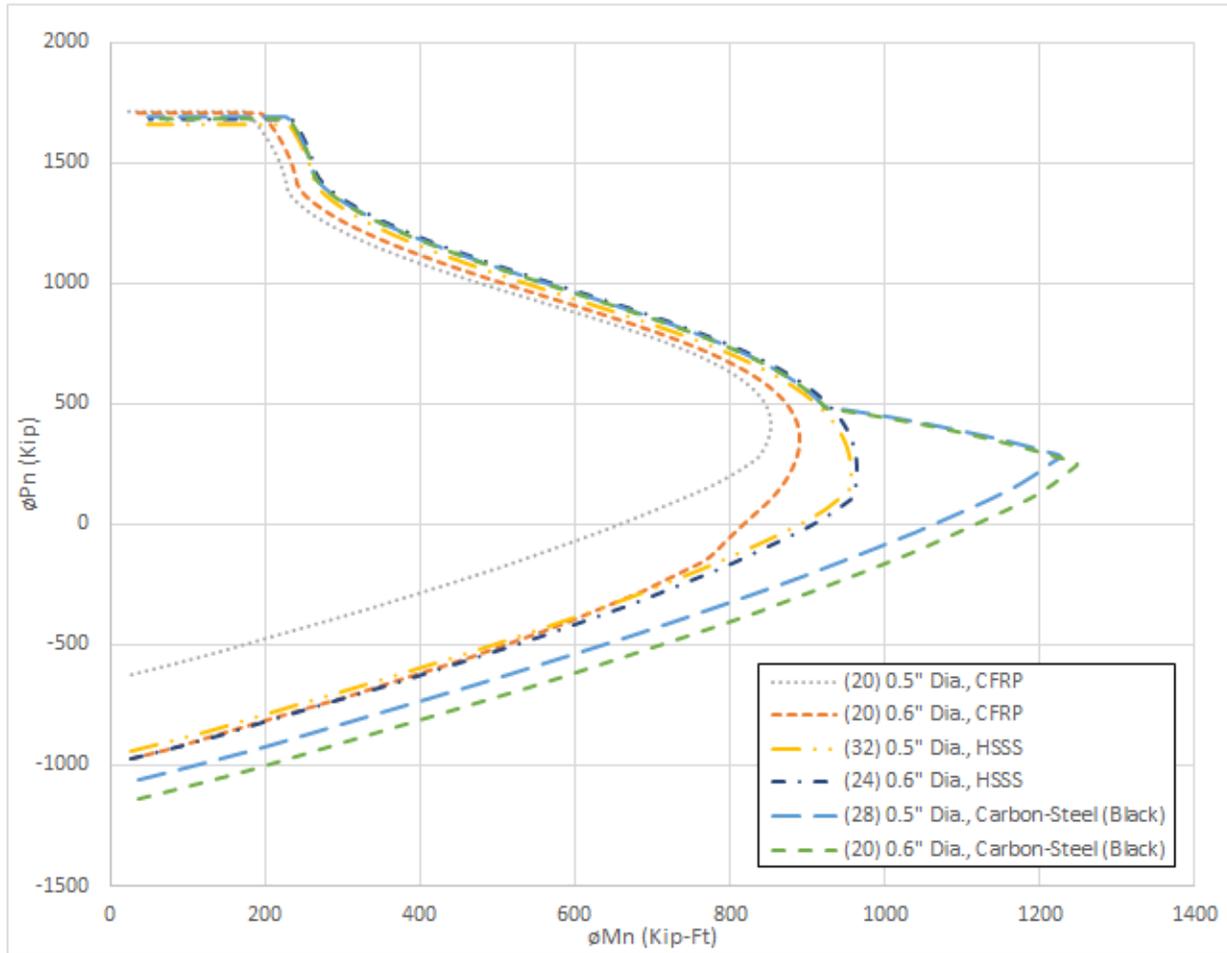

Design Assumptions:

- Concrete compressive strength ( $f'_c$ ) = 6 ksi.
- Modulus of elasticity of prestressing strands,  $E_p$ = 18,000 ksi (1/2" CFRP), 22,480 ksi (0.6" CFRP) 23,500 ksi (HSSS) and 28,500 ksi (Carbon Steel).
- Resistance Factors ( $\phi$ ) based on ACI 440.4R for CFRP strands, (0.75 compression controlled, 0.75 tension controlled); AASHTO LRFD 5.5.4.2.1 for Carbon Steel strands (0.75 compression controlled, 1.0 tension controlled); and SDG guidelines for HSSS strands (0.75 compression and 0.75 tension controlled).
- All piles assumed to have spiral ties.
- Strand sizes and strand patterns used to create interaction curves correspond to those indicated in Index 455-130 for CFRP and HSSS and Index 455-030 for Carbon Steel.