

Attachment III

Road Ranger Service Patrol

Disqualifying Criteria

1. The applicant has been convicted of a felony offense.
2. The applicant is currently on probation for any felony offense or has felony charges pending.
3. The applicant has been convicted of a misdemeanor offense involving any type of theft, violence, or drug offenses within the past three years.
4. The applicant's driver's license is currently suspended or revoked for any reason.
5. The applicant has been convicted of a crime involving domestic violence or currently has a restraining order involving domestic violence or threats.
6. The applicant has been arrested for any charge involving resisting arrest, battery, or assault on a law enforcement officer.
7. The applicant has a pending warrant for any criminal offense.
8. The applicant is illegally residing in or is not approved to work in the United States.
9. At the discretion of the Joint Task Force (JTF) Security Manager based on any other adverse information regarding the applicant.
10. The applicant is listed as a Sexual Offender/Predator.
11. The applicant has more than two (2) convictions for driving under the influence.

(These criteria were adopted from the Joint Task Force (JTF) on State Agency Law Enforcement Communications security procedures.)

Attachment IV

Road Ranger Service Patrol

Equipment, Tools, and Expendables

At a minimum, the CONTRACTOR shall carry the required equipment as mentioned in FDOT Road Ranger Program Procedure No. 750-030-015. The following list is provided to frame the general nature of equipment, tools, and expendables that the CONTRACTOR may be expected to maintain.

1. Equipment

Equipment	Heavy Pickup, Tow/Wrecker, Flatbed
Towing straps, nylon, with hooks and clevis (U-shaped connector)	Two (2) each, 10,000 lbs.
Rubber face push bumper	✓
Light set(s) configured to illuminate the truck and work area in or around the vehicle	✓
360-degree rotating spotlight	✓
Power outlets ("hot boxes", "booster outlets" or equivalent), front and rear-mounted, compatible with 12-volt booster cables	✓
Suitable functioning cab lighting	✓
Roof-mounted, light bar, front to rear controllable, front amber/yellow, and rear amber/yellow/red flashing lights only. The use of white, blue, or other color flashing lights is prohibited.	✓
DEPARTMENT approved truck-mounted dynamic message sign. Mounted atop the cab above the roof-mounted lighted bar. In-cab remote actuation and programming. Device shall be capable of manual raising and lowering should power actuation fail.	Dynamic Message Sign only
Frame-mounted trailer hitch or wheel lift pintle hook adapter with combination ball and pintle hook, 5,000 lb. minimum.	✓
Trailer hitch capable of handling a 1.875-inch ball and/or 2-inch ball	✓
Chain, Grade 8 alloy safety and working chains, assortment of hooks and clevis, suitable to the application	Four (4) Each, 10 foot in length
Trash can, 5-gallon or heavy-duty CONTRACTOR-grade, 30 gal. trash bags	One (1) each
Funnels, multi-purpose with flexible spouts.	Two (2) each
Wheel chocks or 4" x 4" wood wedges	Two (2) each

Approved advance warning signs; 48", reflectorized, MUTCD compliant, roll-up, fabric signs with a black legend and border on fluorescent pink background. Legends may include EMERGENCY SCENE AHEAD, BE PREPARED TO STOP, INCIDENT AHEAD, etc.	Four (4) each
Folding aluminum sign support stands for 48" fabric signs	Four (4) each
Traffic cones, FDOT-approved, 36-inch reflectorized.	Minimum of Sixteen (16) each
Hydraulic floor jack, capable of lifting passenger vehicles.	One (1) each 2 1/2-ton minimum
Air compressor with reservoir capable of inflating tires and operating an impact wrench. Compressor may be engine mounted, electric, or remote engine powered.	✓
Hoses and fittings to fit tire valve stems	✓
Jump Box with 400 cranking amps minimum	One (1) each

2. Tools

Tools	Heavy Pickup, Tow/Wrecker, Flatbed
Shovel	One (1) Square-end D-handle and One (1) Round-end D-handle spade
Steel/street broom, 24"	One (1) each
Lug wrenches to fit most vehicles, 4-way	One (1) each metric One (1) each standard
Hub cap and wheel lock removal kit	One (1) each
Emergency lug nut removal set	One (1) each
Spare Tire Removal Kit (SUV/pickup)	One (1) each
Pry bar, minimum thirty-six (24") inches in length	One (1) each
Air operated impact wrench, or electric impact wrench with self-contained battery, with socket sets to fit all vehicles (metric and standard).	One (1) set metric One (1) set standard
Bolt cutters, 18 inches or larger	One (1) pair
Toolbox containing the following tools:	
Screw Drivers	
Standard 1/8, 3/16, 1/4 and 5/16 Inch	One (1) each
Phillips head #1 and #2	One (1) each
Star driver (Torx bit)	One (1) set
Wire cutters	One (1) pair
Adjustable wrenches	
8-inch	One (1) each
12-inch	One (1) each

Open-end and box wrenches, complete set	One (1) each metric One (1) each standard
Five-pound hammer	One (1) each
Rubber mallet	One (1) each
Electrical tape (20 yards)	One (1) roll
Duct tape (20 yards)	One (1) roll
Tire pressure gauge	One (1) each
Mechanic's wire (25-foot roll)	One (1) roll
Rope, 1/2", (50 ft.)	One (1) each
Flashlight/traffic wand, heavy-duty with spare batteries.	One (1) each
Binoculars	One (1) pair
US DEPARTMENT of Transportation (USDOT) Emergency Response Guidebook (supplied by the DEPARTMENT) or App on Smartphone	One (1) each
Clean shop rags, paper towels, or equivalent	✓

3. Expendables


Expendables	Heavy Pickup, Tow/Wrecker, Flatbed
Diesel fuel in labeled and approved safety cans or tanks with flash arresting screen, spring-closing lid, and spout cover	Five (5) gallons
Gasoline in labeled and approved safety cans or tanks with flash arresting screen, spring-closing lid, and spout cover	Five (5) gallons
First aid kit (First Responder Kit, fully stocked)	One (1) kit
Stop the Bleed kit	One (1) kit
Fire extinguishers. If seal is broken, unit shall be tested, resealed and certified	Two (2) 10-lb ABC
Radiator water in labeled container(s)	One (1) each 5 gallons
Highway wet flares, 30-minute burn (min. quality)	Forty-eight (48) each
Absorbent material for liquid spills	Ten (10) gallons
Vehicle Spill Kit including:	
PND putty (10 oz.) or equivalent	One (1) each
Spill pads, 15"x18" min.	Fifteen (15) each
Spill poly socks, 4'	Three (3) each
Assorted bungees	One (1) set
Drinking water in individually sealed bottles, minimum 16 ounces, chilled.	Twelve (12) bottles

Attachment V

Road Ranger Service Patrol

Vehicle Markings, Logos, and Conspicuity Requirements


Front View

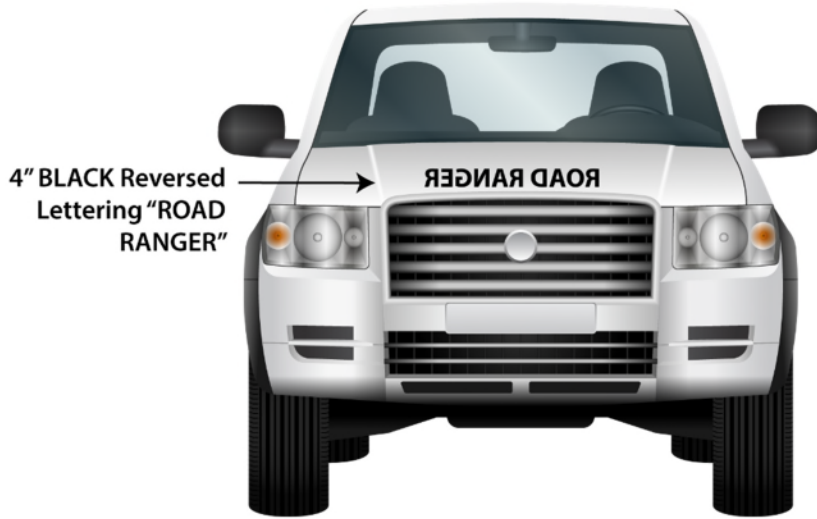

Rear View



Side View

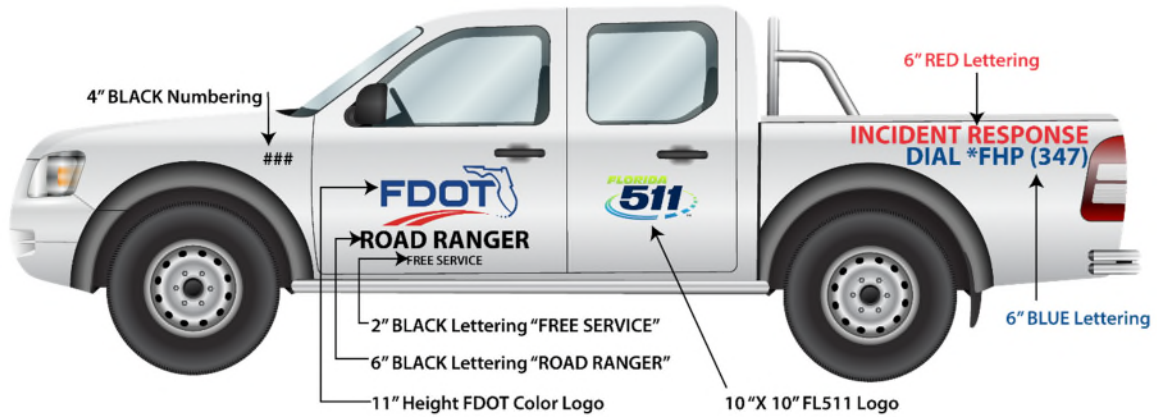

Requirements for Vehicle Markings Products

Product Company	Color and Serial Number	Use
Avery Dennison®	Cardinal Red (SW900-433-0) ¹	For upper cab around windows from conspicuity up, 6" piece on the front of the roof, and sides of the hood from conspicuity up
3M™	Red (680CR-72) with Comply™ adhesive ²	For all other Red on the vehicle
3M™	Blue (680CR-75) with Comply™ adhesive ²	For all Blue on the vehicle
3M™	White (680CR-10) with Comply™ adhesive ²	For all White on the vehicle (white stripes on sides install as one graphic, not separate pieces)
3M™	Black (680CR-85) with Comply™ adhesive ²	For all Black on the vehicle
3M™	White (680CR-10) with Comply™ adhesive ²	For all printed graphics with laminate
3M™	Red/White (983-326) ³	For conspicuity markings
3M™	Yellow/Green (983-23NLES 6150) ⁴	For rear chevron
3M™	Red (983-72NLES 6150) ^{3,4}	For rear chevron

References

¹<https://graphics.averydennison.com/content/dam/averydennison/graphics/na/en/documents/Product-Data-Sheets-NA-ONLY/SandC/vehicle-wrapping/supreme-wrap-film/pds-sw-900-wrapping-film.pdf>

²<https://multimedia.3m.com/mws/media/538421O/3mtm-scotchlitetm-removable-reflective-graphic-film-680cr-pb.pdf>

³<https://multimedia.3m.com/mws/media/1241053O/3m-diamond-grade-conspicuity-series-983-trucks-and-trailers.pdf>

⁴<https://multimedia.3m.com/mws/media/282921O/pb-983-3mtm-diamond-gradetm-conspicuity-markings-series-983.pdf>

Attachment VI

Road Ranger Service Patrol Operator Uniform Requirements

- 1. Shirt and High-Visibility Vests** – The Road Ranger uniform shall either be an integrated ANSI 107-2015 Class 3 HVSA shirt or a separate shirt and ANSI compliant Class 3 vest. All integrated shirts shall be yellow-green in color with a yellow-green, gray, or black collar. Where a separate shirt and vest are chosen, the shirt shall be either white or yellow-green. The predominant background color of the vest shall be high visibility yellow-green. Retroreflective material will be bordered with fluorescent orange-red stripes. In either case, shirts shall have either a full or partial button front. Tee shirts are prohibited.



Logos, insignia, and markings

- Shirt and vest logos shall include the Road Ranger logo (left front), a Florida 511 logo or FDOT Road Ranger logo (left arm), and the Florida TIM or Sponsorship logo (right arm).
*FLORIDA HIGHWAY PATROL (FHP) may be embroidered below the Florida TIM logo.



- The legend “ROAD RANGER” shall be included on the back of both integrated shirts and HVSA vests. Images, logos, or sponsorship information is prohibited on these areas in deference to ANSI requirements, identification, and safety. Sizes for the identification panels shall be as follows:
 - Front patch or imprint – (1.5 in x 4 in) = 6 in²
 - Back text “ROAD” – (3.25 in x 8 in) = 26 in² and “RANGER” – (3.25 in x 12 in) = 39 in²
 - Total non-compliant area – 71 in²
2. **Pants** – Black or dark blue with biomotion markers.
 3. **Black footwear**
 4. **Black belt with no-scratch buckle**
 5. **Cap** – A yellow-green ball cap shall be issued and may be worn. A white or high visibility yellow-green helmet may be worn in lieu of a ball cap. The headwear shall have an FDOT Road Ranger Logo on the front. No other logo or insignia shall be on the headwear, except small lettering may be included on the back or side of the headwear with the text “*FLORIDA HIGHWAY PATROL (FHP)”.



6. **Rain Gear** – Rain gear that is ANSI 107 compliant shall be issued. The FDOT Road Ranger logo shall be incorporated on the front left chest and the words “FDOT Road Ranger” shall be included on the back.
7. **Cold Weather Garments** – Cold weather garments should be a black jacket. A class 3 vest shall be worn over top of all cold-weather garments. Alternatively, an ANSI 107 compliant jacket shall be worn that incorporates the FDOT Road Ranger logo on the front left chest and the words “Road Ranger” on the back. If an ANSI 107 compliant jacket is used, the dominant color shall be yellow-green and any complementing color black or dark gray.

Attachment VII

Road Ranger Service Patrol

Sponsorships

The CONTRACTOR shall not enter into any sponsorship agreements, formal or informal, relating directly or indirectly to the Road Ranger Contract, without the specific, expressed, formal, written approval of the DEPARTMENT.

1. Vehicles

The Sponsor may include decals, insignia or vehicle wraps to be placed on Service Patrol Vehicles in addition to the existing logos. Placement of logos and vehicle wraps may vary based upon vehicle size, type, and configuration. All costs for initial vehicle graphics and installation will be the responsibility of the Sponsor. Any replacement of decals, insignia, or vehicle wraps (full or partial) that are the result of damages or replacement of fleet vehicles, will be done so at the cost of the CONTRACTOR providing Road Ranger Services. In the case of the termination of Sponsorship Rights for any reason other than termination as a result of a default in financial or other obligations by the Sponsor, the DEPARTMENT is responsible for the cost of removing all sponsor insignia from all vehicles and returning the vehicles to their previous condition.

2. Road Ranger Uniforms

The Sponsor may elect to provide uniform patches for the shirts, sweatshirts, jackets, and safety vests for existing uniforms or new uniforms for each Road Ranger. All uniform designs and patch configurations shall meet the specifications required by the procedure Road Ranger Operations, 750-030-015-c. The final design of all uniform items will be reviewed and approved by the Central Office Traffic Incident Management and Road Ranger Program Manager.

3. Promotional Materials

The Sponsor shall have the right to develop other promotional materials to be distributed by Road Rangers to motorists who receive services. All such materials shall be submitted by the Sponsor for the DEPARTMENT's written prior approval before such distribution. The promotional materials shall be paid for by the Sponsor directly at no cost to DEPARTMENT or CONTRACTOR. The Sponsor will have the right to provide, and Road Rangers will distribute an optional online survey for assisted motorists to provide their feedback via a website that will be provided by the Sponsor.

4. Special Events

The Sponsor may request the promotional use of the Road Ranger Service Patrol Vehicles and their operators for events such as child safety seat inspections, the fairs, parades, and other safety events as may be jointly agreed upon, subject to the availability as reasonably determined by the DEPARTMENT. The Sponsor shall make written requests to the DEPARTMENT for such use with a minimum of thirty (30) days' notice in advance. The Sponsor will obtain approval from the DEPARTMENT prior to the CONTRACTOR supporting the event. Once approval has been given,

scheduling and coordination will be between the Sponsor and the Road Ranger Service Patrol provider for the area. Participation of Service Patrol Vehicles and Road Rangers assisting with the special event/publicity shall not hinder the normal Contracted operations of the Road Ranger service provider. The Sponsor shall be responsible to pay for the driver's wages at the Contracted rate and any/all other expenses incurred by the CONTRACTOR to support the event.