



11/01/19


REVISION

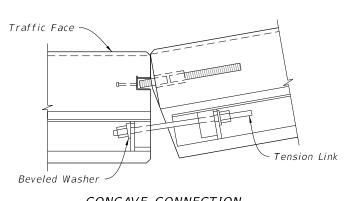


# CONCAVE CONNECTION

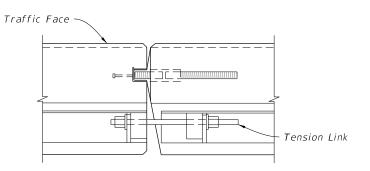


#### PARALLEL CONNECTION

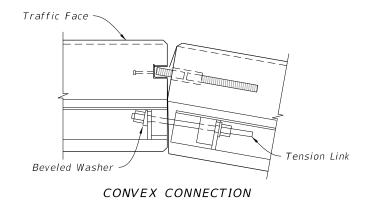


# == PLAN VIEWS OF CONNECTIONS ======



### = au au






FLAT FACE FEMALE END

BEVELED FACE MALE END

# = END VIEWS =

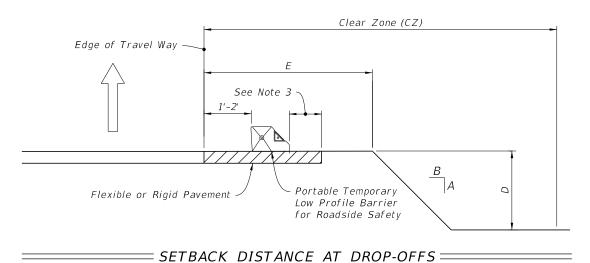

# NOTES:


- 1. LIMITATION OF USE: This installation technique can only be used on flexible or rigid pavement.
- 2. ASPHALT PAD: Where existing pavement is not present, construct 2" Asphalt Pad using miscellaneous asphalt pavement in accordance with Specification 339 with the exception that the use of a pre-emergent herbicide is not required.
- 3. Minimum 9" on 1:10 or flatter slopes for 'Portable Temporary Low Profile Barrier For Roadside Safety.' For values A, B, D and E see Index 102-600.


# SYMBOLS:

Type I Object Marker

□⇒ Direction of Traffic

WORK ZONE	LATERAL	SETBACK
SPEED	OFFSET	DISTANCE
45 MPH OR LESS	1' MIN, 2' PREFERRED	9"



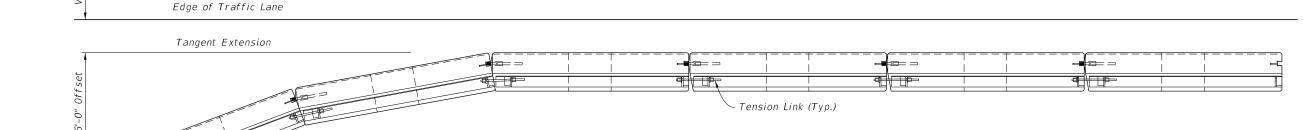

Height to Bottom of Type 1 Object Marker is 18"

DESCRIPTION:

= APPROACH END OFFSET ===

PLAN VIEW

REVISION 11/01/25

