



10/6/3/01

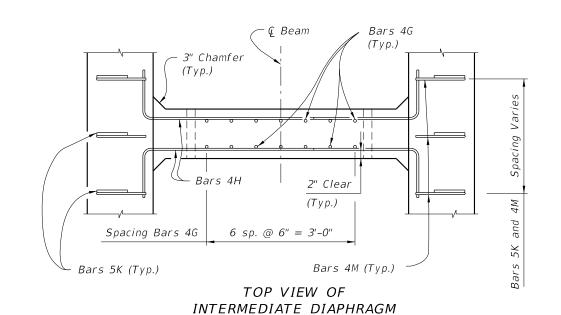

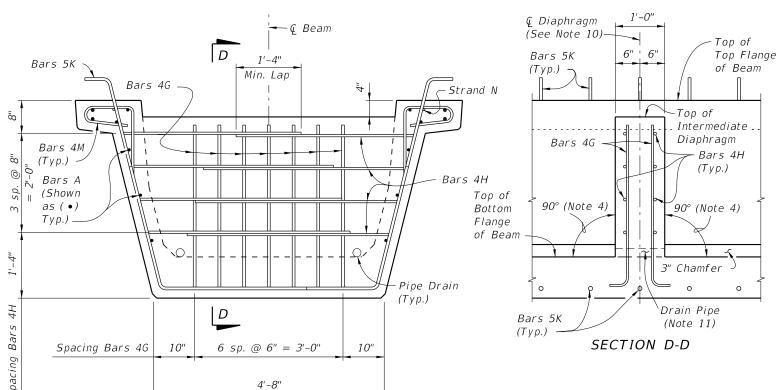

SECTION AT INTERMEDIATE DIAPHRAGM

NOTES: For referenced notes see Index 450-210.

CONVENTIONAL REINFORCING STEEL BENDING DIAGRAMS BILL OF REINFORCING STEEL FOR ONE BEAM ONLY MARKSIZE NO. REQD. LENGTH A1 6 Dim. L - 4" 4 A2 10 Dim. L - 4" В 5 12 4'-1" 4 16 5'-1" D1 3 156 1'-6" Bars 3D1 D2 3 26 4'-6" Ε 5 24 5'-3" Bars 5B 4 20 F 6'-2" 6" G 4 See Table 4'-0" L - 4" (Min. Lap Splice = 2'-0") Bars 5E 4A2 L - 4" (Min. Lap Splice = 1'-4") 4 4'-7" Н See Table 3D2 4'-6" 5 See Table 8'-0" 5 20 14'-0" Μ 4 See Table 3'-11" Bars 6A1, 4A2 and 3D2 Ν ¾" Ø Strand 2 Dim. L - 3" Field Bend as Required for Skew 5'-2" 3" Ø Pin 3'-7" Bars 4C Bars 4F 3'-7" 8" Bars 4G Bars 4H 1'-0" 1'-0" 3" Ø Pin- $10\frac{1}{2}$ " -Field Bend as Required for Skew 4'-0" 1'-07/8" 3'-0" Bars 5L Bars 4M Bars 5K

DESCRIPTION: REVISION 11/01/16

