
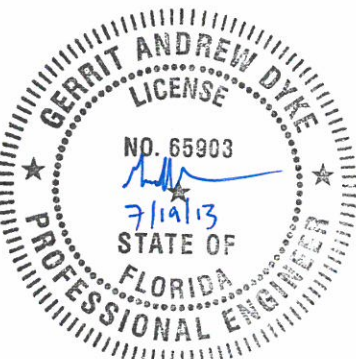


NOTES: UNLESS OTHERWISE SPECIFIED.

1. ALL BOLTS, NUTS, CABLE ASSEMBLIES, CABLE ANCHOR, GROUND STRUT, SLIDER PANEL AND BRACKET, IMPACT HEAD AND OTHER STEEL COMPONENTS SHALL MEET THE GALVANIZING REQUIREMENTS FOR GUARDRAIL, SECTION 967 OF THE FDOT STANDARD SPECIFICATIONS.
2. IF ROCK EXCAVATION IS ENCOUNTERED, CONSULT THE MANUFACTURER'S INSTALLATION MANUAL FOR RECOMMENDATIONS.
3. WHEN SITE CONDITIONS PERMIT, POSTS MAY BE DRIVEN. IF POSTS ARE PLACED IN A DRILLED HOLE, THE BACKFILL MATERIAL MUST BE SATISFACTORILY COMPECTED TO PREVENT SETTLEMENT.
4. THE SPECIAL SHEAR BOLTS USED TO CONNECT THE W-BEAM PANELS AT POSTS #5 AND 7 ARE DIFFERENT THEN STANDARD SPLICE BOLTS. FOR EASY IDENTIFICATION THEY ARE SUPPLIED WITH YELLOW HEADS.

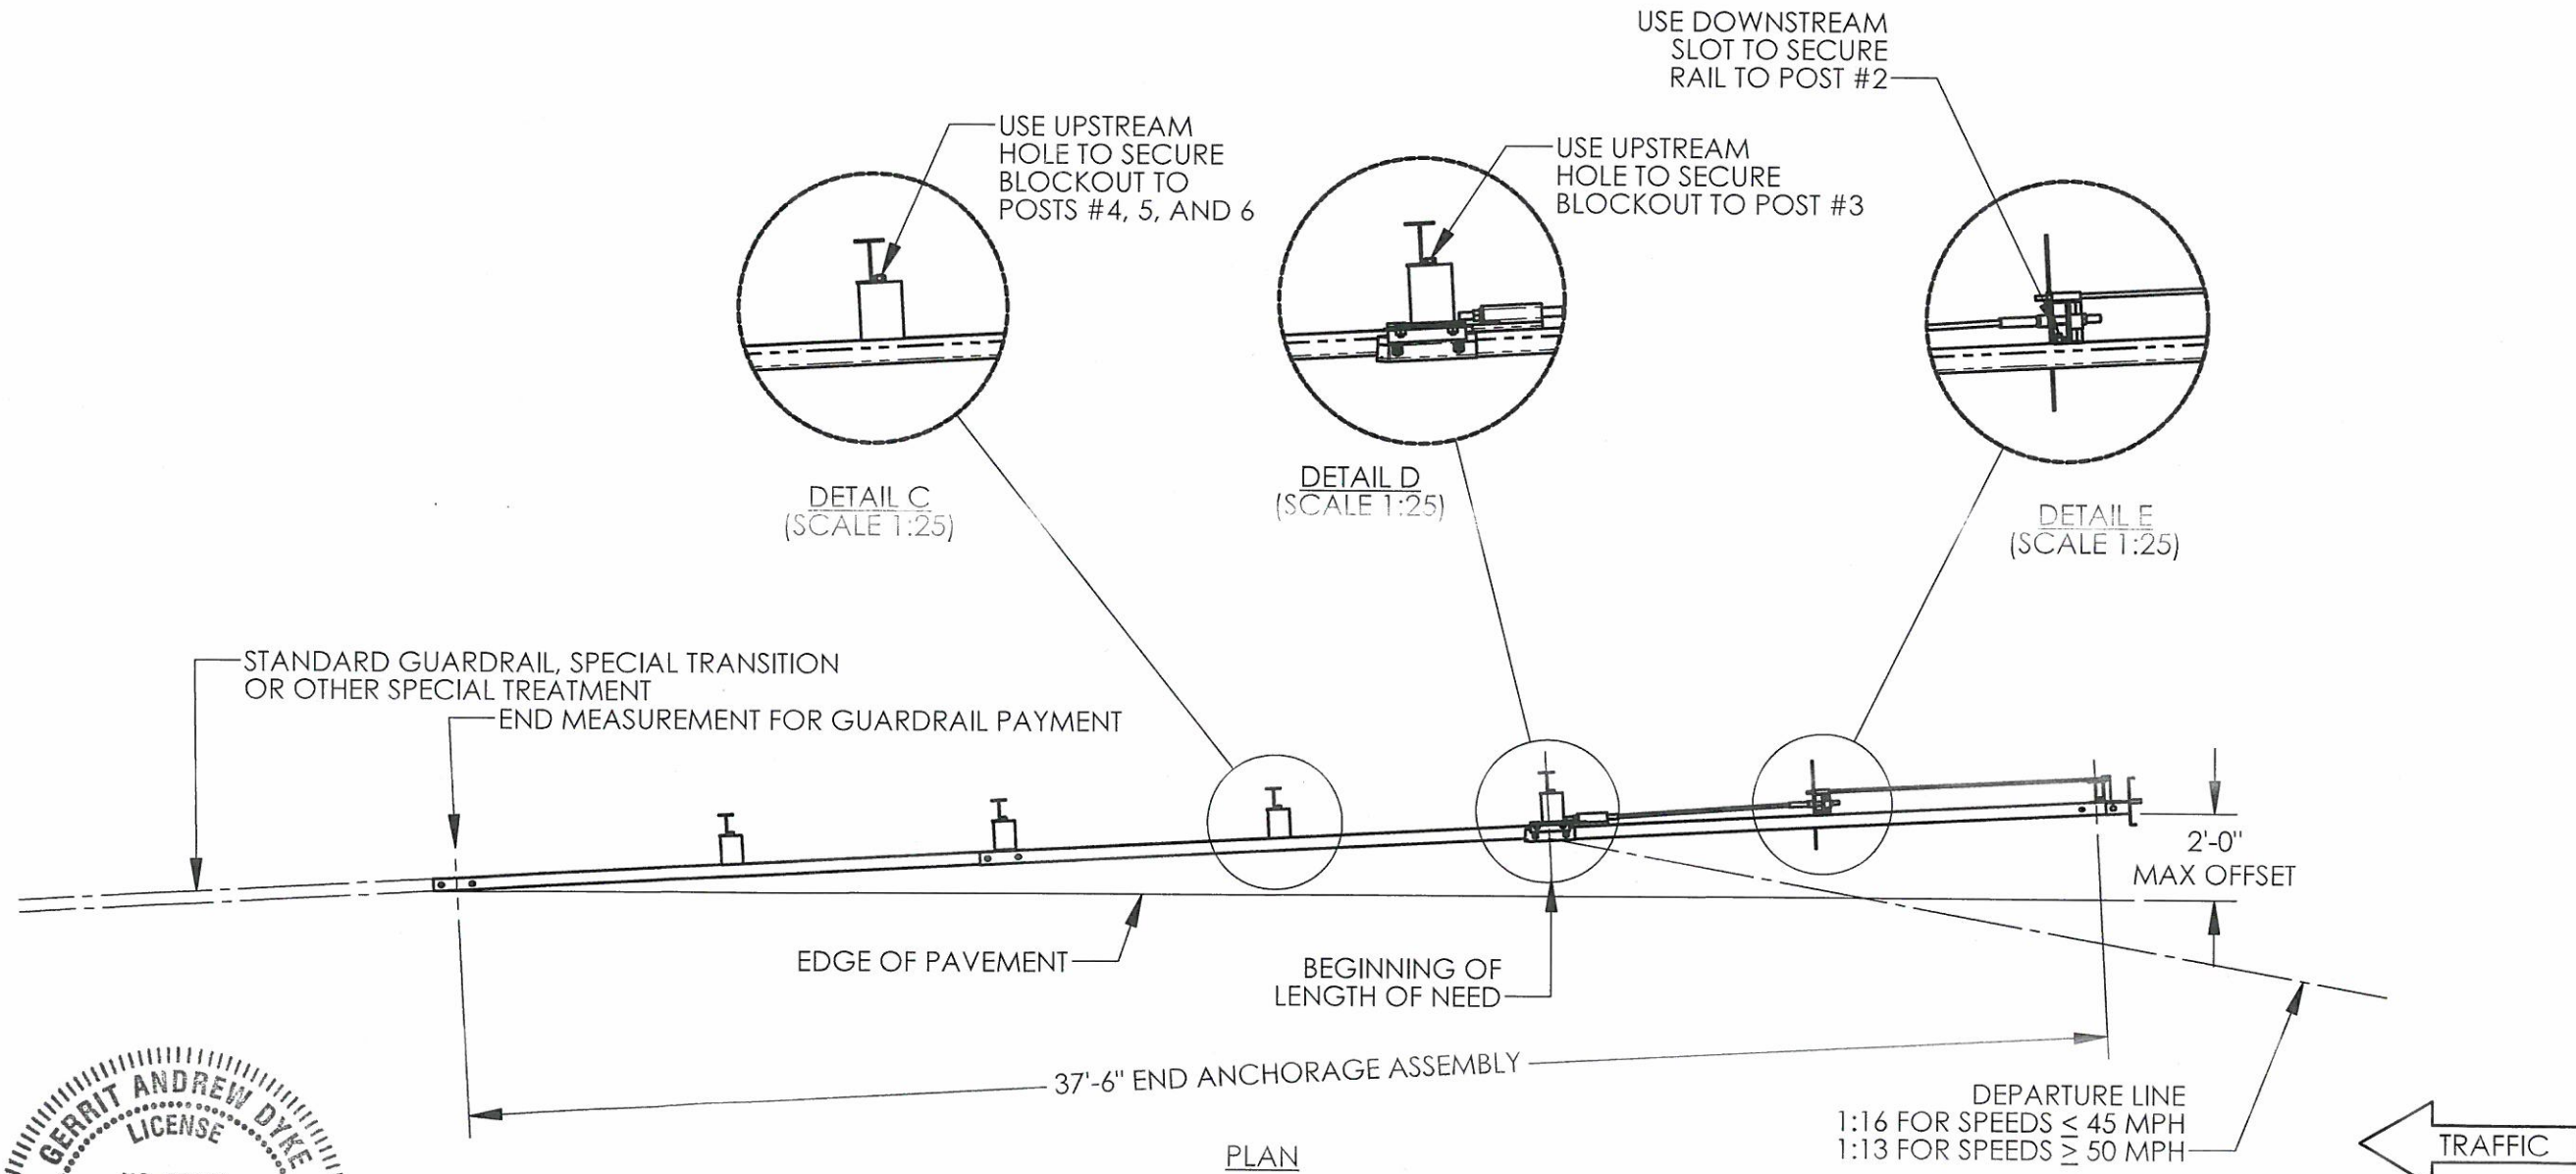

**X-LITE PARALLEL END TERMINAL DETAILS**

SIZE <b>B</b>	DWG NO. <b>BSI-1304042-AP</b>	REV. <b>1</b>
SCALE 1:50	FDOT QPL S536-0221	SHEET 3 OF 3