



NOTES

- 1. All material in the shaded area is excess base to be removed.
- 2. The cost for removal of excess base material shall be included in the contract unit price for base.
- 3. Payment for base shall be calculated using normal width.

REMOVAL OF EXCESS BASE MATERIAL

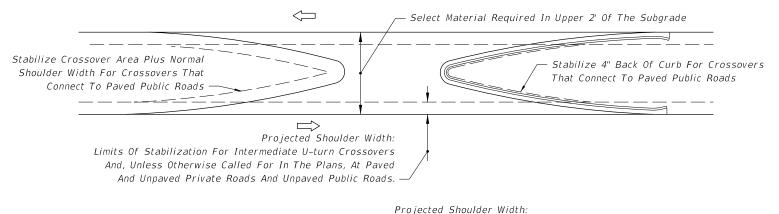

Limits Of Stabilization For Intermediate U-turn Crossovers And, Unless Otherwise Called For In The Plans, At Paved And Unpaved Private Roads And Unpaved Public Roads. Stabilize Crossover Area Plus Normal Stabilize Crossover Area Plus Normal Shoulder Width For Crossovers That Shoulder Width For Crossovers That Connect To Paved Public Roads Connect To Paved Public Roads \Rightarrow Select Material Required In Upper 24" Of The Subgrade -



NOTES

- 1. When the median has curb or curb and gutter, stabilize 4" back of curb.
- 2. When the median has shoulder with no curb or curb and gutter, stabilize to normal shoulder width.
- 3. See the details above for stabilizing requirements at crossroads.
- 4. Stabilize entire area under all paved traffic islands.
- 5. Stabilize full width under all traffic separators.
- 6. Select material as defined on Index 120-001. For minor collectors and local facilities the depth of select material thickness may be reduced from 24" to 18".

MEDIAN STABILIZING DETAILS

REVISION 11/01/17

DESCRIPTION: