SOIL PARAMETERS:

- 1. See Wall Control Drawings for soil characteristics of foundation material to be used in the design of the wall system.
- 2. The Contractor will provide soil design parameters for backfill material based on the actual soil characteristics utilized at the site.

MATERIALS

1. See Specification Section 548 for material requirements.


CONSTRUCTION:

- 1. Walls will be constructed in accordance with Specification Section 548 and the Wall Company's instructions.
- 2. For location and alignment of retaining walls, see Wall Control Drawings.
- 3. If required, locate manholes and drop inlets as shown on wall elevations.
- 4. Refer to Wall Control Drawings of individual walls for minimum reinforcement strip/mesh length, factored bearing resistance's, minimum wall embedment and anticipated long term and differential settlements.
- 5. The Contractor is responsible for controlling water during storm events as needed during construction.
- 6. It is the Contractor's responsibility to determine the location of any guardrail posts behind retaining wall panels. Prior to placement of the top layer of soil reinforcement, individual reinforcing strips/mesh may be skewed (15° maximum) to avoid the post locations if authorized by the Engineer. No cutting of soil reinforcement is allowed unless shown on Shop Drawings and approved by the Engineer. Any damage done to the soil reinforcement due to installation of the guardrail will be repaired by the Contractor at the Contractor's expense. Repair method will be approved by the Engineer.
- 7. If existing or future structures, pipes, foundations or guardrail posts within the reinforced soil volume interfere with the normal placement of soil reinforcement and specific directions have not been provided on the plans, the Contractor will notify the Engineer to determine what course of action shall be taken.
- 8. The Contractor is responsible for gradually displacing upper layer(s) of soil reinforcement downward (15° maximum from horizontal) to avoid cutting soil reinforcement and conflicts with paving and subgrade preparation. The Contractor's attention is directed especially to situations where roadway superelevation and/or soil mixing are anticipated.
- 9. For concrete facing panel surface treatment, see Wall Control Drawings. Extend surface treatment a minimum of 6" below final ground line.
- 10. Drive piles located within the soil volume prior to construction of the retaining wall, unless a method to protect the structure, acceptable to both the Engineer and Wall Company, is proposed and approved in writing. The portion of piles or drilled shafts extensions within the soil volume will be wrapped with polyethylene sheeting in accordance with Specification Section 459.
- 11. A structural extension of the connection of the retaining wall panel to soil reinforcement will be used whenever necessary to avoid cutting or excessive skewing (greater than 15°) of the soil reinforcement around obstructions (i.e., piles, pipes, manholes, drop inlets, etc.).
- 12. Steps in leveling pads will occur at MSE Wall panel interfaces. Panels will not cantilever more than 2" past the end of the upper tier leveling pad.
- 13. The top of the leveling pad or footing will be 2'-0" minimum below final ground line.
- 14. Top of leveling pad elevations shown in the Wall Control Drawings are maximum elevations. The constructed leveling pad elevations may be deeper based on the panel layout shown in the shop drawings.
- 15. The height of panels in the bottom course of MSE Walls must not be less than half the height of a standard panel.
- 16. Work this Index with Index 521-600 thru 521-650.


DESCRIPTION:

SHOP DRAWINGS:

See Specification Section 548 for shop drawing requirements.

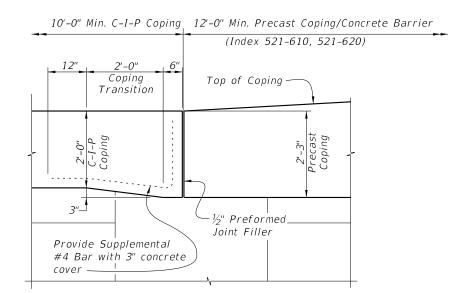

ELEVATION VIEW OF COPING HEIGHT TRANSITION

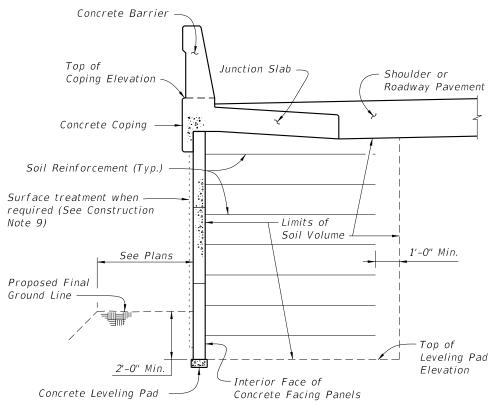

TYPICAL MSE RETAINING WALL SECTION
WITH A CONCRETE BARRIER
(Showing Limits of the Reinforced Soil Volume)

		FD	OT MSE	RETAINI	NG WALL	CLASSI	FICATION TAI	BLE					
Applicable	Durability Requirements (Carbon-Steel Reinforcing)			Durability Requirements (FRP Reinforcing)			Soil	Other Allowable FDOT Wall Types					
FDOT Wall	Concrete	Concrete	Pozzolan	Concrete	Concrete	Pozzolan	Reinforcement						
Type *	Cover	Class	Additions?	Cover	Class	Additions?	Type	2A	2B	2C	2D	2E	2F
	(in.)	for Panels	**	(in.)	for Panels	**							
Type 2A	2	II	No	1.5	II	No	Metal		/	/	/	/	/
Type 2B	2	IV	No	1.5	IV	No	Metal			/	/	/	1
Type 2C	3	IV	No	1.5	IV	No	Metal				/	/	/
Type 2D	3	IV	Yes	2	IV	No	Metal					/	/
Type 2E	3	IV	No	2	IV	No	Plastic						/
Type 2F	3	IV	Yes	2	IV	No	Plastic						

* See Data Table in Contract Plans.

** Highly Reactive Pozzolans

GENERAL NOTES AND DETAILS

LAST REVISION 11/01/20

FDOT

FY 2021-22 STANDARD PLANS