
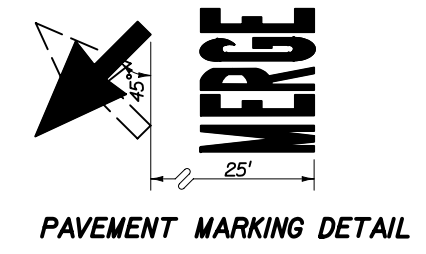



* S	TRANSITION DISTANCE L_1 (FEET)							
	**W 8	9	10	11	12	13	14	
30	120	135	150	165	180	195	210	
35	165	185	205	225	245	265	285	
40	215	240	270	295	320	350	375	
45	360	405	450	495	540	585	630	
50	400	450	500	550	600	650	700	
55	440	495	550	605	660	715	770	
60	480	540	600	660	720	780	840	
65	520	585	650	715	780	845	910	

SPEED M.P.H.*	"A" (FT.)
55	950
50	850
45	750
40	650
30	450

POSTED (DAY) SPEED LIMIT M.P.H.	"y" (FT.)
30 OR LESS	10
35	20
40	20
45	30
50 OR MORE	40

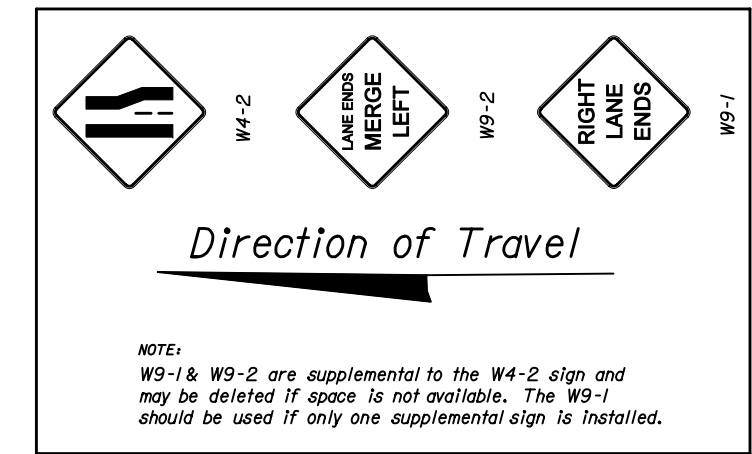

$L_1 = WS$ (45 MPH or Greater) * Design Speed
 $(L_1 = \frac{WS^2}{60})$ ≤ 40 MPH ** Lateral offset

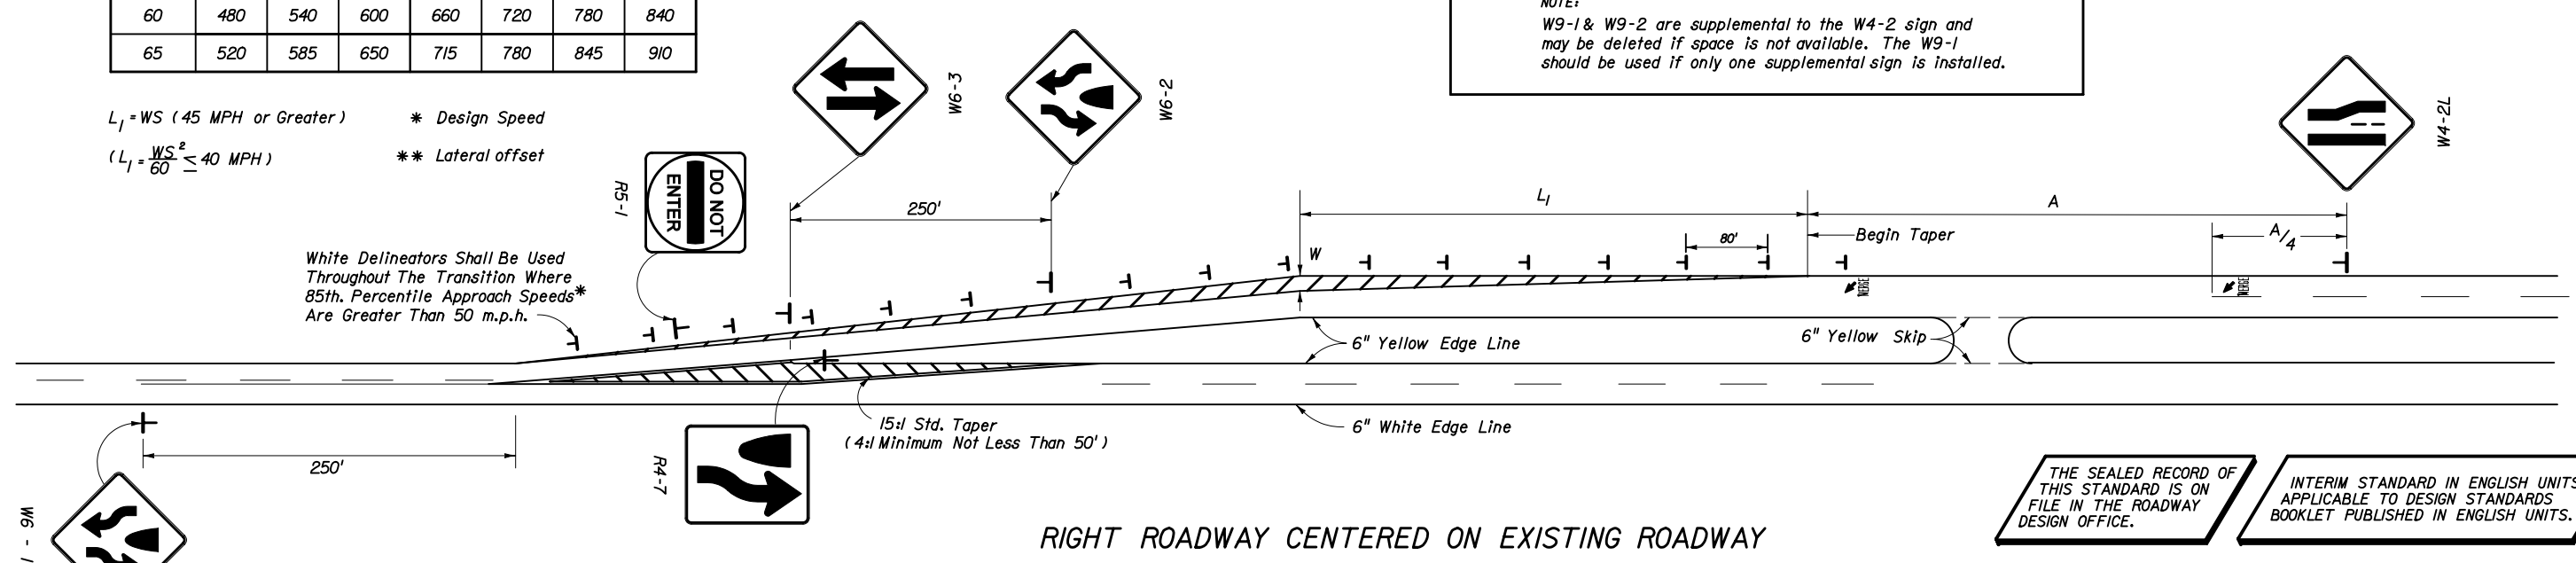

THE SEALED RECORD OF THIS STANDARD IS ON FILE IN THE ROADWAY DESIGN OFFICE.

INTERIM STANDARD IN ENGLISH UNITS APPLICABLE TO DESIGN STANDARDS BOOKLET PUBLISHED IN ENGLISH UNITS.

SCHEMES FOR TRANSITION - 2 LANE / 4 LANE ROADWAY

STATE OF FLORIDA DEPARTMENT OF TRANSPORTATION		
SPECIAL MARKING AREAS		
INTERIM STANDARD	APPROVED BY	
SHEET 5 OF 13 IS A REPLACEMENT FOR THE EXISTING SHEET TO THE DESIGN STANDARDS, BOOKLET DATED JANUARY 2004.	REVISION NO. 04	SHEET NO. 5 of 13
		INDEX NO. 017346

Revised: 01-01-05