GENERAL NOTES:

1. Meet the requirements of Specification 700.

2. Verify Column lengths in the field prior to fabrication.

3. Shop drawings:

   A. Sign Support Shop drawings are not required when fabricated in accordance with this Index and support columns do not exceed the width ("W") shown in the plans by more than 2'-0".

   B. Sign Panels: Horizontal panel splices are allowed at interior wind beams for sign panels with a height ("H") greater than 10 feet. Shop drawings required for horizontal panel splice details.

   C. When shop drawings are required, obtain approval prior to fabrication.

4. Materials:

   A. Sign Panel Mounting Materials:
      a. Aluminum Bars, and Extruded Shapes: ASTM B221, Alloy 6061-T6 or Alloy 6351-T5
      b. Aluminum Structural Shapes: ASTM B221, Alloy 6061-T6
   B. Sign Support Structure Materials:
      a. Steel Plates and Structural Shapes: ASTM A36 or ASTM A709, Grade 36
      b. Steel Weld Metal: E70XX
      c. Shims: Brass ASTM B36 or Galvanized Steel
   C. Aluminum Bolts, Nuts and Washers:
      a. Flat Head and Button Head Bolts: ASTM F 468, Alloy 2024-T4
      b. Hex Nuts: ASTM F467, 2024-T4
      c. Washers: ASTM B221, Alloy 2024-T4
   D. Stainless Steel Bolts, Nuts and Washers Alloy Group 2, Condition A, may be substituted for the Aluminum bolts as follows:
      a. Bolts: ASTM F593, CW1 or SH1
      b. Nuts: ASTM F594,
   E. High Strength (H.S.) Steel Bolts, Nuts and Washers:
      a. Galvanized Hex Head Bolts: ASTM F3125, Grade A325, Type 1
      b. Galvanized Nuts: ASTM A563 Hex, Grade DH
      c. Galvanized Washers: ASTM F436
   F. Concrete: Class II.

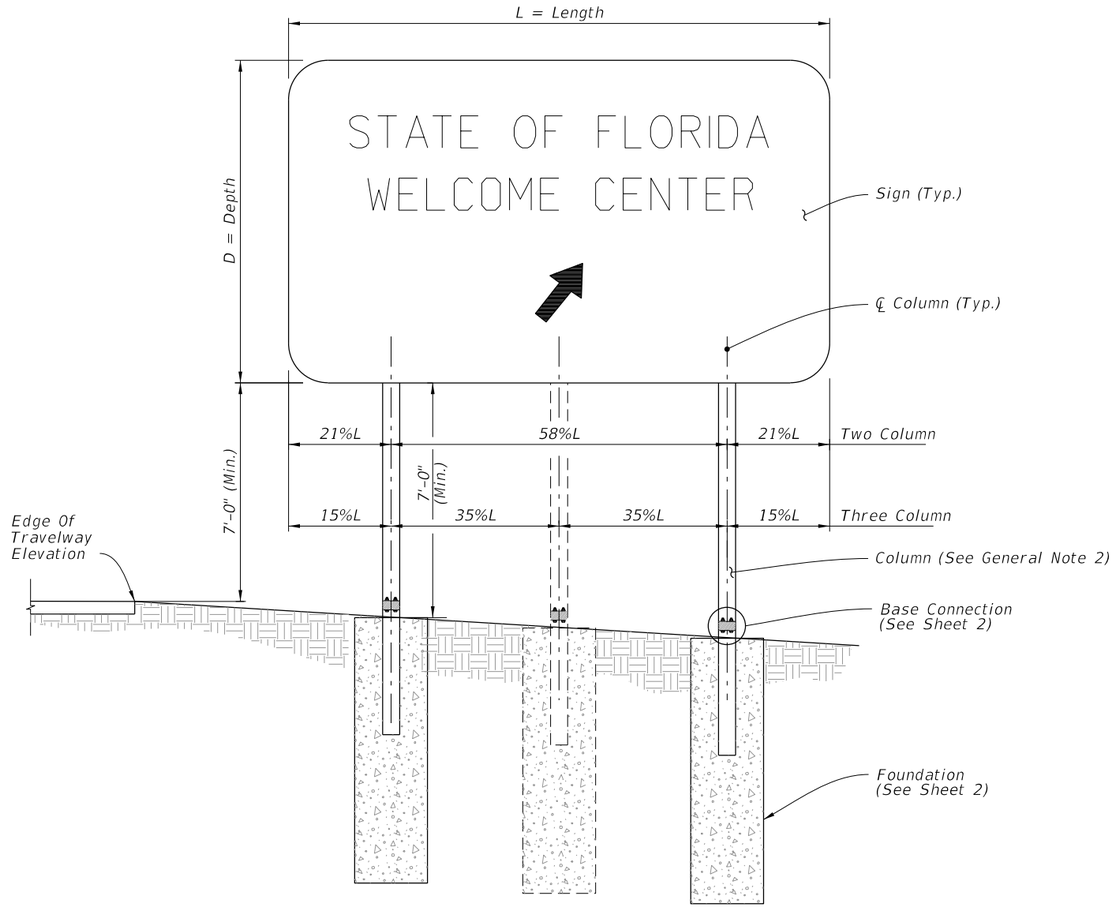

FRONT ELEVATION

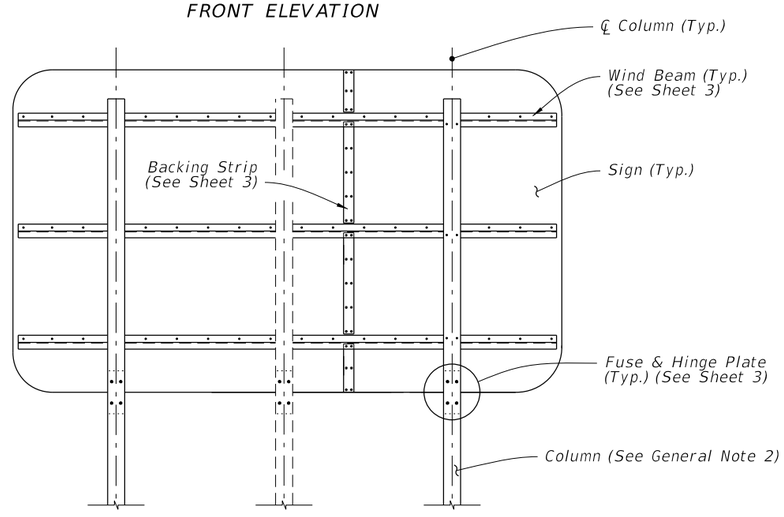

BACK ELEVATION

MULTI-COLUMN SIGN ASSEMBLY

5/13/2024 11:11:17 AM

LAST REVISION	REVISION	DESCRIPTION:	FDOT	FY 2023-24 STANDARD PLANS	MULTI-COLUMN GROUND SIGN	INDEX	SHEET
11/01/22						700-020	1 of 3

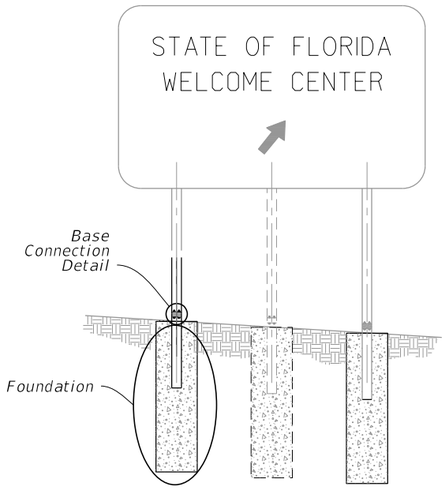

FOUNDATION DATA				
Steel Post & Stub Section*	Dia.	Depth	Stub Column Length	Reinf. Bars V
S 3x5.7	2'-0"	4'-0"	3'-0"	10-#6
W 6x12	2'-0"	6'-0"	3'-0"	10-#6
W 8x18	2'-4"	7'-6"	4'-0"	8-#8
W 8x24	2'-4"	8'-6"	4'-0"	8-#8
W 10x33	2'-4"	10'-3"	4'-0"	8-#8
W 12x45	2'-8"	11'-3"	5'-0"	10-#8

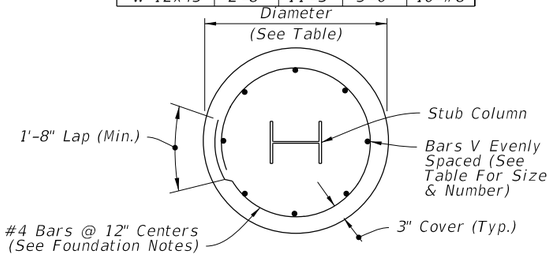

PLAN

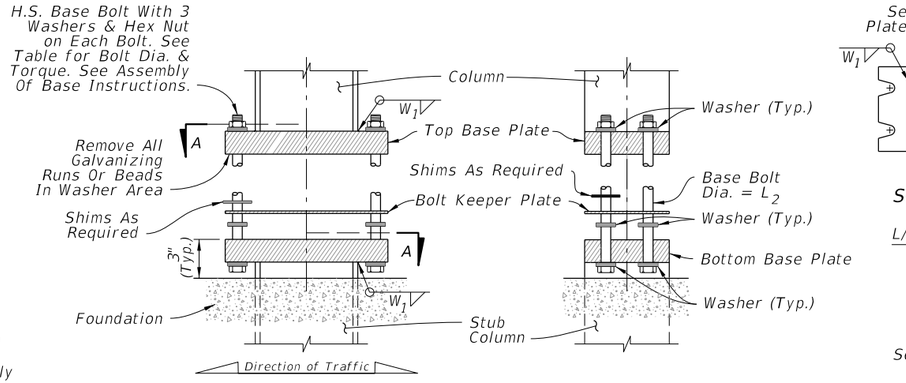

SIDE ELEVATION

FRONT ELEVATION



SECTION A-A

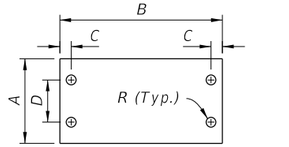

Plate Thickness=0.0149" (28 Gauge)

BOLT KEEPER PLATE DETAIL



SHIM DETAIL

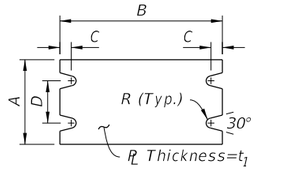

BASE PLATE DETAIL

BASE CONNECTION DATA										SHIM	
Steel Post & Stub Section*	A	B	C	D	R	t_1	L_2	W_1	Torque (lbf*in)	L	M
S 3x5.7	4"	7"	3/4"	2"	5/16"	1"	1/2"	1/4"	90 ± 20	1-1/4"	9/16"
W 6x12	4"	10"	3/4"	2"	3/8"	1-5/8"	5/8"	1/4"	270 ± 45	1-3/8"	11/16"
W 8x18	5-1/4"	12-1/2"	7/8"	2-3/4"	7/16"	1-3/4"	3/4"	3/8"	445 ± 75	1-3/4"	13/16"
W 8x24	6-1/2"	12-1/2"	7/8"	3-1/4"	7/16"	1-3/4"	3/4"	3/8"	445 ± 75	2-1/8"	13/16"
W 10x33	8"	16"	1-1/4"	4-3/4"	9/16"	2"	1"	1/2"	580 ± 90	2-3/8"	1-1/16"
W 12x45	10"	18"	1-1/4"	6"	9/16"	2"	1"	1/2"	580 ± 90	2-3/4"	1-1/16"

* Designations: (Nominal Depth in inches) x (weight in pounds per linear foot).

MULTI-COLUMN SIGN ASSEMBLY

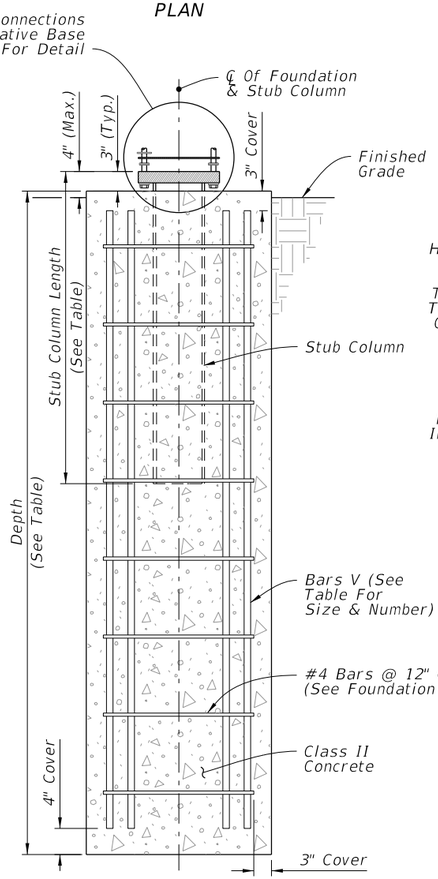

ELEVATION

FOUNDATION NOTES:

The Contractor may use Welded Wire Reinforcement (WWR) for foundation reinforcing.

At the Contractors option, the #4 tie bars at 12" o.c. may be replaced by D10 Spiral Wire @ 6" pitch, with three flat turns at the top and one flat turn at the bottom in accordance with Specification 415.

BASE CONNECTION NOTES:

1. Assembly of Base Instructions:
   - A. Place one washer on each Base Bolt between the Bottom Base Plate and the head of high strength Base Bolt; place the next washer between the Bottom Base Plate and the Bolt Keeper Plate; add the Top Base Plate section and place the third washer between the Top Base Plate and the Nut.
   - B. Shim as required to plumb column. Provide 2-0.0149" thick (28 gauge) and 2-0.0329" thick (21 gauge) shims per column.
2. H.S. Base Bolt L Tightening Instructions:
   - A. Tighten Base Bolts to the maximum possible with a 12" to 15" wrench (this will bed the washers and shims and clear the bolt threads).
   - B. Loosen each Base Bolt one turn.
   - C. Under the supervision of the Engineer, use a calibrated wrench to tighten bolts to the torque prescribed in the Table. Over tightened Base Bolts will not be permitted.
   - D. Burr threads at junction with nut to prevent nut loosening. Treat damaged galvanizing.
3. Assemble Post to Stub with Base Bolts and three flat washers per bolt (See Base Connection Details). Tighten Base Bolts in accordance with Instructions with Note 2.
4. Weld Base Plate to Post & Stub or if using the Alternate Connection Detail weld Base Plate and Stiffeners to Post and Stub.
5. Orient Stub Post according to direction of traffic.

FOUNDATION

BASE CONNECTION

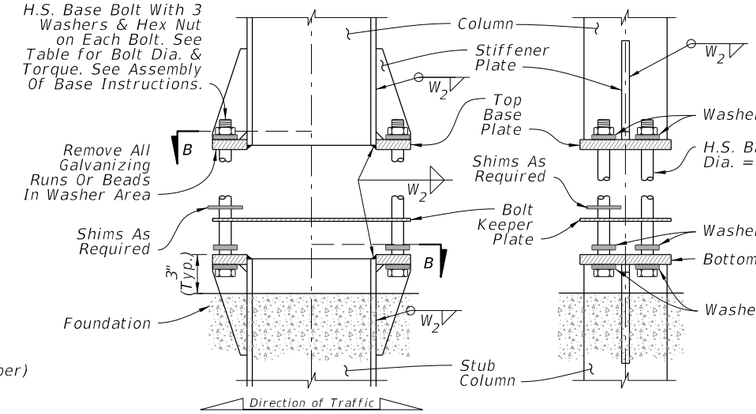

SIDE ELEVATION

FRONT ELEVATION

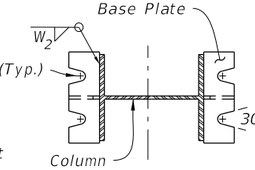

SECTION B-B

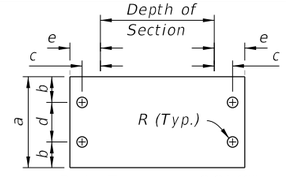

Plate Thickness=0.0149" (28 Gauge)

BOLT KEEPER PLATE DETAIL



BASE PLATE DETAIL



STIFFENER PLATE DETAIL

ALTERNATIVE BASE CONNECTION DATA												
Steel Section*	a	b	c	d	e	t_2	L_2	R	Torque (lbf*in)	g	h	W_2
W 6x12	4-3/4"	1-1/8"	1-3/16"	2-1/2"	2"	1/2"	5/8"	3/8"	270±45	5-1/8"	2"	1/4"
W 8x18	5-3/4"	1-1/2"	1-3/8"	2-3/4"	2-3/16"	5/8"	3/4"	7/16"	445±75	6-1/4"	2-3/16"	1/4"
W 8x24	7"	1-3/4"	1-3/8"	3-1/2"	2-3/8"	3/4"	3/4"	7/16"	445±75	8"	2-3/8"	5/16"
W 10x33	8"	2"	1-9/16"	4"	2-3/4"	3/4"	1"	9/16"	580±90	8"	2-3/4"	5/16"
W 12x45	8"	2"	1-9/16"	4"	3"	3/4"	1"	9/16"	580±90	8"	3"	5/16"

* Designations: (Nominal Depth in inches) x (weight in pounds per linear foot).

ALTERNATIVE BASE CONNECTION

FOUNDATION AND BASE CONNECTION DETAILS

10/6/2022 2:36:28 PM

LAST REVISION	REVISION	DESCRIPTION:				
11/01/22			FY 2023-24 STANDARD PLANS	MULTI-COLUMN GROUND SIGN	INDEX 700-020	SHEET 2 of 3

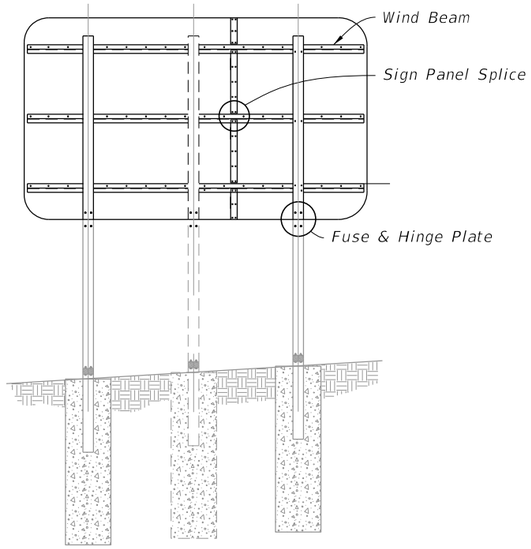

BACK ELEVATION

MULTI-COLUMN SIGN ASSEMBLY

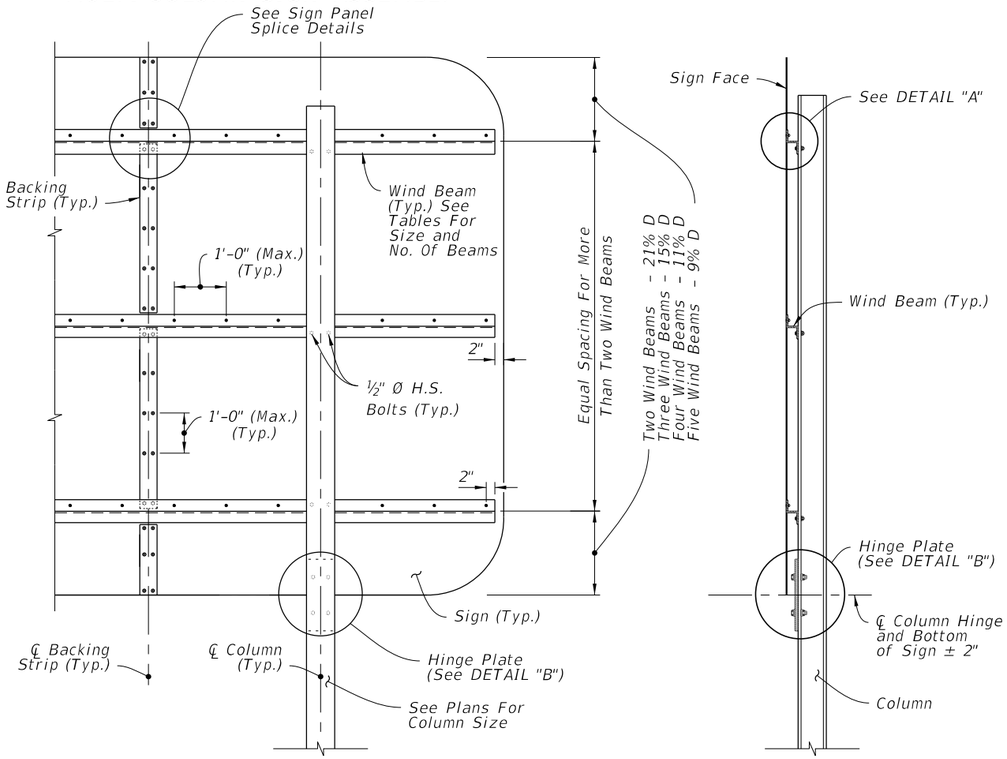

BACK ELEVATION

SIDE ELEVATION

MULTI-COLUMN SIGN BACK PANEL

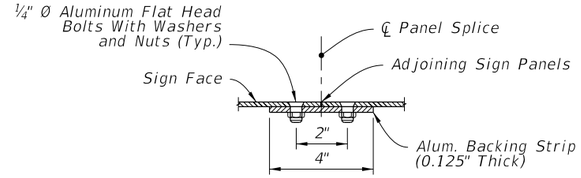

PLAN VIEW

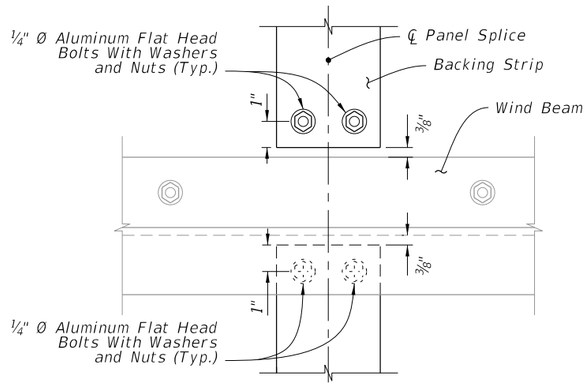

ELEVATION

SIGN PANEL SPLICE

NUMBER OF WIND BEAMS BASED ON SIGN DEPTH (D)			
2 Beams	3 Beams	4 Beams	5 Beams
D ≤ 8'	8' < D ≤ 12'	12' < D ≤ 16'	16' < D ≤ 20'

WIND BEAM SIZE BASED ON SIGN LENGTH (L)		
2 Columns	3 Columns	Aluminum Beam Size **
L ≤ 12'	L ≤ 18'	Z 1-¾ x 1-¾ x 1.09
12' < L ≤ 20'	18' < L ≤ 30'	Z 3 x 2-$^{11}/_{16}$ x 2.33
20' < L ≤ 25'	30' < L ≤ 39'	Z 4-$^{1}/_{16}$ x 3-⅛ x 3.57

**Designation gives (Member Depth in inches) x (Flange Width in inches) x (lb/ft)

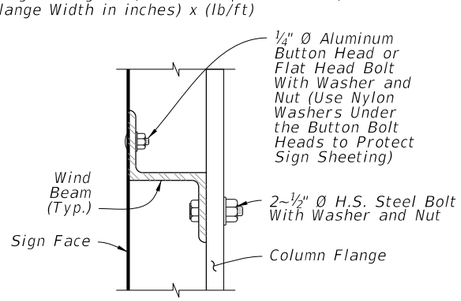

DETAIL "A"

FUSE (HINGE) PLATE DATA									
Steel Section*	a	b	c	d	e	t_2	D_1	D_2	L_1
S 3x5.7	7-1/4"	2-3/8"	1-1/4"	1/2"	9/16"	3/8"	7/16"	9/16"	1/2"
W 6x12	7-1/4"	4"	1-1/4"	7/8"	15/16"	3/8"	13/16"	11/16"	5/8"
W 8x18	8-1/4"	5-1/4"	1-3/8"	1-1/8"	1-1/4"	3/8"	1"	13/16"	3/4"
W 8x24	8-1/4"	6-1/2"	1-3/8"	1-1/2"	1-1/2"	1/2"	1"	13/16"	3/4"
W 10x33	9-1/4"	8"	2"	1-3/4"	1-3/4"	5/8"	1-1/8"	1-1/16"	1"
W 12x45	11"	8"	2"	1-3/4"	1-3/4"	3/4"	1-5/16"	1-1/16"	1"

* Designations: (Nominal Depth in inches) x (Weight in Pounds Per Linear Foot)

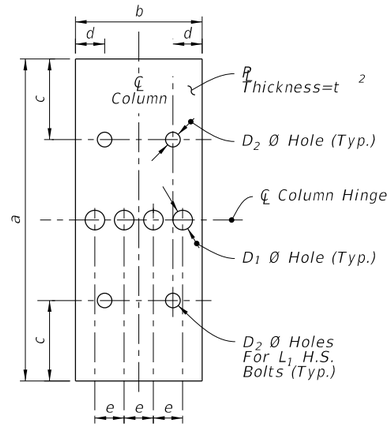

FUSE PLATE

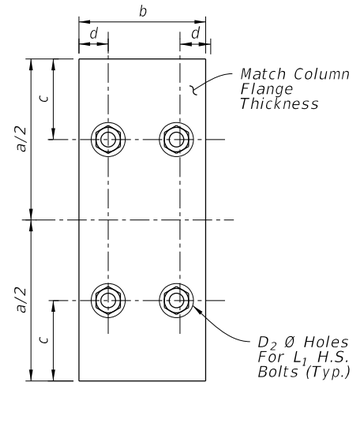

HINGE PLATE

FUSE & HINGE PLATE

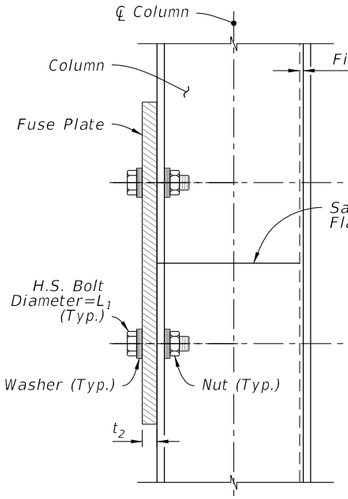

Side Elevation

TYPICAL HINGE

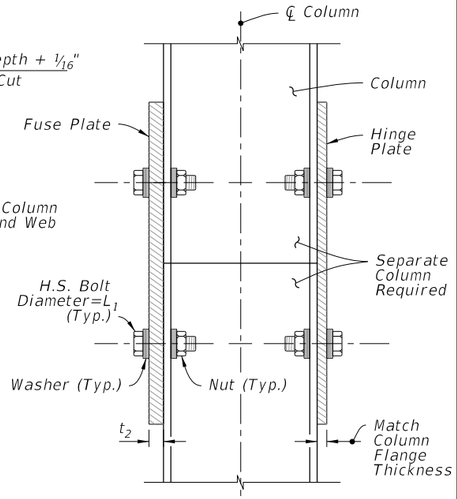

Side Elevation

OPTIONAL HINGE

DETAIL "B"

WIND BEAM, BACKING STRIP & FUSE/HINGE PLATE DETAILS

LAST REVISION	REVISION	DESCRIPTION:	FY 2023-24 STANDARD PLANS	MULTI-COLUMN GROUND SIGN	INDEX	SHEET
11/01/22					700-020	3 of 3

5/13/2024 11:11:26 AM