


## C-I-P COPING - PARTIAL ELEVATION VIEW

1. Provide Class II concrete for slightly aggressive environments or Class IV for moderately or extremely aggressive environments. Dowel Bars 4D extend 11" above the top of retaining wall panel. Field cut as necessary to maintain 2" minimum cover. See Wall Company Drawings for number and spacing


of Dowel Bars 4D. 3. Payment for Dowel Bars 4D, Buildup Concrete and Coping will be made under Retaining Wall System (Permanent).

SECTION A-A C-I-P COPING

Panel width + 6" Panel width Dim. B + 1'-0" Min.

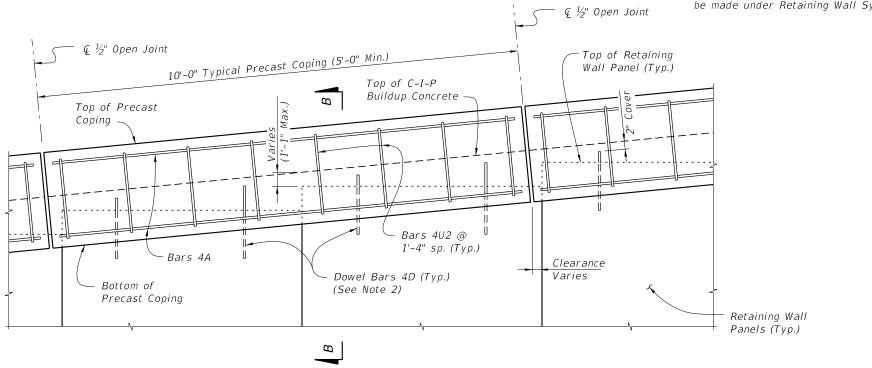

PRECAST COPING - PARTIAL ELEVATION VIEW

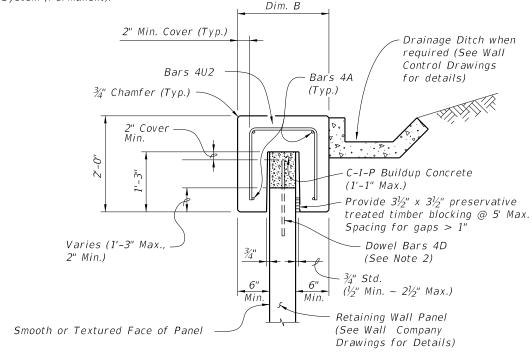

SECTION B-B PRECAST COPING

**REVISION** 07/01/14


DESCRIPTION:


FDOT

FY 2016-17 **DESIGN STANDARDS** 

INDEX NO. 6100


SHEET NO. 1 of 2

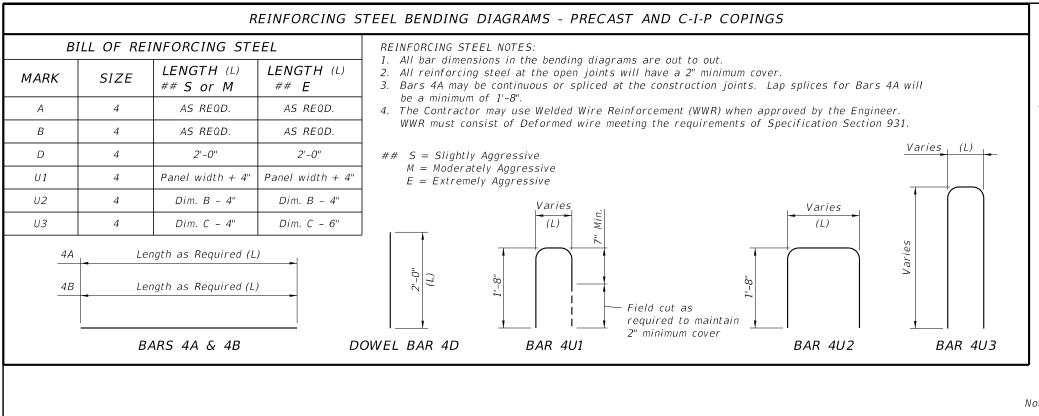

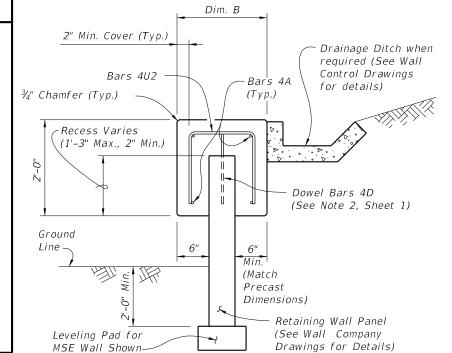

## C-I-P COPING USED WITH PRECAST COPING

Note: When precast coping units do not fit the entire length of the retaining wall, use this similar C-I-P coping for short portions between precast coping units. This C-I-P coping may also be used for vertical copings.

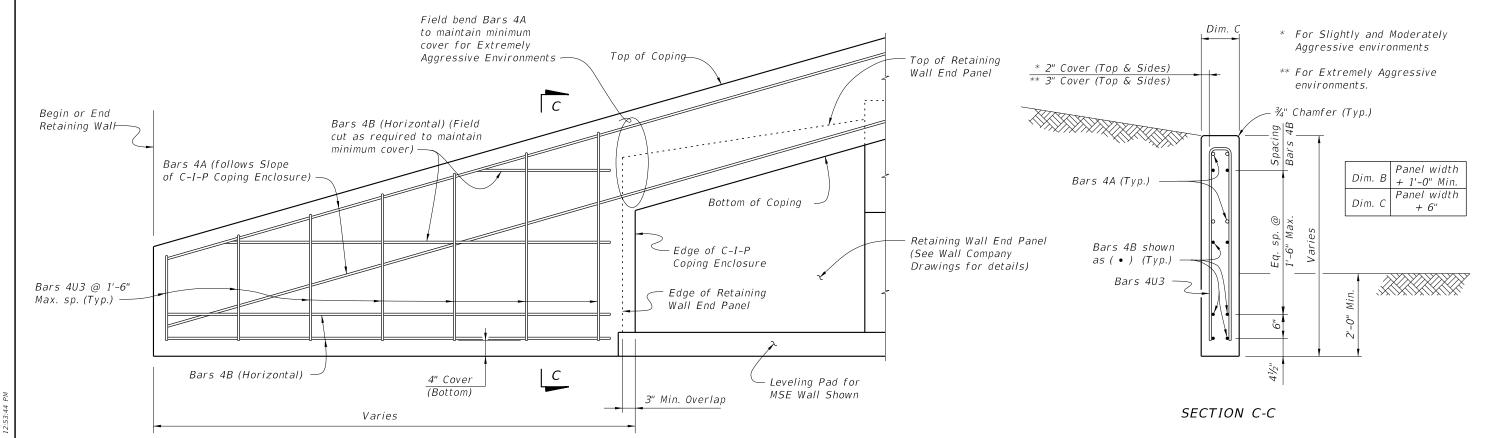

C-I-P COPING ENCLOSURE DETAIL

DESCRIPTION: REVISION 07/01/13

FDOT

FY 2016-17 DESIGN STANDARDS

MSE WALL COPING (PRECAST OR C-I-P)

INDEX NO. 6100

SHEET NO. 2 of 2