



OPTION 1

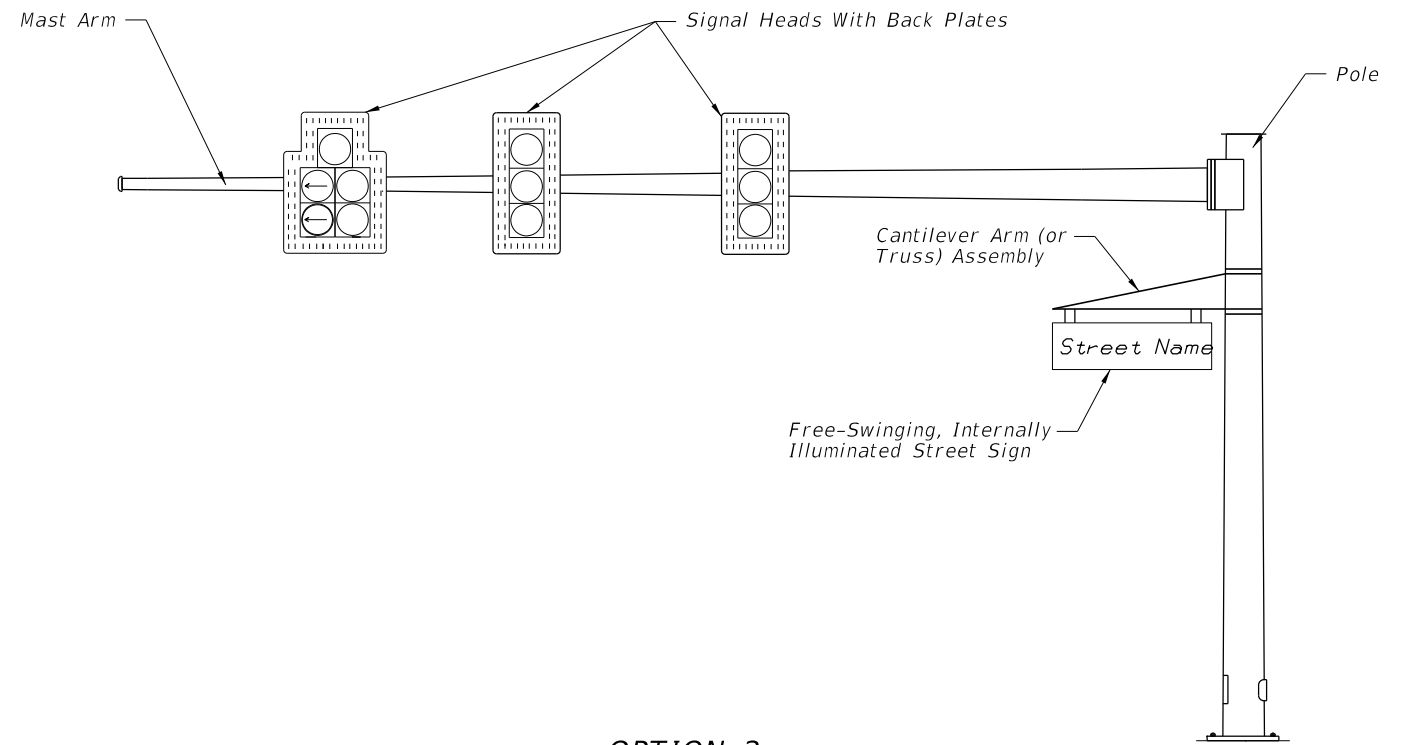

OPTION 2

MAST ARM ASSEMBLY

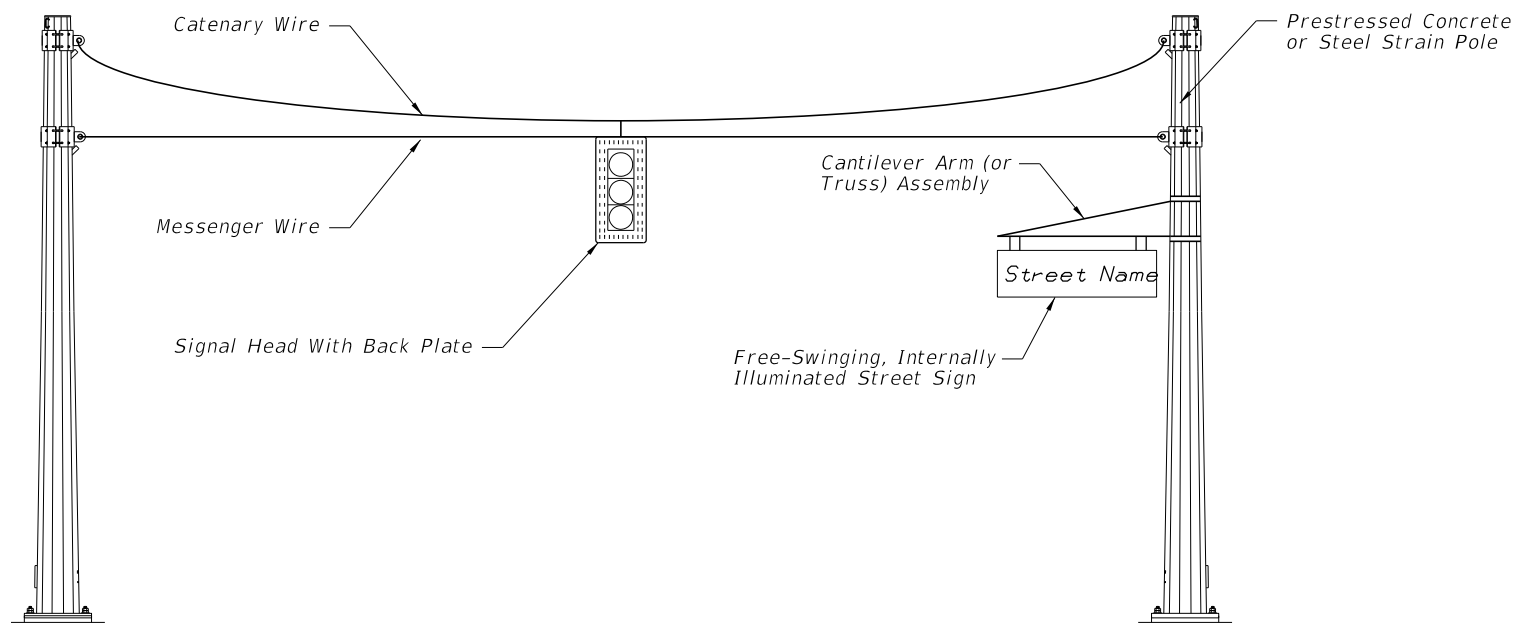


SPAN WIRE ASSEMBLY

NOTES:

1. Free-swinging, internally-illuminated street signs shall only be installed on the signal pole for span wire assemblies. For mast arm assemblies the street sign may be installed on the arm or pole.
2. Free-swinging, internally-illuminated street signs meet the requirements of Specification 700.
3. Pole attachments and cantilever arm (or truss) assemblies may be accepted by Contractor certification provided the signs being supported meet the weight and area limitations included in Specification 700 for "Acceptance by Certification".
4. Pole attachments and cantilever arm (or truss) assemblies supporting signs not meeting the weight or area limitations included in Specification 700 for "Acceptance by Certification" require the submittal of structural calculations and Shop Drawings that have been prepared by and sealed by the Specialty Engineer.

10/3/2023 3:04:59 PM

<p>LAST REVISION 11/01/17</p>	<p>REVISION</p> <p>DESCRIPTION:</p>	 <p>FY 2024-25 STANDARD PLANS</p>	<p>FREE-SWINGING, INTERNALLY-ILLUMINATED STREET SIGN ASSEMBLIES</p>	<p>INDEX 700-050</p>	<p>SHEET 1 of 1</p>
-----------------------------------	-------------------------------------	--	---	--------------------------	-------------------------