



ELEVATION

ALTERNATE STRAND PATTERNS


8 ~ 0.6" Ø, CFRP 7-Strand, at 24 kips $8 \sim \frac{1}{2}$ " Ø, CFRP Single-Strand, at 23.5 kips

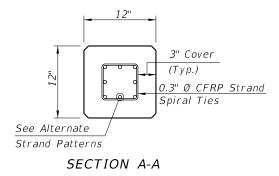

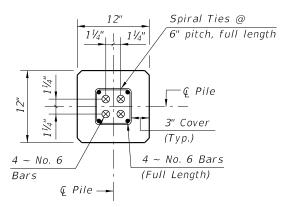

SECTION D-D

(See Nondrivable Unforeseen Reinforced Precast Pile Build-Up Detail)



SECTION E-E

(See Drivable Unforeseen Prestressed Precast Pile Splice Detail)

CFRP PILE SPLICE REINFORCEMENT DETAILS

NOTES:

- 1. Work this Index with Index No. 22600 Notes and Details for Square CFRP & SS Prestressed Concrete Piles and Index No. 22601 - Square CFRP & SS Prestressed Concrete Pile Splices.
- 2. Any of the given Alternate Strand Patterns may be utilized. The strands shall be located as follows:


Place one strand at each corner and place the remaining strands equally spaced between the corner strands. The total strand pattern shall be concentric with the nominal concrete section of the pile.

CFRP PRESTRESSED PILE DETAILS

REVISION 01/01/16

DESCRIPTION:


FY 2016-17 DESIGN STANDARDS

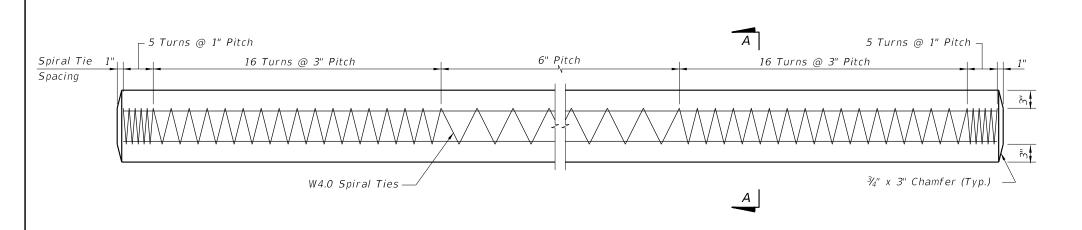


ELEVATION

STRAND PATTERN


 $8 \sim \frac{1}{2}$ " Ø, HSSS at 24 kips



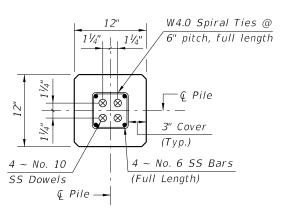

SECTION D-D

(See Nondrivable Unforeseen Reinforced Precast Pile Build-Up Detail)



SECTION E-E

(See Drivable Unforeseen Prestressed Precast Pile Splice Detail)

SS PILE SPLICE REINFORCEMENT DETAILS

NOTES:

- 1. Work this Index with Index No. 22600 Notes and Details for Square CFRP & SS Prestressed Concrete Piles and Index No. 22601 - Square CFRP & SS Prestressed Concrete Pile Splices.
- 2. Any of the given Strand Patterns may be utilized. The strands shall be located as follows:

Place one strand at each corner and place the remaining strands equally spaced between the corner strands. The total strand pattern shall be concentric with the nominal concrete section of the pile.

SS PRESTRESSED PILE DETAILS

REVISION 01/01/16

DESIGN STANDARDS

DESCRIPTION:

FY 2016-17 CONCRETE PILE